


A. Existing #4 Bare Copper to two 8' groundrods spaced 6' apart

B. 2" PVC W/ three 2/0 THHN

C. 2" PVC W/ three 2/0 THHN & one #6 THHN

D. 1.5" PVC W/ three #1 THWN, one #6 THWN and six #18 TFFN

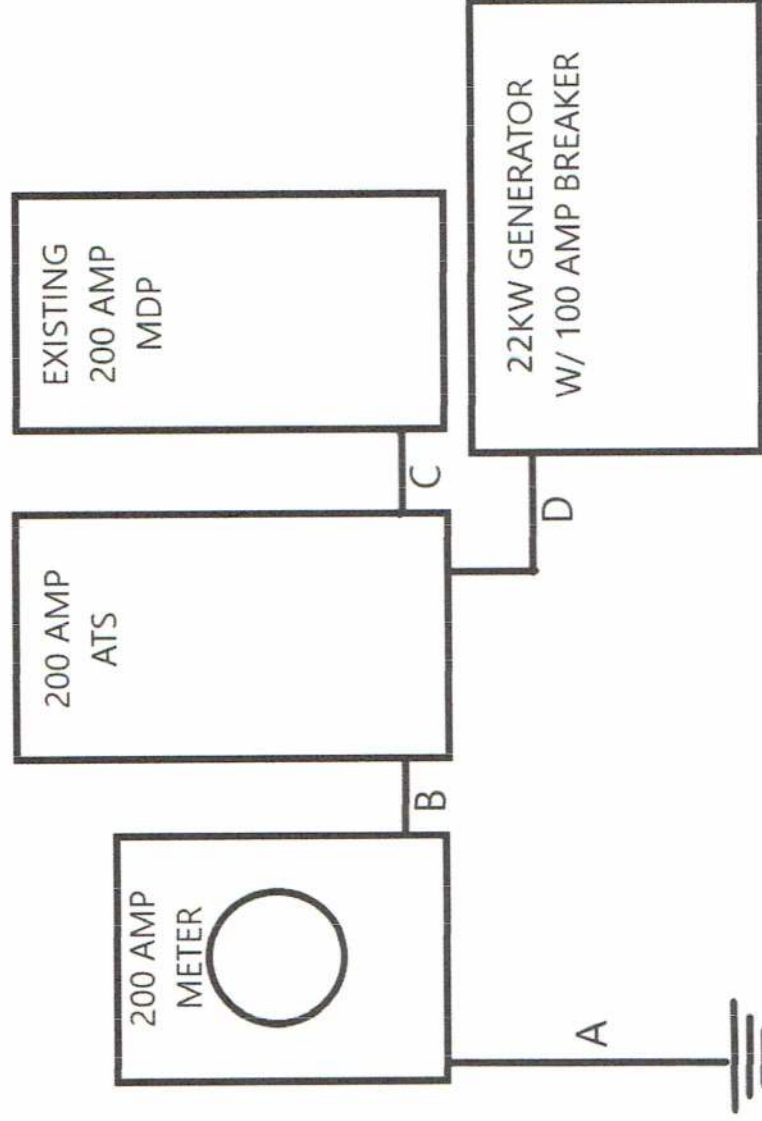

Riser for Greg Sorrells

Trademark Electric, Inc.  
3621 NW 27th Ave.  
Ocala, FL 34475



TRADEMARK ELECTRIC INC.  
 3621 NW 27th Avenue  
 Ocala, FL 34475  
 (352) 629-8617  
 www.trademarkselect.com

## Sizing Report

Rated Nominal Voltage 240  
 Generator Fuel Choice Propane  
 Sizing Method (NEC 220) Part IV  
 (Part III required for selected circuit implementation, Both valid for whole house)

|   |      |           |
|---|------|-----------|
| General Lighting & Receptacles                  |      | Load (kW) |
| Square Footage Being Covered (ft <sup>2</sup> ) | 1100 | 3.3       |
| Small Appliance Circuits (20 amps)              |      |           |
| Kitchen Circuits                                | 2    | 3         |
| Laundry Circuits                                | 1    | 1.5       |

|                                    | Managed Loads | Estimated (kW) | Nameplate (amps) | 240 V | Load (kW) |
|------------------------------------|---------------|----------------|------------------|-------|-----------|
| Fixed-In-Place Appliances & Motors |               |                |                  |       |           |
| Dryer                              |               | 5.5            |                  | X     | 5.5       |
| Water Heater                       |               | 5.0            |                  | X     | 5.0       |
| Dishwasher                         |               | 1.5            |                  |       | 1.5       |
| Refrigerator                       |               | 0.8            |                  |       | 0.8       |
| Well Pump                          |               | 1.5            | 10               | X     | 2.4       |

|                            | Managed Loads | Estimated (kW) | Nameplate (amps) | 240 V | Load (kW) |
|----------------------------|---------------|----------------|------------------|-------|-----------|
| Air Conditioning & Cooling |               |                |                  |       |           |
| 3.0 Ton Unit               |               | 3.0            |                  | X     | 3.0       |


|                            | Managed Loads | Estimated (kW) | Nameplate (amps) | 240 V | Load (kW) |
|----------------------------|---------------|----------------|------------------|-------|-----------|
| Heating & Heat Pumps       |               |                |                  |       |           |
| Heat Pump Electric Element |               | 5.0            | 33               | X     | 7.9       |

|                                     | Estimated (LRA) | Actual (LRA) | Utilized (LRA) |
|-------------------------------------|-----------------|--------------|----------------|
| Transient Requirement               |                 |              |                |
| Largest Motor's Starting Amps (LRA) | 86              | 75           | 75             |

|                                    | Load (kW) | NEC Required |
|------------------------------------|-----------|--------------|
| Summary NEC Load                   |           |              |
| General Lighting & Receptacles     | 7.8       |              |
| Fixed-in-Place Appliances & Motors | 15.2      |              |
| Sum of all General Loads           | 23.0      | 15.2         |
| Cooling                            | 3.0       | 3.0          |
| Heating (w/demand factors)         | 7.9       | 5.1          |
| Larger of Heating & Cooling        | 7.9       | 5.1          |

|  |        |
|--|--------|
| Sizing based on requirements of NEC Article 220, Part IV | 20.3   |
| Elevation  | 0 ft   |
| Minimum size generator for motor starting requirements   | 13     |
| BTU load required  | 355000 |

22 kW Generac Model Generator Recommended

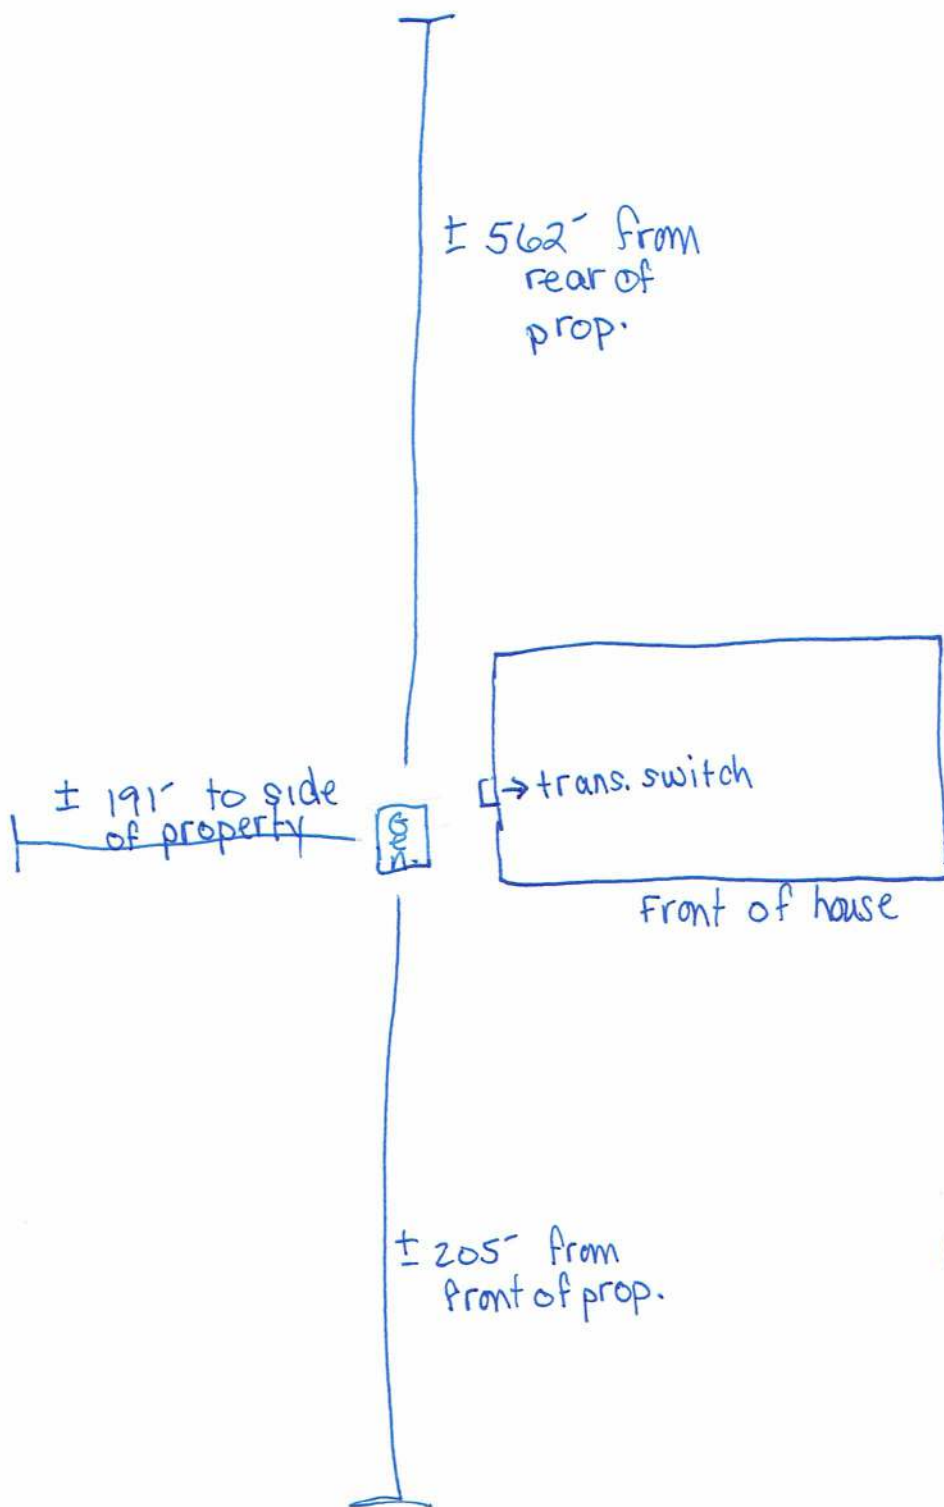

Greg Sorrells  
708 NW Bell Lake Ct.  
Lake City, FL 32055



20/22/24 kW

GENERAC®

**GUARDIAN® SERIES**  
**Residential Standby Generators**  
**Air-Cooled Gas Engine**

20/22/24 kW

1 of 6

**INCLUDES:**

- True Power™ Electrical Technology
- Two-line multilingual digital LCD Evolution™ controller (English/Spanish/French/Portuguese)
- 200 amp service rated transfer switch available
- Electronic governor
- Standard Wi-Fi® connectivity
- System status & maintenance interval LED indicators
- Sound attenuated enclosure
- Flexible fuel line connector
- Natural gas or LP gas operation
- 5 Year limited warranty
- Listed and labeled by the Southwest Research Institute allowing installation as close as 18 in (457 mm) to a structure.\*  
*\*Must be located away from doors, windows, and fresh air intakes and in accordance with local codes.*

[https://assets.swri.org/library/DirectoryOfListedProducts/ConstructionIndustry/973\\_DoC\\_204\\_13204-01-01\\_Rev9.pdf](https://assets.swri.org/library/DirectoryOfListedProducts/ConstructionIndustry/973_DoC_204_13204-01-01_Rev9.pdf)

**Standby Power Rating**

G007038-1, G007039-1, G007038-3, G007039-3 (Aluminum - Bisque) - 20 kW 60 Hz  
G007042-2, G007043-2, G007042-3, G007043-3 (Aluminum - Bisque) - 22 kW 60 Hz  
G007209-0, G007210-0 (Aluminum - Bisque) - 24 kW 60 Hz



**QUIET-TEST™**



Note: ETL or CUL certification only applies to unbundled units and units packaged with limited circuit switches. Units packaged with the Smart Switch are ETL or UL certified in the USA only.

**FEATURES**

- **INNOVATIVE ENGINE DESIGN & RIGOROUS TESTING** are at the heart of Generac's success in providing the most reliable generators possible. Generac's G-Force engine lineup offers added peace of mind and reliability for when it's needed the most. The G-Force series engines are purpose built and designed to handle the rigors of extended run times in high temperatures and extreme operating conditions.
- **TRUE POWER™ ELECTRICAL TECHNOLOGY:** Superior harmonics and sine wave form produce less than 5% Total Harmonic Distortion for utility quality power. This allows confident operation of sensitive electronic equipment and micro-chip based appliances, such as variable speed HVAC systems.
- **TEST CRITERIA:**
  - ✓ **PROTOTYPE TESTED**
  - ✓ **SYSTEM TORSIONAL TESTED**
  - ✓ **NEMA MG1-22 EVALUATION**
  - ✓ **MOTOR STARTING ABILITY**
- **MOBILE LINK™ CONNECTIVITY:** FREE with select Guardian Series Home standby generators, Mobile Link Wi-Fi allows users to monitor generator status from anywhere in the world using a smartphone, tablet, or PC. Easily access information such as the current operating status and maintenance alerts. Users can connect an account to an authorized service dealer for fast, friendly, and proactive service. With Mobile Link, users are taken care of before the next power outage.
- **SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION:** This state-of-the-art power maximizing regulation system is standard on all Generac models. It provides optimized FAST RESPONSE to changing load conditions and MAXIMUM MOTOR STARTING CAPABILITY by electronically torque-matching the surge loads to the engine. Digital voltage regulation at  $\pm 1\%$ .
- **SINGLE SOURCE SERVICE RESPONSE** from Generac's extensive dealer network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component.
- **GENERAC TRANSFER SWITCHES:** Long life and reliability are synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is that the GENERAC product line is offered with its own transfer systems and controls for total system compatibility.
- **PWRVIEW™ TRANSFER SWITCH:** The Generac PWRview Automatic Transfer Switch integrates the PWRview energy monitor to provide real-time energy consumption data that can help lower a home's electricity bill. Using a convenient mobile app, homeowners can access energy usage and alert information while under utility power or generator power. The PWRview energy monitor is a simple to use and low cost tool which helps save money over the life of the generator. Included with model G007210-0.

THE GENERAC  
PROMISE



GENERAC®

**PWRVIEW**

**20/22/24 kW****Features and Benefits****Engine**

- Generac G-Force design
- "Spiny-lok" cast iron cylinder walls
- Electronic ignition/spark advance
- Full pressure lubrication system
- Low oil pressure shutdown system
- High temperature shutdown

Maximizes engine "breathing" for increased fuel efficiency. Plateau honed cylinder walls and plasma moly rings help the engine run cooler, reducing oil consumption and resulting in longer engine life.

Rigid construction and added durability provide long engine life.

These features combine to assure smooth, quick starting every time.

Pressurized lubrication to all vital bearings means better performance, less maintenance, and longer engine life. Now featuring up to a 2 year/200 hour oil change interval.

Shutdown protection prevents catastrophic engine damage due to low oil.

Prevents damage due to overheating.

**Generator**

- Revolving field
- Skewed stator
- Displaced phase excitation
- Automatic voltage regulation
- UL 2200 listed

Allows for a smaller, light weight unit that operates 25% more efficiently than a revolving armature generator.

Produces a smooth output waveform for compatibility with electronic equipment.

Maximizes motor starting capability.

Regulating output voltage to  $\pm 1\%$  prevents damaging voltage spikes.

For your safety.

**Transfer Switch (if applicable)**

- Fully automatic
- NEMA 3R
- Integrated load management technology
- Remote mounting

Transfers vital electrical loads to the energized source of power.

Can be installed inside or outside for maximum flexibility.

Capability to manage additional loads for efficient power management.

Mounts near an existing distribution panel for simple, low-cost installation.

**PWRview Transfer Switch (if applicable)**

- PWRview energy monitor
- Ability to view real-time energy consumption data
- PWRview mobile app

Energy usage at-a-glance.

Better understand the home's energy profile.

Access daily energy intelligence and insights.

**Evolution™ Controls**

- AUTO/MANUAL/OFF illuminated buttons
- Two-line multilingual LCD
- Sealed, raised buttons
- Utility voltage sensing
- Generator voltage sensing
- Utility interrupt delay
- Engine warm-up
- Engine cool-down
- Programmable exercise
- Smart battery charger
- Main line circuit breaker
- Electronic governor

Selects the operating mode and provides easy, at-a-glance status indication in any condition.

Provides homeowners easily visible logs of history, maintenance, and events up to 50 occurrences.

Smooth, weather-resistant user interface for programming and operations.

Constantly monitors utility voltage, setpoints 65% dropout, 80% pick-up, of standard voltage.

Constantly monitors generator voltage to verify the cleanest power delivered to the home.

Prevents nuisance start-ups of the engine, adjustable 2-1500 seconds from the factory default setting of 5 seconds by a qualified dealer.

Verifies engine is ready to assume the load, setpoint approximately 5 seconds.

Allows engine to cool prior to shutdown, setpoint approximately 1 minute.

Operates engine to prevent oil seal drying and damage between power outages by running the generator for 5 minutes every other week. Also offers a selectable setting for weekly or monthly operation providing flexibility and potentially lower fuel costs to the owner.

Delivers charge to the battery only when needed at varying rates depending on outdoor air temperature.

Compatible with lead acid and AGM-style batteries.

Protects generator from overload.

Maintains constant 60 Hz frequency.



## 20/22/24 kW

## Features and Benefits

### Unit

- SAE weather protective enclosure
- Enclosed critical grade muffler
- Small, compact, attractive

Sound attenuated enclosures ensure quiet operation and protection against mother nature, withstanding winds up to 150 mph (241 km/h). Hinged key locking roof panel for security. Lift-out front for easy access to all routine maintenance items. Electrostatically applied textured epoxy paint for added durability.

Quiet, critical grade muffler is mounted inside the unit to prevent injuries.

Makes for an easy, eye appealing installation, as close as 18 in (457 mm) away from a structure.

### Installation System

- 14 in (35.6 cm) flexible fuel line connector
- Integral sediment trap

Listed ANSI Z21.75/CSA 6.27 outdoor appliance connector for the required connection to the gas supply piping.

Meets IFGC and NFPA 54 installation requirements.

### Connectivity (Wi-Fi equipped models only)

- Ability to view generator status
- Ability to view generator Exercise/Run and Total Hours
- Ability to view generator maintenance information
- Monthly report with previous month's activity
- Ability to view generator battery information
- Weather information

Monitor generator with a smartphone, tablet, or computer at any time via the Mobile Link application for complete peace of mind.

Review the generator's complete protection profile for exercise hours and total hours.

Provides maintenance information for the specific model generator when scheduled maintenance is due.

Detailed monthly reports provide historical generator information.

Built in battery diagnostics displaying current state of the battery.

Provides detailed local ambient weather conditions for generator location.

## 20/22/24 kW

## Generator

| Model  | G007038-1<br>G007039-1<br>(20 kW)                                  | G007042-2<br>G007043-2<br>(22 kW) | G007038-3<br>G007039-3<br>(20 kW)  | G007042-3<br>G007043-3<br>(22 kW) | G007209-0<br>G007210-0<br>(24 kW) |
|--|--|-----------------------------------|------------------------------------|-----------------------------------|-----------------------------------|
| Rated maximum continuous power capacity (LP)   | 20,000 Watts*  | 22,000 Watts*                     | 20,000 Watts*                      | 22,000 Watts*                     | 24,000 Watts*                     |
| Rated maximum continuous power capacity (NG)   | 18,000 Watts*  | 19,500 Watts*                     | 18,000 Watts*                      | 19,500 Watts*                     | 21,000 Watts*                     |
| Rated voltage  |  |                                   | 240                                |                                   |                                   |
| Rated maximum continuous load current – 240 volts (LP/NG)                                    | 83.3 / 75.0  | 91.7 / 81.3                       | 83.3 / 75.0                        | 91.7 / 81.3                       | 100 / 87.5                        |
| Total Harmonic Distortion  |  |                                   | Less than 5%                       |                                   |                                   |
| Main line circuit breaker  | 90 amp   | 100 amp                           | 90 amp                             | 100 amp                           | 100 amp                           |
| Phase  |  |                                   | 1                                  |                                   |                                   |
| Number of rotor poles  |  |                                   | 2                                  |                                   |                                   |
| Rated AC frequency   |  |                                   | 60 Hz                              |                                   |                                   |
| Power factor   |  |                                   | 1.0                                |                                   |                                   |
| Battery requirement (not included)   | 12 Volts, Group 26R 540 CCA minimum or Group 35AGM 650 CCA minimum |                                   |                                    |                                   |                                   |
| Unit weight (lb / kg)  | 448 / 203  | 466 / 211                         | 436 / 198                          | 445 / 202                         | 455 / 206                         |
| Dimensions (L x W x H) in / cm   |  |                                   | 48 x 25 x 29 / 121.9 x 63.5 x 73.7 |                                   |                                   |
| Sound output in dB(A) at 23 ft (7 m) with generator operating at normal load**               | 67   | 67                                | 67                                 | 67                                | 67                                |
| Sound output in dB(A) at 23 ft (7 m) with generator in Quiet-Test™ low-speed exercise mode** | 55   | 57                                | 55                                 | 57                                | 57                                |
| Exercise duration  |  |                                   | 5 min                              |                                   |                                   |

## Engine

|                               |  |                    |                    |                    |                    |
|-------------------------------|--|--------------------|--------------------|--------------------|--------------------|
| Engine type                   | GENERAC G-Force 1000 Series              |                    |                    |                    |                    |
| Number of cylinders           | 2  |                    |                    |                    |                    |
| Displacement                  | 999 cc                                   |                    |                    |                    |                    |
| Cylinder block                | Aluminum w/ cast iron sleeve             |                    |                    |                    |                    |
| Valve arrangement             | Overhead valve                           |                    |                    |                    |                    |
| Ignition system               | Solid-state w/ magneto                   |                    |                    |                    |                    |
| Governor system               | Electronic                               |                    |                    |                    |                    |
| Compression ratio             | 9.5:1                                    |                    |                    |                    |                    |
| Starter                       | 12 VDC                                   |                    |                    |                    |                    |
| Oil capacity including filter | Approx. 1.9 qt / 1.8 L                   |                    |                    |                    |                    |
| Operating rpm                 | 3,600                                    |                    |                    |                    |                    |
| Fuel consumption              |  |                    |                    |                    |                    |
| Natural gas                   | ft <sup>3</sup> /hr (m <sup>3</sup> /hr) |                    |                    |                    |                    |
| 1/2 Load                      |  | 204 (5.78)         | 228 (6.46)         | 164 (4.64)         | 203 (5.75)         |
| Full Load                     |  | 301 (8.52)         | 327 (9.26)         | 287 (8.13)         | 306 (8.66)         |
| Liquid propane                | ft <sup>3</sup> /hr (gal/hr) [L/hr]      |                    |                    |                    |                    |
| 1/2 Load                      |  | 87 (2.37) [8.99]   | 92 (2.53) [9.57]   | 86 (2.36) [8.95]   | 92 (2.53) [9.57]   |
| Full Load                     |  | 130 (3.56) [13.48] | 142 (3.90) [14.77] | 136 (3.74) [14.15] | 142 (3.90) [14.77] |

Note: **Fuel pipe must be sized for full load.** Required fuel pressure to generator fuel inlet at all load ranges - 3.5–7 in water column (0.87–1.74 kPa) for NG, 10–12 in water column (2.49–2.99 kPa) for LP gas. For BTU content, multiply ft<sup>3</sup>/hr x 2500 (LP) or ft<sup>3</sup>/hr x 1000 (NG). For Megajoule content, multiply m<sup>3</sup>/hr x 93.15 (LP) or m<sup>3</sup>/hr x 37.26 (NG).

## Controls

|   |  |
|---|--|
| Two-line plain text multilingual LCD                                    | Simple user interface for ease of operation.   |
| Mode buttons: AUTO  | Automatic start on utility failure. Weekly, Bi-weekly, or Monthly selectable exerciser.    |
| MANUAL  | Start with starter control, unit stays on. If utility fails, transfer to load takes place. |
| OFF   | Stops unit. Power is removed. Control and charger still operate.                           |
| Ready to Run/Maintenance messages                                       | Standard   |
| Engine run hours indication   | Standard   |
| Programmable start delay between 2–1500 seconds                         | Standard (programmable by dealer only)   |
| Utility Voltage Loss/Return to Utility adjustable (brownout setting)    | From 140–171 V / 190–216 V   |
| Future Set Capable Exerciser/Exercise Set Error warning                 | Standard   |
| Run/Alarm/Maintenance logs  | 50 events each   |
| Engine start sequence   | Cyclic cranking: 16 sec on, 7 rest (90 sec maximum duration).                              |
| Starter lock-out  | Starter cannot re-engage until 5 sec after engine has stopped.                             |
| Smart Battery Charger   | Standard   |
| Charger Fault/Missing AC warning  | Standard   |
| Low Battery/Battery Problem Protection and Battery Condition Indication | Standard   |
| Automatic Voltage Regulation with Over and Under Voltage Protection     | Standard   |
| Under-Frequency/Overload/Stepper Overcurrent Protection                 | Standard   |
| Safety Fused/Fuse Problem Protection                                    | Standard   |
| Automatic Low Oil Pressure/High Oil Temperature Shutdown                | Standard   |
| Overcrank/Overspeed (@ 72 Hz)/rpm Sense Loss Shutdown                   | Standard   |
| High Engine Temperature Shutdown  | Standard   |
| Internal Fault/Incorrect Wiring protection                              | Standard   |
| Common external fault capability  | Standard   |
| Field upgradable firmware   | Standard   |

\*\*Sound levels are taken from the front of the generator. Sound levels taken from other sides of the generator may be higher depending on installation parameters. Rating definitions - Standby: Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. (All ratings in accordance with BS5514, ISO3046 and DIN6271). \* Maximum kilovolt amps and current are subject to and limited by such factors as fuel BTU/megajoule content, ambient temperature, altitude, engine power and condition, etc. Maximum power decreases approximately 3.5% for each 1,000 ft (304.8 m) above sea level; and also will decrease approximately 1% for each 10 °F (6 °C) above 60 °F (16 °C).



## 20/22/24 kW

## Switch Options

### Service Rated Automatic Transfer Switch Features

- Intelligently manages up to four air conditioner loads with no additional hardware.
- Up to eight additional large (240 VAC) loads can be managed when used in conjunction with Smart Management Modules (SMMs).
- Electrically operated, mechanically-held contacts for fast, clean connections.
- Rated for all classes of load, 100% equipment rated, both inductive and resistive.
- 2-pole, 250 VAC contactors.
- Service equipment rated, dual coil design.
- Rated for both aluminum and copper conductors.
- Main contacts are silver plated or silver alloy to resist welding and sticking.
- NEMA/UL 3R aluminum outdoor enclosure allows for indoor or outdoor mounting flexibility.

### Dimensions

| 200 Amps 120/240, 1Ø<br>Open Transition Service Rated |        |       |       |       |       |
|---|--------|-------|-------|-------|-------|
|   | Height |       | Width |       | Depth |
|   | H1     | H2    | W1    | W2    |       |
| in  | 26.8   | 30.1  | 10.5  | 13.5  | 6.9   |
| cm  | 67.95  | 76.43 | 26.67 | 34.18 | 17.5  |

### Wire Ranges


| Conductor Lug | Neutral Lug  | Ground Lug |
|---------------|--------------|------------|
| 250 MCM - #6  | 350 MCM - #6 | 2/0 - #14  |

### Model

|                                    |                |
|------------------------------------|----------------|
| No. of poles                       | 2              |
| Current rating (amps)              | 200            |
| Voltage rating (VAC)               | 120/240, 1Ø    |
| Utility voltage monitor (fixed)*   |                |
| -Pick-up                           | 80%            |
| -Dropout                           | 65%            |
| Return to Utility*                 | Approx. 13 sec |
| Exercises bi-weekly for 5 minutes* | Standard       |
| ETL or UL listed                   | Standard       |
| Enclosure type                     | NEMA/UL 3R     |
| Circuit breaker protected          | 22,000         |
| Lug range                          | 250 MCM - #6   |

\*Function of Evolution controller

Exercise can be set to weekly, bi-weekly, or monthly

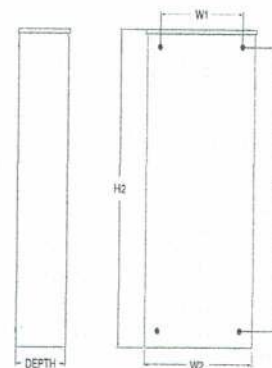

### PWRview Automatic Transfer Switch Features

- Integrated PWRview monitor provides real-time energy usage data through PWRview app.
- Intelligently manages up to four air conditioner loads with no additional hardware.
- Up to eight additional large (240 VAC) loads can be managed when used in conjunction with Smart Management Modules (SMMs).
- Electrically operated, mechanically-held contacts for fast, clean connections.
- Rated for all classes of load, 100% equipment rated, both inductive and resistive.
- 2-pole, 250 VAC contactors.
- Service equipment rated, dual coil design.
- Rated for both aluminum and copper conductors.
- Main contacts are silver plated or silver alloy to resist welding and sticking.
- NEMA 3R aluminum outdoor enclosure allows for indoor or outdoor mounting flexibility.
- Heavy duty Generac Contactor is an ETL recognized device.

### Dimensions

| 200 Amps 120/240, 1Ø<br>Open Transition Service Rated |        |       |       |       |       |
|---|--------|-------|-------|-------|-------|
|   | Height |       | Width |       | Depth |
|   | H1     | H2    | W1    | W2    |       |
| in  | 26.8   | 30.1  | 10.5  | 13.5  | 6.9   |
| cm  | 67.95  | 76.43 | 26.67 | 34.18 | 17.5  |

### Wire Ranges


| Conductor Lug | Neutral Lug  | Ground Lug |
|---------------|--------------|------------|
| 250 MCM - #6  | 350 MCM - #6 | 2/0 - #14  |

### Model

|                                    |                |
|------------------------------------|----------------|
| No. of poles                       | 2              |
| Current rating (amps)              | 200            |
| Voltage rating (VAC)               | 120/240, 1Ø    |
| Utility voltage monitor (fixed)*   |                |
| -Pick-up                           | 80%            |
| -Dropout                           | 65%            |
| Return to Utility*                 | Approx. 13 sec |
| Exercises bi-weekly for 5 minutes* | Standard       |
| ETL or UL listed                   | Standard       |
| Enclosure type                     | NEMA 3R        |
| Circuit breaker protected          | 22,000         |
| Lug range                          | 250 MCM - #6   |

\*Function of Evolution controller

Exercise can be set to weekly, bi-weekly, or monthly

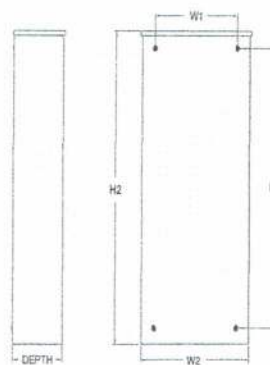





**20/22/24 kW****Available Accessories**

| Model #  | Product                                     | Description   |
|--|---|---|
| G005819-0  | 26R Wet Cell Battery                        | Every standby generator requires a battery to start the system. Generac offers the recommended 26R wet cell battery for use with all air-cooled standby product (excluding PowerPact®).   |
| G007101-0  | Battery Pad Warmer                          | Pad warmer rests under the battery. Recommended for use if temperature regularly falls below 0 °F (-18 °C). (Not necessary for use with AGM-style batteries).   |
| G007102-0  | Oil Warmer                                  | Oil warmer slips directly over the oil filter. Recommended for use if temperature regularly falls below 0 °F (-18 °C).  |
| G007103-1  | Breather Warmer                             | Breather warmer is for use in extreme cold weather applications. For use with Evolution controllers only in climates where heavy icing occurs.  |
| G005621-0  | Auxiliary Transfer Switch Contact Kit       | The auxiliary transfer switch contact kit allows the transfer switch to lock out a single large electrical load that may not be needed. Not compatible with 50 amp pre-wired switches.  |
| G007027-0 - Bisque                                   | Fascia Base Wrap Kit (Standard on 22/24 kW) | The fascia base wrap snaps together around the bottom of the new air-cooled generators. This offers a sleek, contoured appearance as well as offering protection from rodents and insects by covering the lifting holes located in the base.  |
| G005703-0 - Bisque                                   | Touch-Up Paint Kit                          | If the generator enclosure is scratched or damaged, it is important to touch up the paint to protect from future corrosion. The touch-up paint kit includes the necessary paint to correctly maintain or touch up a generator enclosure.  |
| G006485-0  | Scheduled Maintenance Kit                   | Generac's scheduled maintenance kit provides all the items necessary to perform complete routine maintenance on a Generac automatic standby generator (oil not included).   |
| G007005-0  | Wi-Fi LP Tank Fuel Level Monitor            | The Wi-Fi enabled LP tank fuel level monitor provides constant monitoring of the connected LP fuel tank. Monitoring the LP tank's fuel level is an important step in verifying the generator is ready to run during an unexpected power failure. Status alerts are available through a free application to notify users when the LP tank is in need of a refill.  |
| G007000-0 (50 amp)<br>G007006-0 (100 amp)            | Smart Management Module                     | Smart Management Modules (SMM) are used to optimize the performance of a standby generator. It manages large electrical loads upon startup and sheds them to aid in recovery when overloaded. In many cases, using SMM's can reduce the overall size and cost of the system.  |
| G007169-0 - 4G LTE<br>G007170-0 - Wi-Fi/<br>Ethernet | Mobile Link® Cellular Accessories           | The Mobile Link family of Cellular Accessories allow users to monitor generator status from anywhere in the world, using a smart phone, tablet, or PC. Easily access information such as the current operating status and maintenance alerts. Users can connect an account with an authorized service dealer for fast, friendly, and proactive service. With Mobile Link, users are taken care of before the next power outage. |
| G007220-0 - Bisque                                   | Base Plug Kit                               | Base plugs snap into the lifting holes on the base of air-cooled home standby generators. This offers a sleek, contoured appearance, as well as offers protection from rodents and insects by covering the lifting holes located in the base. Kit contains four plugs, sufficient for use on a single air-cooled home standby generator.  |

**Dimensions & UPCs**

| Model     | UPC          |
|-----------|--------------|
| G007038-1 | 696471074185 |
| G007038-3 | 696471074185 |
| G007039-1 | 696471074192 |
| G007039-3 | 696471074192 |
| G007042-2 | 696471074208 |
| G007042-3 | 696471074208 |
| G007043-2 | 696471074215 |
| G007043-3 | 696471074215 |
| G007209-0 | 696471071511 |
| G007210-0 | 696471078220 |

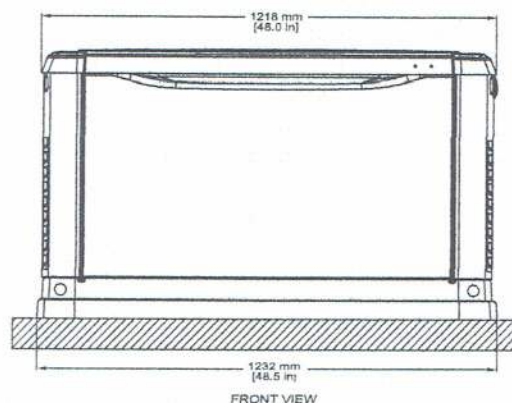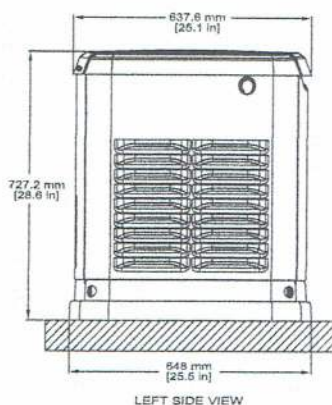

Dimensions shown are approximate. See installation manual for exact dimensions. DO NOT USE THESE DIMENSIONS FOR INSTALLATION PURPOSES.

## Automatic Transfer Switches

# GENERAC®

## Service and non-Service rated Automatic Smart Transfer Switches

100 - 400 Amps, Single Phase



\*CUL only applies to non-service rated switches

### Description

Generac Automatic Transfer Switches are designed for use with single phase generators that utilize an Evolution™ or Nexus™ Controller. The 100, 200, and 400 amp open transition switches are available in single phase in both service equipment rated and non-service equipment rated configurations. The 150 and 300 amp open transition switches are only available in a service rated equipment configuration.

### Standard Features

Service rated (RXSW) Generac Automatic Transfer Switches are housed in an aluminum NEMA/UL Type 3R enclosure\*, with electrostatically applied and baked powder paint. The Heavy Duty Generac Contactor is a UL recognized device, designed for years of service. The controller at the generator handles all the timing, sensing, exercising functions, and transfer commands. All switches are covered by a 5 year limited warranty.

\* Non-service rated (RXSC) switches are housed in a steel enclosure.

### DPM Technology

Through the use of digital power technology (DPM), these switches have the capability to manage up to 4 individual HVAC (24 VAC controlled) loads with no additional hardware. When used in tandem with Smart Management Modules, up to 8 more loads can be managed as well, providing the most installation efficient power management options available.

# GENERAC®





**100-400 Amps, Single Phase****Automatic Smart Transfer Switches****Functions**

All timing and sensing functions originate in the generator controller

|                               |   |
|-------------------------------|---|
| Utility voltage drop-out..... | < 65%   |
| Timer to generator start..... | 10 second factory set, adjustable between 2-1500 seconds by a qualified dealer* |
| Engine warm up delay.....     | 5 seconds   |
| Standby voltage sensor.....   | 65% for 5 seconds   |
| Utility voltage pickup.....   | > 60%   |
| Re-transfer time delay.....   | 15 seconds  |
| Engine cool-down timer.....   | 60 seconds  |
| Exerciser.....                | 5 or 12 minutes adjustable weekly/BI-weekly/Monthly**                           |

The transfer switch can be operated manually without power applied.

\*When used in conjunction with units utilizing Evolution™ controls \*\*Adjustable via the controller

**Specifications**

| Model                            | RXSC100A3       | RXSW100A3                     | RXSW150A3                     | RXSC200A3       | RXSW200A3                     | RXSW300A3                     | RXSC400A3       | RXSW400A3                     |
|----------------------------------|-----------------|-------------------------------|-------------------------------|-----------------|-------------------------------|-------------------------------|-----------------|-------------------------------|
| Amps                             | 100             | 100                           | 150                           | 200             | 200                           | 300                           | 400             | 400                           |
| Voltage                          | 120/240, 1Ø     | 120/240, 1Ø                   | 120/240, 1Ø                   | 120/240, 1Ø     | 120/240, 1Ø                   | 120/240, 1Ø                   | 120/240, 1Ø     | 120/240, 1Ø                   |
| Load Transition Type (Automatic) | Open Transition | Open Transition Service Rated | Open Transition Service Rated | Open Transition | Open Transition Service Rated | Open Transition Service Rated | Open Transition | Open Transition Service Rated |
| Enclosure Type                   | NEMA/UL 3R      | NEMA/UL 3R                    | NEMA/UL 3R                    | NEMA/UL 3R      | NEMA/UL 3R                    | NEMA/UL 3R                    | NEMA/UL 3R      | NEMA/UL 3R                    |
| UL Rating                        | UL/CUL          | UL                            | UL                            | UL/CUL          | UL                            | UL                            | UL/CUL          | UL                            |
| Withstand Rating (Amps)          | 10,000          | 10,000                        | 22,000                        | 10,000          | 22,000                        | 22,000                        | 22,000          | 22,000                        |
| Lug Range                        | 1/0 - #14       |                               | 250 MCM - #6                  |                 |                               | 600 MCM - #4 or 1/0 - 250 MCM |                 |                               |

**Dimensions**

| Model                |    | RXSC100A3   | RXSW100A3   | RXSW150A3   | RXSC200A3   | RXSW200A3   | RXSW300A3    | RXSC400A3   | RXSW400A3    |
|----------------------|----|-------------|-------------|-------------|-------------|-------------|--------------|-------------|--------------|
| Height<br>(in./mm)   | H1 | 17.24/437.9 | 17.24/437.9 | 26.75/679.4 | 17.24/437.9 | 26.75/679.4 | 42.91/1089.9 | 31.25/793.8 | 42.91/1089.9 |
|                      | H2 | 20/508      | 20/508      | 30/762      | 20/508      | 30/762      | 48/1219.2    | 36/914.4    | 48/1219.2    |
| Width<br>(in./mm)    | W1 | 12.5/317.5  | 12.5/317.5  | 10.5/266.7  | 12.5/317.5  | 10.5/266.7  | 16.69/423.9  | 19.18/487.2 | 16.69/423.9  |
|                      | W2 | 14.6/370.8  | 14.6/370.8  | 13.5/342.9  | 14.6/370.8  | 13.5/342.9  | 21.82/554.2  | 24/609.6    | 21.82/554.2  |
| Depth (in./mm)       |    | 7.09/180.1  | 7.09/180.1  | 6.3/160.1   | 7.09/180.1  | 6.3/160.1   | 10.06/255.5  | 10.06/255.5 | 10.06/255.5  |
| Weight (lbs./kg/box) |    | 20/9.07     | 22.5/10.21  | 39/17.69    | 20/9.07     | 39/17.69    | 140/63.5     | 133/60.33   | 140/63.5     |

