

20/22/24 kW



GUARDIAN® SERIES

Residential Standby Generators
Air-Cooled Gas Engine



INCLUDES:

- True Power™ Electrical Technology
- Two-line multilingual digital LCD Evolution™ controller (English/Spanish/French/Portuguese)
- 200 amp service rated transfer switch available
- Electronic governor
- Standard Wi-Fi[®] connectivity
- System status & maintenance interval LED indicators
- Sound attenuated enclosure
- Flexible fuel line connector
- Natural gas or LP gas operation
- 5 Year limited warranty
- Listed and labeled for installation as close as 18 in (457 mm) to a structure.*
 - *Must be located away from doors, windows, and fresh air intakes and in accordance with local codes.

Standby Power Rating

G007038-1, G007039-1, G007038-3, G007039-3 (Aluminum - Bisque) - 20 kW 60 Hz G007042-2, G007043-2, G007042-3, G007043-3 (Aluminum - Bisque) - 22 kW 60 Hz G007209-0, G007210-1 (Aluminum - Bisque) - 24 kW 60 Hz





Note: CETL or CUL certification only applies to unbundled units and units packaged with limited circuit switches. Units packaged with the Smart Switch are ETL or UL certified in the USA only.

FEATURES

- INNOVATIVE ENGINE DESIGN & RIGOROUS TESTING are at the heart of Generac's success in providing the most reliable generators possible. Generac's G-Force engine lineup offers added peace of mind and reliability for when it's needed the most. The G-Force series engines are purpose built and designed to handle the rigors of extended run times in high temperatures and extreme operating conditions.
- TRUE POWER™ ELECTRICAL TECHNOLOGY: Superior harmonics and sine wave form produce less than 5% Total Harmonic Distortion for utility quality power. This allows confident operation of sensitive electronic equipment and micro-chip based appliances, such as variable speed HVAC systems.
- O TEST CRITERIA:
 - PROTOTYPE TESTED
 SYSTEM TORSIONAL TESTED
- NEMA MG1-22 EVALUATION
 MOTOR STARTING ABILITY
- MOBILE LINK® CONNECTIVITY: FREE with select Guardian Series Home standby generators, Mobile Link Wi-Fi allows users to monitor generator status from anywhere in the world using a smartphone, tablet, or PC. Easily access information such as the current operating status and maintenance alerts. Users can connect an account to an authorized service dealer for fast, friendly, and proactive service. With Mobile Link, users are taken care of before the next power outage.

- SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION: This state-of-the-art power maximizing regulation system is standard on all Generac models. It provides optimized FAST RESPONSE to changing load conditions and MAXIMUM MOTOR STARTING CAPABILITY by electronically torque-matching the surge loads to the engine. Digital voltage regulation at ±1%.
- SINGLE SOURCE SERVICE RESPONSE from Generac's extensive dealer network
 provides parts and service know-how for the entire unit, from the engine to the smallest electronic component.
- GENERAC TRANSFER SWITCHES: Long life and reliability are synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is that the GENERAC product line is offered with its own transfer systems and controls for total system compatibility.











GENERAC

Features and Benefits

20/22/24 kW

Generac G-Force design
 Maximizes engine "breathing" for increased fuel efficiency. Plateau honed cylinder walls and plasma moly rings help the engine run cooler, reducing oil consumption and resulting in longer engine life.

"Spiny-lok" cast iron cylinder walls Rigid construction and added durability provide long engine life.

Electronic ignition/spark advance These features combine to assure smooth, quick starting every time.

• Full pressure lubrication system Pressurized lubrication to all vital bearings means better performance, less maintenance, and longer engine

life. Now featuring up to a 2 year/200 hour oil change interval.

Low oil pressure shutdown system
 Shutdown protection prevents catastrophic engine damage due to low oil.

High temperature shutdown
 Prevents damage due to overheating.

Generator

Skewed stator

Revolving field
 Allows for a smaller, light weight unit that operates 25% more efficiently than a revolving armature generator.

Produces a smooth output waveform for compatibility with electronic equipment.

Displaced phase excitation
 Maximizes motor starting capability.

Automatic voltage regulation
 Regulating output voltage to ±1% prevents damaging voltage spikes.

UL 2200 listed
 For your safety.

Transfer Switch (if applicable)

Fully automatic
 Transfers vital electrical loads to the energized source of power.

NEMA 3R
 Can be installed inside or outside for maximum flexibility.

Integrated load management technology
 Capability to manage additional loads for efficient power management.

Remote mounting
 Mounts near an existing distribution panel for simple, low-cost installation.

Evolution™ Controls

AUTO/MANUAL/OFF illuminated buttons
 Selects the operating mode and provides easy, at-a-glance status indication in any condition.

Two-line multilingual LCD
 Provides homeowners easily visible logs of history, maintenance, and events up to 50 occurrences.

Sealed, raised buttons
 Smooth, weather-resistant user interface for programming and operations.

Utility voltage sensing
 Constantly monitors utility voltage, setpoints 65% dropout, 80% pick-up, of standard voltage.

Generator voltage sensing
 Constantly monitors generator voltage to verify the cleanest power delivered to the home.

Utility interrupt delay
 Prevents nuisance start-ups of the engine, adjustable 2-1500 seconds from the factory default setting of 5

seconds by a qualified dealer.

Engine warm-up
 Verifies engine is ready to assume the load, setpoint approximately 5 seconds.

Engine cool-down Allows engine to cool prior to shutdown, setpoint approximately 1 minute.

Programmable exercise
 Operates engine to prevent oil seal drying and damage between power outages by running the generator for

5 minutes every other week. Also offers a selectable setting for weekly or monthly operation providing

flexibility and potentially lower fuel costs to the owner.

Smart battery charger
 Delivers charge to the battery only when needed at varying rates depending on outdoor air temperature.

Compatible with lead acid and AGM-style batteries.

Main line circuit breaker
 Protects generator from overload.

Electronic governor
 Maintains constant 60 Hz frequency.

Unit

SAE weather protective enclosure
 Sound attenuated enclosures ensure quiet operation and protection against mother nature, withstanding winds up to 150 mph (241 km/h). Hinged key locking roof panel for security. Lift-out front for easy access

to all routine maintenance items. Electrostatically applied textured epoxy paint for added durability.

Enclosed critical grade muffler
 Quiet, critical grade muffler is mounted inside the unit to prevent injuries.

Small, compact, attractive
 Makes for an easy, eye appealing installation, as close as 18 in (457 mm) away from a structure.

20/22/24 kW

Features and Benefits

Installation System

• 14 in (35.6 cm) flexible fuel line connector

Listed ANSI Z21.75/CSA 6.27 outdoor appliance connector for the required connection to the gas supply

Integral sediment trap

Meets IFGC and NFPA 54 installation requirements.

Connectivity (Wi-Fi equipped models only)

· Ability to view generator status

Monitor generator with a smartphone, tablet, or computer at any time via the Mobile Link application for complete peace of mind.

Ability to view generator Exercise/Run and Total Hours

Review the generator's complete protection profile for exercise hours and total hours.

Ability to view generator maintenance information

Provides maintenance information for the specific model generator when scheduled maintenance is due.

· Monthly report with previous month's activity

Detailed monthly reports provide historical generator information.

· Ability to view generator battery information

Built in battery diagnostics displaying current state of the battery. Provides detailed local ambient weather conditions for generator location.

Weather information

3 of 6



Electronic

95-1

12 VDC

3,600

164 (4.64)

287 (8.13)

Approx. 1.9 qt/1

Specifications

203 (5.75) 306 (8.66)

92 (2.53) [9.57]

142 (3.90) [14.77]

20/22/24 kW

Generator Model	G007038-1 G007039-1 (20 kW)	G007042-2 G007043-2 (22 kW)	G007038-3 G007039-3 (20 kW)	G007042-3 G007043-3 (22 kW)	G007209-0 G007210-1 (24 kW)	
Rated maximum continuous power capacity (LP)	20,000 Watts*	22,000 Walts*	20,000 Watts*	22,000 Watts*	24,000 Watts*	
Raled maximum continuous power capacity (NG)	18,000 Watts*	19,500 Watts*	18,000 Watts*	19,500 Watts*	21,000 Watts*	
Rated voltage			240			
Rated maximum continuous load current – 240 volts (LP/NG)	83.3 / 75.0	91.7 / 81.3	83.3 / 75.0	91.7 / 81.3	100 / 87.5	
Total Harmonic Distortion			Less than 5%			
Main line circuit breaker	90 amp	100 amp	90 amp	100 amp	100 amp	
Phase			1			
Number of rotor poles			2			
Rated AC frequency			60 Hz			
Power factor	1.0					
Battery requirement (not included)	12 V	olts, Group 26R 540 C	CA minimum or Group	35AGM 650 CCA mi	nimum	
Unit weight (lb / kg)	448 / 203	466 / 211	436 / 198	445 / 202	455 / 206	
Dimensions (LxWxH) in / cm		48 x	25 x 29 / 121.9 x 63.5	x73.7		
Sound output in dB(A) at 23 ft (7 m) with generator operating at normal load**	67	67	67	67	67	
Sound output in dB(A) at 23 ft (7 m) with generator in Quiet-Test** low-speed exercise mode**	55	57	55	57	57	
Exercise duration	15 -1 11 12 1 1 11 11		5 min	MILES TO THE RESIDENCE		
Engine						
Engine type		GE	NERAC G-Force 1000	Series		
Number of cylinders			2			
Displacement	999 cc Aluminum w/ cast iron sleeve Overhead valve					
Cylinder block						
Valve arrangement						
Ignition system			Solid-state w/ magne	to		
A 100 CO			Flectronic			

87 (2.37) [8.99] 92 (2.53) [9.57] 86 (2.36) [8.95] 130 (3.56) [13.48] 142 (3.90) [14.77] 136 (3.74) [14.15] Full Load Note: Fuel pipe must be sized for full load. Required fuel pressure to generator fuel inlet at all load ranges – 3.5–7 in water column (0.87–1.74 kPa) for NG, 10–12 in water column (2.49–2.99 kPa) for LP gas. For BTU content, multiply ft³/hr x 2500 (LP) or ft³/hr x 1000 (NG). For Megajoule content, multiply m³/hr x 93.15 (LP) or m³/hr x 37.26 (NG).

204 (5.78) 301 (8.52)

228 (6.46)

327 (9.26)

Governor system

Operating rpm Fuel consumption

Natural gas

Liquid propane

Starter

Compression ratio

Oil capacity including filter

ft³/hr (m³/hr) 1/2 Load Full Load

1/2 Load

ft3/hr (gal/hr) [L/hr]

Controls	
Two-line plain text multilingual LCD	Simple user interface for ease of operation.
Mode buttons: AUTO	Automatic start on utility failure. Weekly, Bi-weekly, or Monthly selectable exerciser.
MANUAL	Start with starter control, unit stays on. If utility fails, transfer to load takes place.
OFF	Stops unit. Power is removed. Control and charger still operate.
Ready to Run/Maintenance messages	Standard
Engine run hours indication	Standard
Programmable start delay between 2–1500 seconds	Standard (programmable by dealer only)
Utility Voltage Loss/Return to Utility adjustable (brownout setting)	From 140-171 V / 190-216 V
Future Set Capable Exerciser/Exercise Set Error warning	Standard
Run/Alarm/Maintenance logs	50 events each
	Cyclic cranking: 16 sec on, 7 rest (90 sec maximum duration).
Engine start sequence	Starter cannot re-engage until 5 sec after engine has stopped.
Starter lock-out	Standard
Smart Battery Charger	Standard
Charger Fault/Missing AC warning Low Battery/Battery Problem Protection and Battery Condition indication	Standard
Automatic Voltage Regulation with Over and Under Voltage Protection	Standard
	Standard
Under-Frequency/Overload/Stepper Overcurrent Protection	Standard
Safety Fused/Fuse Problem Protection	Standard
Automatic Low Oil Pressure/High Oil Temperature Shutdown	Standard
Overcrank/Overspeed (@ 72 Hz)/rpm Sense Loss Shutdown	Standard
High Engine Temperature Shutdown	Standard
Internal Fault/Incorrect Wiring protection	Standard
Common external fault capability	Standard
Field upgradable limiware	Standard Applicable Applicable for symptom

^{**}Sound levels are taken from the front of the generator. Sound levels taken from other sides of the generator may be higher depending on installation parameters. Rating definitions - Standby; Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. (All ratings in accordance with BS5514, IS03046 and DIN6271). * Maximum kilovolt amps and current are subject to and limited by such factors as fuel BTU/megajoute content, ambient temperature, altitude, engine power and condition, etc. Maximum power decreases approximately 3.5% for each 1,000 ft (304.8 m) above sea level; and also will decrease approximately 1% for each 10 °F (6 °C) above 60 °F (16 °C).



Switch Options

20/22/24 kW

Service Rated Automatic Transfer Switch Features

- Intelligently manages up to four air conditioner loads with no additional hardware.
- Up to eight additional large (240 VAC) loads can be managed when used in conjunction with Smart Management Modules (SMMs).
- Electrically operated, mechanically-held contacts for fast, clean connections.
- Main breakers are rated for 80% continuous load.
- 2-pole, 250 VAC contactors.
- Service equipment rated, dual coil design.
- Rated for both aluminum and copper conductors.
- Main contacts are silver plated or silver alloy to resist welding and sticking.
- NEMA/UL 3R aluminum outdoor enclosure allows for indoor or outdoor mounting flexibility.


Dimensions

			nps 120/24 sition Servi					
	Hei	Height Width				Height		Donth
	H1	H2	W1	W2	Depth			
in	26.8	30.1	10.5	13.5	6.9			
cm	67.95	76.43	26.67	34.18	17.5			

Wire Ranges			
Conductor Lug	Neutral Lug	Ground Lug	
250 MCM - #6	350 MCM - #6	2/0 - #14	

Model	G007039-1, G007039-3 (20 kW) G007043-2, G007043-3 (22 kW) G007210-1 (24 kW)		
No. of poles	2		
Current rating (amps)	200		
Voltage rating (VAC)	120/240, 10		
Utility voltage monitor (fixed)* -Pick-up -Dropout	80% 65%		
Return to Utility*	Approx. 13 sec		
ETL or UL listed	Standard		
Enclosure type	NEMA/UL 3R		
Circuit breaker protected	22,000		
Lug range	250 MCM - #6		

*Function of Evolution controller Exercise can be set to weekly, bi-weekly, or monthly






Available Accessories


20,	/22	/24	kW
Description.	-		-

Model #	Product	Description
G007101-0	Battery Pad Warmer	Pad warmer rests under the battery. Recommended for use if temperature regularly falls below 0 °F (-18 °C). (Not necessary for use with AGM-style batteries).
G007102-0	Oil Warmer	Oil warmer slips directly over the oil filter. Recommended for use if temperature regularly falls below 0 °F (-18 °C).
G007103-1	Breather Warmer	Breather warmer is for use in extreme cold weather applications. For use with Evolution controllers only in climates where heavy icing occurs.
G005621-0	Auxiliary Transfer Switch Contact Kit	The auxiliary transfer switch contact kit allows the transfer switch to lock out a single large electrical load that may not be needed. Not compatible with 50 amp pre-wired switches.
G007027-0 - Bisque	Fascia Base Wrap Kit (Standard on 22/24 kW)	The fascia base wrap snaps together around the bottom of the new air-cooled generators. This offers a sleek, contoured appearance as well as offering protection from rodents and insects by covering the lifting holes located in the base.
G005703-0 - Bisque	Touch-Up Paint Kit	If the generator enclosure is scratched or damaged, it is important to touch up the paint to protect from future corrosion. The touch-up paint kit includes the necessary paint to correctly maintain or touch up a generator enclosure.
G006485-0	Scheduled Maintenance Kit	Generac's scheduled maintenance kit provides all the items necessary to perform complete routine maintenance on a Generac automatic standby generator (oil not included).
G007005-0	Wi-Fi LP Tank Fuel Level Monitor	The Wi-Fi enabled LP tank fuel level monitor provides constant monitoring of the connected LP fuel tank. Monitoring the LP tank's fuel level is an important step in verifying the generator is ready to run during an unexpected power failure. Status alerts are available through a free application to notify users when the LP tank is in need of a refill.
G007000-0 (50 amp) G007006-0 (100 amp)	Smart Management Module	Smart Management Modules (SMM) are used to optimize the performance of a standby generator. It manages large electrical loads upon startup and sheds them to aid in recovery when overloaded. In many cases, using SMM's can reduce the overall size and cost of the system.
G007169-0 - 4G LTE G007170-0 - Wi-Fi/ Ethernet	Mobile Link [®] Cellular Accessories	The Mobile Link family of Cellular Accessories allow users to monitor generator status from anywhere in the world, using a smart phone, tablet, or PC. Easily access information such as the current operating status and maintenance alerts. Users can connect an account with an authorized service dealer for fast, friendly, and proactive service. With Mobile Link, users are taken care of before the next power outage.
G007220-0 - Bisque	Base Plug Kit	Base plugs snap into the lifting holes on the base of air-cooled home standby generators. This offers a sleek, contoured appearance, as well as offers protection from rodents and insects by covering the lifting holes located in the base. Kit contains four plugs, sufficient for use on a single air-cooled home standby generator.

Dimensions & UPCs

Model	UPC		
G007038-1	696471074185		
G007038-3	696471074185		
G007039-1	696471074192		
G007039-3	696471074192		
G007042-2	696471074208		
G007042-3	696471074208		
G007043-2	696471074215		
G007043-3	696471074215		
G007209-0	696471071511		
G007210-1	696471084801		



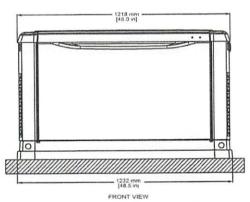

Dimensions shown are approximate. See installation manual for exact dimensions. DO NOT USE THESE DIMENSIONS FOR INSTALLATION PURPOSES.



Section 4: Generator Placement

Generator Placement

See Figure 4-1. All air-cooled generators come with a composite pad. This composite pad elevates the generator and helps prevent water from pooling around base.

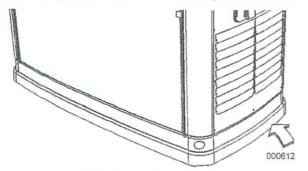


Figure 4-1. Composite Pad

The composite pad allows the generator to be placed on two types of surfaces:

- on 5 in (127 mm) of compacted pea gravel or crushed stone
- on a concrete pad

See local codes to verify what type of site base is required. If a concrete pad is required, all federal, state, and local codes must be followed. Place generator, with composite pad attached, and position correctly as per dimensional information given in *Site Preparation*.

NOTE: Generator must be level within 0.5 in (13 mm).

NOTE: See *Figure 4-2*. DO NOT remove composite pad for mounting generator to concrete. The composite pad is pre-drilled to accommodate mounting bolts.

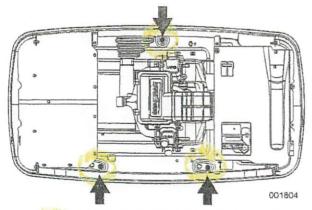


Figure 4-2. Mounting Hole Locations

Three mounting holes are available if codes require securing generator to concrete. Mounting holes are located inside the generator compartment—two in front and one in back.

Three 3/8 in (or M10) lag bolts (not supplied) are recommended for securing the generator to a concrete pad.

NOTE: The top of the generator carton has a template which can be used to mark the concrete pad to pre-drill the mounting holes.

Fascia Installation (If Applicable)

- Locate the four threaded black rubber bumpers supplied with the loose parts. (See Parts Shipped Loose.)
- See Figure 4-3. Remove bumpers from bag and screw them into threaded holes located inside the end pieces of the fascia (two each) opposite one another (A).

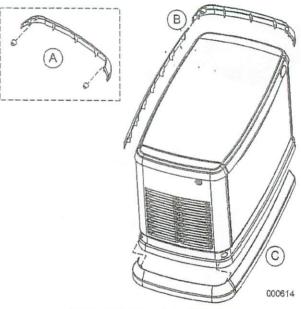


Figure 4-3. Fascia Installation

 Snap one of the end pieces into one of the front/ rear pieces of fascia. Repeat this action with the other two remaining pieces of fascia (B).

NOTE: Do not assemble all four pieces together at this point.


- Place both assemblies at the generator base and fit the rubber mounts into the lifting holes in the generator base (C).
- Once aligned, snap together the two remaining connection points.

ELECTRIC GENERATOR PRE-CAST CONCRETE PADS PAD DEPOT, INC.

DESIGN CALCULATIONS: WIND EXPOSURE = Condition C IMPORTANCE FACTOR = 1 Vult = 170 mph SHAPE FACTOR = 0.90EXPOSURE ADJUSTMENT FACTOR (Uplift) = 0.67 (Ht. Above Ground 5')

PAD FOR: GENERAC AIR-COOLED 16KW: 18KW: 20KW: 22KW: 24KW GENERATORS

L = 4.0' W = 2.1' H = 2.4' Unit Wt. = 455lbs. Pad Wt = 225lbs Po(wind) = 26.5x1.21=32.06psfV(vertical reaction) = 225lbs + 455lbs = 680lbs Overturn Uplift (U) = (L)(H)(Po)(Shape Factor) = 4.0x2.4x32.06x0.9 = 277lbs Wind Uplift, Ph = 60psf Wind U = (W)(L)(Ph)(Exp. Adj. Factor) = 4.0x2.4x60x0.67 = 386lbsTotal Uplift = U + Wind U = 277 + 386 = 663lbsTotal V (Vertical Download= Pad Wt.+ Unit Wt.= 225 + 455 = 680lbs > 663lbs

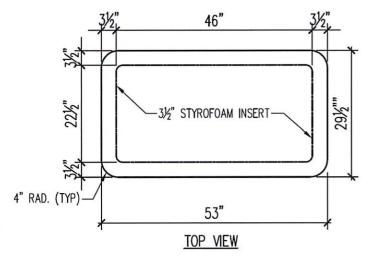

DESIGN CRITERIA NOTES:


1. ALL CONCRETE TO BE 3000 PSI, 28 DAY STRENGTH.

2. ALL REINFORCED GRADE STEEL TO BE A-615 GR 60.

3. 7th. ED. 2020 FLORIDA BUILDING CODE.

4. WND DESIGN: Vult = 170 mph; Vasd = 132 mph.

5. WIND EXPOSURE = C

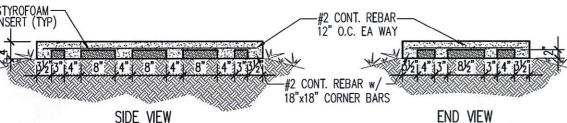



Digitally signed by Lan-Anh Nguyen Date: 2021.06.12

21:39:34 -04'00'





CONSULTANT LAN ENGINEERING CA#32690 4801 48th AVE. N. ST. PETERSBURG, FLORIDA 33714 PHONE (727) 688-5632

THESE CONSTRUCTION DOCUMENTS HAVE BEEN PREPARED UNDER THE DIRECT SUPERVISION OF LAN-ANH NOUVEN, P.E. (FL.# 68225), LAH-ANH NOUVEN, HEREBY CERTIFIES THAT THESE DOCUMENTS COMPLY WITH ALL APPLICABLE SECTIONS OF THE FLORIDA BUILDING CODE 2020 TO THE SUPERIOR S

THESE PLANS SHALL REFERENCE COMPLIANCE WITH THE 2020, 7th. EDITION FLORIDA BUILDING THIS DRAWING AND DESIGN IS VALID FOR 12 MONTHS AFTER THE DATE IT IS SIGNED & SEALED. DATE:

CLIENT:

PRE-CAST CONCRETE **GENERATOR PAD** 16/18/20/22/24 KW GENERATORS

PROJECT
DATE:
DRAWN B
SCALE:

SHEET NERX00-21 3/3/2021 G.S. OF 1 N.T.S.



Automatic Transfer Switches



Service and Non-Service Rated **Automatic Transfer Switches**



GENERAC





Models: RXSC100A3

> RXSW100A3 RXSW150A3 RXSC200A3 RXSW200A3





Description

Generac Automatic Transfer Switches are designed for use with single phase generators that utilize an Evolution™ or Nexus™ Controller. The 100 and 200 amp open transition switches are available in single phase in both service equipment rated and non-service equipment rated configurations. The 150 amp open transition switch is only available in a service rated equipment configuration.

Standard Features

Service rated (RTSW) Generac Automatic Transfer Switches are housed in an aluminum NEMA/UL Type 3R enclosure*, with electrostatically applied and baked powder paint. The Heavy Duty Generac Contactor is a UL recognized device, designed for years of service. The controller at the generator handles all the timing, sensing, exercising functions, and transfer commands. All switches are covered by a five year limited warranty.

* Non-service rated (RTSC) switches are housed in a steel enclosure.

Load Management Technology

Through the use of the integrated Smart A/C Module (SACM), these switches have the capability to manage up to four individual HVAC (24 VAC controlled) loads with no additional hardware. When used in tandem with external Smart Management Modules, a total of eight more loads can be managed, providing the most installation efficient power management options available.





GENERAC[®]

100-200 Amps, Single Phase

Automatic Transfer Switches

Functions

All timing and sensing functions originate in the generator controller.

Utility Voltage Drop-out	<65%
Timer to Generator Start	10 Second Factory Set, Adjustable Between 2 - 1,500 Seconds by a Qualified Dealer*
Engine Warmup Delay	5 Seconds
Standby Voltage Sensor	65% for 5 Seconds
Utility Voltage Pickup	>80%
Re-transfer Time Delay	15 Seconds
Engine Cooldown Timer	60 Seconds
Exerciser	Nexus™: 12 Minutes Weekly Evolution™: 5 to 12 Minutes Adjustable, Weekly/Bi-weekly/Monthly
The Transfer Switch can be Operated Manually	/ Without Power Applied

^{*} When used in conjunction with units utilizing Evolution™ controls

Specifications

Model	RXSC100A3	RXSW100A3	RXSW150A3	RXSC200A3	RXSW200A3
Amps	100	100	150	200	200
Voltage	120/240, 1ø	120/240, 1ø	120/240, 1ø	120/240, 1ø	120/240, 1ø
Load Transition Type (Automatic)	Open Transition	Open Transition Service Rated	Open Transition Service Rated	Open Transition	Open Transition Service Rated
Enclosure Type	NEMA/UL 3R	NEMA/UL 3R	NEMA/UL 3R	NEMA/UL 3R	NEMA/UL 3R
UL Rating	UL/CUL	UL	UL	UL/CUL	UL
Withstand Rating (Amps)	10,000	10,000	22,000	10,000	22,000
Lug Range	2/0 -	#14		250 MCM - #6	




100-200 Amps, Single Phase

Automatic Transfer Switches


Dimensions

Model		RXSC100A3 RXSW100A3 RXSW		RXSW150A3	RXSC200A3	RXSW200A3	
Usinht is (see)	H1	17.2 (437.9)	17.2 (437.9)	26.8 (679.4)	17.2 (437.9)	26.8 (679.4)	
Height - in (mm)	H2	20.0 (508.0)	20.0 (508.0)	30.0 (672.0)	20.0 (508.0)	30.0 (672.0)	
Mildle in (man)	W1	12.5 (317.5)	12.5 (317.5)	10.5 (266.7)	12.5 (317.5)	10.5 (266.7)	
Width - in (mm)	W2	14.6 (370.8)	14.6 (370.8)	13.5 (342.9)	14.6 (370.8)	13.5 (342.9)	
Depth - in (mm)		7.1 (180.1)	7.1 (180.1)	6.3 (160.1)	7.1 (180.1)	6.3 (160.1)	
Weight - Ibs (kg)		20.0 (9.1)	22.5 (10.2)	39.0 (17.7)	20.0 (9.1)	39.0 (17.7)	

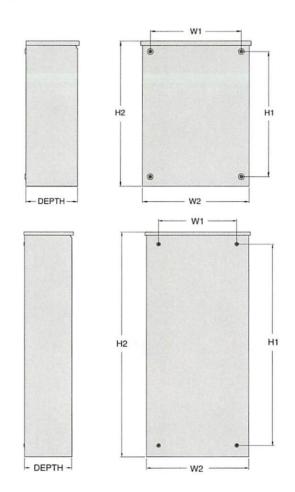



Cable Engineered by Draka 600 Volt, Tray Cable PVC/Nylon Insulated Circuit Conductors Overall PVC Jacket



Components

- A: (3) -#1 AWG Class B stranded, 8000 series, aluminum conductors w/50 mils (1.27 mm) heat and moisture resistant, polyvinyl chloride (PVC) insulation and jacketed w/ 7 mils (0.18 mm) nylon applied directly to the surface of the insulation.
- B: (6) -#18 AWG Class K stranded, soft drawn, bare copper conductors w/15 mils (0.38 mm) heat and moisture resistant, polyvinyl chloride (PVC) insulation and jacketed w/ 4 mils (0.10 mm) nylon applied directly to the surface of the insulation.
- C: (1) -#6 AWG Class B stranded, 8000 series, aluminum conductor w/30 mils (0.76 mm) heat and moisture resistant, polyvinyl chloride (PVC) insulation and jacketed w/ 5 mils (0.13 mm) nylon applied directly to the surface of the insulation
- D: Mylar binder tape.
- E: 80 mils (2.03 mm) of heat and moisture resistant, polyvinyl chloride (PVC) jacket.

Print Legend

(UL) E60544 POWER AND CONTROL TRAY CABLE TYPE TC-ER-JP 1 AWG AL (42,4 mm2) 3/C + 6 AWG AL (13,3 mm2) 1/C GROUND THWN CONDS & 18 AWG (0,82 mm2) 6/C TFFN CONDS 600V 75C DRY/75C WET OIL RES I SUNLIGHT RESISTANCE DIRECT BURIAL JOIST PULL GENERAC P/N AL1622 "sequential footage print"

Physical Characteristics

Cable Weight: 664 lb/mft (988 kg/km)

Copper Weight: 31 lb/mft (46 kg/km)

Aluminum Weight: 267 lb/mft (397 kg/km)

Nominal Cable OD: 1.130 in (28.7 mm)

				•	•				
R e v	DATE	CHANGE DETAIL			One Tamaqua Blvd		Draka Engineered Solutions		
0	10/12/17	New Issue					One Tamaqua Blvd		
1	10/18/17	Changed PN, Cable Weight			Schuyikill Haven PA 17972 Phone: 570-385-4381 Fax: 570-385				
2	10/24/17	Added JP installation	n under ratings						
3									
A	Approvals: Engineering: Final:		Project Name: Generac		Generac				
Draka Cableteq USA Inc. reserves the right to modify this information without prior notification and does not make a warrardy or representation of any kind, whether implied or					Part Number:		382924		
expressed with respect to the Information contained herein. Draka Cableteq assumes no fixes, and will not be liable for direct or indirect, special; incidental or consequential damages, any defect or personal injury resulting from the use of this document. EngDrawing-RevO1-April07					Quote Number:	Q04278-3			
					File Number:	type tc ti	type tc thhn-pvc 3C1AL 1C6AL 6C18BC 382924 GENERAC		
					Page Number:		Page 1 of 2		

Physical Characteristics

Conductor Color Code:

1 AWG - Black, White and Red

6 AWG - Green

18 AWG - Black, Red, Yellow, Yellow/Black, Blue and White

Jacket Color:

Orange

Electrical / Optical Characteristics

Voltage:

600V

Specifications

Conductors: ASTM B 3, ASTM B 174, ASTM B 801

Insulation: ICEA S-95-658 (NEMA WC 70), ICEA S-73-532 (NEMA WC 57), UL 83 for Type THWN wires

Jacket: ICEA S-95-658 (NEMA WC 70), ICEA S-73-532 (NEMA WC 57), UL 1277

Ratings

UL THWN 600V

UL Type TC-ER-JP 600V

The insulation is acceptable for use in locations at 75 °C dry and 75 °C wet.

The cable is suitable for use in cable trays, aerial or direct burial installations.

The cable is JP rated for installation in accordance with Part II of Article 334.

Packaging

Bulk reels


Rev	DATE	CHANGE DETAIL			SPRYSMIAN		Draka Engineered Solutions			
0	10/12/17	New Issue						One Tamaqua Blvd		
1	10/18/17	Changed PN, C	Cable Weight			One Tamaqua Blvd Schuylkill Haven PA 17972 Phone: 570-385-4381 Fax: 570-385-109				
2	10/24/17	Added JP insta	lation under ratings							
3										
A	Approvals: Engineering: Final:		Project Name:	Name: Generac						
Draka Cableteq USA Inc. reserves the right to modify this information without prior notification and does not make a warranty or representation of any kind, whether implied or expressed with respect to the information contained herein. Draka Cableteq assumes no itsiss, and will not be lable for direct or indired, special; incidental or consequential damages,					her Implied or	Part Number:		382924		
						Quote Number:	Q04278-3			
any defect or personal injury resulting from the use of this document. EngDrawing-Rev01-April07					File Number:	type tc thhn-pvc 3C1AL 1C6AL 6C18BC 382924 GENERAC				
						Page Number:	Page 2 of 2			



Dale Jarosz EC13009069 10949 SW 93rd Terrace Ocala, FL 34481 727-294-3241 August 16, 2022 Customer: Marsha & Gary Powers 8957 SW Tustenuggee Avenue Lady Lake, FL 32024

Nole Grang

Electrical Line Diagram NEC 2017

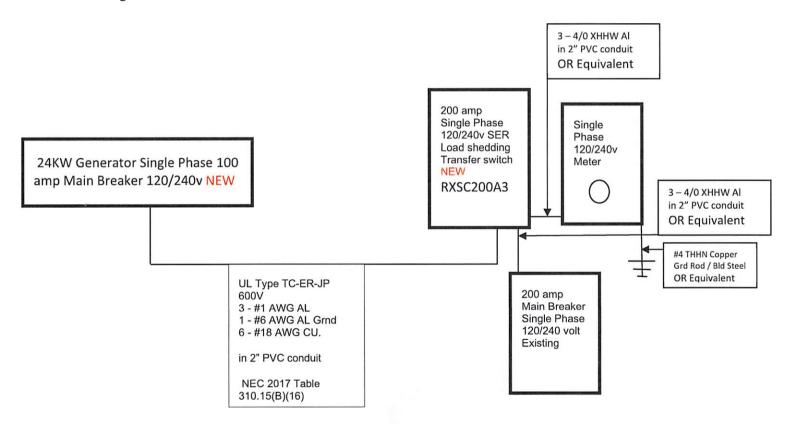

	Residential Optional Calc	ulation	9/25/1997 Gary & Marsha Powers					
		Version 2010 H						
STEP 1	Article 220.82 (B) (1),(2)			GenerX Gen	erators Inc.			
sq. ft ▼	2000 General Lighting load	6,000 VA	111B Dunbar Ave.					
	2 Small Appliance	3,000 VA		Fl. 34677				
	1 Laundry circuit	1,500 VA		813-814-5900 office	/ 727-213-9073Fax			
	Gen.Lgt, Sm App.& Laun. Load	10,500 VA		8/16/2022 11:42				
	_							
STEP 2	Article 220.82 (C)		General lighting	g, Sm. Appl. & Laundry	10,500 VA			
A/C Con	denser & Fixed Electric Space Heatin	g QTY	Total 1					
A/C #1 ▼	VA AHU 1 Select ▼	VA 1 ▼	Heating Load	VA				
A/C #2 ▼	VA AHU 2 Select ▼	VA Qty ▼	CU Load	VA				
A/C #3 ▼	VA AHU 3 Select ▼	VA Qty ▼	•					
A/C #4 ▼	VA AHU 4 Select ▼	VA Qty ▼	Electric Space Heat @ 6	5% <4, 40% >3, vs. A/C @ 100%	VA			
A/C #5 🔻	VA AHU 5 Select 🔻	VA Qty ▼						
STEP 3	_ Article 220.82 (B) (3)		Appliance	Demand Load	11,407 VA			
4,500 VA ▼	1 Water Heater	4,500 VA						
1,400 VA ▼		1,400 VA	Dryer De	emand Load	5,000 VA			
600 VA ▼		600 VA		.				
1,030 VA ▼		1,030 VA	Range D	emand Load	12,000 VA			
690 VA		690 VA	Somiler	- B-mand	04 E60 VA			
400 VA ▼		400 VA	Service	e Demand	21,563 VA			
1,200 VA ▼	- '	1,200 VA VA		Demand Load	90 A			
1,440 VA ▼	Mini Refrig	VA VA		Demanu Loud	an W			
170 VA ▼		VA VA		Neutral Demand	78 A			
☐ 6,670 VA ▼	-	VA VA		House bonnana	IVA			
1,500 VA ▼	-	VA VA		Min.Service Req.	100 A			
	select ▼ Jacuzzi Tub	VA		•				
	select	VA		Min. Feeder size	4			
	3/4 hp ▼ Well Pump	1,587 VA		Min. Neutral size	4			
	select ▼ Fountain Pump	VA		Eq. Grding Cond.	8			
	select ▼ Elevator	VA			Copper			
	Pool Equip. Panel Other Load	VA Apply Deman VA No Demand	d					
	Other Load	VA No Demand	Total Ap	opliance Load 11,407 V	/A			
				,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				
	STEP 4 Article 220.82 (B) (3)							
	Electric Clothes Dryers	5,000 VA						
	STEP 5 Article 220.82 (B) (3)	Cal C damand	8000					
or N	Electric Ranges 12,000 W umber of appliances	Col C demand	0000					
]	• •	Cooktop	Col B demand					
		Cooktop	Col B demand	Load Shed	(1) AC/AH			
	_	Oven(s)	Col B demand					
		Oven(s)	Col B demand					
	Number of applia		Dem. Factor					
		Cooktop & Oven Demand L	oad		imp1ids@comcast.net			
>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>>								
				1 0 - C - No				
	Pool Panel Feeder Calculation Continuous Motors 0	(See Note) A 0	B N 0		n-continuous Motors			
	Non-continuous 0		0 0	select ▼ ☐ 240v	select ▼ □ 240v			
	Spa heater 11 kVA		0	select ▼ □ 240v	select ▼ □ 240v			
İ	Pool heater 3.5 ton		0	select ▼ □ 240v	select ▼ □ 240v			
	Pool heater 5 ton		0	select ▼ □ 240v	select ▼ □ 240v			
I	Pool Light select ▼ 0		0 0	4 -	select ▼ □ 240v			
	ı • 	□ 240v 0	0 0	4 '	. –			
I	other load 0	□ 240v 0	0 0		Motor Neutral Load			
I		240v 0	0 0					
ĺ	☐ Min.Copper Pool Feeder Minimum Panel Rating	AWG A Phase	A A Amperes Neut. load	Max.Unbalanced Neutral Loa	u			
	minimitatii Faitei Naung	A Flidse	,poroo itout toau	4				