



Freedom Forever
Planset Revision Letter

9/13/2023
REV #2

Attn. Columbia County (FL):

The changes outlined in Revision Details have been applied to the plans corresponding to the following customer:

PEG HICKEY ADD-ON
327 NW CARR CT , LAKE CITY, FL 32055

Revision Details:

Adjusted tie in to line side tap in automatic transfer switch

All corresponding changes are notated on the plans by revision clouds.

Thank you for your time in reviewing these plans. Please reach out if you have any additional questions or concerns.

Construction Engineering
Freedom Forever
engineering@freedomforever.com

ROOF MOUNT PHOTOVOLTAIC SYSTEM

CODES:

THIS PROJECT COMPLIES WITH THE FOLLOWING:
2020 7TH EDITION FLORIDA BUILDING CODE: BUILDING
2020 7TH EDITION FLORIDA BUILDING CODE: RESIDENTIAL
2020 7TH EDITION FLORIDA BUILDING CODE: MECHANICAL
2020 7TH EDITION FLORIDA BUILDING CODE: PLUMBING
2020 7TH EDITION FLORIDA BUILDING CODE: FUEL GAS
2020 7TH EDITION FLORIDA BUILDING CODE: ENERGY CONSERVATION
2020 7TH EDITION FLORIDA BUILDING CODE: EXISTING BUILDING
2020 7TH EDITION FLORIDA BUILDING CODE: ACCESSIBILITY
2020 7TH EDITION FLORIDA FIRE PREVENTION CODE
2017 NATIONAL ELECTRIC CODE
AS ADOPTED BY COLUMBIA COUNTY (FL)

VICINITY MAP:

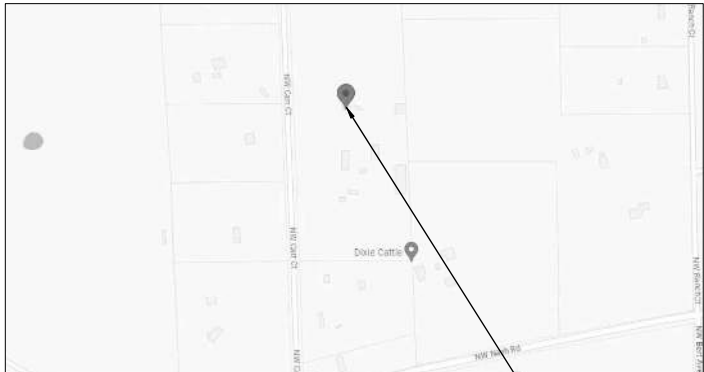


TABLE OF CONTENTS:

PV-1	SITE LOCATION
PV-2	SITE PLAN
PV-2A	ROOF PLAN WITH MODULES LAYOUT
PV-2B	ROOF AND STRUCTURAL TABLES
PV-3	MOUNTING DETAILS
PV-4	THREE LINE DIAGRAM
PV-5	CONDUCTOR CALCULATIONS
PV-6	EQUIPMENT & SERVICE LIST
PV-7	LABELS
PV-7A	SITE PLACARD
PV-8	OPTIMIZER CHART
PV-9	SAFETY PLAN
PV-10	SAFETY PLAN
APPENDIX	MANUFACTURER SPECIFICATION SHEETS

CONSTRUCTION NOTES:

CONDUIT AND CONDUCTOR SPECIFICATIONS ARE BASED ON MINIMUM CODE REQUIREMENTS AND ARE NOT MEANT TO LIMIT UP-SIZING AS REQUIRED BY FIELD CONDITIONS.

ALL SOLAR ENERGY SYSTEM EQUIPMENT SHALL BE SCREENED TO THE MAXIMUM EXTENT POSSIBLE AND SHALL BE PAINTED A COLOR SIMILAR TO THE SURFACE UPON WHICH THEY ARE MOUNTED.

MODULES SHALL BE TESTED , LISTED AND IDENTIFIED WITH FIRE CLASSIFICATION IN ACCORDANCE WITH UL 2703. SMOKE AND CARBON MONOXIDE ALARMS ARE REQUIRED PER SECTION R314 AND 315 TO BE VERIFIED AND INSPECTED BY INSPECTOR IN THE FIELD.

DIG ALERT (811) TO BE CONTACTED AND COMPLIANCE WITH EXCAVATION SAFETY PRIOR TO ANY EXCAVATION TAKING PLACE

PHOTOVOLTAIC SYSTEM GROUND WILL BE TIED INTO EXISTING GROUND AT MAIN SERVICE FROM DC DISCONNECT/INVERTER AS PER 2017 NEC SEC 250.166(A).

SOLAR PHOTOVOLTAIC SYSTEM EQUIPMENT WILL BE INSTALLED IN ACCORDANCE WITH REQUIREMENTS OF ART. 690 OF THE 2017 NEC

THE MAIN SERVICE PANEL WILL BE EQUIPPED WITH A GROUND ROD OR UFER

UTILITY COMPANY WILL BE NOTIFIED PRIOR TO ACTIVATION OF THE SOLAR PV SYSTEM

SOLAREEDGE OPTIMIZERS ARE LISTED TO IEC 62109-1 (CLASS II SAFETY) AND UL 1741 STANDARDS

INSTALL CREW TO VERIFY ROOF STRUCTURE PRIOR TO COMMENCING WORK. EMT CONDUIT ATTACHED TO THE ROOF USING CONDUIT MOUNT.

THIS SYSTEM DESIGNED WITH:
WIND SPEED: 120
WIND EXPOSURE: C



This item has been digitally signed and sealed by David Hoehman on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Digitally signed
by David
Hoehman
Date:
2023.09.14
12:14:32 -04'00'

CLIENT:
PEG HICKEY ADD-ON
327 NW CARR CT, LAKE CITY, FL 32055
AHJ: COLUMBIA COUNTY (FL)
UTILITY: FPL - FLORIDA POWER & LIGHT
METER: ACD8733
PHONE: (386) 867-0620
EMAIL: BIGDOGMOM1@GMAIL.COM
FINANCE: OTHER

SYSTEM:
SYSTEM SIZE (DC): 47 X 380 = 17,860 KW
SYSTEM SIZE (AC): 13,800 KW @ 240V
MODULES: 47 X JINKO SOLAR:
JKM380M-6RL3-B
OPTIMIZERS: 47 X SOLAREEDGE S440
INVERTER 1: SOLAREEDGE SE10000HJUSRGM [SI1]
INVERTER 2: SOLAREEDGE SE3800HJUSRGM [SI1]

REVISIONS		
NO.	REVISED BY	DATE
1	A.M.	8/21/2023
2	T.L.	9/13/2023
-	-	-











freedom
FREEDOM FOREVER LLC
2619 CONSULATE DR SUITE 800, ORLANDO, FL 32819
Tel: (800) 385-1075
GREG ALBRIGHT

CONTRACTOR LICENSE:
CERTIFIED ELECTRICAL CONTRACTOR
EC13008056


SITE LOCATION			
JOB NO:	DATE:	DESIGNED BY:	SHEET:
350453	9/13/2023	T.L.	PV-1



LEGEND:


-  CHIMNEY
-  PIPE VENT
-  MODULES
-  CONDUIT
-  SETBACK
-  AC DISCONNECT
-  JUNCTION BOX
-  SUBPANEL
-  ISOLATED LOAD PANEL
-  MAIN SERVICE PANEL

NW CARR CT

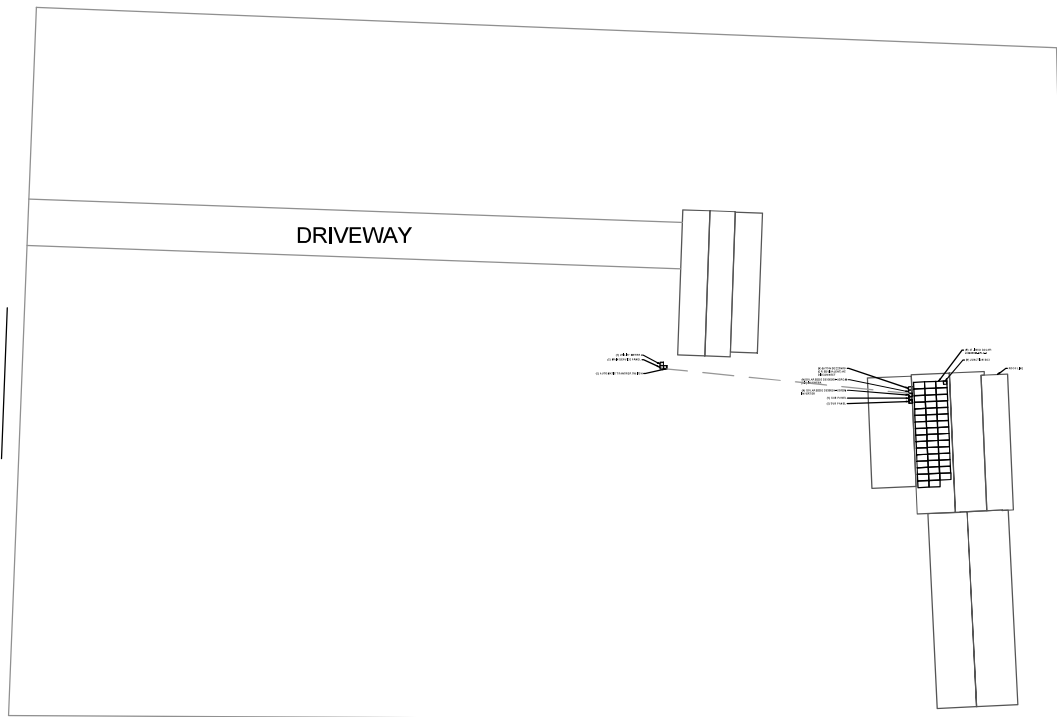

SITE PLAN
SCALE: 1/64" = 1'-0"

1



I, David Hoehman, am the State Engineer for the said
Professional Engineer and the signature must be written
for any electronic, signed.

Digitally
signed by
David
Hoehman
Date:
2023.09.14
12:14:59
-04'00'

ROOF AREA: 9445.04 SQ. FT.

CLIENT:
PEG HICKEY ADD-ON
327 NW CARR CT, LAKE CITY, FL 32055
AHJ: COLUMBIA COUNTY (FL)
UTILITY: FPL - FLORIDA POWER & LIGHT
METER: ACD8733
PHONE: (386) 867-0620
EMAIL: BIGDOGMOM1@GMAIL.COM
FINANCE: OTHER

SYSTEM:
SYSTEM SIZE (DC): 47 X 380 = 17,860 KW
SYSTEM SIZE (AC): 13,800 KW @ 240V
MODULES: 47 X JINKO SOLAR:
JKM380M-6RL3-B
OPTIMIZERS: 47 X SOLAREDGE S440
INVERTER 1: SOLAREDGE SE10000H-USRGM
(S1)
INVERTER 2: SOLAREDGE SE3800H-USRGM
(S1)

REVISIONS		
NO.	REVISED BY	DATE
1	A.M.	8/21/2023
2	T.L.	9/13/2023
-	-	-



FREEDOM FOREVER LLC
2619 CONSULATE DR SUITE 800, ORLANDO,
FL 32819
Tel: (800) 385-1075
GREG ALBRIGHT


CONTRACTOR LICENSE:
CERTIFIED ELECTRICAL CONTRACTOR
EC13008056


SITE PLAN


JOB NO:	DATE:	DESIGNED BY:	SHEET:
350453	9/13/2023	T.L.	PV-2


LEGEND:


 CHIMNEY


 PIPE VENT


 MODULES


 CONDUIT


 SETBACK


 AC DISCONNECT

 JUNCTION BOX


 SUBPANEL

 ISOLATED LOAD PANEL

 MAIN SERVICE PANEL

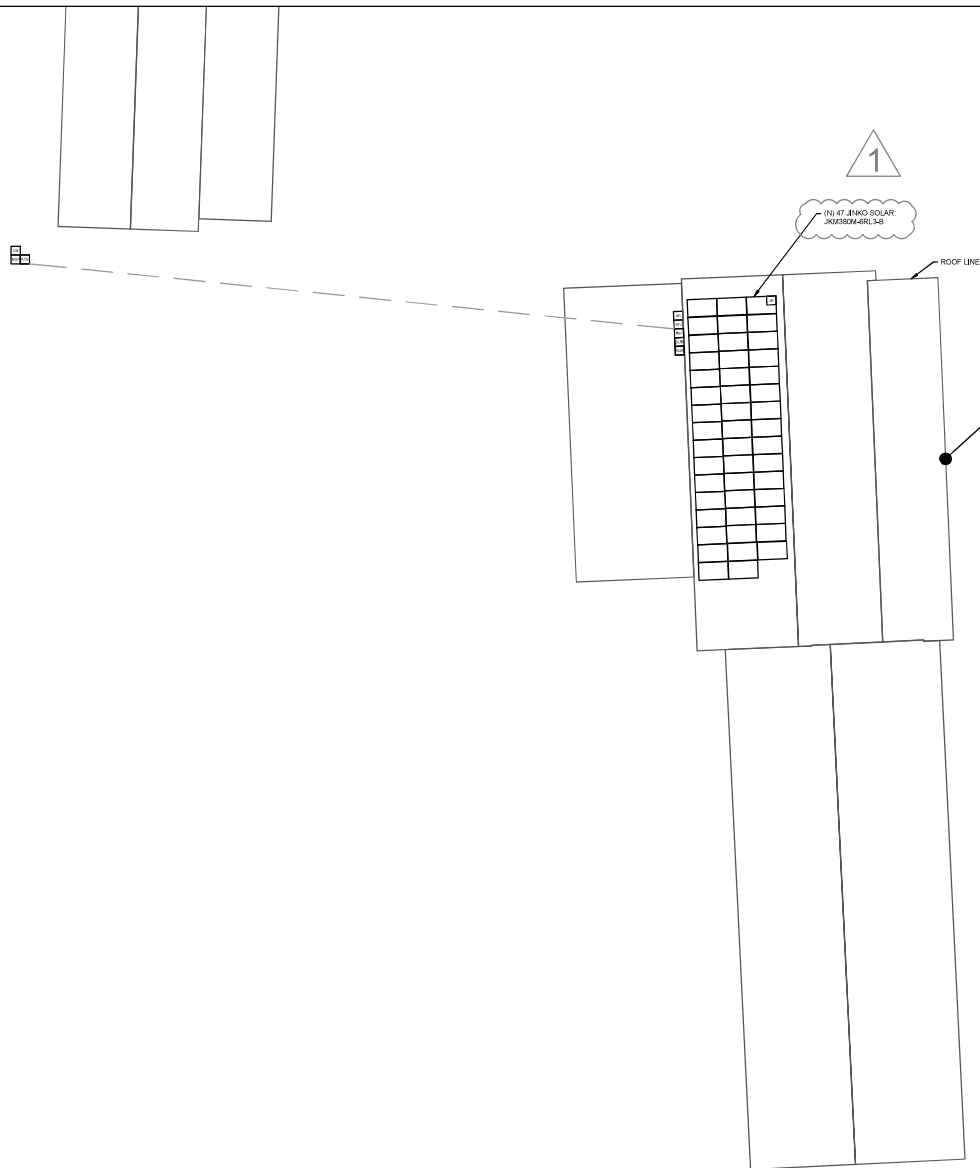

TOTAL ROOF AREA: 9445.04 SQ FT
TOTAL ARRAY AREA: 965.67 SQ FT
ARRAY COVERAGE: 10.22%
SYSTEM DISTRIBUTED WEIGHT: 2.31 LBS
S-5: SOLARFOOT POINT-LOAD: 12.66 LBS




Digitally signed by Ryan Ngo, PE. on the date and/or time stamp shown using a digital signature. Printed copies of this document are not considered signed and sealed and the signature must be verified by a 3rd Party Certificate Authority on any electronic copy.

Roof Area: 9445,04 SQ FT

CLIENT:
PEG HICKEY ADD-ON
327 NW CARR CT, LAKE CITY, FL 32055
AHJ: COLUMBIA COUNTY (FL)
UTILITY: FPL - FLORIDA POWER & LIGHT
METER: ACD8733
PHONE: (386) 867-0620
EMAIL: BIGDOGMOM1@GMAIL.COM
FINANCE: OTHER

SYSTEM:
SYSTEM SIZE (DC): 47 X 380 = 17,860 KW
SYSTEM SIZE (AC): 13,800 KW @ 240V
MODULES: 47 X JINKO SOLAR:
JKM380M-6RL3-B
OPTIMIZERS: 47 X SOLAREEDGE S440
INVERTER 1: SOLAREEDGE SE10000H-JSRGM [SI1]
INVERTER 2: SOLAREEDGE SE3800H-JSRGM [SI1]

REVISIONS		
NO.	REVISED BY	DATE
1	A.M.	8/21/2023
2	T.L.	9/13/2023
-	-	-




FREEDOM FOREVER LLC

2619 CONSULATE DR SUITE 800, ORLANDO, FL 32819

Tel: (800) 385-1075

GREG ALBRIGHT



CONTRACTOR LICENSE:
CERTIFIED ELECTRICAL CONTRACTOR
EC13008056

ROOF PLAN WITH MODULES LAYOUT			
JOB NO:	DATE:	DESIGNED BY:	SHEET:
350453	9/13/2023	T.L.	PV-2A

ROOF PLAN
SCALE: 1/24" = 1'-0"

1

NOTES:

1. EMT CONDUIT ATTACHED TO THE ROOF USING CONDUIT MOUNTS
2. ATTACHED CLAMPS AT 25% FROM THE EDGE AND 50% FROM THE CENTER OF THE MODULES
3. JUNCTION BOX IS MOUNTED TO THE RAIL.

ROOF DETAILS:

TOTAL ROOF AREA: 9445.04 SQ FT
TOTAL ARRAY AREA: 965.67 SQFT
ARRAY COVERAGE: 10.22%
SYSTEM DISTRIBUTED WEIGHT: 2.31 LBS
S-5I: SOLARFOOT POINT-LOAD: 12.66 LBS



This item has been digitally signed and sealed by Ryan Ngo, PE. on the date and/or time stamp shown using a digital signature. Printed copies of this document are not considered signed and sealed and the signature must be verified by a 3rd Party Certificate Authority on any electronic copy.

ROOF AREA STATEMENT						
ROOF	MODULE QUANTITY	ROOF PITCH	ARRAY PITCH	AZIMUTH	ROOF AREA	ARRAY AREA
ROOF 1	47	21	21	268	1508.93 SQ FT	965.67 SQ FT
----	----	----	----	----	SQ FT	SQ FT
----	----	----	----	----	SQ FT	SQ FT
----	----	----	----	----	SQ FT	SQ FT
----	----	----	----	----	SQ FT	SQ FT
----	----	----	----	----	SQ FT	SQ FT
----	----	----	----	----	SQ FT	SQ FT
----	----	----	----	----	SQ FT	SQ FT
----	----	----	----	----	SQ FT	SQ FT
----	----	----	----	----	SQ FT	SQ FT
----	----	----	----	----	SQ FT	SQ FT

CLIENT:
PEG HICKEY ADD-ON
327 NW CARR CT, LAKE CITY, FL 32055
AHJ: COLUMBIA COUNTY (FL)
UTILITY: FPL - FLORIDA POWER & LIGHT
METER: ACD8733
PHONE: (386) 867-0620
EMAIL: BIGDOGGMOM1@GMAIL.COM
FINANCE: OTHER

SYSTEM:
SYSTEM SIZE (DC): 47 X 380 = 17,860 KW
SYSTEM SIZE (AC): 13,800 KW @ 240V
MODULES: 47 X JINKO SOLAR:
JKM380M-6RL3-B
OPTIMIZERS: 47 X SOLAREEDGE S440
INVERTER 1: SOLAREEDGE SE10000HJUSRGM [SI1]
INVERTER 2: SOLAREEDGE SE3800HJUSRGM [SI1]

REVISIONS		
NO.	REVISED BY	DATE
1	AJM	8/21/2023
2	T.L.	9/13/2023
-	-	-



FREEDOM FOREVER LLC
2619 CONSULATE DR SUITE 800, ORLANDO, FL 32819
Tel: (800) 385-1075
GREG ALBRIGHT




CONTRACTOR LICENSE:
CERTIFIED ELECTRICAL CONTRACTOR
EC13008056

ROOF DETAILS			
JOB NO:	DATE:	DESIGNED BY:	SHEET:
350453	9/13/2023	T.L.	PV-2B

BACKFEED FUSE SIZING					
MAX. CONTINUOUS OUTPUT 58.00A @ 240V					
58.00	X	1.25	=	73AMPS	80A FUSES - OK



Digitally signed
by David
Hoehman
Date:
2023.09.14
12:15:13 -04'00'

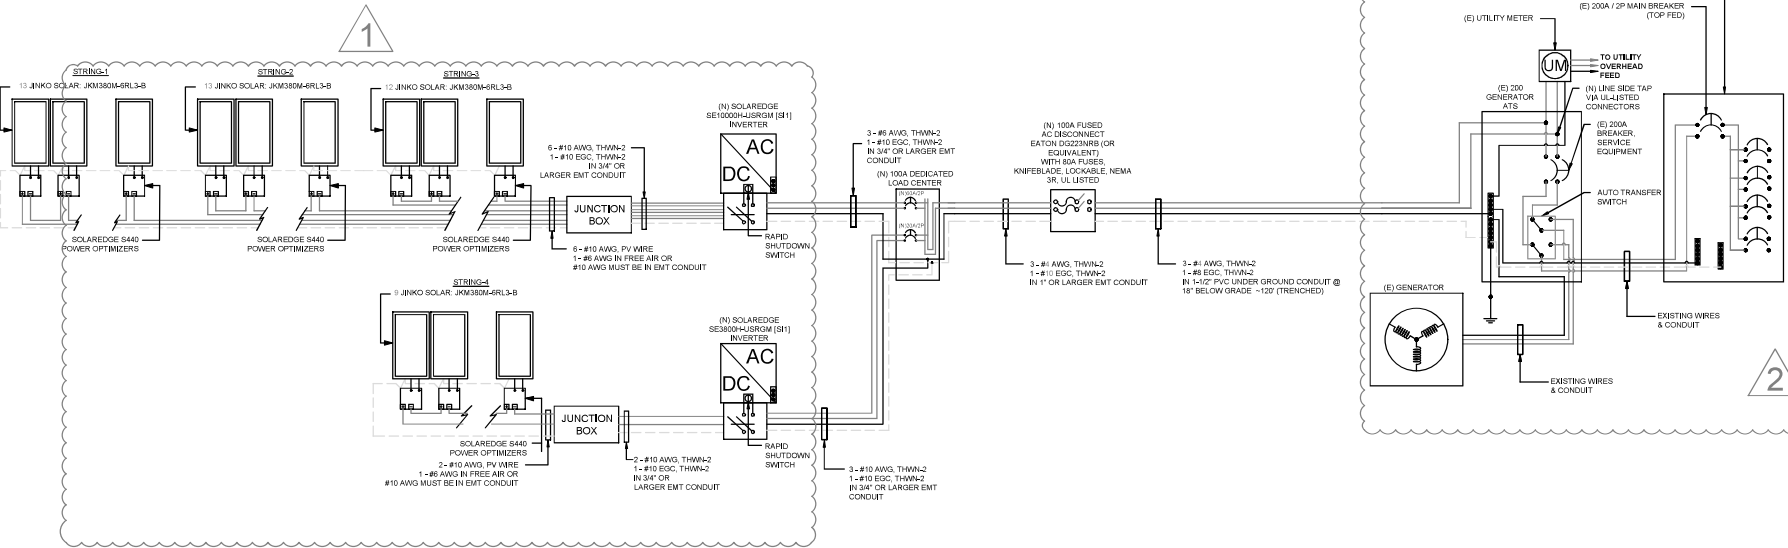

CLIENT:
PEG HICKEY ADD-ON
327 NW CARR CT, LAKE CITY, FL 32055
AHJ: COLUMBIA COUNTY (FL)
UTILITY: FPL - FLORIDA POWER & LIGHT
METER: ACD8733
PHONE: (386) 867-0620
EMAIL: BIGDOGMOM1@GMAIL.COM
FINANCE: OTHER

SYSTEM:
SYSTEM SIZE (DC): 47 X 380 = 17,860 KW
SYSTEM SIZE (AC): 13,800 KW @ 240V
MODULES: 47 X JINKO SOLAR:
JMK380M-6RL3-B
OPTIMIZERS: 47 X SOLAREdge S440
INVERTER 1: SOLAREdge SE10000HJSRGM
INVERTER 2: SOLAREdge SE3800HJSRGM

REVISIONS		
NO.	REVISED BY	DATE
1	A.M.	8/21/2023
2	T.L.	9/13/2023
-	-	-

freedom
FOREVER LLC
2619 CONSULATE DR SUITE 800, ORLANDO,
FL 32819
Tel: (800) 385-1075
GREG ALBRIGHT
CONTRACTOR LICENSE:
CERTIFIED ELECTRICAL CONTRACTOR
EC13008056


NOTE:
CONDUIT AND CONDUCTORS SPECIFICATIONS ARE BASED
ON MINIMUM CODE REQUIREMENTS AND ARE NOT MEANT
TO LIMIT UP-SIZING AS REQUIRED BY FIELD CONDITIONS

THREE LINE DIAGRAM			
JOB NO: 350453	DATE: 9/13/2023	DESIGNED BY: T.L.	SHEET: PV-4



CONDUCTOR AMPACITY CALCULATIONS IN ACCORDANCE WITH NEC 690.8.


CONDUCTOR CALCULATIONS			
JOB NO: 350453	DATE: 9/13/2023	DESIGNED BY: T.L.	SHEET: PV-5

[illegible][illegible][illegible]

EQUIPMENT & SERVICE LIST			
JOB NO: 350453	DATE: 9/13/2023	DESIGNED BY: T.L.	SHEET: PV-6

WARNING:
POWER SOURCE OUTPUT
CONNECTION
DO NOT RELOCATE THIS
OVERCURRENT DEVICE.

705.12(B)(2)(3)(b)




"WARNING"
DUAL POWER SOURCES
SECOND SOURCE IS PHOTOVOLTAIC SYSTEM
RATED AC OUTPUT CURRENT - 58.00 AMPS
AC NORMAL OPERATING VOLTAGE - 240 VOLTS

690.54

**SOLAR PV SYSTEM EQUIPPED
WITH RAPID SHUTDOWN**


**TURN RAPID
SHUTDOWN SWITCH TO
THE "OFF" POSITION TO
SHUT DOWN PV SYSTEM
AND REDUCE SHOCK
HAZARD IN THE ARRAY**



690.56(C)(1)(A)

**EMERGENCY RESPONDER
THIS SOLAR PV SYSTEM EQUIPPED
WITH RAPID SHUTDOWN**

**TURN RAPID SHUTDOWN
SWITCH TO THE "OFF"
POSITION TO SHUT DOWN
ENTIRE PV SYSTEM**



NFPA 11.12.2.1.1.1.1

**PV SYSTEM AC DISCONNECT
RATED AC OUTPUT CURRENT - 58.00 AMPS
AC NORMAL OPERATING VOLTAGE - 240 VOLTS**

690.15, 690.54

**RAPID SHUTDOWN SWITCH FOR
SOLAR PV SYSTEM**

690.56(C)(3)

INVERTER

AC

If you have any questions about your system, please call
our Customer Support Team at

888.557.6431


or visit freedomforever.com/customer-service



*Freedom Forever is a licensed contractor in all states it operates in. For more information, visit freedomforever.com/Disclaimer

NOTES:

1. NEC ARTICLES 690 AND 705 AND IRC SECTION R324 MARKINGS SHOWN HEREON.
2. ALL MARKING SHALL CONSIST OF THE FOLLOWING:
 - A. UV RESISTANT SIGN MATERIAL WITH ENGRAVED OR MACHINE PRINTED LETTERS OR ELECTRO-PLATING.
 - B. RED BACKGROUND COLOR WHITE TEXT AND LINE WORK.
 - C. ARIAL FONT.
3. ALL SIGNS SHALL BE SIZED APPROPRIATELY AND PLACED IN THE LOCATIONS SPECIFIED. SIGNAGE CANNOT BE HAND-WRITTEN.
4. SIGNS SHALL BE ATTACHED TO THE SERVICE EQUIPMENT WITH POP-RIVETS OR SCREWS



Digitally signed
by David
Hoehman
Date:
2023.09.14
12:15:57 -04'00'


"WARNING"
ELECTRICAL SHOCK HAZARD.
TERMINALS ON BOTH LINE AND LOAD SIDES
MAY BE ENERGIZED IN THE OPEN POSITION.

690.13 (B)

**PV SYSTEM DC DISCONNECT
MAXIMUM VOLTAGE: 480V
MAXIMUM CIRCUIT CURRENT: 27A
MAX RATED OUTPUT CURRENT OF
THE CONTROLLER OR DC-TO-DC
CONVERTER: 15A**

690.53

ARRAY



NEC 690.31(G)(3) & (4)

"WARNING"
PHOTOVOLTAIC POWER SOURCE

EVERY 10' ON CONDUIT AND ENCLOSURES

CLIENT:
PEG HICKEY ADD-ON
327 NW CARR CT, LAKE CITY, FL 32055
AHJ: COLUMBIA COUNTY (FL)
UTILITY: FPL - FLORIDA POWER & LIGHT
METER: ACD8733
PHONE: (386) 867-0620
EMAIL: BIGDOGMOM1@GMAIL.COM
FINANCE: OTHER

SYSTEM:
SYSTEM SIZE (DC): 47 X 360 = 17,860 KW
SYSTEM SIZE (AC): 13,800 KW @ 240V
MODULES: 47 X JINKO SOLAR:
JKM380M-6RL3-B
OPTIMIZERS: 47 X SOLAREEDGE S440
INVERTER 1: SOLAREEDGE SE1000H-JSRGM [SI]
INVERTER 2: SOLAREEDGE SE3800H-JSRGM [SI]

NO.	REVISIONS		DATE
	REVISED BY		
1	A.M.		8/21/2023
2	T.L.		9/13/2023
-	-		-

freedom
FOREVER
FREEDOM FOREVER LLC
2619 CONSULATE DR SUITE 800, ORLANDO,
FL 32819
Tel: (800) 385-1075
GREG ALBRIGHT

CONTRACTOR LICENSE:
CERTIFIED ELECTRICAL CONTRACTOR
EC13008056

LABELS			
JOB NO:	DATE:	DESIGNED BY:	SHEET:
350453	9/13/2023	T.L.	PV-7




Digitally
signed by
David
Hoehman
Date:

2023.09.14
12:16:11 -04'00'

This item has been digitally signed and sealed by David Hoehman on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified for any electronic copies.

CAUTION:

POWER TO THIS BUILDING IS
ALSO SUPPLIED FROM THE
FOLLOWING SOURCES WITH
DISCONNECTS AS SHOWN

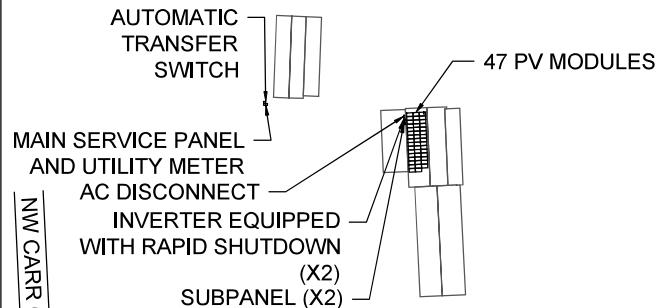

WARNING

TURN OFF PHOTOVOLTAIC AC DISCONNECT
PRIOR TO WORKING INSIDE PANEL

2

CLIENT:
PEG HICKEY ADD-ON
327 NW CARR CT, LAKE CITY, FL 32055
AHJ: COLUMBIA COUNTY (FL)
UTILITY: FPL - FLORIDA POWER & LIGHT
METER: ACD8733
PHONE: (386) 867-0620
EMAIL: BIGDOGDOM1@GMAIL.COM
FINANCE: OTHER

SYSTEM:
SYSTEM SIZE (DC): 47 X 360 = 17,860 KW
SYSTEM SIZE (AC): 13,800 KW @ 240V
MODULES: 47 X JINKO SOLAR:
JKM380M-6RL3-B
OPTIMIZERS: 47 X SOLAREEDGE S440
INVERTER 1: SOLAREEDGE SE10000H-USRGM
[SI1]
INVERTER 2: SOLAREEDGE SE3800H-USRGM
[SI1]

NO.	REVISIONS		DATE
	REVISED BY		
1	A.M.		8/21/2023
2	T.L.		9/13/2023
-	-		-



FREEDOM FOREVER LLC
2619 CONSULATE DR SUITE 800, ORLANDO,
FL 32819
Tel: (800) 385-1075
GREG ALBRIGHT

Greg Albright

CONTRACTOR LICENSE:
CERTIFIED ELECTRICAL CONTRACTOR
EC13008056

SITE PLACARD

JOB NO:	DATE:	DESIGNED BY:	SHEET:
350453	9/13/2023	T.L.	PV-7A

NOTES:

1. NEC ARTICLES 690 AND 705 AND IRC SECTION R324 MARKINGS SHOWN HEREON.
2. ALL MARKING SHALL CONSIST OF THE FOLLOWING:
 - A. UV RESISTANT SIGN MATERIAL WITH ENGRAVED OR MACHINE PRINTED LETTERS OR ELECTRO-PLATING.
 - B. RED BACKGROUND COLOR WHITE TEXT AND LINE WORK.
 - C. AERIAL FONT.
3. ALL SIGNS SHALL BE SIZED APPROPRIATELY AND PLACED IN THE LOCATIONS SPECIFIED. SIGNAGE CANNOT BE HAND-WRITTEN.
4. SIGNS SHALL BE ATTACHED TO THE SERVICE EQUIPMENT WITH POP-RIVETS OR SCREWS.

1-15

16-30

31-45

46-60

SOLAREEDGE OPTIMIZER CHART

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

AC
INV
INV
SUB
SUB

JB



CLIENT:
PEG HICKEY ADD-ON
327 NW CARR CT, LAKE CITY, FL 32055
AHJ: COLUMBIA COUNTY (FL)
UTILITY: FPL - FLORIDA POWER & LIGHT
METER: ACD8733
PHONE: (386) 867-0620
EMAIL: BIGDOGMOM1@GMAIL.COM
FINANCE: OTHER

SYSTEM:
SYSTEM SIZE (DC): 47 X 380 = 17,860 KW
SYSTEM SIZE (AC): 13,800 KW @ 240V
MODULES: 47 X JINKO SOLAR:
JKM380M-6RL3-B
OPTIMIZERS: 47 X SOLAREEDGE S440
INVERTER 1: SOLAREEDGE SE10000HJUSRGM
[SI1]
INVERTER 2: SOLAREEDGE SE3800HJUSRGM
[SI1]

REVISIONS		
NO.	REVISED BY	DATE
1	AJM	8/21/2023
2	T.L.	9/13/2023
-	-	-



FREEDOM FOREVER LLC
2619 CONSULATE DR SUITE 800, ORLANDO,
FL 32819
Tel: (800) 385-1075
GREG ALBRIGHT

CONTRACTOR LICENSE:
CERTIFIED ELECTRICAL CONTRACTOR
EC13008056

OPTIMIZER CHART

JOB NO:	DATE:	DESIGNED BY:	SHEET:
350453	9/13/2023	T.L.	PV-8

SAFETY PLAN

INSTRUCTIONS:

1. USE SYMBOLS IN KEY TO MARK UP THIS SHEET.
2. SAFETY PLAN MUST BE MARKED BEFORE JOB STARTS AS PART OF THE PRE-PLAN
3. DOCUMENT ALL ADDITIONAL HAZARDS ON THIS PAGE & MAKE NOTES ON THE JHA SHEET

INCIDENT REPORTING:

INJURIES - CALL INJURY HOTLINE

(855) 400-7233

**If injury is life threatening, call 911 first THEN the Injury Hotline*

NON-INJURIES - USE MOBILE INCIDENT REPORTING
(Auto, Property Damage, Near Miss)



NEAREST OCCUPATIONAL/INDUSTRIAL CLINIC:

NAME: _____

ADDRESS: _____

NEAREST HOSPITAL:

NAME: _____

ADDRESS: _____

SAFETY COACH CONTACT INFORMATION:

NAME: _____

PHONE NUMBER: _____


ALL EMPLOYEES ON SITE SHALL BE MADE AWARE OF THE SAFETY PLAN AND SIGN INDICATING THAT THEY ARE AWARE OF THE HAZARDS ON-SITE AND THE PLAN FOR WORKING SAFELY.

NAME

SIGNATURE

_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

DATE: _____ TIME: _____

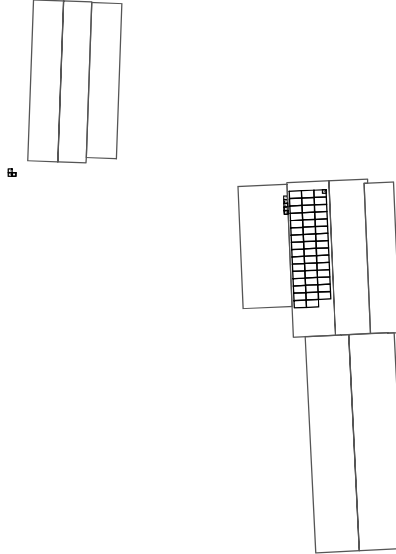

MARK UP KEY

☐ P PERMANENT ANCHOR

☐ T TEMPORARY ANCHOR

☐ IL INSTALLER LADDER

☐ B JUNCTION / COMBINER BOX

☐ S STUB-OUT

☒ SKYLIGHT

☐ NO LADDER ACCESS (STEEP GRADE OR GROUND LEVEL OBSTRUCTIONS)

☐ RESTRICTED ACCESS

— CONDUIT

☐ GAS GAS SHUT OFF

☐ H₂O WATER SHUT OFF

☐ 7 SERVICE DROP

☐ Z POWER LINES

CLIENT:
PEG HICKEY ADD-ON
327 NW CARR CT, LAKE CITY, FL 32055
AHJ: COLUMBIA COUNTY (FL)
UTILITY: FPL - FLORIDA POWER & LIGHT
METER: ACD8733
PHONE: (386) 867-0620
EMAIL: BIGDOGMOM1@GMAIL.COM
FINANCE: OTHER

SYSTEM:
SYSTEM SIZE (DC): 47 X 380 = 17,860 KW
SYSTEM SIZE (AC): 13,800 KW @ 240V
MODULES: 47 X JINKO SOLAR:
JKM380M-6RL3-B
OPTIMIZERS: 47 X SOLAREEDGE S440
INVERTER 1: SOLAREEDGE SE10000H4JSRGM [SH]
INVERTER 2: SOLAREEDGE SE3800H4JSRGM [SH]

BREAK AND WATER LOG

THIS LOG IS TO BE FILLED OUT ANY TIME THE TEMP EXCEEDS **90** DEGREES. THE CREW LEAD AND ROOF LEAD ARE RESPONSIBLE FOR ENSURING THIS IS COMPLETED AND UPLOADED AT THE END OF EVERYDAY WHEN TEMPS EXCEED **90** DEGREES

NAME	0800HRS	0900HRS	1000HRS	1100HRS	1200HRS	1300HRS	1400HRS	1500HRS	1600HRS

REVISIONS		
NO.	REVISED BY	DATE
1	AJM	8/21/2023
2	T.L.	9/13/2023
-	-	-

FREEDOM FOREVER LLC
2619 CONSULATE DR SUITE 800, ORLANDO, FL 32819
Tel: (800) 385-1075
GREG ALBRIGHT

CONTRACTOR LICENSE:
CERTIFIED ELECTRICAL CONTRACTOR
EC13008056

SAFETY PLAN			
JOB NO: 350453	DATE: 9/13/2023	DESIGNED BY: T.L.	SHEET: PW-9

JOB HAZARD ANALYSIS

Crew leader to fill out all sections below, hold a pre-job safety meeting with all personnel, and upload this completed document and the Safety Plan to Site Capture

Ladder Access

- Ladders must be inspected before each use.
- Extension ladders must be set up on a firm and level surface at a 4-to-1 rise to run angle (or 75 degrees) and the top must be secured to the structure. Extension style ladders placed on uneven, loose or slippery surfaces must additionally have the base firmly anchored or lashed so the base will not slip out.
- Extension ladders must be used with walk-through devices or the ladder must extend 36" above the stepping off point.
- A-frame ladders must only be climbed with the ladder spreader bars locked in the open position; A-frame ladders shall not be climbed while in the closed position (ex, closed and used while leaned against a structure).

- Additional notes:

Mobile Equipment

- Only Qualified operators will operate equipment; operators must maintain a certification on their person for the equipment being operated.
- Type(s) of mobile equipment (Type/Make/Model):
- Qualified operator(s):

Material Handling and Storage

- Materials will be staged/stored in a way that does not present a hazard to client, personnel or public. Materials stored on the roof will be physically protect from failing or sliding off.

Fall Protection

- A site-specific plan for fall prevention and protection is required prior to starting work and must remain onsite at all times until work is complete; a fall rescue plan must be outlined and discussed among the crew prior to work start.
- First-person-Up (FPU) must install their anchor and connect before any other task, including installing other anchors. The Last-Person-Down (LPD) must be the only person on a roof uninstalling fall protection.

- FPCP (name and title):

- FPU and LPD (name and title):

Electrical Safety

- The Electrical Qualified Person (EQP) is required onsite to perform electrical work.
- All electrical work will be performed with equipment in an electrically safe condition (de-energized) unless approval has been granted prior to work.
- Service drops and overhead electrical hazards will be identified and protected from contact, as necessary.
- EQP (name and tile):

Public Protection

- The safety of the Client and Public must be maintained at all times.
- The Client and the Public shall be prevented from entering the work zone through the use of barriers and/or signage, as required.
- Company, Client and Public property shall be protected from falling objects.
- Pets (including dogs) shall be secured by their owners prior to work start.
- The Client should not leave pets, family members, or others in charge or care of Employees, Contractors, or Temporary Workers.

- Crew leader responsible for communication with the client:

- Client and public is excluded from work area by barricades (N/A, Yes, No):

Training and Pre-Job Safety Briefing

- All employees onsite shall be made aware of the specific hazards of this project and review this HJA during a pre-job briefing, and their signature indicates awareness of site conditions and the plan to eliminate any hazards identified prior to and during the project.

- Crew leader (name/title):

- Crew member (name/title):

- Crew member (name/title):

- Crew member (name/title):

- Crew member (name/title):

- Crew member (name/title):

Airborne Contaminants:

- Asbestos-containing (Transite) piping (ACP) - Do not disturb (move, drill, cut fracture, etc.)
- Asbestos-containing thermal insulation (ACI) and Asbestos-containing duct wrapping (ACV) - do not disturb, no attic or crawlspace access is allowed if work to be performed could cause exposure to personnel, client or public.

- If yes, list specific tasks and protection in place:

Weather and Environment

- The site supervisor shall forecast the weather conditions at the job site, prior to crew arrival, in order to mitigate any hazards associated with inclement weather (heat, cold, wind, rain, etc.)
- The site supervisor will utilized a portable wind meter (anemometer) to verify actual onsite wind conditions, by checking at the ground and on any elevated work surface (ex, rooftop) prior to work start, at midday and prior to solar panel staging on a roof.
- Elevated work involving the moving or maneuvering of solar panels shall cease at 25mph (sustained wind) until wind subsides.
- Forecasted weather maximum temp (degrees f):

Heat Related Illness Prevention

- Employees shall have access to potable drinking water that is fresh, pure, and suitably cool. The water shall be located as close as practicable to the areas where employees are working. Water shall be supplied in sufficient quantity at the beginning of the work shift to provide at least one quart per employee per hour for drinking for the entire shift. Employees may begin the shift with smaller quantities of water if they identify the location and have effective means for replenishment during the shift to allow employees to drink on quart or more per hour. The frequent drinking of water shall be encouraged.
- Shade shall be present when temperature exceeds 80 degrees Fahrenheit. When the outdoor temperature in the work exceeds 80 degrees Fahrenheit, employees shall have and maintain one or more areas with shade at all times.
- New employees must be acclimatized. New employees will be monitored by their Crew Leader (site supervisor) for the first two (2) weeks of employment or longer when necessary.
- Employees will be allowed and encouraged to implement scheduled breaks during each shift. Employees must take cool-down breaks in the shade any time they feel the need to do so to protect them from overheating. Supervisors are REQUIRED to allow employees any break period they need during high heat conditions.
- Cool Vests are encouraged for all employees at all times during periods of high heat.
- Identify the location of the closet Occupational/Industrial Clinic or Hospital in case a crew member becomes ill.

What is the specific plan to provide and replenish sufficient water for all employees on site?

- If offsite replenish is necessary, where will you go to replenish water (location/address):

- Who will replenish the drinking water (name):

Restroom facilities

- Employees shall have access to restroom facilities with hand-washing stations. Use of onsite restroom is at the client's discretion (location is annotated below). If client does not give permission, location of suitable restroom facilities with hand-washing stations offsite will be provided. The onsite supervisor will identify location and make arrangements to ensure all employees have access at any point.

- Restroom facilities will be (circle one): Onsite - Offsite
- If Offsite, add location name and address:

Incident Reporting Procedure

- Contact your Site Supervisor

Name:

Phone:

- Contact your Manager

Name:

Phone:

- Contact your Site Supervisor

Name:

Phone:

With: Your full name, phone number, office location, brief description of what happen and when.

NOTE ADDITIONAL HAZARDS NOT ADDRESSED ABOVE
(add as many as necessary by using additional sheets)

Define the Hazard:	Method/steps to prevent incident:
Define the Hazard:	Method/steps to prevent incident:
Define the Hazard:	Method/steps to prevent incident:
Define the Hazard:	Method/steps to prevent incident:

CLIENT:
PEG HICKEY ADD-ON
327 NW CARR CT, LAKE CITY, FL 32055
AHJ: COLUMBIA COUNTY (FL)
UTILITY: FPL - FLORIDA POWER & LIGHT
METER: ACD8733
PHONE: (386) 867-0620
EMAIL: BIGDOGMO1@GMAIL.COM
FINANCE: OTHER

SYSTEM:
SYSTEM SIZE (DC): 47 X 360 = 17,860 KW
SYSTEM SIZE (AC): 13,800 KW @ 240V
MODULES: 47 X JINKO SOLAR:
JKM380M-6RL3-B
OPTIMIZERS: 47 X SOLAREDGE S440
INVERTER 1: SOLAREDGE SE10000H-USRGM [SH]
INVERTER 2: SOLAREDGE SE3800H-USRGM [SH]

REVISIONS		
NO.	REVISED BY	DATE
1	A.M.	8/21/2023
2	T.L.	9/13/2023
-	-	-


FREEDOM FOREVER LLC
2619 CONSULATE DR SUITE 800, ORLANDO, FL 32819
Tel: (800) 385-1075
GREG ALBRIGHT

CONTRACTOR LICENSE:
CERTIFIED ELECTRICAL CONTRACTOR
EC1308056

SAFETY PLAN			
JOB NO:	DATE:	DESIGNED BY:	SHEET:
350453	9/13/2023	T.L.	PW-10

FOR INSTALLATION REFERENCE ONLY

SCAN QR CODE TO ACCESS REFERENCE LINK

FREEDOM REFERENCES



INSTALL HOTLINE

PV INSTALLATION REFERENCES



ENPHASE IQ8



SOLAREdge HD WAVE



TESLA INVERTER

BATTERY INSTALLATION REFERENCES



TESLA POWERWALL 2



SHIFT/SELF CONSUMPTION



SOLAREdge ENERGY BANK



SOLAREdge LG RESU (BACKUP)



TESLA POWERWALL+ (BACKUP)



EAGLE 66TR G4

380-400 WATT TILING RIBBON MODULE

Positive power tolerance of 0~+3%

- NYSE-listed since 2010, Bloomberg Tier 1 manufacturer
- Top performance in the strictest 3rd party labs
- Premium solar factories in USA, Vietnam, and Malaysia

KEY FEATURES



TR Technology

Tiling Ribbon eliminates cell gaps to increase module efficiency and power.



9BB Half Cell Technology

Uniquely designed 9 busbar half cut solar cells deliver ultra-high power in a small footprint.



Shade Tolerant

Twin array design allows continued performance even with shading by trees or debris.



Thick and Tough

Fire Type 1 rated module engineered with a thick frame, 3.2mm front side glass, and thick backsheet for added durability.




Leading Warranty


25-year product and 25-year linear power warranty; 98% guaranteed first year, max 0.55% annual loss.



ENGINEERING DRAWINGS

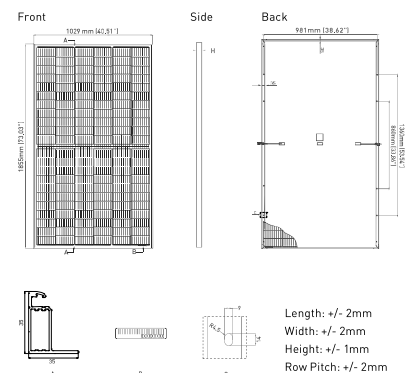

ELECTRICAL PERFORMANCE & TEMPERATURE DEPENDENCE

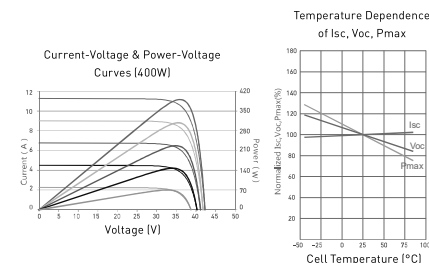

MECHANICAL CHARACTERISTICS

No. of Cells	132 (2x66)
Dimensions	1855x1029x35mm (73.03x40.51x1.37 in)
Weight	21.5 kg (47.40 lbs)
Front Glass	3.2mm, Anti-Reflection Coating High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP67 Rated
Output Cables	12 AWG, 2053mm [80.83in] or Customized Length
Connector	Staubli MC4
Fire Type	Type 1
Pressure Rating	5400Pa (Snow) & 2400Pa (Wind)

TEMPERATURE CHARACTERISTICS

Temperature Coefficients of Pmax	-0.35%/°C
Temperature Coefficients of Voc	-0.28%/°C
Temperature Coefficients of Isc	0.048%/°C
Nominal Operating Cell Temperature [NOCT]	45 ± 2°C

MAXIMUM RATINGS

Operating Temperature [°C]	-40°C~+85°C
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	20A

PACKAGING CONFIGURATION

2 pallets = 1 stack; 30pcs/pallets, 60pcs/stack, 720pcs/ 40'HQ Container

- ISO9001:2008 Quality Standards
- ISO14001:2004 Environmental Standards
- IEC61215, IEC61730 certified products
- UL61730 Certification
- ISO45001:2018 Occupational Health & Safety Standards



ELECTRICAL CHARACTERISTICS

Module Type	JKM380M-6RL3-B		JKM385M-6RL3-B		JKM390M-6RL3-B		JKM395M-6RL3-B		JKM400M-6RL3-B	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power [Pmax]	380Wp	283Wp	385Wp	286Wp	390Wp	290Wp	395Wp	294Wp	400Wp	298Wp
Maximum Power Voltage [Vmp]	36.90V	33.70V	37.02V	33.90V	37.15V	34.02V	37.27V	34.13V	37.39V	34.25V
Maximum Power Current [Imp]	10.30A	8.39A	10.40A	8.45A	10.50A	8.53A	10.60A	8.61A	10.70A	8.69A
Open-circuit Voltage [Voc]	44.22V	41.74V	44.34V	41.85V	44.47V	41.97V	44.59V	42.09V	44.71V	42.20V
Short-circuit Current [Isc]	11.12A	8.98A	11.22A	9.06A	11.32A	9.14A	11.42A	9.22A	11.52A	9.30A
Module Efficiency STC [%]	19.91%		20.17%		20.43%		20.69%		20.96%	

*STC: ☀ Irradiance 1000W/m²

NOCT: ☀ Irradiance 800W/m²

🌡 Cell Temperature 25°C

🌡 Ambient Temperature 20°C

☁ AM = 1.5

☁ AM = 1.5

🌀 Wind Speed 1m/s

*Power measurement tolerance: +/- 3%

The company reserves the final right for explanation on any of the information presented hereby. JKM380-400M-6RL3-B-A2-US

BUILDING YOUR TRUST IN SOLAR. WWW.JINKOSOLAR.US

BUILDING YOUR TRUST IN SOLAR. WWW.JINKOSOLAR.US



Power Optimizer For North America

S440, S500



POWER OPTIMIZER

PV power optimization at the module level

- Specifically designed to work with SolarEdge residential inverters
- Detected abnormal PV connector behavior, preventing potential safety issues¹
- Module-level voltage shutdown for installer and firefighter safety
- Superior efficiency (99.5%)
- Mitigates all types of module mismatch loss, from manufacturing tolerance to partial shading
- Faster installations with simplified cable management and easy assembly using a single bolt
- Flexible system design for maximum space utilization
- Compatible with bifacial PV modules
- Meets NEC requirements for arc fault protection (AFCI) and Photovoltaic Rapid Shutdown System (PVRSS)

¹ Exposed to availability in 2022

solareedge.com

solareedge


/ Power Optimizer For North America S440, S500

	S440	S500	Unit
INPUT			
Rated Input DC Power ¹	440	500	W
Absolute Maximum Input Voltage (V _{in}) ²	40	40	V _r r
MPPT Operating Range	16-60	16-60	V _r r
Maximum Short Circuit Current (I _{sc}) of Connected PV Module	14.5	15	A _r r
Maximum Efficiency	99.5	99.5	%
Warranty Efficiency	99.5	99.5	%
Overload Capacity	II	II	
OUTPUT DURING OPERATION			
Maximum Output Current	15	15	A _r r
Maximum Output Voltage	60	60	V _r r
OUTPUT DURING STANDBY (POWER OPTIMIZER DISCONNECTED FROM INVERTER OR INVERTER OFF)			
Safety Output Voltage (Power Optimizer)	1-100V	1-100V	V _r r
STANDARD COMPLIANCE			
Photovoltaic Rapid Shutdown System	NEC 2014, 2017 & 2020		
EMC	FCC Part 15 Class B, IEC61000-6-2, IEC61000-6-3		
Safety	IEC62109-1 (class II safety), UL1741		
Material	UL94 V-0, UV Resistant		
RoHS	Yes		
Fire Safety	VDE-AR-E 2100-712:2013-05		
INSTALLATION SPECIFICATIONS			
Maximum Allowed System Voltage	1000	1000	V _d c
Dimensions (W x L x H)	129 x 153 x 30 / 5.07 x 6.02 x 1.18	129 x 153 x 30 / 5.07 x 6.02 x 1.18	mm / in
Weight (including cables)	655 / 1.5	655 / 1.5	gr / lb
Input Connector	MC4m	MC4m	
Input Wire Length	0.1 / 0.32	0.1 / 0.32	m / ft
Output Connector	MC4	MC4	
Output Wire Length	(+) 2.3, (-) 0.10 / (+) 7.54, (-) 0.32	(+) 2.3, (-) 0.10 / (+) 7.54, (-) 0.32	m / ft
Operating Temperature Range ³	-40 to +85	-40 to +85	°C
Protection Rating	IP68 / Type6B	IP68 / Type6B	
Relative Humidity	0 - 100	0 - 100	%

¹ Rated power of the module at STC will not exceed the power optimizer Rated Input DC Power. Values with up to +5% power tolerance are allowed.
² For other connecting types please contact SolarEdge.
³ For ambient temperature above +25°C / +77°F, power derating is applied. Refer to Power Optimizers Temperature Derating Technical Note for more details.

PV System Design Using a SolarEdge Inverter	Single Phase HD-Wave	Three Phase for 208V grid	Three Phase for 277/480V grid	
Minimum String Length (Power Optimizers)	S440, S500	8	14	18
Maximum String Length (Power Optimizers)		25	50	50
Maximum Nominal Power per String	S700 (6000 with SE7600-US, SE1400-US)	6000	12750	15000
Maximum Allowed Connected Power per String ¹ (Permitted only when the difference in connected power between strings is 1000W or less)	Refer to Footnote 5	One String 7200W Two strings or more 7800W	15,000W	
Parallel Strings of Different Lengths or Orientations		Y		

¹ A string with more than 40 optimizers has not met NEC input string requirements, safety package will treat as over 40V requirement.
² If the inverter has a power limit, the maximum power per string will be limited to the inverter's maximum power per string. Refer to <https://www.solar-edge.com/>.
³ Please refer to the maximum power per string in the inverter's technical specifications.
⁴ Refer to the maximum power per string in the inverter's technical specifications.

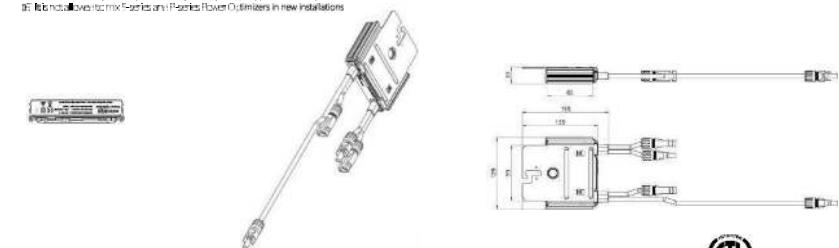

© SolarEdge Technologies, Inc. All rights reserved. SOLAREGE, the SolarEdge logo, PVRSS, HD-WAVE, and SOLAREGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are the property of their respective owners. For more information, contact SolarEdge at sales@se.com. Subject to change without notification.



Single Phase Inverter with HD-Wave Technology for North America

SE3000H-US / SE3800H-US / SE5000H-US / SE6000H-US / SE7600H-US / SE10000H-US / SE11400H-US

12-25
YEAR
WARRANTY



INVERTERS

Optimized installation with HD-Wave technology

- Specifically designed to work with power optimizers
- Record-breaking 99% weighted efficiency
- Quick and easy inverter commissioning directly from a smartphone using the SolarEdge SetApp
- Fixed voltage inverter for longer strings
- Integrated arc fault protection and rapid shutdown for NEC 2014, NEC 2017 and NEC 2020 per article 690.11 and 690.12
- UL1741 SA certified, for CPUC Rule 21 grid compliance
- Small, lightweight, and easy to install both outdoors or indoors
- Built-in module-level monitoring
- Optional: Faster installations with built-in consumption metering (1% accuracy) and production revenue grade metering (0.5% accuracy, ANSI C12.20)

solaredge.com

solaredge

/ Single Phase Inverter with HD-Wave Technology for North America

SE3000H-US / SE3800H-US / SE5000H-US / SE6000H-US / SE7600H-US / SE10000H-US / SE11400H-US

MODEL NUMBER	SE3000H-US	SE3800H-US	SE5000H-US	SE6000H-US	SE7600H-US	SE10000H-US	SE11400H-US		
APPLICABLE TO INVERTERS WITH PART NUMBER	SEXXXXH-XXXXXBXX4								
OUTPUT									
Rated AC Power Output	3000	3800 @ 240V 3300 @ 208V	5000	6000 @ 240V 5000 @ 208V	7600	10000	11400 @ 240V 10000 @ 208V	VA	
Maximum AC Power Output	3000	3800 @ 240V 3300 @ 208V	5000	6000 @ 240V 5000 @ 208V	7600	10000	11400 @ 240V 10000 @ 208V	VA	
AC Output Voltage Min.-Nom.-Max. (211 - 240 - 264)	✓	✓	✓	✓	✓	✓	✓	Vac	
AC Output Voltage Min.-Nom.-Max. (183 - 208 - 229)	-	✓	-	✓	-	-	✓	Vac	
AC Frequency (Nominal)	59.3 - 60 - 60.5 ⁽¹⁾								Hz
Maximum Continuous Output Current @240V	12.5	16	21	25	32	42	47.5	A	
Maximum Continuous Output Current @208V	-	16	-	24	-	-	48.5	A	
Power Factor	1, Adjustable - 0.85 to 0.85								
GFDI Threshold	1								A
Utility Monitoring, Islanding Protection, Country Configurable Thresholds	Yes								
INPUT									
Maximum DC Power @240V	4650	5900	7750	9300	11800	15500	17650	W	
Maximum DC Power @208V	-	5100	-	7750	-	-	15500	W	
Transformer-less, Ungrounded	Yes								
Maximum Input Voltage	480								Vdc
Nominal DC Input Voltage	380								Vdc
Maximum Input Current @240V ⁽²⁾	8.5	10.5	13.5	16.5	20	27	30.5	Adc	
Maximum Input Current @208V ⁽²⁾	-	9	-	13.5	-	-	27	Adc	
Max. Input Short Circuit Current	45								Adc
Reverse-Polarity Protection	Yes								
Ground-Fault Isolation Detection	600k Ω Sensitivity								
Maximum Inverter Efficiency	99	99.2						%	
C/E Weighted Efficiency	99						99 @ 240V 98.5 @ 208V	%	
Nighttime Power Consumption	< 2.5								W

(1) For other regional settings please contact SolarEdge support

(2) A higher current source may be used; the inverter will limit its input current to the values stated

/ Single Phase Inverter with HD-Wave Technology

for North America


SE3000H-US / SE3800H-US / SE5000H-US / SE6000H-US/
SE7600H-US / SE10000H-US / SE11400H-US

MODEL NUMBER	SE3000H-US	SE3800H-US	SE5000H-US	SE6000H-US	SE7600H-US	SE10000H-US	SE11400H-US	
ADDITIONAL FEATURES								
Supported Communication Interfaces	RS485, Ethernet, ZigBee (optional), Cellular (optional)							
Revenue Grade Metering, ANSI C12.20	Optional ⁽³⁾							
Consumption metering								
Inverter Commissioning	With the SetApp mobile application using Built-in Wi-Fi Access Point for Local Connection							
Rapid Shutdown – NEC 2014, NEC 2017 and NEC 2020, 690.12	Automatic Rapid Shutdown upon AC Grid Disconnect							
STANDARD COMPLIANCE								
Safety	UL1741, UL1741 SA, UL1699B, CSA C22.2, Canadian AFCI according to TLL M-07							
Grid Connection Standards	IEEE1547, Rule 21, Rule 14 (H)							
Emissions	FCC Part 15 Class B							
INSTALLATION SPECIFICATIONS								
AC Output Conduit Size / AWG Range	1" Maximum / 14-6 AWG					1" Maximum / 14-4 AWG		
DC Input Conduit Size / # of Strings / AWG Range	1" Maximum / 1-2 strings / 14-6 AWG					1" Maximum / 1-3 strings / 14-6 AWG		
Dimensions with Safety Switch (HxWxD)	17.7 x 14.6 x 6.8 / 450 x 370 x 174					21.3 x 14.6 x 7.3 / 540 x 370 x 185		
Weight with Safety Switch	22 / 10	25.1 / 11.4	26.2 / 11.9	38.8 / 17.6				
Noise	< 25			<50				
Cooling	Natural Convection							
Operating Temperature Range	-40 to +140 / -40 to +60°							
Protection Rating	NEMA 4X (Inverter with Safety Switch)							

(3) Inverter with Revenue Grade Meter P/N: SExxxxH-US0008NCA; Inverter with Revenue Grade Production and Consumption Meter P/N: SExxxxH-US0008NR. For consumption metering, current transformers should be ordered separately. SEACT0750-200NA-20 or SEACT0750-400NA-20, 20 units per box.
(4) Full power up to at least 50°C / 122°F; for power derating information refer to: <https://www.solaredge.com/sites/default/files/se-temperature-derating-note-na.pdf>

How to Enable Consumption Monitoring

By simply wiring current transformers through the inverter's existing AC conduits and connecting them to the service panel, homeowners will gain full insight into their household energy usage helping them to avoid high electricity bills

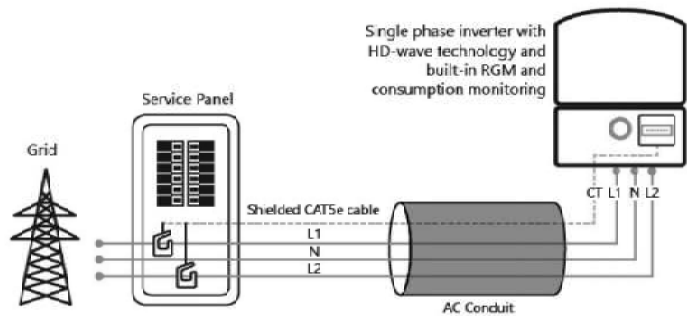

Product specifications

Eaton DG223NRB

Catalog Number: DG223NRB

Eaton General duty cartridge fuse safety switch, 100 A, NEMA 3R, Painted galvanized steel, Class H fuses, Fusible with neutral, Two-pole, Three-wire, Category: general duty safety switch, 240 V

General specifications

Product Name	Catalog Number
Eaton general duty cartridge fuse safety switch	DG223NRB
	UPC
	782113144252
Product Length/Depth	Product Height
7.38 in	19.25 in
Product Width	Product Weight
9.13 in	14 lb
Warranty	Certifications
Eaton Selling Policy 25-000, one (1) year UL Listed from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.	UL Listed
	Catalog Notes
	Maximum hp ratings apply only when dual element fuses are used. 3-Phase hp rating shown is a grounded B phase rating, UL listed.



Physical Attributes

Enclosure
NEMA 3R

Enclosure material
Painted galvanized steel

Fuse configuration
Fusible with neutral

Number Of Poles
Two-pole

Number of wires
3

Type
General duty, cartridge fused

Performance Ratings

Amperage Rating
100A

Fuse class provision
Class H fuses

Voltage rating
240V

Miscellaneous

Product Category
General duty safety switch

Resources

Catalogs
Eaton's Volume 2—Commercial Distribution

Multimedia
Double Up on Safety
Switching Devices Flex Center

Specifications and datasheets
Eaton Specification Sheet - DG223NRB



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2023 Eaton. All Rights Reserved.

Eaton is a registered trademark.
All other trademarks are property of their respective owners.




Eaton.com/socialmedia




INSULATION-PIERCING TAP CONNECTORS CONECTORES DE DERIVACIÓN QUE PERFORAN EL AISLAMIENTO

Installation Instructions:

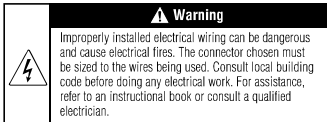

Warning

Improperly installed electrical wiring can be dangerous and cause electrical fires. The connector chosen must be sized to the wires being used. Consult local building code before doing any electrical work. For assistance, refer to an instructional book or consult a qualified electrician.

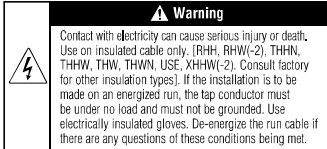

Warning

Contact with electricity can cause serious injury or death. Use on insulated cable only. (RHH, RHW(-2), THHN, THHW, THW, THWN, USE, XHHW(-2)). Consult factory for other insulation types). If the installation is to be made on an energized run, the tap conductor must be under no load and must not be grounded. Use electrically insulated gloves. De-energize the run cable if there are any questions of these conditions being met.

- Determine the direction for the tap conductor to exit and discard one end cap. **See figure 1.**
- Position the main (or feeder) side of the connector around the run cable and tighten the bolt finger tight. **See figure 2.** If required, loosen the bolt slightly to allow the connector to open completely. **DISASSEMBLY NOT RECOMMENDED.** The plastic "Turbo" spacer holds the connector open which eases installation and ensures proper connections.
- Cut the end of the tap cable squarely. **DO NOT STRIP CABLE INSULATION.**
- Insert the tap cable into the tap side of the connector until it is seated in the remaining end cap. **See figure 3.**
- Continue tightening the torque regulating bolt with a standard box or socket wrench until the torque regulating piece breaks away. If the connector has two (2) assembly bolts, alternately tighten until the hexagonal torque devices break away. **See figures 4a & 4b.** Note that the plastic "turbo" spacer on the side will also break. To make the installation even easier and to relieve torque from the cables, a second wrench can be used on the hexagonal piece on the bottom of the connector.

DO NOT use gripping type pliers, pipe, open ended or adjustable wrenches as these may damage the hexagonal torque regulating device. A torque wrench is not required.

MAKE SURE ONLY THE TOP HEXAGONAL TORQUE DEVICE OF THE BOLT HEAD IS USED FOR ASSEMBLY. THE SECOND HEX PIECE [CLOSER TO THE BODY OF THE CONNECTOR] IS USED FOR DISASSEMBLY.

Note: The torque regulating bolt ensures the correct torque is applied to the conductors without using a torque wrench. Important information such as run and tap ranges, voltage ratings and material/temperature ratings is marked on the connector.




figure 1




figure 2




figure 3




figure 4a

figure 4b

Instalación Instrucciones:



Advertencia

Los cables eléctricos mal instalados pueden ser peligrosos y provocar incendios. El conector escogido debe ser de un tamaño adecuado para los cables que se utilicen. Consulte los códigos de construcción locales antes de efectuar trabajos eléctricos. Si necesita ayuda, consulte un libro de instrucciones o consulte con un electricista capacitado.



Advertencia

Use sólo en cable aislado. (RHH, RHW(-2), THHN, THHW, THW, THWN, USE, XHHW(-2)). Consulte con la fábrica para obtener información sobre otros tipos de aislamiento). Si se va a hacer la instalación sobre un cable con corriente el conductor derivado debe estar libre de carga y no debe estar aterado. Use guantes con aislamiento eléctrico. Quite la corriente al cable del cual se hace la derivación si no se pueden cumplir estas condiciones. El contacto con electricidad puede producir lesiones graves o mortales.

- Determine la dirección en la que el conductor derivado saldrá y desdese la tapa terminal sobrante. **Vea la ilustración 1.**
- Coloque el lado principal (o de alimentación) del conector alrededor del cual se hace la derivación y apriete firmemente el dedo del perno. **Vea la ilustración 2.** Si hace falta, afloje el perno ligeramente para permitir que el conector se abra completamente. **NO ES RECOMENDABLE DESARMAR EL CONECTOR.** El espaciador "turbo" de plástico mantiene al conector abierto, lo cual facilita la instalación y asegura que las conexiones se hagan correctamente.
- Corte el extremo del cable de derivación perpendicularmente a su eje. **NO PELE EL AISLAMIENTO DEL CABLE.**
- Inserte el cable de derivación en el lado de derivación del conector hasta que tope contra la tapa terminal que queda. **Vea la ilustración 3.**
- Continué apretando este perno que regula la torsión con una llave estándar o de cubo hasta que la pieza que regula la torsión se parta y se separe. Si el conector tiene dos (2) pernos de ensamblaje, apriételos alternativamente hasta que el dispositivo de regulación de torció se parta. **Vea la ilustración 4a y 4b.** Observe que el espaciador "turbo" de plástico en el costado también se fracturará. Para hacer esta instalación aún más fácil y para aliviar la torsión de los cables, se puede usar una segunda llave sobre la pieza hexagonal al fondo del conector.

NO USE alicates de presión, llaves de turbo, llaves comunes o ajustables ya que éstas pueden dañar el dispositivo hexagonal que regula la torsión. No se requiere una llave de torsión.

ASEGÚRESE QUE SE USE, PARA EL ENSAMBLADO, SOLO EL DISPOSITIVO SUPERIOR DE REGULACIÓN DE TORSIÓN DE LA CABEZA DEL PERNO. LA SEGUNDA PIEZA HEXAGONAL (LA MÁS CERCAÑA AL CUERPO DEL CONECTOR) SE USA SOLO PARA DESARMAR EL CONECTOR.

Nota: El perno regulador de torsión garantiza la aplicación de la torsión correcta a los conductores sin usar una llave de torsión. La información importante de longitud de cable pelado y de toma, las clasificaciones de materiales y temperatura está marcada en el conector.

B-TAP® INSULATION PIERCING TAP CONNECTORS TORQUE AND CURRENT RATINGS

(Solid and/or Stranded)

CATALOG#	MAIN	TAP	NOMINAL TORQUE	TAP CURRENT RATING (IN AMPS)*
BTC2/0-14	2/0-4	10-14	80 IN. LBS.	40
BTC1/0-10	1/0-8	2-10	80 IN. LBS.	130
BTC4/0-10	4/0-3	2-10	125 IN. LBS.	130
BTC4/0-6	4/0-2	1/0-6	160 IN. LBS.	170
BTC4/0-2	4/0-2	4/0-2	160 IN. LBS.	260
BTC250-6	250-4	4/0-6	160 IN. LBS.	260
BTC250-4	250-1	3/0-4	160 IN. LBS.	225
BTC250-2	250-1/0	4/0-2	160 IN. LBS.	260
BTC350-1/0	350-1/0	350-1/0	330 IN. LBS.	350
BTC500-4	500-2/0	4/0-4	330 IN. LBS.	260
BTC500-1/0	500-4/0	350-1/0	330 IN. LBS.	350
BTC500-14	750-3/0	10-14	80 IN. LBS.	40
BTC750-250	750-250	500-250	330 IN. LBS.	430

+10-14 Cu SOLID/STRANDED; 10-12 Al SOLID/STRANDED

++2-10 Cu SOLID/STRANDED; 2-10 Al STRANDED

+++2-10 Cu SOLID/STRANDED; 2-8 Al STRANDED

++++10-14 Cu SOLID/STRANDED; 10-12 Al STRANDED

Full line is 600V dual-rated, 194°F(90°C)

* Based on NEC Table 310-16 1996 (Not more than 3 insulated conductors in a raceway at ambient temperature of 30° C) for the largest tap wire size.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.



ADVERTENCIA: Cáncer y Daño Reproductivo - www.P65Warnings.ca.gov.

One year limited warranty. See idealind.com for more information.

Garantía limitada de un año. Visite www.idealind.com para obtener detalles de la garantía.



1800 S. Prairie Drive
Sycamore, IL, U.S.A.
800-435-0705 • www.idealind.com



IDEAL INDUSTRIES, INC.

1375 Park Avenue • Sycamore, Illinois 60178 • 815.895.5181 • www.idealind.com

ALL IDEAL Customers

2/9/23

Subject: **The Buchanan B-TAP® splice/tap connectors meet the 2020 NEC article 230.46 requirement for “line side applications”**

The Buchanan B-TAP® brand of insulation piercing connectors which correspond to part numbers beginning with “BTC” meet the requirements of article 230.46 of the 2020 NEC. These products have already been tested to the newer requirements. The installation instructions are in the process of being updated to show the required notation: “suitable for use on the line side of the service equipment”. This change will take a few weeks to get into our production.

In addition, the marking “SR” will be added to the product. That addition is in process and will take a few months to complete.

This notice will provide confirmation to the inspectors that B-TAP® products meet the requirements of the 2020 and 2023 NEC article 230.46 “Spliced and Tapped Conductors”.

Sushil Keswani

A handwritten signature in cursive script, appearing to read "Sushil Keswani", written in black ink.

Director of Engineering
IDEAL Industries, Inc.,

ZMW.E5238 - Wire Connectors and Soldering Lugs

Note: We are enhancing our systems and you may notice duplicate entries/missing/outdated data. During this interim period, please contact our Customer Service at <https://www.ul.com/about/locations>.

Wire Connectors and Soldering Lugs

IDEAL INDUSTRIES INC
1375 Park Ave
SYCAMORE, IL 60178 United States

E5238

[View model for additional information](#)

Insulated butt splice crimp type connectors, Model(s): [BVS1](#), [BVS2](#), [BVS5](#)

Insulated flange spade type crimp connectors, Model(s): [SV5-3,7](#), [SV15-4](#), [SV15-6](#)

Insulated flange spade type crimp connectors, Model(s): [FSNYD1-3,7](#), [FSNYD1-4](#), [FSNYD1-5](#), [FSNYD2-3,7](#), [FSNYD2-4](#), [FSNYD2-5](#), [FSNYD5-3,7](#), [FSNYD5-4](#), [FSNYD5-5](#)

Insulated hook type crimp connectors, Model(s): [HNYD1-3,7](#), [HNYD1-4](#), [HNYD1-5](#), [HNYD2-3,7](#), [HNYD2-4](#), [HNYD2-5](#), [HNYD5-3,7](#), [HNYD5-4](#), [HNYD5-5](#), [HNY1-3,7](#), [HNY1-4](#), [HNY1-5](#), [HNY2-4](#), [HNY2-5](#), [HNY5-3,7](#), [HNY5-4](#), [HNY5-5](#)

Insulated locking spade crimp connectors, Model(s): [LSNYD1-3,7](#), [LSNYD2-3,7](#), [LSNYD5-3,7](#), [LSNYD5-4](#), [LSNYD5-5](#), [LSNYD11-4](#), [LSNYD11-5](#), [LSNYD12-4](#), [LSNYD12-5](#)

Insulated multiple stud ring type crimp connectors, Model(s): [MSRNYD1-3753](#), [MSRNYD2-3753](#), [MSRNYD5-3753](#)

Insulated parallel connectors, Model(s): [PVT1](#), [PVT14](#), [PVT2](#), [PVT22](#), [PVT5](#), [PVT8](#)

Insulated pin type connectors, Model(s): [PTNYD1-12](#), [PTNYD2-12](#), [PTNYD5-13](#)

Insulated ring type crimp connectors, Model(s): [RNYB14-11](#), [RNYB22-11](#), [RNYD1-10](#), [RNYD1-3,2](#), [RNYD1-5](#), [RNYD1-6](#), [RNYD1-8](#), [RNYD2-10](#), [RNYD2-2](#), [RNYD2-3,2](#), [RNYD2-6](#), [RNYD2-8](#), [RNYD5-10](#), [RNYD5-12](#), [RNYD5-3,2](#), [RNYD5-3,7](#), [RNYD5-5](#), [RNYD5-6](#), [RNYD5-8](#), [RNYD11-3,7](#), [RNYD11-4](#), [RNYD12-3,7](#), [RNYD12-4](#), [RNYD15-3,7](#), [RNYD15-4](#), [RNYDM2-3,7](#), [RNYDS1-3,7](#), [RNYDS1-4](#), [RNYDS2-4](#), [RNYDS2-5](#), [RNYDS5-4](#), [RV1-3,2](#), [RV1-5](#), [RV1-6](#), [RV2-3,2](#), [RV5-10](#), [RV5-3,7](#), [RV5-5](#), [RV5-6](#), [RV5-8](#), [RV11-4](#), [RV12-4](#), [RV15-4](#), [RVM1-3,7](#), [RVM2-3,7](#), [RVY1-3,2](#)

Insulated spade type crimp connectors, Model(s): [SNYD1-3,2](#), [SNYD5-3,7](#), [SNYD5-5](#), [SNYD11-3,7](#), [SNYD11-4](#), [SNYD12-3,7](#), [SNYD12-4](#), [SNYD12-5](#), [SNYD15-4](#), [SNYD111-3,7](#), [SNYD112-3,7](#), [SNYDM1-4](#), [SNYDM2-4](#), [SNYDS1-5](#), [SNYDS2-5](#), [SV11-3,7](#), [SV11-5](#), [SV12-3,7](#), [SV12-5](#), [SVM1-4](#), [SVM2-4](#), [SVY1-3,2](#), [SVY2-3,2](#), [SVY5-3,7](#), [SVY5-5](#), [SVY5-5](#), [SVY11-3,7](#), [SVY11-4](#), [SVY12-3,7](#), [SVY12-4](#), [SVY12-5](#), [SVY15-4](#), [SVY111-3,7](#), [SVY112-3,7](#), [SVM1-4](#), [SVM2-4](#), [SVY5-5](#), [SVY5-5](#), [SVY5-5](#)

Insulated splice connectors, Model(s): [PB1-](#), [PB2-](#), [PB5-](#)

Insulating caps or covers, for use on manufacturer's splice caps, for 2006-S, 2008-S connectors, Model(s): [2007](#)

Insulating caps or covers, for use on manufacturer's splice caps, for 2011-S connector, Model(s): [2014](#)

Listed pressure cable connectors, Model(s): [BHT1](#), [BHT2](#), [BHT5](#), [BN1](#), [BN2](#), [BN5](#), [BNT1-16](#), [BNT14](#), [BNT2-16](#), [BNT22](#), [BNT5-20](#), [BNT8](#), [BNYD1](#), [BNYD2](#), [BNYD5](#), [BNY11](#), [BNY12](#), [BNY15](#), [BV1](#), [BV2](#), [BV5](#), [BVT14](#), [BVT22](#), [BVT8](#)

Listed pressure ring terminal connectors, Model(s): [RNYB14-8](#), [RNYB8-11](#), [RNYB122-5](#), [RNYB122-6](#)

Listed splicing wire connectors, Model(s): [L12](#), [L13](#), [L15](#)

Non-insulated flange spade crimp connectors, Model(s): [FSN1-3,7](#), [FSN1-4](#), [FSN1-5](#), [FSN2-3,7](#), [FSN2-4](#), [FSN2-5](#), [FSN5-3,7](#), [FSN5-4](#), [FSN5-5](#), [FSNB1-3,7](#), [FSNB1-4](#), [FSNB1-5](#), [FSNB2-3,7](#), [FSNB2-4](#), [FSNB2-5](#), [FSNB5-3,7](#), [FSNB5-4](#), [FSNB5-5](#), [FSNL1-3,7](#), [FSNL2-5](#)

Non-insulated hook crimp connectors, Model(s): [HN1-4](#), [HN1-5](#), [HN2-3,7](#), [HN2-4](#), [HN2-5](#), [HNS-3,7](#), [HNS-4](#), [HNS-5](#)

Non-insulated locking type crimp connectors, Model(s): [LSN1-3,7](#), [LSN2-3,7](#), [LSN5-3,7](#), [LSN5-4](#), [LSN5-5](#), [LSN5-6](#), [LSN11-4](#), [LSN11-5](#), [LSN12-5](#)

Non-insulated multiple stud ring type crimp connectors, Model(s): [MSRNB1-3753](#)

Non-insulated parallel crimp connectors, Model(s): [PNT1](#), [PNT14](#), [PNT2](#), [PNT22](#), [PNT5](#), [PNT8](#), [PNT1](#), [PNT2](#), [PNT5](#)

Non-insulated pin type crimp connectors, Model(s): [PTN1-12](#), [PTN2-12](#), [PTN5-13](#)

Non-insulated ring type crimp connector, Model(s): [RNB1-10](#), [RNB1-3,2](#), [RNB14-11](#), [RNB14-12](#), [RNB14-16](#), [RNB1-6](#), [RNB1-8](#), [RNB2-10](#), [RNB2-2](#), [RNB2-6](#), [RNB5-12](#), [RNB8-12](#), [RNB11-4](#)

Non-insulated ring type crimp connectors, Model(s): [RNB1-3,2](#), [RNB14-10](#), [RNB14-5](#), [RNB14-8](#), [RNB1-5](#), [RNB2-10](#), [RNB22-10](#), [RNB22-12](#), [RNB22-8](#), [RNB2-3,2](#), [RNB2-8](#), [RNB5-3,2](#), [RNB5-3,7](#), [RNB5-5](#), [RNB5-6](#), [RNB5-8](#), [RNB8-10](#), [RNB8-11](#), [RNB8-16](#), [RNB8-8](#), [RNB11-3,7](#), [RNB122-5](#), [RNB122-6](#), [RNB12-3,7](#), [RNB12-5](#), [RNB138-10](#), [RNB15-3,7](#), [RNB15-4](#), [RNB15-5](#), [RNB11-3,7](#), [RNB11-5](#), [RNB12-3,7](#), [RNB12-5](#), [RNB12-6](#), [RNB12-8](#), [RNB12-10](#), [RNB12-12](#), [RNB12-14](#), [RNB12-16](#), [RNB12-18](#), [RNB12-20](#), [RNB12-22](#), [RNB12-24](#), [RNB12-26](#), [RNB12-28](#), [RNB12-30](#), [RNB12-32](#), [RNB12-34](#), [RNB12-36](#), [RNB12-38](#), [RNB12-40](#), [RNB12-42](#), [RNB12-44](#), [RNB12-46](#), [RNB12-48](#), [RNB12-50](#), [RNB12-52](#), [RNB12-54](#), [RNB12-56](#), [RNB12-58](#), [RNB12-60](#), [RNB12-62](#), [RNB12-64](#), [RNB12-66](#), [RNB12-68](#), [RNB12-70](#), [RNB12-72](#), [RNB12-74](#), [RNB12-76](#), [RNB12-78](#), [RNB12-80](#), [RNB12-82](#), [RNB12-84](#), [RNB12-86](#), [RNB12-88](#), [RNB12-90](#), [RNB12-92](#), [RNB12-94](#), [RNB12-96](#), [RNB12-98](#), [RNB12-100](#), [RNB12-102](#), [RNB12-104](#), [RNB12-106](#), [RNB12-108](#), [RNB12-110](#), [RNB12-112](#), [RNB12-114](#), [RNB12-116](#), [RNB12-118](#), [RNB12-120](#), [RNB12-122](#), [RNB12-124](#), [RNB12-126](#), [RNB12-128](#), [RNB12-130](#), [RNB12-132](#), [RNB12-134](#), [RNB12-136](#), [RNB12-138](#), [RNB12-140](#), [RNB12-142](#), [RNB12-144](#), [RNB12-146](#), [RNB12-148](#), [RNB12-150](#), [RNB12-152](#), [RNB12-154](#), [RNB12-156](#), [RNB12-158](#), [RNB12-160](#), [RNB12-162](#), [RNB12-164](#), [RNB12-166](#), [RNB12-168](#), [RNB12-170](#), [RNB12-172](#), [RNB12-174](#), [RNB12-176](#), [RNB12-178](#), [RNB12-180](#), [RNB12-182](#), [RNB12-184](#), [RNB12-186](#), [RNB12-188](#), [RNB12-190](#), [RNB12-192](#), [RNB12-194](#), [RNB12-196](#), [RNB12-198](#), [RNB12-200](#), [RNB12-202](#), [RNB12-204](#), [RNB12-206](#), [RNB12-208](#), [RNB12-210](#), [RNB12-212](#), [RNB12-214](#), [RNB12-216](#), [RNB12-218](#), [RNB12-220](#), [RNB12-222](#), [RNB12-224](#), [RNB12-226](#), [RNB12-228](#), [RNB12-230](#), [RNB12-232](#), [RNB12-234](#), [RNB12-236](#), [RNB12-238](#), [RNB12-240](#), [RNB12-242](#), [RNB12-244](#), [RNB12-246](#), [RNB12-248](#), [RNB12-250](#), [RNB12-252](#), [RNB12-254](#), [RNB12-256](#), [RNB12-258](#), [RNB12-260](#), [RNB12-262](#), [RNB12-264](#), [RNB12-266](#), [RNB12-268](#), [RNB12-270](#), [RNB12-272](#), [RNB12-274](#), [RNB12-276](#), [RNB12-278](#), [RNB12-280](#), [RNB12-282](#), [RNB12-284](#), [RNB12-286](#), [RNB12-288](#), [RNB12-290](#), [RNB12-292](#), [RNB12-294](#), [RNB12-296](#), [RNB12-298](#), [RNB12-300](#), [RNB12-302](#), [RNB12-304](#), [RNB12-306](#), [RNB12-308](#), [RNB12-310](#), [RNB12-312](#), [RNB12-314](#), [RNB12-316](#), [RNB12-318](#), [RNB12-320](#), [RNB12-322](#), [RNB12-324](#), [RNB12-326](#), [RNB12-328](#), [RNB12-330](#), [RNB12-332](#), [RNB12-334](#), [RNB12-336](#), [RNB12-338](#), [RNB12-340](#), [RNB12-342](#), [RNB12-344](#), [RNB12-346](#), [RNB12-348](#), [RNB12-350](#), [RNB12-352](#), [RNB12-354](#), [RNB12-356](#), [RNB12-358](#), [RNB12-360](#), [RNB12-362](#), [RNB12-364](#), [RNB12-366](#), [RNB12-368](#), [RNB12-370](#), [RNB12-372](#), [RNB12-374](#), [RNB12-376](#), [RNB12-378](#), [RNB12-380](#), [RNB12-382](#), [RNB12-384](#), [RNB12-386](#), [RNB12-388](#), [RNB12-390](#), [RNB12-392](#), [RNB12-394](#), [RNB12-396](#), [RNB12-398](#), [RNB12-400](#), [RNB12-402](#), [RNB12-404](#), [RNB12-406](#), [RNB12-408](#), [RNB12-410](#), [RNB12-412](#), [RNB12-414](#), [RNB12-416](#), [RNB12-418](#), [RNB12-420](#), [RNB12-422](#), [RNB12-424](#), [RNB12-426](#), [RNB12-428](#), [RNB12-430](#), [RNB12-432](#), [RNB12-434](#), [RNB12-436](#), [RNB12-438](#), [RNB12-440](#), [RNB12-442](#), [RNB12-444](#), [RNB12-446](#), [RNB12-448](#), [RNB12-450](#), [RNB12-452](#), [RNB12-454](#), [RNB12-456](#), [RNB12-458](#), [RNB12-460](#), [RNB12-462](#), [RNB12-464](#), [RNB12-466](#), [RNB12-468](#), [RNB12-470](#), [RNB12-472](#), [RNB12-474](#), [RNB12-476](#), [RNB12-478](#), [RNB12-480](#), [RNB12-482](#), [RNB12-484](#), [RNB12-486](#), [RNB12-488](#), [RNB12-490](#), [RNB12-492](#), [RNB12-494](#), [RNB12-496](#), [RNB12-498](#), [RNB12-500](#), [RNB12-502](#), [RNB12-504](#), [RNB12-506](#), [RNB12-508](#), [RNB12-510](#), [RNB12-512](#), [RNB12-514](#), [RNB12-516](#), [RNB12-518](#), [RNB12-520](#), [RNB12-522](#), [RNB12-524](#), [RNB12-526](#), [RNB12-528](#), [RNB12-530](#), [RNB12-532](#), [RNB12-534](#), [RNB12-536](#), [RNB12-538](#), [RNB12-540](#), [RNB12-542](#), [RNB12-544](#), [RNB12-546](#), [RNB12-548](#), [RNB12-550](#), [RNB12-552](#), [RNB12-554](#), [RNB12-556](#), [RNB12-558](#), [RNB12-560](#), [RNB12-562](#), [RNB12-564](#), [RNB12-566](#), [RNB12-568](#), [RNB12-570](#), [RNB12-572](#), [RNB12-574](#), [RNB12-576](#), [RNB12-578](#), [RNB12-580](#), [RNB12-582](#), [RNB12-584](#), [RNB12-586](#), [RNB12-588](#), [RNB12-590](#), [RNB12-592](#), [RNB12-594](#), [RNB12-596](#), [RNB12-598](#), [RNB12-600](#), [RNB12-602](#), [RNB12-604](#), [RNB12-606](#), [RNB12-608](#), [RNB12-610](#), [RNB12-612](#), [RNB12-614](#), [RNB12-616](#), [RNB12-618](#), [RNB12-620](#), [RNB12-622](#), [RNB12-624](#), [RNB12-626](#), [RNB12-628](#), [RNB12-630](#), [RNB12-632](#), [RNB12-634](#), [RNB12-636](#), [RNB12-638](#), [RNB12-640](#), [RNB12-642](#), [RNB12-644](#), [RNB12-646](#), [RNB12-648](#), [RNB12-650](#), [RNB12-652](#), [RNB12-654](#), [RNB12-656](#), [RNB12-658](#), [RNB12-660](#), [RNB12-662](#), [RNB12-664](#), [RNB12-666](#), [RNB12-668](#), [RNB12-670](#), [RNB12-672](#), [RNB12-674](#), [RNB12-676](#), [RNB12-678](#), [RNB12-680](#), [RNB12-682](#), [RNB12-684](#), [RNB12-686](#), [RNB12-688](#), [RNB12-690](#), [RNB12-692](#), [RNB12-694](#), [RNB12-696](#), [RNB12-698](#), [RNB12-700](#), [RNB12-702](#), [RNB12-704](#), [RNB12-706](#), [RNB12-708](#), [RNB12-710](#), [RNB12-712](#), [RNB12-714](#), [RNB12-716](#), [RNB12-718](#), [RNB12-720](#), [RNB12-722](#), [RNB12-724](#), [RNB12-726](#), [RNB12-728](#), [RNB12-730](#), [RNB12-732](#), [RNB12-734](#), [RNB12-736](#), [RNB12-738](#), [RNB12-740](#), [RNB12-742](#), [RNB12-744](#), [RNB12-746](#), [RNB12-748](#), [RNB12-750](#), [RNB12-752](#), [RNB12-754](#), [RNB12-756](#), [RNB12-758](#), [RNB12-760](#), [RNB12-762](#), [RNB12-764](#), [RNB12-766](#), [RNB12-768](#), [RNB12-770](#), [RNB12-772](#), [RNB12-774](#), [RNB12-776](#), [RNB12-778](#), [RNB12-780](#), [RNB12-782](#), [RNB12-784](#), [RNB12-786](#), [RNB12-788](#), [RNB12-790](#), [RNB12-792](#), [RNB12-794](#), [RNB12-796](#), [RNB12-798](#), [RNB12-800](#), [RNB12-802](#), [RNB12-804](#), [RNB12-806](#), [RNB12-808](#), [RNB12-810](#), [RNB12-812](#), [RNB12-814](#), [RNB12-816](#), [RNB12-818](#), [RNB12-820](#), [RNB12-822](#), [RNB12-824](#), [RNB12-826](#), [RNB12-828](#), [RNB12-830](#), [RNB12-832](#), [RNB12-834](#), [RNB12-836](#), [RNB12-838](#), [RNB12-840](#), [RNB12-842](#), [RNB12-844](#), [RNB12-846](#), [RNB12-848](#), [RNB12-850](#), [RNB12-852](#), [RNB12-854](#), [RNB12-856](#), [RNB12-858](#), [RNB12-860](#), [RNB12-862](#), [RNB12-864](#), [RNB12-866](#), [RNB12-868](#), [RNB12-870](#), [RNB12-872](#), [RNB12-874](#), [RNB12-876](#), [RNB12-878](#), [RNB12-880](#), [RNB12-882](#), [RNB12-884](#), [RNB12-886](#), [RNB12-888](#), [RNB12-890](#), [RNB12-892](#), [RNB12-894](#), [RNB12-896](#), [RNB12-898](#), [RNB12-900](#), [RNB12-902](#), [RNB12-904](#), [RNB12-906](#), [RNB12-908](#), [RNB12-910](#), [RNB12-912](#), [RNB12-914](#), [RNB12-916](#), [RNB12-918](#), [RNB12-920](#), [RNB12-922](#), [RNB12-924](#), [RNB12-926](#), [RNB12-928](#), [RNB12-930](#), [RNB12-932](#), [RNB12-934](#), [RNB12-936](#), [RNB12-938](#), [RNB12-940](#), [RNB12-942](#), [RNB12-944](#), [RNB12-946](#), [RNB12-948](#), [RNB12-950](#), [RNB12-952](#), [RNB12-954](#), [RNB12-956](#), [RNB12-958](#), [RNB12-960](#), [RNB12-962](#), [RNB12-964](#), [RNB12-966](#), [RNB12-968](#), [RNB12-970](#), [RNB12-972](#), [RNB12-974](#), [RNB12-9](#)

Splicing wire connectors, Model(s): [H-1566](#), [H-1567](#), [H-1570](#), [H-1571](#), [H-1572](#), [H-1591](#), [H-1592](#), [H-1594](#)

Terminal connectors, Model(s): [10](#), [11](#), [22](#), [250](#), [300](#), [341](#), [342](#), [410](#) with [insulating cap No. 415](#), [411](#) with [insulating cap No. 417](#), [412](#) with [insulating cap No. 417](#), [451](#), [452](#), [454](#), [48](#), [49](#), [49 Black](#), [53-B](#), [59B](#), [600](#), [71B#](#), [72B#](#), [73B#](#), [73B+](#), [74B](#), [76B](#), [76B+](#), [78B+](#), [82](#), [K-5504](#), [LSN12-4](#), [M-3](#), [PV3-750](#), [PV3-750](#), [PV3-750](#), [PV4-750](#), [PV4-750](#), [PV4-750](#), [RNB12-4](#), [RNB514-6](#), [RNB538-6](#), [RNB538-6](#), [RNB538-6](#), [RNB22-10](#), [RNB58-6](#), [RV2-6](#), [RVL2-5](#), [SV5-5](#), [WT1](#), [WT2](#), [WT3](#), [WT4](#), [WT41](#), [WT51](#), [WT52](#), [WT53](#), [WT54](#), [WT6](#)

Terminal Connectors, Model(s): [RNB22-11](#)

Wire Connectors, Model(s): [65](#), [653](#)

Wire Connectors and Soldering Lugs, Model(s): [L22](#), [L23](#), [L25](#), [PS10](#), [PS12](#), [PS2](#), [PS3](#), [PS4](#), [PS4S](#), [PS5](#), [PS6](#), [PS8](#)

- The equipment (71B, 72B and 73B) were also evaluated to the requirements of UL 2043 and are suitable for use in air handling spaces.

* - May be followed by suffix B, J, T or X.

NOTE - All models may be provided with or without prefix "V" or suffix "MP" or "V" and prefix "BP". All models may be followed by suffixes BT, UB or UF with or without a two or four digit number; with or without suffixes B, LP, NP, PF, PH, SP and/or T. Die Series terminals may be followed by Suffixes UL, UT, UF, US, or UB, with or without a two to four digit number; with or without Suffix T or B, followed by Suffixes SP, LP, NP, PF, or and/or NM, by PH or BE, with or without Suffixes NT, BS, and /or G.

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL Solutions' Follow - Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL Solutions' Follow - Up Service. Always look for the Mark on the product.

UL Solutions permits the reproduction of the material contained in Product IQ subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from Product IQ with permission from UL Solutions" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "©2023 UL LLC"

S-5!®

The Right Way!

NEW PRODUCT SolarFoot™

Introducing the new SolarFoot™ for exposed fastener metal roofing with the strength, testing, quality, and time-proven integrity you expect from S-5!. The SolarFoot provides an ideal mounting platform to attach the L-Foot (not included) of a rail-mounted PV system to the roof. This solution is The Right Way to secure rail-mounted solar systems to exposed fastener metal such as AG-Panel or R-Panel.

SolarFoot Features:

Manufactured in the U.S.A. from certified raw material

Fabricated in our own ISO 9001:2015 certified factory

All aluminum and stainless components

25yr limited warranty

Compatible with all commercial L-Foot products on the market

Factory applied 40-year isobutylene/isoprene crosslink polymer sealant for reliable weathertightness

Sealant reservoir to prevent over-compression of sealant

Load-to-failure tested Normal to Seam by a nationally accredited laboratory on numerous metal roof materials and substrates

Four points of attachment into structure or deck with tested holding strength for engineered applications



Integrated M8-1.25x17mm stud and M8-1.25 stainless steel hex flange nut included

S-5!®
The Right Way!



SolarFoot™ Mounting for Exposed Fastener Roofing

The SolarFoot is a simple, cost-effective pedestal for L-Foot (not included) attachment of rail-mounted solar PV. The unique design is compatible with all rail producer L-Foot components. The new SolarFoot assembly ensures a durable weathertight solution for the life of the roof. Special factory applied butyl co-polymeric sealant contained in a reservoir is The Right Way, allowing a water-tested seal. Stainless integrated stud and hex flange lock-nut secure the L-Foot into position. A low center of gravity reduces the moment arm commonly associated with L-Foot attachments. Direct attachment of the SolarFoot to the structural member or deck provides unparalleled holding strength.



**Fasteners sold separately. Fastener type varies with substrate. Contact S-5! on how to purchase fasteners and obtain our test results. L-Foot also sold separately.*

Fastener Selection

Metal to Metal:
1/4-14 Self Drilling Screw
1-1/2" to 2-1/2"

Metal to Wood:
1/4-14 Type 17 AB Milled Point
1-1/2" to 2-1/2"

To source fasteners for your projects, contact S-5!

When other brands claim to be "just as good as S-5!", tell them to PROVE IT.

SolarFoot Advantages:

Exposed fastener mounting platform for solar arrays attached via L-Foot and Rails

Weatherproof attachment to exposed fastener roofing

Butyl sealant reservoir provides long-term waterproof seal

M8-1.25x17mm stud with M8 hex flange nut for attachment of all popular L-Foot/rail combinations

Tool: 13 mm Hex Socket or 1/2" Hex Socket

Tool Required: Electric screw gun with hex drive socket for self-tapping screws.

Low Center of Gravity reduces moment arm commonly associated with L-Foot/Rail solar mounting scenarios

Attaches directly to structure or deck for optimal holding strength

S-5! Recommended substrate-specific (e.g. steel purlin, wood 2x4, OSB, etc.) fasteners provide excellent waterproofing and pull-out strength

Fastener through-hole locations comply with NDS (National Design Specification) for Wood Construction

S-5!® Warning! Please use this product responsibly!

The independent lab test data found at www.S-5.com can be used for load-critical designs and applications.

Products are protected by multiple U.S. and foreign patents. For published data regarding holding strength, fastener torque, patents, and trademarks, visit the S-5! website at www.S-5.com. Copyright 2017, Metal Roof Innovations, Ltd. S-5! products are patent protected.

Copyright 2017, Metal Roof Innovations, Ltd. Version 102017

Distributed by:

The right way to attach almost anything to metal roofs!

888-825-3432 | www.S-5.com |

SOLARMOUNT



SOLARMOUNT is the professionals' choice for residential PV mounting applications. Every aspect of the system is designed for an easier, faster installation experience. **SOLARMOUNT** is a complete solution with revolutionary universal clamps, **FLASHKIT PRO**, full system UL 2703 certification and 25-year warranty. Not only is **SOLARMOUNT** easy to install, but best-in-class aesthetics make it the most attractive on any block!



New & Improved:
THE PROFESSIONALS' CHOICE
With Superior Aesthetics



NOW FEATURING FLASHKIT PRO
The Complete Roof Attachment Solution
FEATURING **SHED & SEAL** TECHNOLOGY



NOW WITH UNIVERSAL MIDCLAMPS
Accommodates 30mm-51mm module frames
One tool, one-person installs are here!



REVOLUTIONARY NEW ENDCLAMPS
Concealed design and included End Caps

THE PROFESSIONALS' CHOICE FOR RESIDENTIAL RACKING

BEST INSTALLATION EXPERIENCE • CURB APPEAL • COMPLETE SOLUTION • UNIRAC SUPPORT

FOR QUESTIONS OR CUSTOMER SERVICE VISIT UNIRAC.COM OR CALL (505) 248-2702

SOLARMOUNT



BETTER DESIGNS

TRUST THE INDUSTRY'S BEST DESIGN TOOL

Start the design process for every project in our U-Builder on-line design tool. It's a great way to save time and money.

BETTER SYSTEMS

ONE SYSTEM - MANY APPLICATIONS

Quickly set modules flush to the roof on steep pitched roofs. Orient a large variety of modules in Portrait or Landscape. Tilt the system up on flat or low slow roofs. Components available in mill, clear, and dark finishes to optimize your design financials and aesthetics.

BETTER RESULTS

MAXIMIZE PROFITABILITY ON EVERY JOB


Trust Unirac to help you minimize both system and labor costs from the time the job is quoted to the time your teams get off the roof. Faster installs. Less Waste. More Profits.

BETTER SUPPORT


WORK WITH THE INDUSTRIES MOST EXPERIENCED TEAM

Professional support for professional installers and designers. You have access to our technical support and training groups. Whatever your support needs, we've got you covered. Visit Unirac.com/solarmount for more information.


CONCEALED UNIVERSAL ENDCLAMPS



END CAPS INCLUDED WITH EVERY ENDCLAMP



UNIVERSAL SELF STANDING MIDCLAMPS



U-BUILDER ONLINE DESIGN TOOL SAVES TIME & MONEY

Visit design.unirac.com

LISTED **UL2703** BONDING & GROUNDING
MECHANICAL LOADING
SYSTEM FIRE CLASSIFICATION

UNIRAC CUSTOMER SERVICE MEANS THE HIGHEST LEVEL OF PRODUCT SUPPORT

UNMATCHED EXPERIENCE	CERTIFIED QUALITY	ENGINEERING EXCELLENCE	BANKABLE WARRANTY	DESIGN TOOLS	PERMIT DOCUMENTATION
----------------------	-------------------	------------------------	-------------------	--------------	----------------------

TECHNICAL SUPPORT

Unirac's technical support team is dedicated to answering questions & addressing issues in real time. An online library of documents including engineering reports, stamped letters and technical data sheets greatly simplifies your permitting and project planning process.

CERTIFIED QUALITY PROVIDER

Unirac is the only PV mounting vendor with ISO certifications for 9001:2008, 14001:2004 and OHSAS 18001:2007, which means we deliver the highest standards for fit, form, and function. These certifications demonstrate our excellence and commitment to first class business practices.

BANKABLE WARRANTY

Don't leave your project to chance. Unirac has the financial strength to back our products and reduce your risk. Have peace of mind knowing you are providing products of exceptional quality. SOLARMOUNT is covered by a 25 year limited product warranty and a 5 year limited finish warranty.

ENHANCE YOUR REPUTATION WITH QUALITY RACKING SOLUTIONS BACKED BY ENGINEERING EXCELLENCE AND A SUPERIOR SUPPLY CHAIN

FOR QUESTIONS OR CUSTOMER SERVICE VISIT UNIRAC.COM OR CALL (505) 248-2702



Certificate of Compliance

Certificate: 70131735

Master Contract: 266909

Project: 80082031

Date Issued: 2021-06-02

Issued To: **Unirac**
1411 Broadway NE
Albuquerque, New Mexico, 87102
United States

Attention: Klaus Nicolaedis

The products listed below are eligible to bear the CSA Mark shown with adjacent indicators 'C' and 'US' for Canada and US or with adjacent indicator 'US' for US only or without either indicator for Canada only.

Issued by: *Michael Hoffnagle*
Michael Hoffnagle



PRODUCTS

CLASS - C531302 - POWER SUPPLIES - PHOTOVOLTAICS-PV Racking and clamping systems
CLASS - C531382 - POWER SUPPLIES - PHOTOVOLTAICS-PV Racking and clamping systems -
Certified to US Standards

Models:	SM	- SOLARMOUNT Flush-to-Roof is an extruded aluminum rail PV racking system that is installed parallel to the roof in landscape or portrait orientations.
	ULA	- Unirac Large Array is a ground mount system using the SolarMount (SM) platform for the bonding and grounding of PV modules.

Solarmount



Certificate: 70131735
Project: 80082031

Master Contract: 266909
Date Issued: 2021-06-02

The system listed is designed to provide bonding/grounding, and mechanical stability for photovoltaic modules. The system is secured to the roof with the L-Foot components through the roofing material to building structure. Modules are secured to the racking system with stainless steel or aluminum mid clamps and Aluminum end clamps. The modules are bonded to the racking system with the stainless-steel bonding mid clamps with piercing points. The system is grounded with 10 AWG copper wire to bonding/grounding lugs. Fire ratings of Class A with Type 1, 2, 3, 10, 19, 22 or 25 for steep slope. Tested at 5" interstitial gap which allows installation at any stand-off height.

The grounding of the system is intended to comply with the latest edition of the National Electrical Code, to include NEC 250 & 690. Local codes compliance is required, in addition to national codes. All grounding/bonding connections are to be torqued in accordance with the Installation Manual and the settings used during the certification testing for the current edition of the project report.

The system may employ optimizers/micro-inverters and used for grounding when installed per installation instructions.

UL 2703 Mechanical Load ratings:

Downward Design Load (lb/ft ²)	113.5
Upward Design Load (lb/ft ²)	50.7
Down-Slope Load (lb/ft ²)	16.13

Test Loads:


Downward Load (lb/ft ²)	170.20
Upward Load (lb/ft ²)	76.07
Down-Slope Load (lb/ft ²)	24.2

Unirac Large Array

ULA is a ground mount system using the SolarMount (SM) platform for the bonding and grounding of PV modules. ULA aluminum components merge with SM rails and installer-supplied steel pipe. The SM rail system is secured to the horizontal Pipe using the Rail Bracket components. The Rear and Front cap secures the horizontal Pipe to the vertical Pipe. The Front cap is also used to secure the Cross brace. A Slider is attached to the vertical Pipe to secure the Cross brace. The SM rails, caps, slider, rail brackets, and cross braces materials are 6105-T5 aluminum extrusion. Fasteners materials are 304 stainless steel. Horizontal and vertical pipe materials meet the minimum requirements of ASTM A53 for galvanized steel pipe in 2" and 3" diameter.

The mechanical load ratings from the SM test data will be applied to the ULA model.

Fire Testing is not applicable due to being a ground mount system.

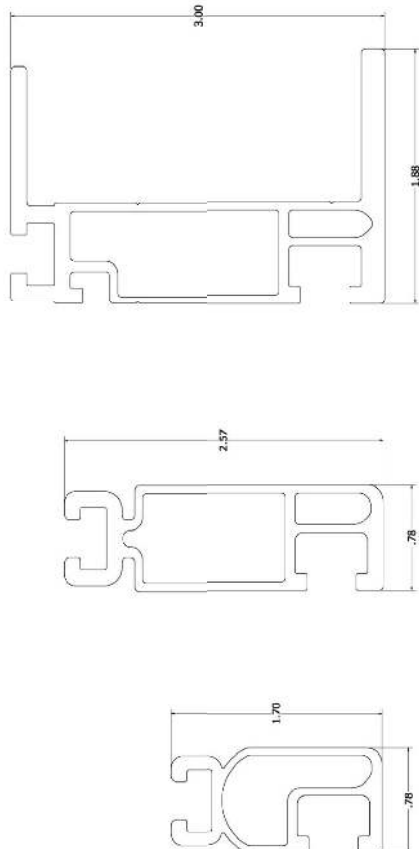

Properties	SOLARMOUNT Light	SOLARMOUNT Rail Profile 2	SOLARMOUNT HD	Units
BEAM HEIGHT	1.70	2.57	3.00	in
APPROX WEIGHT	0.491	0.728	1.271	plf
CROSS SECTION AREA	0.409	0.625	1.059	in ²
SECTION MODULUS (X-AXIS)	0.15	0.363	0.898	in ³
SECTION MODULUS (Y-AXIS)	0.067	0.113	0.221	in ³
MOMENT OF INERTIA (X-AXIS)	0.13	0.467	1.45	in ⁴
MOMENT OF INERTIA (Y-AXIS)	0.026	0.045	0.267	in ⁴
RADIUS OF GYRATION (X-AXIS)	0.564	0.865	1.17	in
RADIUS OF GYRATION (Y-AXIS)	0.254	0.269	0.502	in

Certificate



Certificate no. **US 82160015 01**

License Holder:
Unirac Inc.
1411 Broadway NE
Albuquerque NM 87102
USA

Manufacturing Plant:
Unirac Inc.
1411 Broadway NE
Albuquerque NM 87102
USA

Test report no.: USA-31440029 005
Tested to: UL 2703:2015

Client Reference: Tom Young

Certified Product: Module Rack Mounting System

License Fee - Units

Model Designation: SolarMount (SM)

7

Max System Voltage of PV Module: 1000 VDC
Max Size of PV Module: 20.8 sq.ft. surface area
Max Overcurrent Protection Rating of PV Module:
30 A when using the qualified grounding lugs;
20 A when using the Enphase micro inverter EGC.

Fire Rating: Class A when installed with
Type 1, Type 2, Type3, or Type 10 fire rated modules.

(continued)


Appendix: 1.1-5

7

Licensed Test mark:



Date of Issue
(day/mo/yr)
27/07/2016



12-May-2023

Unirac
1411 Broadway Blvd. NE
Albuquerque, NM 87101
Tel: 505 242 6411

Attn.: Engineering Department

Subject: Engineering Certification for the Unirac SOLARMOUNT Flush Rail System to Support Photovoltaic Panels.


The Unirac SOLARMOUNT Flush-to-Roof is an extruded aluminum rail system that is engineered to hold most framed solar modules to a roof structure and installed parallel to the roof.

We have reviewed the SOLARMOUNT system, a proprietary mounting system constructed from modular parts which are intended for rooftop installation of solar photovoltaic (PV) panels; and have reviewed the U-Builder 2.0 Online tool. This U-Builder 2.0 software includes analysis for the SOLARMOUNT rails (SM LIGHT rail, SM STANDARD rail, and SM HEAVY DUTY rail) with Standard, Universal AF, and Pro Series hardware. All information, data, and analysis are in compliance with the following codes, city ordinances, and typical specifications:

- Codes:**
1. 2014-2020 Florida Building Code.
 2. ASCE/SEI 7-10, 7-16 Minimum Design Loads for Buildings and Other Structures.
 3. International Building Code, 2012- 2018 Edition w/ Provisions from SFAOC PV-2 2017.
 4. International Residential Code, 2012- 2018 Edition w/ Provisions from SFAOC PV-2 2017.
 5. AC408, Acceptance Criteria for Modular Framing Systems Used to Support Photovoltaic (PV) Panels, November 1, 2012 by ICC-ES.
 6. Aluminum Design Manual, 2015 & 2020 Edition.

Following are typical specifications to meet the above code requirements:

- Design Criteria:** Ground Snow Load = 0 - 100 (psf)
Basic Wind Speed = 85 - 190 (mph)
Roof Mean Height = 0 - 60 (ft)
Roof Pitch = 0 - 45 (degrees)
Exposure Category = B, C & D
- Attachment:** **Shingle Roof:**
I-Foot, Flashkit Pro, Flashloc Comp, Flashloc Duo, Flashkit Pro SR
Metal Roof:
Standing Seam attachments, PM-9000S, PM Adjust Slotted
Tile Roofs:
Solar Hooks, Tile Replacement
- Attachment Spacing:** Per U-Builder 2.0 Engineering report.
- Cantilever:** The maximum cantilever length is $L/3$, where "L" is the span noted in the U-Builder 2.0 online tool.
- Clearance:** 2" to 10" clear from top of roof to top of PV panel
- Tolerance(s):** 1.0" tolerance for any specified dimension in this report is allowed for installation



Installation Orientation: See SOLARMOUNT Rail Flush Installation Guide.
Landscape - PV Panel long dimension is parallel to ridge/eave line of the roof and the PV panel is mounted on the long side.
Portrait - PV Panel short dimension is parallel to ridge/eave line of the roof and the PV panel is mounted on the short side.

Components and Cladding Roof Zones:

The Components and Cladding Roof Zones shall be determined based on ASCE 7-10 & 7-16 Component and Cladding design.

Notes:

1. U-Builder 2.0 Online tool analysis is only for Unirac SM SOLARMOUNT Rail Flush systems and do not include roof capacity check.
2. Risk Category II per ASCE 7-16.
3. Topographic factor, K_{zt} is 1.0.
4. Array Edge Factor $V_e = 1.5$
5. Average parapet height is 0.0 ft.
6. Wind speeds are I RFD values.
7. Attachment spacing(s) apply to a seismic design category E or less.

Design Responsibility:

The U-Builder 2.0 design software is intended to be used under the responsible charge of a registered design professional where required by the authority having jurisdiction. In all cases, this U-Builder 2.0 software should be used under the direction of a design professional with sufficient structural engineering knowledge and experience to be able to:

- Evaluate whether the U-Builder 2.0 Software is applicable to the project, and
- Understand and determine the appropriate values for all input parameters of the U-Builder 2.0 software.

This letter certifies that the Unirac SM SOLARMOUNT Rails Flush, when installed according to the U-Builder 2.0 engineering report and the manufacturer specifications are in compliance with the above codes and loading criteria.

This certification excludes evaluation of the following components:

- 1) The structure to support the loads imposed on the building by the array; including, but not limited to: strength and deflection of structural framing members, fastening and/or strength of roofing materials, and/or the effects of snow accumulation on the structure.
- 2) The attachment of the SM SOLARMOUNT Rails to the existing structure.
- 3) The capacity of the solar module frame to resist the loads.

This requires additional knowledge of the building and is outside the scope of the certification of this racking system.

Please feel free to call for any questions or clarifications.

Prepared By:
Engineering Alliance, Inc
Sugar Land, TX

Saddam
Ahmad

Digitally signed by
Saddam Ahmad
Date: 2023.05.12
08:33:34 -0500



This item has been electronically signed and sealed by Saddam Ahmad PE using a Digital Signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

BARUN CORP

September 14, 2023

RE:

CERTIFICATION LETTER

Project Address:

PEG HICKEY ADD-ON
327 NW CARR CT
LAKE CITY, FL 32055

Design Criteria:

- Applicable Codes = 2020 FLBC/FLEBC 7th Edition, 2020 FLRC 7th Edition, 2018 IEBC/IBC, ASCE 7-16 and 2018 NDS
- Risk Category = II
- Wind Speed = 120 mph, Exposure Category C, Partially/Fully Enclosed Method
- Ground Snow Load = 0 psf
- Roof 1: 2 x 6 @ 24" OC, Roof DL = 6 psf, Roof LL/SL = 20 psf (Non-PV), Roof LL/SL = 0 psf (PV)

To Whom It May Concern,


A structural evaluation of loading was conducted for the above address based on the design criteria listed above.

Existing roof structural framing has been reviewed for additional loading due to installation of Solar PV System on the roof. The structural review applies to the sections of roof that is directly supporting the Solar PV System.

Based on this evaluation, I certify that the alteration to the existing structure by installation of the Solar PV System meets the prescriptive compliance requirements of the applicable existing building and/or new building provisions adopted/referenced above.

Additionally, the Solar PV System assembly (including attachment hardware) has been reviewed to be in accordance with the manufacturer's specifications and to meet and/or exceed the requirements set forth by the referenced codes.

Sincerely,

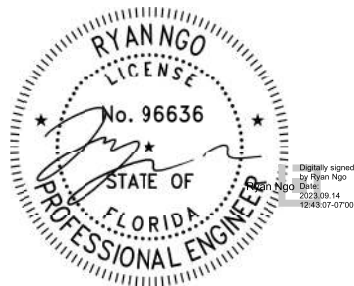

This item has been digitally signed and sealed by Ryan Ngo, PE. on the date and/or time stamp shown using a digital signature. Printed copies of this document are not considered signed and sealed and the signature must be verified by a 3rd Party Certificate Authority on any electronic copy.

This document is the property of Barun Corp and cannot be reproduced without prior consent. It is site specific and shall not be transferred to any other property, property owner, person(s), or entity. This document may include an expression of professional opinion by the engineer of record, which is based on his or her best knowledge, information provided by others, and belief. Other professionals may have different opinions. Barun Corp reserves the right to amend and/or supplement this document in the event additional information be uncovered or made available.

BARUN CORP	RESULTS SUMMARY
PEG HICKEY ADD-ON, 327 NW CARR CT, LAKE CITY, FL 32055	

MOUNTING PLANE STRUCTURAL EVALUATION			
MOUNTING PLANE	ROOF PITCH	RESULT	GOVERNING ANALYSIS
Roof 1	21°	OK	IEBC IMPACT CHECK

STANDOFF HARDWARE EVALUATION FOR WIND UPLIFT	
MOUNTING PLANE	WIND UPLIFT DCR
Roof 1	77.0%

Limits of Scope of Work and Liability:

The existing structure has been reviewed based on the assumption that it has been originally designed and constructed per appropriate codes. The structural analysis of the subject property is based on the provided site survey data. The calculations produced for this structure's assessment are only for the roof framing supporting the proposed PV installation referenced in the stamped planset and were made according to generally recognized structural analysis standards and procedures. All PV modules, racking and attachment components shall be designed and installed per manufacturer's approved guidelines and specifications. These plans are not stamped for water leakage or existing damage to the structural component that was not accessed during the site survey. Prior to commencement of work, the PV system installer should verify that the existing roof and connections are in suitable condition and inspect framing noted on the certification letter and inform the Engineer of Record of any discrepancies prior to installation. The installer should also check for any damages such as water damage, cracked framing, etc. and inform the Engineer of Record of existing deficiencies which are unknown and/or were not observable during the time of survey and have not been included in this scope of work. Any change in the scope of the work shall not be accepted unless such change, addition, or deletion is approved in advance and in writing by the Engineer of Record.

BARUN CORP	LOAD CALCULATION
	Roof 1
PEG HICKEY ADD-ON, 327 NW CARR CT, LAKE CITY, FL 32055	

PV PANELS DEAD LOAD (PV-DL)	
PV Panels Weight	= 2.50 psf
Hardware Assembly Weight	= 0.50 psf
Total PV Panels	PV-DL = 3.00 psf

ROOF DEAD LOAD (R-DL)			
Existing Roofing Material Weight	Corrugated Metal Roof	1 Layer(s)	= 1.50 psf
Underlayment Weight			= 0.50 psf
Plywood/OSB Sheathing Weight			= 1.50 psf
Framing Weight	2 x 6 @ 24 in. O.C.		= 1.15 psf
No Vaulted Ceiling			= 0.00 psf
Miscellaneous			= 1.50 psf
Total Roof Dead Load			R-DL = 6.10 psf

REDUCED ROOF LIVE LOAD (Lr)	
Roof Live Load	Lo = 20.00 psf
Member Tributary Area	At < 200 ft ²
Roof 1 Pitch	21° or 5/12
Tributary Area Reduction Factor	R1 = 1.00
Roof Slope Reduction Factor	R2 = 0.98
Reduced Roof Live Load, Lr = Lo (R1) (R2)	Lr = 19.50 psf

SNOW LOAD	
Ground Snow Load	pg = 0.00 psf
Effective Roof Slope	21°
Snow Importance Factor	Is = 1.00
Snow Exposure Factor	Ce = 1.00
Snow Thermal Factor	Ct = 1.10
Minimum Flat Roof Snow Load	pf-min = 0.00 psf
Flat Roof Snow Load	pf = 0.00 psf

SLOPED ROOF SNOW LOAD ON ROOF (Non-Slippery Surfaces)	
Roof Slope Factor	Cs-roof = 0.82
Sloped Roof Snow Load on Roof	ps-roof = 0.00 psf

SLOPED ROOF SNOW LOAD ON PV PANELS (Unobstructed Slippery Surfaces)	
Roof Slope Factor	Cs-PV = 0.82
Sloped Roof Snow Load on PV Panels	ps-PV = 0.00 psf

BARUN CORP	IEBC IMPACT CHECK	
	Roof 1	
PEG HICKEY ADD-ON, 327 NW CARR CT, LAKE CITY, FL 32055		

	EXISTING	WITH PV PANELS	
Roof Dead Load (DL) =	6.10	9.10	psf
Roof Live Load (Lr) =	19.50	0.00	psf
Roof Snow Load (SL) =	0.00	0.00	psf
	EXISTING	WITH PV PANELS	
(DL + Lr)/Cd =	20.48	10.11	psf
(DL + SL)/Cd =	5.30	7.91	psf
Maximum Gravity Load =	20.48	10.11	psf
Load Increase (%) =	-50.63%	OK	

The requirements of section 806.2 of 2018 IEBC are met and the structure is permitted to remain unaltered.

BARUN CORP	WIND UPLIFT CALCULATION
	Roof 1
PEG HICKEY ADD-ON, 327 NW CARR CT, LAKE CITY, FL 32055	

SITE INFORMATION			
Ultimate Wind Speed =	120.00 mph	Roof Pitch =	21°
Risk Category =	II	Roof Type =	Gable
Exposure Category =	C	Velocity Pressure Exposure Coefficient, Kz =	0.85
Mean Roof Height =	15.00 ft	Topographic Factor, Kzt =	1.00
Solar Array Dead Load =	3.00 psf	Wind Directionality Factor, Kd =	0.85
a =	3.00 ft	Ground Elevation Factor, Ke =	1.00

DESIGN CALCULATIONS			
Wind Velocity Pressure, qh =		26.60 psf	(0.00256*Kz*Kzt*Kd*Ke*(V^2))
Solar Array Pressure Equalization Factor, ya =		0.60	
Hardware Type =		S-5 PROTEABRACKET	
Allowable Load =		300.00 lbs	Metal Roof Attachment
Array Edge Factor, yE =		1.50	Exposed Condition
Max. X - Spacing (Zone 1 & 2e) =		2.25 ft	Effective Wind Area 6.75 ft²
Max. Y - Spacing (Zone 1 & 2e) =		3.00 ft	
Max. X - Spacing (Zone 2n - 3e) =		2.25 ft	Effective Wind Area 6.75 ft²
Max. Y - Spacing (Zone 2n - 3e) =		3.00 ft	
Max. X - Spacing (Zone 3r) =		1.50 ft	Effective Wind Area 4.50 ft²
Max. Y - Spacing (Zone 3r) =		3.00 ft	
ROOF ZONE	G _{Cp} (-) UPLIFT	UPLIFT PRESSURE	
1 & 2e	-1.50	-19.87 psf	
2n - 3e	-2.50	-34.23 psf	
3r	-3.52	-48.82 psf	

NOTE:

- Wind calculation is based on ASCE 7-16, 29.4 - C&C, LC #7: 0.6DL + 0.6WL is used.