

2.05BALLASTS AND DRIVERS

A. Ballasts/Drivers – General Requirements:

1. Provide ballasts containing no polychlorinated biphenyls (PCBs).
2. Minimum Efficiency/Efficacy: Provide ballasts complying with all current applicable federal and state ballast efficiency/efficacy standards.
- B. Dimmable LED Drivers:
  1. Dimming Range: Continuous dimming from 100 percent to five percent relative light output unless dimming capability to lower level is indicated, without flicker.
  2. Control Compatibility: Fully compatible with the dimming controls to be installed.

2.06LAMPS

A. Manufacturers:

1. Where a specific manufacturer or model is indicated elsewhere in the luminaire schedule or on the drawings, substitutions are not permitted unless explicitly indicated.
- B. Lamps – General Requirements:
  1. Unless explicitly excluded, provide new, compatible, operable lamps in each luminaire.
  2. Verify compatibility of specified lamps with luminaires to be installed. Where lamps are not specified, provide lamps per luminaire manufacturer's recommendations.
  3. Minimum Efficiency: Provide lamps complying with all current applicable federal and state lamp efficiency standards.
  4. Color Temperature Consistency: Unless otherwise indicated, for each type of lamp furnish products which are consistent in perceived color temperature. Replace lamps that are determined by the Architect to be inconsistent in perceived color temperature.

PART 3 EXECUTION

3.01 INSTALLATION

- A. Coordinate locations of outlet boxes provided under Section 26 0533.16 as required for installation of luminaires provided under this section.
- B. Install products in accordance with manufacturer's instructions.
- C. Install luminaires securely, in a neat and workmanlike manner, as specified in NECA 500 (commercial lighting) and NECA 502 (industrial lighting).
- D. Provide required support and attachment in accordance with Section 26 0529.
- E. Install luminaires plumb and square and aligned with building lines and with adjacent luminaires.
- F. Suspended Ceiling Mounted Luminaires:
  1. Do not use ceiling tiles to bear weight of luminaires.
  2. Do not use ceiling support system to bear weight of luminaires unless ceiling support system is certified as suitable to do so.
  3. Secure lay-in luminaires to ceiling support channels using listed safety clips at four corners.
  4. In addition to ceiling support wires, provide two galvanized steel safety wire(s), minimum 12 gauge, connected from opposing corners of each recessed luminaire to building structure.
  5. See appropriate Division 9 section where suspended grid ceiling is specified for additional requirements.
- G. Recessed Luminaires:
  1. Install trims tight to mounting surface with no visible light leakage.
  2. Non-IC Rated Luminaires: Maintain required separation from insulation and combustible materials according to listing.
  3. Luminaires Recessed in Fire-Rated Ceilings: Install using accessories and firestopping materials to meet regulatory requirements for fire rating.
- H. Suspended Luminaires:
  1. Unless otherwise indicated, specified mounting heights are to bottom of luminaire.
  2. Install using the suspension method indicated, with support lengths and accessories as required for specified mounting height.
  3. Provide minimum of two supports for each luminaire equal to or exceeding 4 feet nominal length, with no more than 4 feet between supports.
  4. Install canopies tight to mounting surface.
  5. Unless otherwise indicated, support pendants from swivel hangers.
- I. Wall-Mounted Luminaires: Unless otherwise indicated, specified mounting heights are to center of luminaire.
- J. Install accessories furnished with each luminaire.
- K. Bond products and metal accessories to branch circuit equipment grounding conductor.
- L. Emergency Lighting Units:
  1. Unless otherwise indicated, connect unit to unswitched power from same circuit feeding normal lighting in same room or area. Bypass local switches, contactors, or other lighting controls.
  2. Install lock-on device on branch circuit breaker serving units.
- M. Exit Signs:
  1. Unless otherwise indicated, connect unit to unswitched power from same circuit feeding normal lighting in same room or area. Bypass local switches, contactors, or other lighting controls.
  2. Install lock-on device on branch circuit breaker serving units.
- N. Remote Ballasts: Install in accessible location as indicated or as required to complete installation, using conductors per manufacturer's recommendations not exceeding manufacturer's recommended maximum conductor length to luminaire.
- O. Identify luminaires connected to emergency power system in accordance with Section 26 0553.
- P. Install lamps in each luminaire.

3.02 ADJUSTING

- A. Aim and position adjustable luminaires to achieve desired illumination as indicated or as directed by Architect. Secure locking fittings in place.
- B. Aim and position adjustable emergency lighting unit lamps to achieve optimum illumination of egress path as required or as directed by Architect or authority having jurisdiction.
- C. Exit Signs with Field-Selectable Directional Arrows: Set as indicated or as required to properly designate egress path as directed by Architect or authority having jurisdiction.

19. SECTION 26 5600 EXTERIOR LIGHTING

PART 1 PRODUCTS

1.01 LUMINAIRE TYPES

- A. Furnish products as indicated in luminaire schedule included on the drawings.
- B. Substitutions: See Section 01 6000 – Product Requirements. Equivalent products, except where individual luminaire types are designated with substitutions not permitted. Submit comparative pricing with all luminaire substitutions.
- 1.02 LUMINAIRES
  - A. Provide products that are listed and labeled as complying with UL 1598, where applicable.
  - B. Provide products listed, classified, and labeled as suitable for the purpose intended.
  - C. Unless otherwise indicated, provide complete luminaires including lamp(s) and all sockets, ballasts, reflectors, lenses, housings and other components required to position, energize and protect the lamp and distribute the light.
  - D. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, hardware, poles, foundations, supports, trims, accessories, etc. as necessary for a complete operating system.
  - E. Provide products suitable to withstand normal handling, installation, and service without any damage, distortion, corrosion, fading, discoloring, etc.
  - F. Provide luminaires listed and labeled as suitable for wet locations unless otherwise indicated.
  - G. LED Luminaires:
    1. Components: UL 8750 recognized or listed as applicable.
    2. Tested in accordance with IES LM-79 and IES LM-80.
    3. LED Estimated Useful Life: Minimum of 50,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.
  - H. Exposed Hardware: Stainless steel.

1.03 BALLASTS AND DRIVERS

- A. Manufacturers:
  1. General Electric Company/GE Lighting: [www.gelighting.com/#/se](http://www.gelighting.com/#/se).
  2. OSRAM Sylvania, Inc; [www.osram.us/ts/#/se](http://www.osram.us/ts/#/se).
- B. Ballasts/Drivers – General Requirements:
  1. Provide ballasts containing no polychlorinated biphenyls (PCBs).
  2. Minimum Efficiency/Efficacy: Provide ballasts complying with all current applicable federal and state ballast efficiency/efficacy standards.

1.04 LAMPS

- A. Lamps – General Requirements:
  1. Unless explicitly excluded, provide new, compatible, operable lamps in each luminaire.
  2. Verify compatibility of specified lamps with luminaires to be installed. Where lamps are not specified, provide lamps per luminaire manufacturer's recommendations.
  3. Minimum Efficiency: Provide lamps complying with all current applicable federal and state lamp efficiency standards.
  4. Color Temperature Consistency: Unless otherwise indicated, for each type of lamp furnish products which are consistent in perceived

color temperature. Replace lamps that are determined by the Architect to be inconsistent in perceived color temperature.

1.05 POLES


- A. All Poles:
  1. Provide poles and associated support components suitable for the luminaire(s) and associated supports and accessories to be installed.
2. Structural Design Criteria:
  - a. Comply with AASHTO LTS.
  - b. Wind Load: Include effective projected area (EPA) of luminaire(s) and associated supports and accessories to be installed.
  - c. Dead Load: Include weight of proposed luminaire(s) and associated supports and accessories.
3. Material: Steel, unless otherwise indicated.
4. Shape: Square straight, unless otherwise indicated.
5. Finish: Match luminaire finish, unless otherwise indicated.
6. Mounting: Install on concrete foundation, height as indicated on the drawings, unless otherwise indicated.

- B. Metal Poles: Provide ground lug, accessible from handhole or transformer base.

PART 2 EXECUTION

2.01 INSTALLATION

- A. Coordinate locations of outlet boxes provided under Section 26 0533.16 as required for installation of luminaires provided under this section.
- B. Install products in accordance with manufacturer's instructions.
- C. Install luminaires in accordance with NECA/IESNA 501.
- D. Provide required support and attachment in accordance with Section 26 0529.
- E. Install luminaires plumb and square and aligned with building lines and with adjacent luminaires.
- F. Install accessories furnished with each luminaire.
- G. Bond products and metal accessories to branch circuit equipment grounding conductor.
- H. Install lamps in each luminaire.

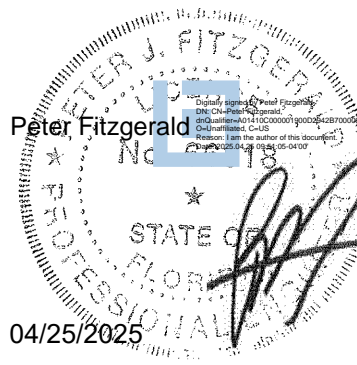

Design and construction documents as instruments of services are given in confidence and remain the property of Onyx Creative. The use of this design and these construction documents for purposes other than the specific project named herein is strictly prohibited without expressed written consent of Onyx Creative.



SCHEDULE I 4-24-2025  
SCHEDULE II -

Project No.: 24.0808  
Drawn By: KRS  
Date 4-24-2025 Issue Bid & Permit