


Digitally signed
 by Danny Kail
 Date: 2024.09.12
 10:09:59 -04'00'

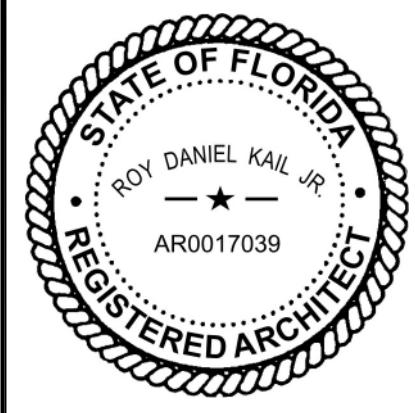

NEW FIRE DEPARTMENT ADMINISTRATION BUILDING
 1575 NW LAKE JEFFERY ROAD
 LAKE CITY, FLORIDA


#	Date	Note

ROOF PLAN AND
 REFLECTED CEILING PLAN
 VARIES
 CONSTRUCTION DOCUMENTS

DATE
 9/12/2024


2338

A-3

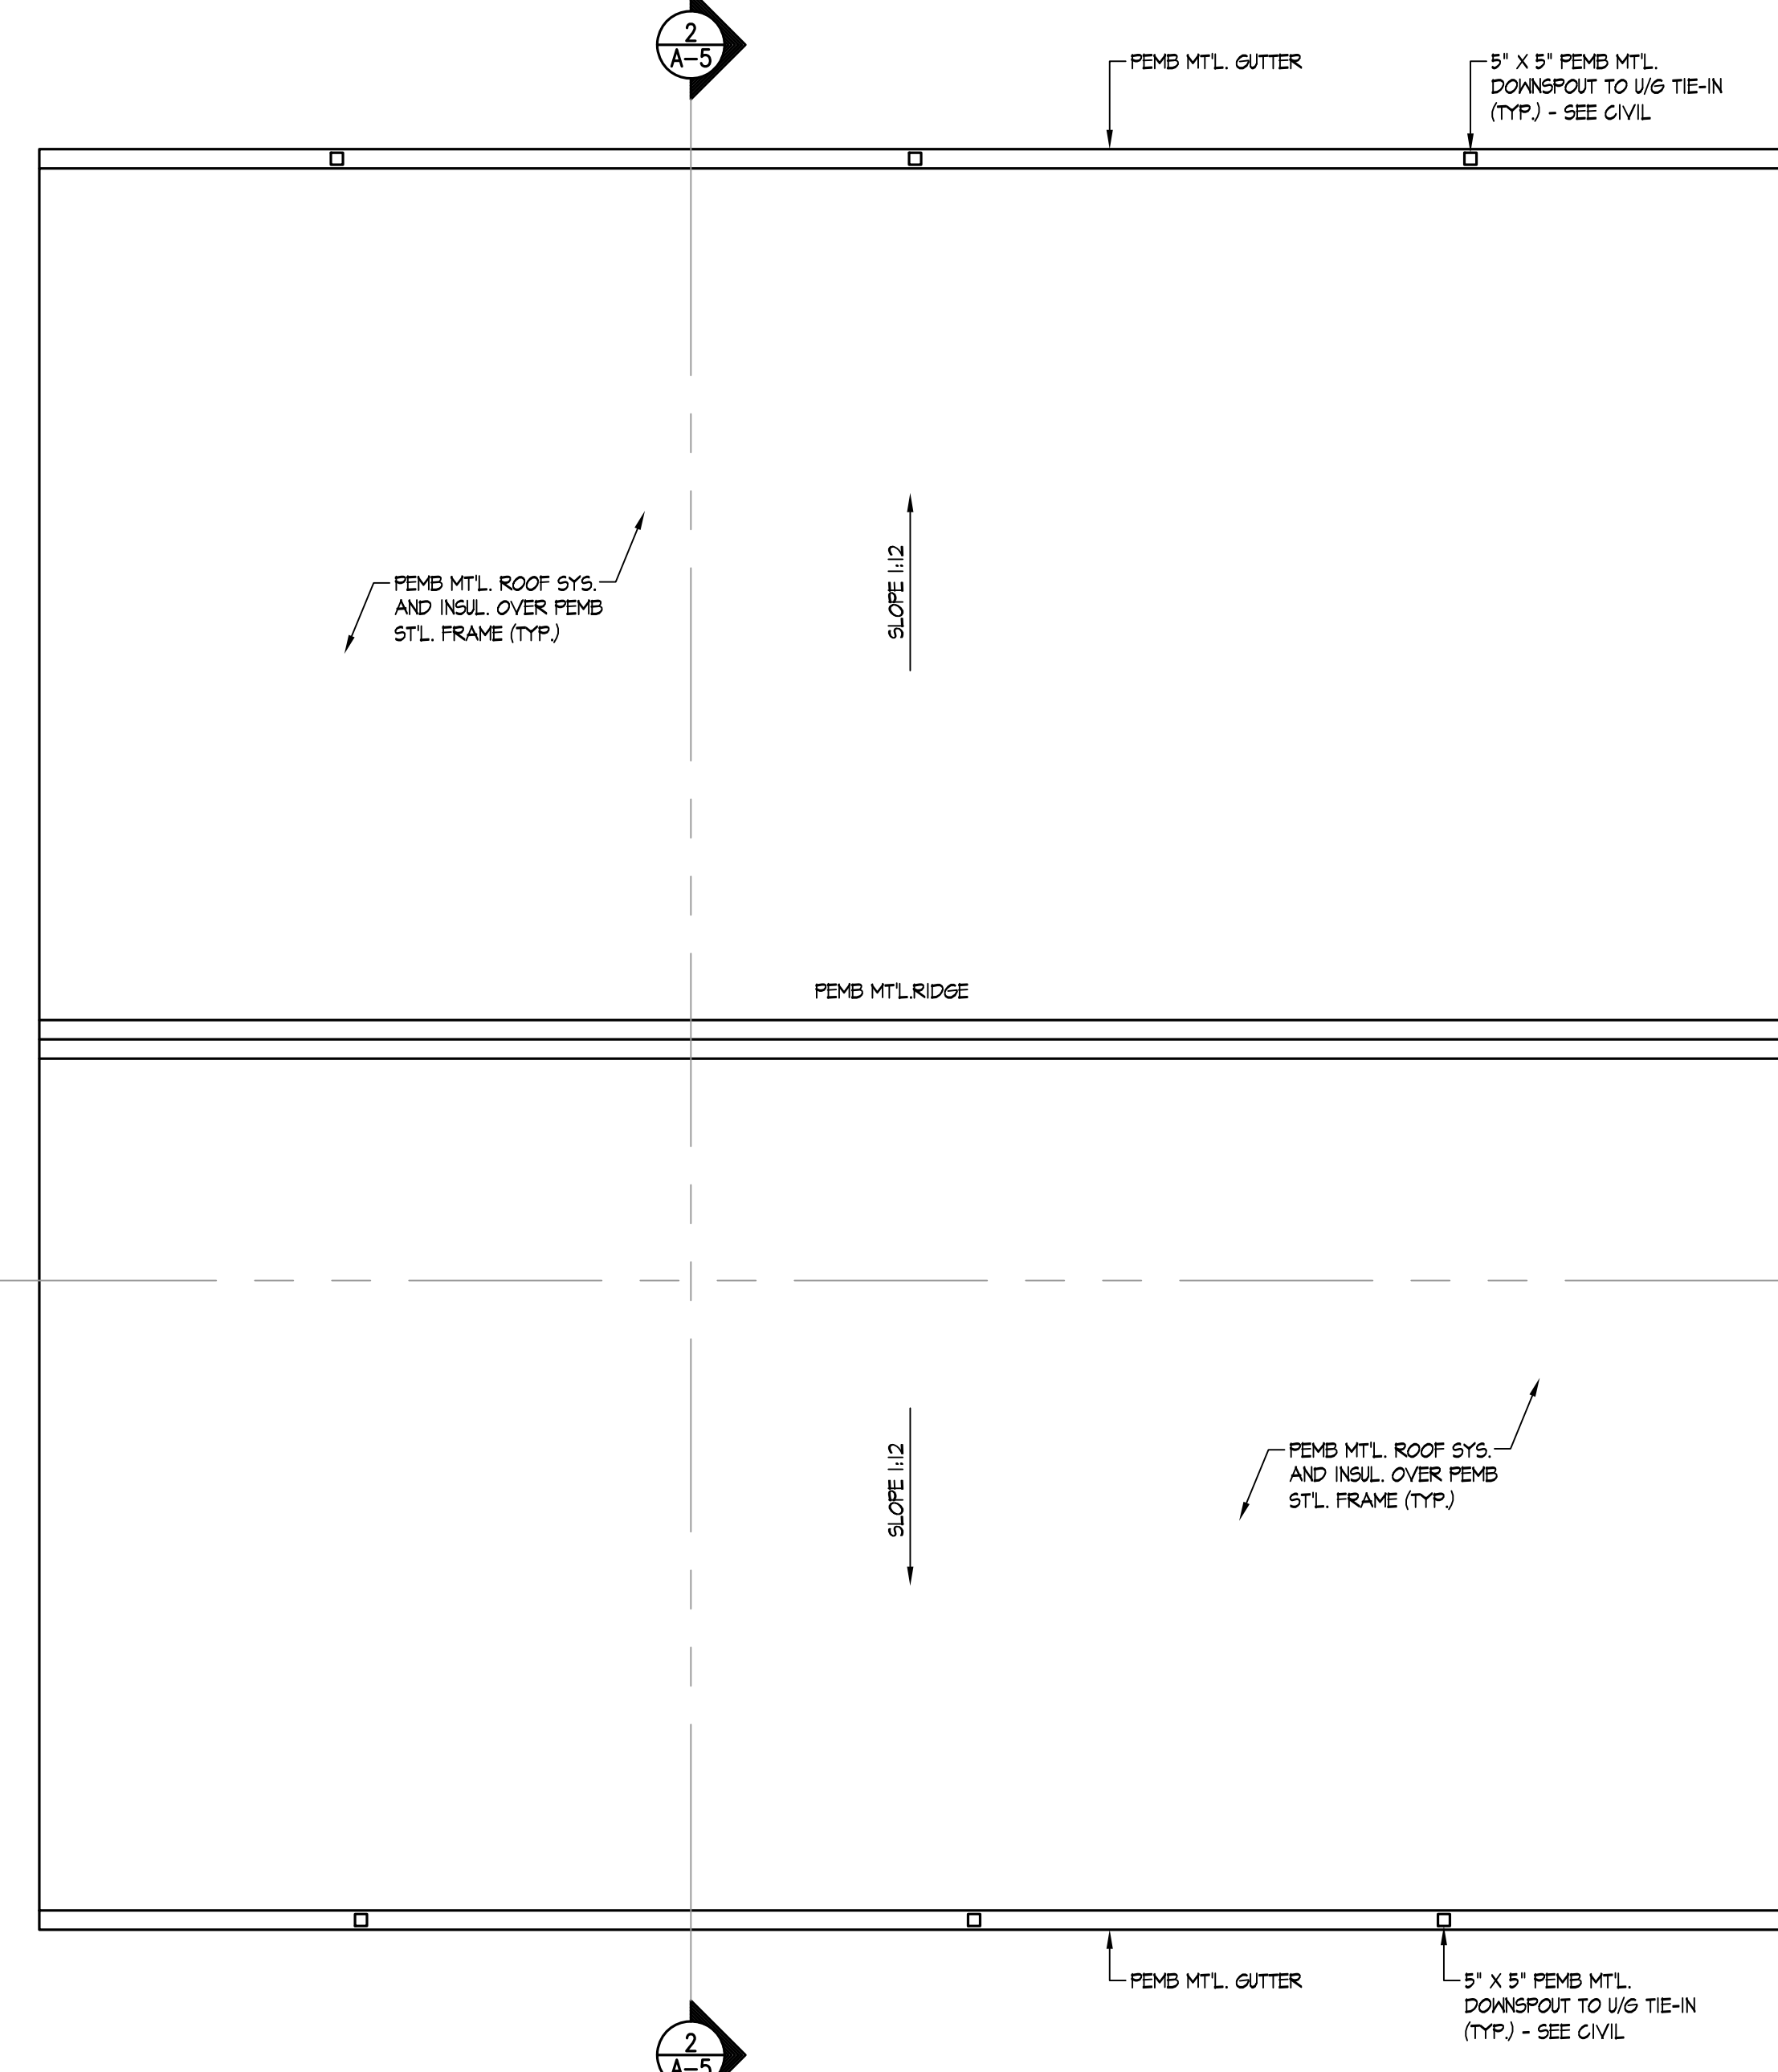



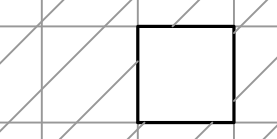




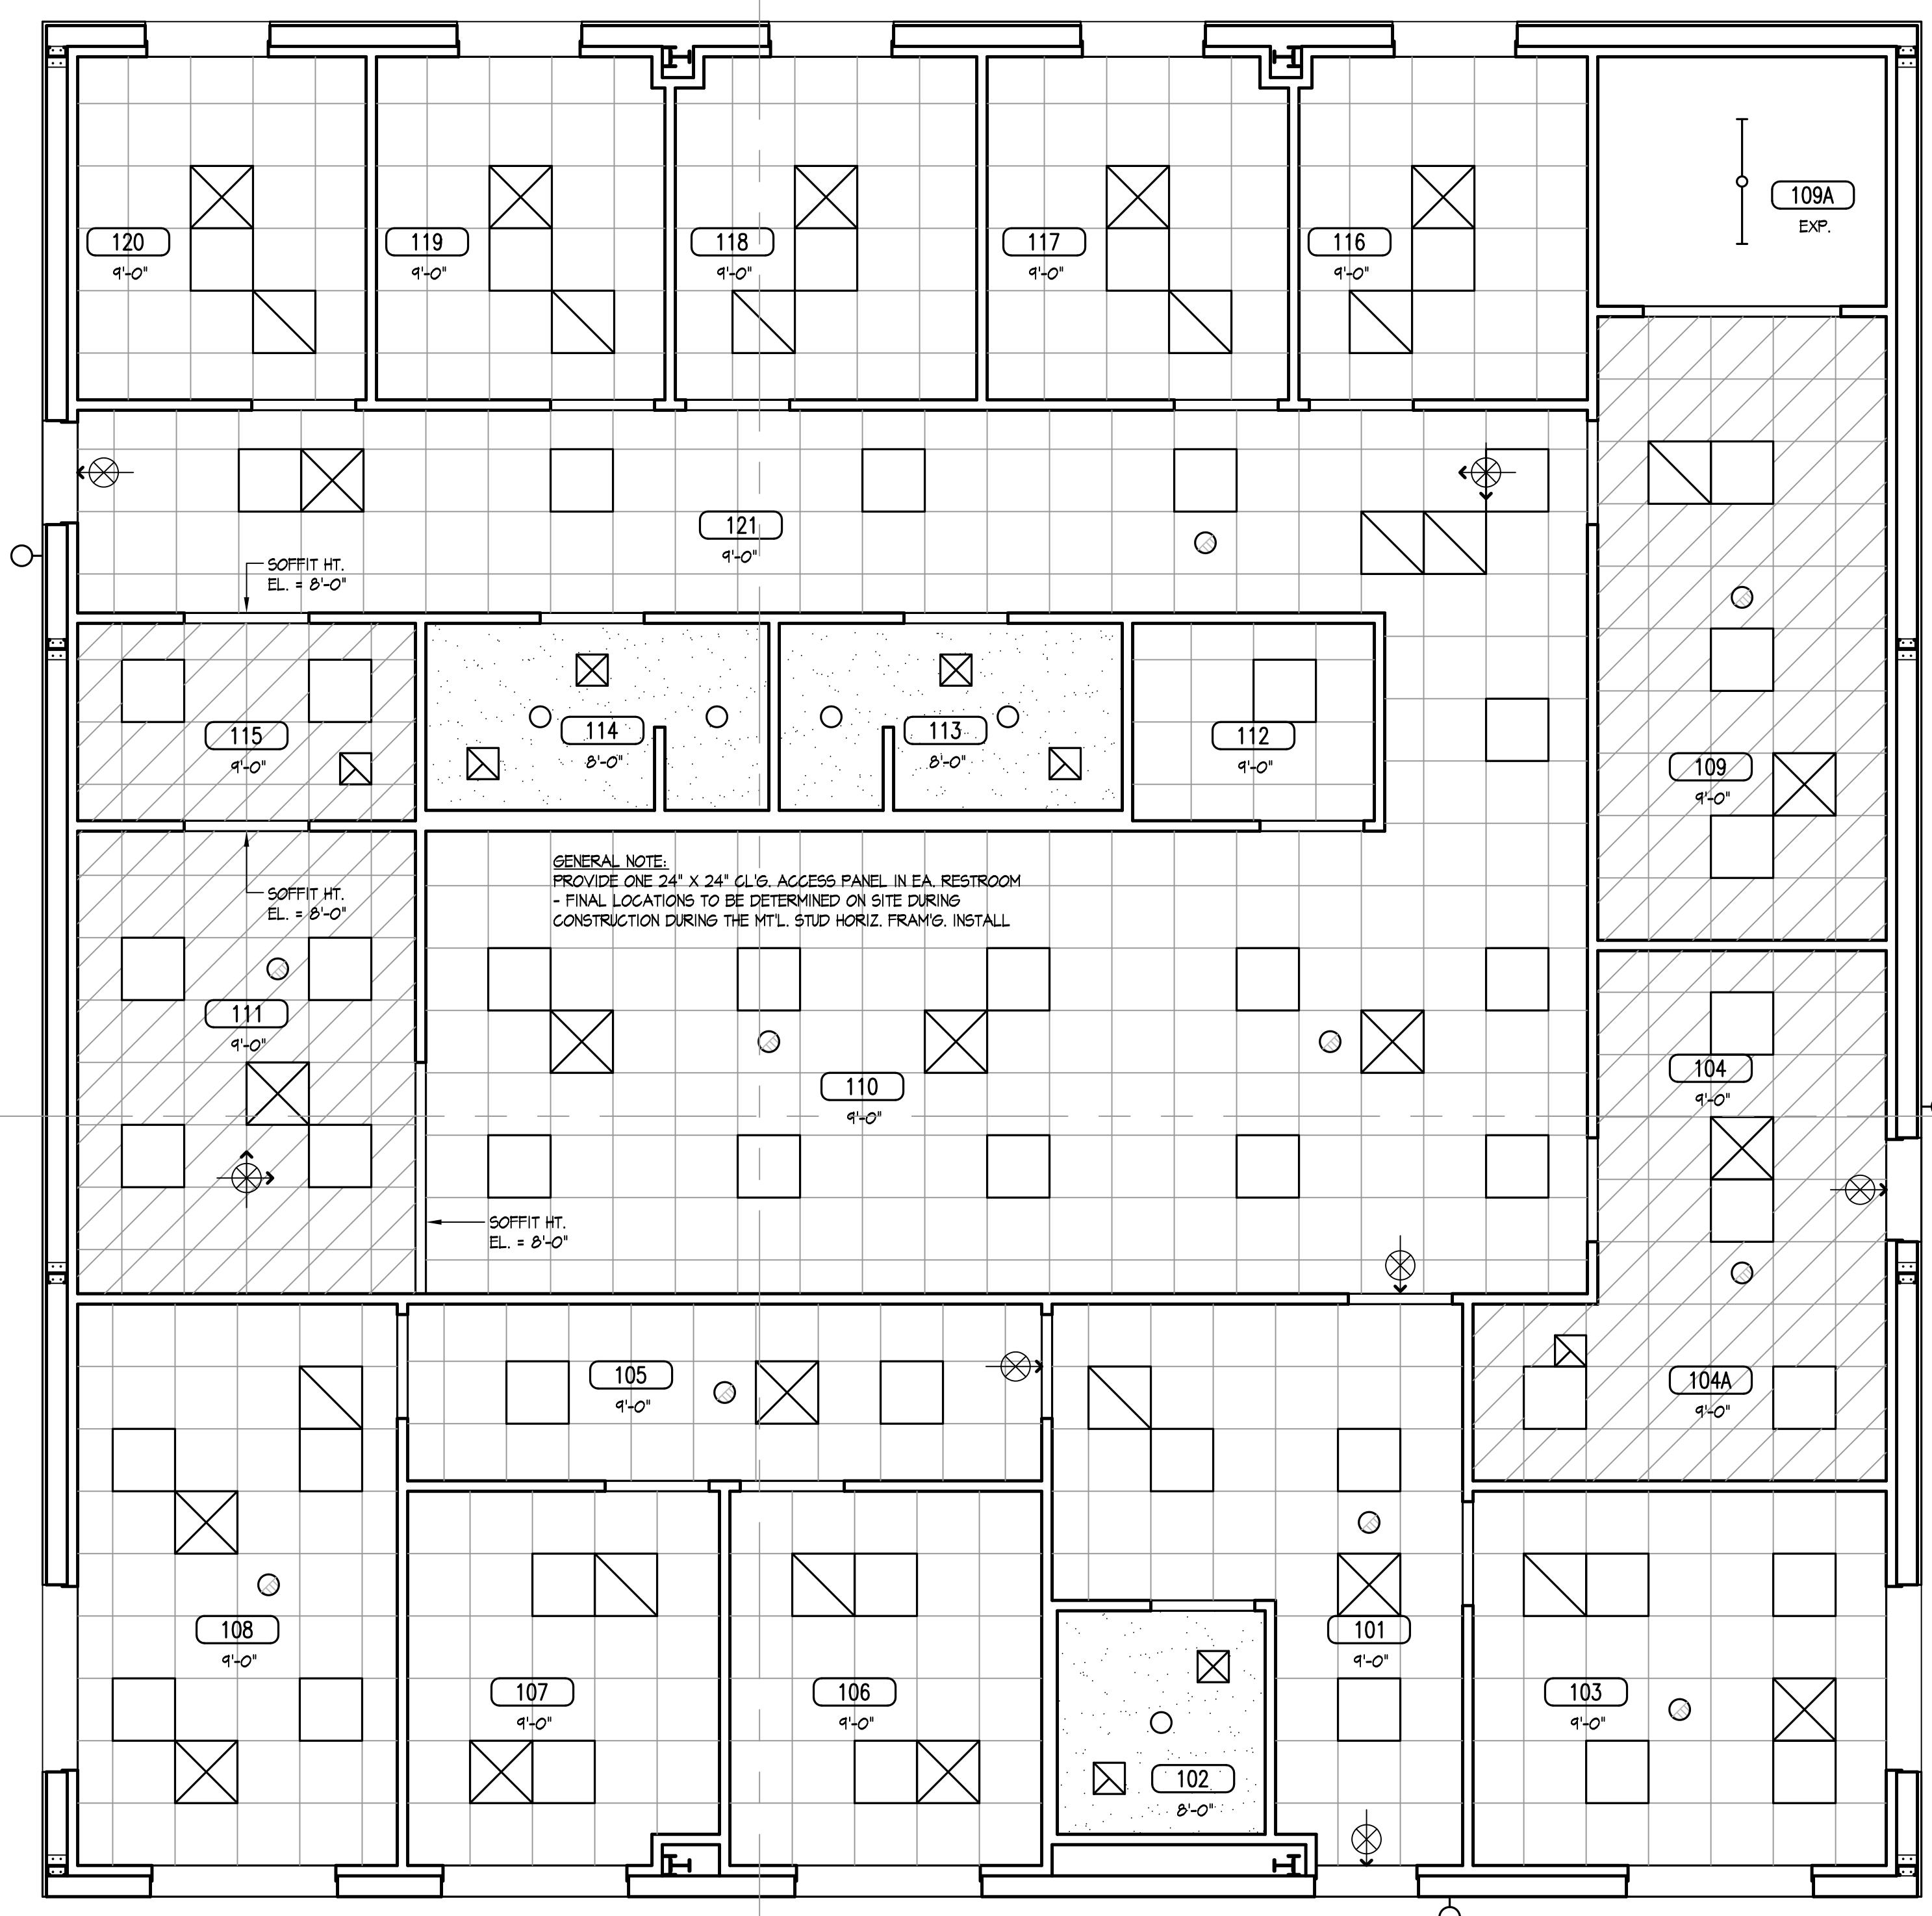



ROOF PLAN
 3/16" = 1'-0"

GENERAL NOTE: SEE PLUMB'G.
 FOR VTR LOCATIONS



REFLECTED CEILING PLAN
 1/4" = 1'-0"

RCP LEGEND

-  EXIT LIGHT - SEE ELEC.
-  2X2 SUSP. A.T. GRID AND TILE SYS.
-  2X2 SUSP. MOISTURE RESISTANT GRID AND TILE SYS.
- SUSP. 5/8" MOISTURE RESISTANT GYP. BD. OVER DRYWALL / PLASTER GRID SYS. AND 3-1/2" BATT INSUL. ON GYP. BD. ABV.
-  SUPPLY AIR DIFFUSER - SEE MECH.
-  RETURN AIR GRILLE - SEE MECH.
-  EXHAUST FAN - SEE MECH.
-  LIGHT FIXTURE - SEE ELEC.
-  RECESSED LIGHT FIXTURE - SEE ELEC.
-  EXTERIOR LIGHT FIXTURE - SEE ELEC.
-  OCCUPANCY SENSOR - SEE ELEC.
-  SUSP. LIGHT FIXTURE - SEE ELEC.

RCP NOTES

- SUSPENDED CEILING, SUSPENSION SYSTEMS AND LIGHT FIXTURES ARE TO BE SUSPENDED FROM STRUCTURE ABOVE - LIGHT FIXTURES ARE TO BE SUSPENDED SEPARATELY FROM GRID ON DIAGONAL CORNERS
- SUPPLY DIFFUSERS AND RETURN GRILLES ARE TO BE SUPPORTED BY THE SUSPENDED GRID WHICH IS TO BE SUPPORTED BY THE WIRE AT DIAGONAL CORNERS AT EACH LOCATION
- THE CEILING SUBCONTRACTOR IS TO PROVIDE AND INSTALL THE TIE WIRE FOR THE CEILING GRID, MECHANICAL ITEMS AND LIGHT FIXTURES - THE MECHANICAL AND ELECTRICAL SUBCONTRACTORS ARE TO MAKE THE FINAL CONNECTIONS OF THEIR RESPECTIVE ITEMS TO THE TIE WIRE AND CEILING GRID
- REPORT ANY CONFLICTS PRIOR TO ANY INSTALLATION
- REFER TO THE MECHANICAL, PLUMBING, FIRE PROTECTION AND ELECTRICAL DOCUMENTS FOR ADDITIONAL CEILING INFORMATION