

20

ENERGY PERFORMANCE LEVEL (EPL) DISPLAY CARD

ESTIMATED ENERGY PERFORMANCE INDEX* = 86

The lower the Energy Performance Index, the more efficient the home.

,FL,

<p>1. New construction or existing 2. Single family or multiple family 3. Number of units, if multiple family 4. Number of Bedrooms 5. Is this a worst case? 6. Conditioned floor area above grade (ft²) Conditioned floor area below grade (ft²) 7. Windows**</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;"></td> <td style="width: 20%;">Description</td> <td style="width: 20%;"></td> <td style="width: 20%;">Area</td> </tr> <tr> <td>a. U-Factor:</td> <td>Dbl, U=0.26</td> <td></td> <td>81.67 ft²</td> </tr> <tr> <td>SHGC:</td> <td>SHGC=0.20</td> <td></td> <td></td> </tr> <tr> <td>b. U-Factor:</td> <td>N/A</td> <td></td> <td>ft²</td> </tr> <tr> <td>SHGC:</td> <td></td> <td></td> <td></td> </tr> <tr> <td>c. U-Factor:</td> <td>N/A</td> <td></td> <td>ft²</td> </tr> <tr> <td>SHGC:</td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="2">Area Weighted Average Overhang Depth:</td> <td></td> <td>1.500 ft</td> </tr> <tr> <td colspan="2">Area Weighted Average SHGC:</td> <td></td> <td>0.200</td> </tr> </table> <p>8. Skylights</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;"></td> <td style="width: 20%;">Description</td> <td style="width: 20%;"></td> <td style="width: 20%;">Area</td> </tr> <tr> <td>U-Factor:(AVG)</td> <td>N/A</td> <td></td> <td>N/A ft²</td> </tr> <tr> <td>SHGC(AVG):</td> <td>N/A</td> <td></td> <td></td> </tr> </table> <p>9. Floor Types</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;"></td> <td style="width: 20%;">Insulation</td> <td style="width: 20%;"></td> <td style="width: 20%;">Area</td> </tr> <tr> <td>a. Raised Floor</td> <td>R= 0.0</td> <td></td> <td>617.00 ft²</td> </tr> <tr> <td>b. N/A</td> <td>R=</td> <td></td> <td>ft²</td> </tr> <tr> <td>c. N/A</td> <td>R=</td> <td></td> <td>ft²</td> </tr> </table>		Description		Area	a. U-Factor:	Dbl, U=0.26		81.67 ft ²	SHGC:	SHGC=0.20			b. U-Factor:	N/A		ft ²	SHGC:				c. U-Factor:	N/A		ft ²	SHGC:				Area Weighted Average Overhang Depth:			1.500 ft	Area Weighted Average SHGC:			0.200		Description		Area	U-Factor:(AVG)	N/A		N/A ft ²	SHGC(AVG):	N/A				Insulation		Area	a. Raised Floor	R= 0.0		617.00 ft ²	b. N/A	R=		ft ²	c. N/A	R=		ft ²	<p>10. Wall Types(690.7 sqft.)</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;"></td> <td style="width: 20%;">Insulation</td> <td style="width: 20%;"></td> <td style="width: 20%;">Area</td> </tr> <tr> <td>a. Frame - Wood, Exterior</td> <td>R=13.0</td> <td></td> <td>690.67 ft²</td> </tr> <tr> <td>b. N/A</td> <td></td> <td></td> <td></td> </tr> <tr> <td>c. N/A</td> <td></td> <td></td> <td></td> </tr> <tr> <td>d. N/A</td> <td></td> <td></td> <td></td> </tr> </table> <p>11. Ceiling Types(617.0 sqft.)</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;"></td> <td style="width: 20%;">Insulation</td> <td style="width: 20%;"></td> <td style="width: 20%;">Area</td> </tr> <tr> <td>a. Flat ceiling under att (Vented)</td> <td>R=30.0</td> <td></td> <td>617.00 ft²</td> </tr> <tr> <td>b. N/A</td> <td></td> <td></td> <td></td> </tr> <tr> <td>c. N/A</td> <td></td> <td></td> <td></td> </tr> </table> <p>12. Roof(Metal, Vented)</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;"></td> <td style="width: 20%;">Deck R=0.0</td> <td style="width: 20%;"></td> <td style="width: 20%;">714 ft²</td> </tr> </table> <p>13. Ducts, location & insulation level</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;"></td> <td style="width: 20%;">R</td> <td style="width: 20%;"></td> <td style="width: 20%;">ft²</td> </tr> <tr> <td>a.</td> <td></td> <td></td> <td></td> </tr> <tr> <td>b.</td> <td></td> <td></td> <td></td> </tr> <tr> <td>c.</td> <td></td> <td></td> <td></td> </tr> </table> <p>14. Cooling Systems</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;"></td> <td style="width: 20%;">kBTu/hr</td> <td style="width: 20%;"></td> <td style="width: 20%;">Efficiency</td> </tr> <tr> <td>a. Central Unit</td> <td>12.0</td> <td></td> <td>SEER:21.00</td> </tr> </table> <p>15. Heating Systems</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;"></td> <td style="width: 20%;">kBTu/hr</td> <td style="width: 20%;"></td> <td style="width: 20%;">Efficiency</td> </tr> <tr> <td>a. Electric Heat Pump</td> <td>12.0</td> <td></td> <td>HSPF:8.50</td> </tr> </table> <p>16. Hot Water Systems - None required</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 20%;"></td> <td style="width: 20%;">a. N/A</td> <td style="width: 20%;"></td> <td style="width: 20%;">N/A</td> </tr> </table> <p>b. Conservation features</p> <p>17. Credits</p> <p style="text-align: right;">CF, Pstat</p>		Insulation		Area	a. Frame - Wood, Exterior	R=13.0		690.67 ft ²	b. N/A				c. N/A				d. N/A					Insulation		Area	a. Flat ceiling under att (Vented)	R=30.0		617.00 ft ²	b. N/A				c. N/A					Deck R=0.0		714 ft ²		R		ft ²	a.				b.				c.					kBTu/hr		Efficiency	a. Central Unit	12.0		SEER:21.00		kBTu/hr		Efficiency	a. Electric Heat Pump	12.0		HSPF:8.50		a. N/A		N/A
	Description		Area																																																																																																																																										
a. U-Factor:	Dbl, U=0.26		81.67 ft ²																																																																																																																																										
SHGC:	SHGC=0.20																																																																																																																																												
b. U-Factor:	N/A		ft ²																																																																																																																																										
SHGC:																																																																																																																																													
c. U-Factor:	N/A		ft ²																																																																																																																																										
SHGC:																																																																																																																																													
Area Weighted Average Overhang Depth:			1.500 ft																																																																																																																																										
Area Weighted Average SHGC:			0.200																																																																																																																																										
	Description		Area																																																																																																																																										
U-Factor:(AVG)	N/A		N/A ft ²																																																																																																																																										
SHGC(AVG):	N/A																																																																																																																																												
	Insulation		Area																																																																																																																																										
a. Raised Floor	R= 0.0		617.00 ft ²																																																																																																																																										
b. N/A	R=		ft ²																																																																																																																																										
c. N/A	R=		ft ²																																																																																																																																										
	Insulation		Area																																																																																																																																										
a. Frame - Wood, Exterior	R=13.0		690.67 ft ²																																																																																																																																										
b. N/A																																																																																																																																													
c. N/A																																																																																																																																													
d. N/A																																																																																																																																													
	Insulation		Area																																																																																																																																										
a. Flat ceiling under att (Vented)	R=30.0		617.00 ft ²																																																																																																																																										
b. N/A																																																																																																																																													
c. N/A																																																																																																																																													
	Deck R=0.0		714 ft ²																																																																																																																																										
	R		ft ²																																																																																																																																										
a.																																																																																																																																													
b.																																																																																																																																													
c.																																																																																																																																													
	kBTu/hr		Efficiency																																																																																																																																										
a. Central Unit	12.0		SEER:21.00																																																																																																																																										
	kBTu/hr		Efficiency																																																																																																																																										
a. Electric Heat Pump	12.0		HSPF:8.50																																																																																																																																										
	a. N/A		N/A																																																																																																																																										

I certify that this home has complied with the Florida Energy Efficiency Code for Building Construction through the above energy saving features which will be installed (or exceeded) in this home before final inspection. Otherwise, a new EPL Display Card will be completed based on installed Code compliant features.


Builder Signature: _____ Date: _____

Address of New Home: _____ City/FL Zip: ,FL,



*Note: This is not a Building Energy Rating. If your Index is below 70, your home may qualify for energy efficient mortgage (EEM) incentives if you obtain a Florida Energy Rating. For information about the Florida Building Code, Energy Conservation, contact the Florida Building Commission's support staff.

**Label required by Section R303.1.3 of the Florida Building Code, Energy Conservation, if not DEFAULT

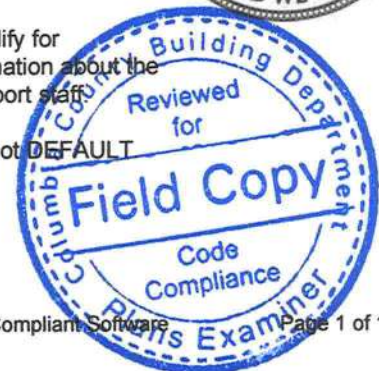

Residential System Sizing Calculation

Summary

Project Title:
Tuell Residence

, FL


7/21/2023

Location for weather data: Gainesville, FL - Defaults: Latitude(29.7) Altitude(100 ft.) Temp Range(M)			
Humidity data: Interior RH (50%) Outdoor wet bulb (77F) Humidity difference(51gr.)			
Winter design temperature(TMY3 99%)	30 F	Summer design temperature(TMY3 99%)	94 F
Winter setpoint	70 F	Summer setpoint	75 F
Winter temperature difference	40 F	Summer temperature difference	19 F
Total heating load calculation	14342 Btuh	Total cooling load calculation	10318 Btuh
Submitted heating capacity	% of calc Btuh	Submitted cooling capacity	% of calc Btuh
Total (Electric Heat Pump)	83.7 12000	Sensible (SHR = 0.85)	106.4 10200
Heat Pump + Auxiliary(0.0kW)	83.7 12000	Latent	247.6 1800
		Total (Electric Heat Pump)	116.3 12000

WINTER CALCULATIONS

Winter Heating Load (for 617 sqft)


Load component		Load	
Window total	82 sqft	849	Btuh
Wall total	569 sqft	2020	Btuh
Door total	40 sqft	640	Btuh
Ceiling total	617 sqft	786	Btuh
Floor total	617 sqft	9493	Btuh
Infiltration	13 cfm	553	Btuh
Duct loss		0	Btuh
Subtotal		14342	Btuh
Ventilation	Ex:0 cfm; Sup:0 cfm	0	Btuh
TOTAL HEAT LOSS		14342	Btuh

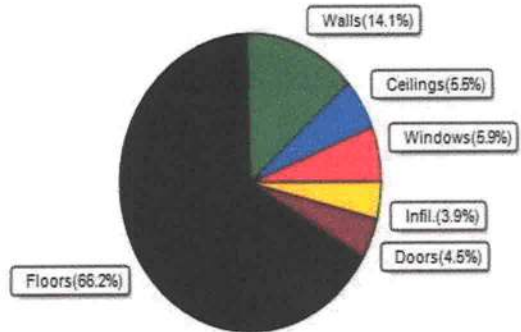


SUMMER CALCULATIONS

Summer Cooling Load (for 617 sqft)

Load component		Load	
Window total	82 sqft	1579	Btuh
Wall total	569 sqft	1288	Btuh
Door total	40 sqft	480	Btuh
Ceiling total	617 sqft	865	Btuh
Floor total		3323	Btuh
Infiltration	9 cfm	197	Btuh
Internal gain		1860	Btuh
Duct gain		0	Btuh
Sens.Ventilation	Ex:0 cfm; Sup:0 cfm	0	Btuh
Blower Load		0	Btuh
Total sensible gain		9591	Btuh
Latent gain(ducts)		0	Btuh
Latent gain(infiltration)		327	Btuh
Latent gain(ventilation)		0	Btuh
Latent gain(internal/occupants/other)		400	Btuh
Total latent gain		727	Btuh
TOTAL HEAT GAIN		10318	Btuh

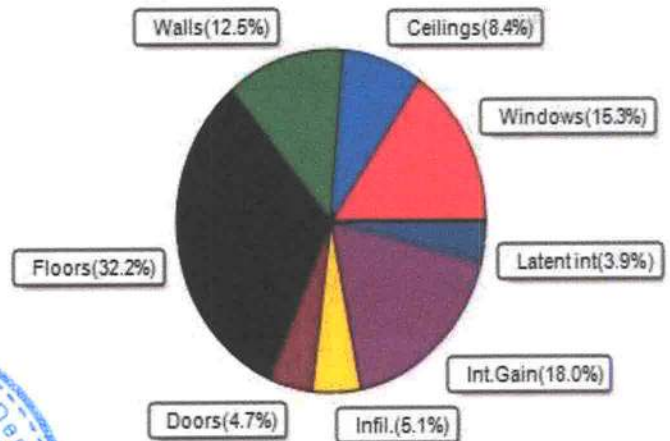

8th Edition

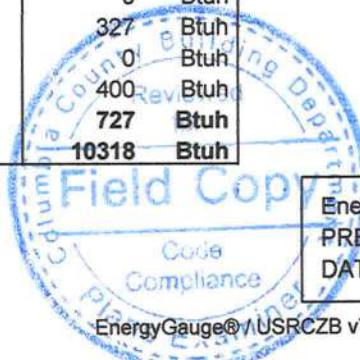

EnergyGauge® System Sizing

PREPARED BY: _____

DATE: _____

[Signature]
7-21-23

System Sizing Calculations - Summer

Residential Load - Whole House Component Details

Project Title:
Tuell Residence

, FL

7/21/2023

Reference City: Gainesville, FL (Defaults)
Humidity difference: 51gr.

Temperature Difference: 19.0F(TMY3 99%)
Summer Setpoint: 75 °F (Required Manual J default)

Component Loads for Whole House

Window	Type*						Overhang		Window Area(sqft)			HTM		Load
	Panes	SHGC	U	InSh	IS	Ornt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded	
1	2 NFRC	0.20, 0.26	No	No	W	1.5ft	2.3ft	15.0	0.0	15.0	9	24	363 Btuh	
2	2 NFRC	0.20, 0.26	No	No	N	1.5ft	2.3ft	15.0	0.0	15.0	9	9	137 Btuh	
3	2 NFRC	0.20, 0.26	No	No	N	1.5ft	2.3ft	6.7	0.0	6.7	9	9	61 Btuh	
4	2 NFRC	0.20, 0.26	No	No	W	1.5ft	2.3ft	6.0	0.0	6.0	9	24	145 Btuh	
5	2 NFRC	0.20, 0.26	No	No	N	1.5ft	2.3ft	6.0	0.0	6.0	9	9	55 Btuh	
6	2 NFRC	0.20, 0.26	No	No	E	1.5ft	2.3ft	3.0	0.0	3.0	9	24	73 Btuh	
7	2 NFRC	0.20, 0.26	No	No	E	1.5ft	2.3ft	30.0	0.0	30.0	9	24	727 Btuh	
	Excursion													18 Btuh
	Window Total								82 (sqft)					1579 Btuh
Walls	Type	U-Value	R-Value	Area(sqft)		HTM		Load						
			Cav/Sheath											
1	Frame - Wood - Ext	0.09	13.0/0.0	65.0		2.3		147 Btuh						
2	Frame - Wood - Ext	0.09	13.0/0.0	173.0		2.3		392 Btuh						
3	Frame - Wood - Ext	0.09	13.0/0.0	58.0		2.3		131 Btuh						
4	Frame - Wood - Ext	0.09	13.0/0.0	63.3		2.3		143 Btuh						
5	Frame - Wood - Ext	0.09	13.0/0.0	209.7		2.3		475 Btuh						
	Wall Total			569 (sqft)				1288 Btuh						
Doors	Type	U-Value	R-Value	Area (sqft)	HTM	Load								
1	Insulated - Exterior			20.0	12.0	240 Btuh								
2	Insulated - Exterior			20.0	12.0	240 Btuh								
	Door Total			40 (sqft)		480 Btuh								
Ceilings	Type/Color/Surface	U-Value	R-Value	Area(sqft)	HTM	Load								
1	Vented Attic/Med/Metal	0.032	30.0/0.0	617.0	1.40	865 Btuh								
	Ceiling Total			617 (sqft)		865 Btuh								
Floors	Type	U-Value	R-Value	Size	HTM	Load								
1	Raised - Open		0.0	617 (sqft)	5.4	3323 Btuh								
	Floor Total			617.0 (sqft)		3323 Btuh								
Envelope Subtotal:								7534 Btuh						
Infiltration	Type	Average ACH	Volume(cuft)	Wall Ratio	CFM=	Load								
	Natural	0.11	4936	1	9.5	197 Btuh								
Internal gain	Occupants	Btuh/occupant	Appliance	Load										
	2	X 230	+ 1400	1860 Btuh										
Sensible Envelope Load:								9591 Btuh						
Duct load	NA, Supply(R0.0-None), Return(R0.0-None) (DGM of 0.000)						0 Btuh							
Sensible Load All Zones								9591 Btuh						

Manual J Summer Calculations

Residential Load - Component Details (continued)

Project Title: Climate:FL_GAINESVILLE_REGIONAL_A
 Tuell Residence

, FL

7/21/2023

WHOLE HOUSE TOTALS

Whole House Totals for Cooling	Sensible Envelope Load All Zones	9591 Btuh
	Sensible Duct Load	0 Btuh
	Total Sensible Zone Loads	9591 Btuh
	Sensible ventilation (Ex:0 cfm; Sup:0 cfm)	0 Btuh
	Blower	0 Btuh
	Total sensible gain	9591 Btuh
	Latent infiltration gain (for 51 gr. humidity difference)	327 Btuh
	Latent ventilation gain	0 Btuh
	Latent duct gain	0 Btuh
	Latent occupant gain (2.0 people @ 200 Btuh per person)	400 Btuh
	Latent other gain	0 Btuh
	Latent total gain	727 Btuh
	TOTAL GAIN	10318 Btuh

EQUIPMENT

1. Central Unit	#	12000 Btuh
-----------------	---	------------

*Key: Window types (Panels - Number and type of panes of glass)
 (SHGC - Shading coefficient of glass as SHGC numerical value)
 (U - Window U-Factor)
 (InSh - Interior shading device: none(No), Blinds(B), Draperies(D) or Roller Shades(R))
 - For Blinds: Assume medium color, half closed
 For Draperies: Assume medium weave, half closed
 For Roller shades: Assume translucent, half closed
 (IS - Insect screen: none(N), Full(F) or Half(½))
 (Ornt - compass orientation)



Version 8

System Sizing Calculations - Winter

Residential Load - Whole House Component Details

Project Title:
Tuell Residence
Building Type: User

, FL

7/21/2023

Reference City: Gainesville, FL (Defaults) Winter Temperature Difference: 40.0 °F (TMY3 99%)
Winter Setpoint: 70 °F (Required Manual J default)

Component Loads for Whole House									
Window	Panels/Type	Frame	U	Orientation	Area(sqft)	X	HTM=	Load	
1	2, NFRC 0.20	Vinyl	0.26	W	15.0		10.4	156 Btuh	
2	2, NFRC 0.20	Vinyl	0.26	N	15.0		10.4	156 Btuh	
3	2, NFRC 0.20	Vinyl	0.26	N	6.7		10.4	69 Btuh	
4	2, NFRC 0.20	Vinyl	0.26	W	6.0		10.4	62 Btuh	
5	2, NFRC 0.20	Vinyl	0.26	N	6.0		10.4	62 Btuh	
6	2, NFRC 0.20	Vinyl	0.26	E	3.0		10.4	31 Btuh	
7	2, NFRC 0.20	Vinyl	0.26	E	30.0		10.4	312 Btuh	
	Window Total					81.7(sqft)			849 Btuh
Walls	Type	Ornt.	Ueff.	R-Value (Cav/Sh)	Area	X	HTM=	Load	
1	Frame - Wood	- Ext	(0.089)	13.0/0.0	65		3.55	231 Btuh	
2	Frame - Wood	- Ext	(0.089)	13.0/0.0	173		3.55	614 Btuh	
3	Frame - Wood	- Ext	(0.089)	13.0/0.0	58		3.55	206 Btuh	
4	Frame - Wood	- Ext	(0.089)	13.0/0.0	63		3.55	225 Btuh	
5	Frame - Wood	- Ext	(0.089)	13.0/0.0	210		3.55	744 Btuh	
	Wall Total					569(sqft)			2020 Btuh
Doors	Type	Storm	Ueff.	R-Value	Area	X	HTM=	Load	
1	Insulated - Exterior,	n	(0.400)		20		16.0	320 Btuh	
2	Insulated - Exterior,	n	(0.400)		20		16.0	320 Btuh	
	Door Total					40(sqft)			640Btuh
Ceilings	Type/Color/Surface	Ueff.	R-Value	Area	X	HTM=	Load		
1	Flat ceil/M/Metal	(0.032)	30.0/0.0	617		1.3	786 Btuh		
	Ceiling Total					617(sqft)		786Btuh	
Floors	Type	Ueff.	R-Value	Size	X	HTM=	Load		
1	Raised - Open	(0.385)	0.0	617.0 sqft		15.4	9493 Btuh		
	Floor Total					617 sqft		9493 Btuh	
Envelope Subtotal:								13788 Btuh	
Infiltration	Type	Wholehouse	ACH	Volume(cuft)	Wall Ratio	CFM=	Load		
	Natural		0.15	4936	1.00	12.6	553 Btuh		
Duct load	NA, R0.0, Supply(), Return() (DLM of 0.000)						0 Btuh		
All Zones	Sensible Subtotal All Zones							14342 Btuh	

Manual J Winter Calculations

Residential Load - Component Details (continued)

Project Title:
Tuell Residence
Building Type: User

, FL

7/21/2023

WHOLE HOUSE TOTALS

Totals for Heating	Subtotal Sensible Heat Loss Ventilation Sens. Heat Loss (Ex:0 cfm; Sup:0 cfm) Total Heat Loss	14342 Btuh 0 Btuh 14342 Btuh
---------------------------	--	------------------------------------

EQUIPMENT

1. Electric Heat Pump	#	12000 Btuh
-----------------------	---	------------

Key: Window types - NFRC (Requires U-Factor and Shading coefficient(SHGC) of glass as numerical values)
 or - Glass as 'Clear' or 'Tint' (Uses U-Factor and SHGC defaults)
 U - (Window U-Factor)
 HTM - (ManualJ Heat Transfer Multiplier)



Version 8