

(12-049--F111 in later BRYAN ZECHER/KOCH --, ** - CJ3T)

Top chord 2x4 SP M-30
 Bot chord 2x4 SP M-30
 Webs 2x4 SP #3

Roof overhang supports 2.00 psf soffit load.


Bottom chord checked for 10.00 psf non-concurrent live load.

Provide (2) 16d common nails(0.162"x3.5"), toe nailed at Top chord.
 Provide (2) 16d common nails(0.162"x3.5"), toe nailed at Bot chord.

120 mph wind, 15.00 ft mean hgt, ASCE 7-10, CLOSED bldg, Located anywhere in roof, RISK CAT II, EXP B, wind TC DL=5.0 psf, wind BC DL=5.0 psf. GCpl(+/-)-0.18

Wind loads and reactions based on MWFRS with additional C&C member design.

Deflection meets L/240 live and L/180 total load. Creep increase factor for dead load is 1.50.

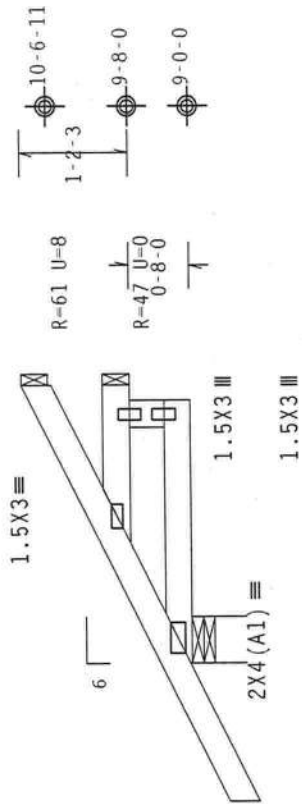

← 1-6-0 →

1-3-8 1-6-8 0.210
 3-0-0 Over 3 Supports

R=262 U=2 W=6"
 RL=37

Design Crit: FBC2010Res/TPI-2007 (STD)
 FT/RT=10%(0%/0(0))

Scale = .5" / Ft.

| | | | |
|----------|----------|--------|-------------------|
| TC LL | 20.0 PSF | REF | R487-- 44503 |
| TC DL | 10.0 PSF | DATE | 03/08/12 |
| BC DL | 10.0 PSF | DRW | HCUSR487 12068034 |
| BC LL | 0.0 PSF | HC-ENG | DF/DF |
| TOT.LD. | 40.0 PSF | SEQN- | 274230 |
| DUR.FAC. | 1.25 | | |
| SPACING | 24.0" | JREF- | 1UK8487_Z01 |




WARNING READ AND FOLLOW ALL NOTES ON THIS SHEET. FURNISH THIS DESIGN TO ALL CONTRACTORS INCLUDING INSTALLERS.

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to the latest edition of BCSI (Building Components Safety Institute) for safety practices prior to installation. Truss installers shall provide temporary bracing per BCSI details. The top chord shall have properly attached structural sheathing and bottom chord shall have bracing installed per BCSI sections B3, B7 or B10, as applicable.

ITW Building Components Group Inc. (ITWBCG) shall not be responsible for any deviation from the bracing of trusses. Apply plates to each face of truss and position as shown above and on the job drawing or cover page listing this drawing. Indicates acceptance of professional engineering structure the responsibility of the individual engineer. For more information see: This Job.

ITW-865: www.itw865.com; TPI: www.tpinet.org; MCA: www.mcaindustry.com; ICC: www.iccsafe.org



PLT TYP. Wave

(12-049--Fill in later BRYAN ZECHER/KOCH --, ** - CJ5T)

Top chord 2x4 SP M-30
 Bot chord 2x4 SP M-30
 Webs 2x4 SP #3

Roof overhang supports 2.00 psf soffit load.


Bottom chord checked for 10.00 psf non-concurrent live load.

Provide (2) 16d common nails(0.162"x3.5"); toe nailed at Top chord.
 Provide (2) 16d common nails(0.162"x3.5"); toe nailed at Bot chord.

120 mph wind, 15.00 ft mean hgt, ASCE 7-10, CLOSED bldg, not located within 4.50 ft from roof edge. RISK CAT II, EXP B, wind TC DL=5.0 psf, wind BC DL=5.0 psf. Gcpi(+/-)=0.18

Wind loads and reactions based on MVFRS with additional C&C member design.

Deflection meets L/240 live and L/180 total load. Creep increase factor for dead load is 1.50.

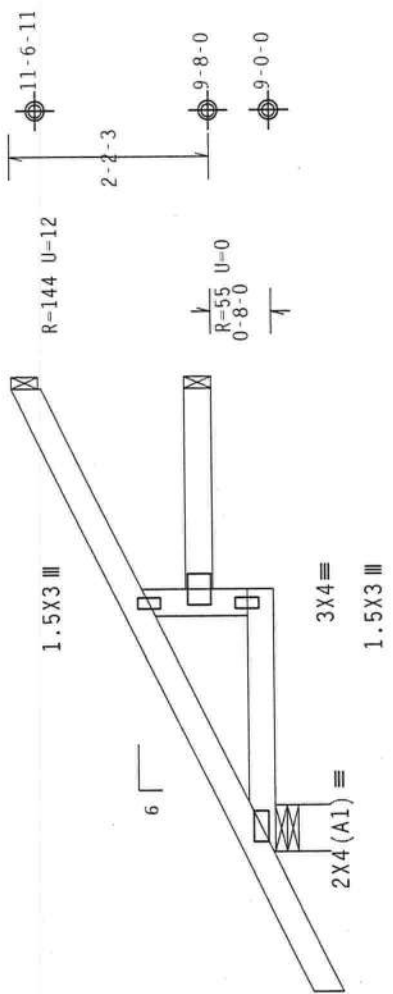

← 1-6-0 →

← 2-10-0 →
 ← 5-0-0 Over 3 Supports →
 2-2-0


R-331 U=0 W=6"
 RL=53/-23

Design Crit: FBC2010Res/TPI-2007 (STD)
 FT/RT=10% (0%) / 0 (0)

| | |
|----------------------------|-----------------------|
| FL / - / 4 / - / - / R / - | Scale = .5" / Ft. |
| TC LL 20.0 PSF | REF R487 -- 44504 |
| TC DL 10.0 PSF | DATE 03/08/12 |
| BC DL 10.0 PSF | DRW HCUSR487 12068035 |
| BC LL 0.0 PSF | HC-ENG DF/DF |
| TOT.LD. 40.0 PSF | SEQN- 274234 |
| DUR.FAC. 1.25 | |
| SPACING 24.0" | JREF- 1UK8487_Z01 |



****IMPORTANT**** FURNISH THIS DESIGN TO ALL CONTRACTORS INCLUDING INSTALLERS.
 Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to the latest edition of BCSI (Building Component Safety Information) by using the BCSI practices prior to performing these functions. Properly attached structural sheathing and bottom chord bracing are essential for the proper performance of the truss. The contractor shall have bracing installed per BCSI sections B3, B7 or B10, as applicable.
 The Building Components Group Inc. (ITMBCSI) shall not be responsible for any deviation from this drawing or for any damage to the truss in connection with any handling, shipping, installation or bracing of trusses. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-2 for standard plate positions. A seal on the drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this information is the responsibility of the Building Designer per ANSI/TPI-1. For more information see: This job's general notes page; ITR-BCSI: www.itrbcsi.com; TPI: www.tpinet.org; NICA: www.sbciindustry.com; IBC: www.iccsafe.org.




PLT TYP. Wave

(12-049--Fill in later BRYAN ZECHER/KOCH -- ** - EJ9T)
 Top chord 2x4 SP M-30
 Bot chord 2x4 SP M-30
 Webs 2x4 SP #3

Roof overhang supports 2.00 psf soffit load.
 Bottom chord checked for 10.00 psf non-concurrent live load.
 MWFRS loads based on trusses located at least 7.50 ft. from roof edge.
 Provide { 2 } 16d common nails (0.162"x3.5"); toe nailed at Top chord.
 Provide { 2 } 16d common nails (0.162"x3.5"); toe nailed at Bot chord.

120 mph wind, 15.00 ft mean hgt, ASCE 7-10, CLOSED bldg, not located within 9.00 ft from roof edge, RISK CAT II, EXP B, wind TC DL=5.0 psf, wind BC DL=5.0 psf. GCPI(+/-)=0.18
 Wind loads and reactions based on MWFRS with additional C&C member design.
 Deflection meets L/240 live and L/180 total load. Creep increase factor for dead load is 1.50.

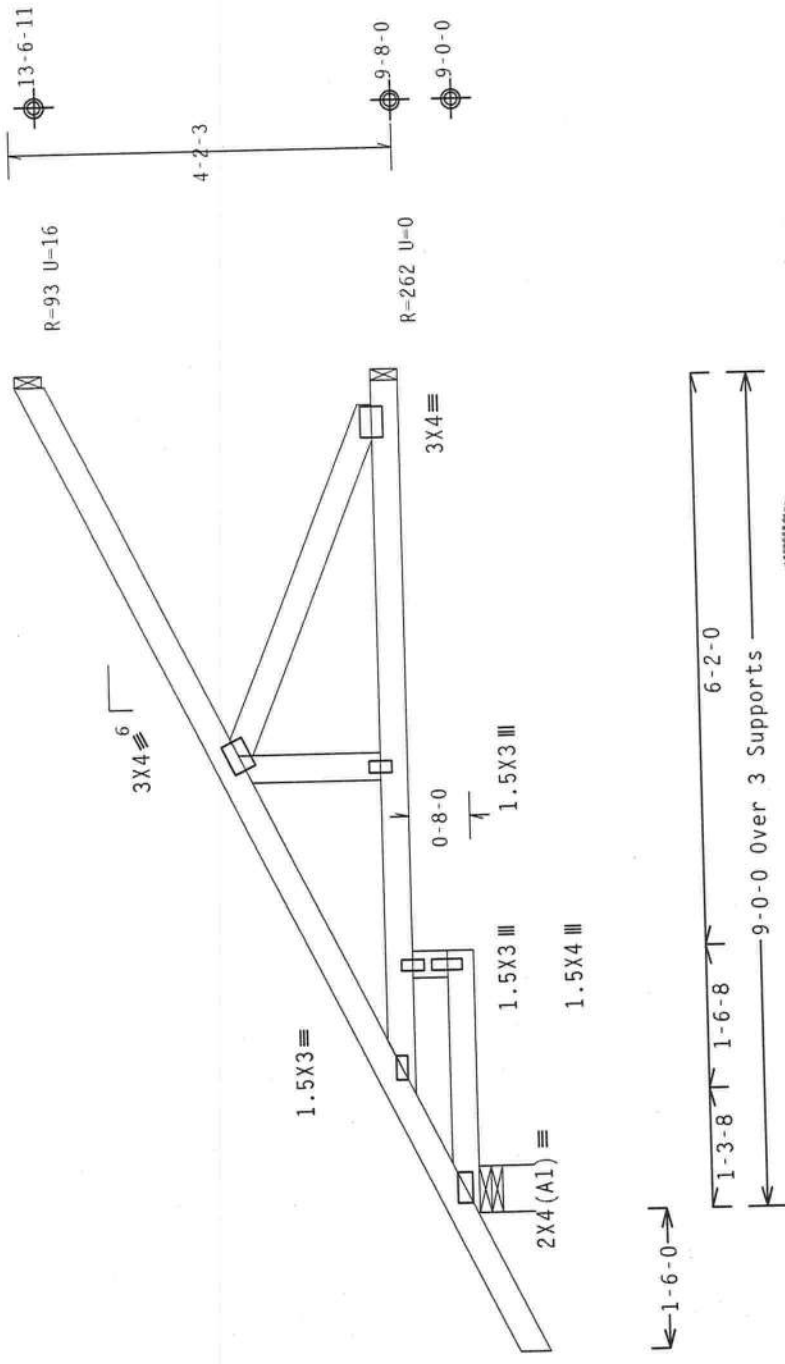

R-487 U-0 W=6"
 RL-86/-30

Design Crit: FBC2010Res/TPI-2007 (STD)
 FT/RT=10%(0%)/0(0)

| | | | |
|----------|----------|----------------|-------------------|
| TC LL | 20.0 PSF | FL/-/4/-/-/R/- | Scale = .5"/Ft. |
| TC DL | 10.0 PSF | REF R487-- | 44506 |
| BC DL | 10.0 PSF | DATE | 03/08/12 |
| BC LL | 0.0 PSF | DRW | HCUSR487 12068037 |
| TOT.LD. | 40.0 PSF | HC-ENG | DF/DF |
| DUR.FAC. | 1.25 | SEQN- | 274283 |
| SPACING | 24.0" | JREF- | 1UK8487_Z01 |



PLT TYP. Wave

ALPINE

ITW Building Components Group Inc.
 Haines City, FL 33844
 FL COA #0 278

WARNING READ AND FOLLOW ALL NOTES ON THIS SHEET
 FURNISH THIS DESIGN TO ALL CONTRACTORS INCLUDING INSTALLERS.
 Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to the following edition of BCSI (Building Component Safety Information, by TPI and acting as the BCSI agent) prior to performing these functions. Installers shall provide a bracing plan for each truss unless noted otherwise. Top chord shall have properly attached bracing and bottom chord shall have a properly attached rigid ceiling. Locations shown for permanent lateral restraints of webs shall have bracing installed per BCSI sections 83, 87 or 810, as applicable.
 ITW Building Components Group Inc. (ITWBCG) shall not be responsible for any deviation from the any failure to build the truss in conformance with the mass and position as shown above and on the Bracing of trusses. Apply plates to each web in the position as shown above and on the drawing or coverage page. Details, unless noted otherwise, shall be in accordance with the drawings. Indicates acceptance of professional engineering responsibility of the Building Designer per ANSI/TPI 1 sec.2. For more information see: This Job's general notes page: ITN-BCG: www.itnbcg.com; TPI: www.tpinet.org; HICK: www.hickindustry.com; ICC: www.iccsafe.org

(12-049--Fill in later BRYAN ZECHER/KOCH -- ** - EJ9)

Top chord 2x4 SP M-30
 Bot chord 2x4 SP M-30
 Webs 2x4 SP #3

Roof overhang supports 2.00 psf soffit load.


Bottom chord checked for 10.00 psf non-concurrent live load.

MWFRS loads based on trusses located at least 7.50 ft. from roof edge.

Provide (2) 16d common nails(0.162"x3.5"), toe nailed at Top chord.
 Provide (2) 16d common nails(0.162"x3.5"), toe nailed at Bot chord.

120 mph wind, 15.00 ft mean hgt, ASCE 7-10, CLOSED bldg, not located within 9.00 ft from roof edge, RISK CAT II, EXP B, wind TC DL=5.0 psf, wind BC DL=5.0 psf. 6Cpi(+/-)=0.18

Wind loads and reactions based on MWFRS with additional C&C member design.
 Deflection meets L/240 live and L/180 total load. Creep increase factor for dead load is 1.50.

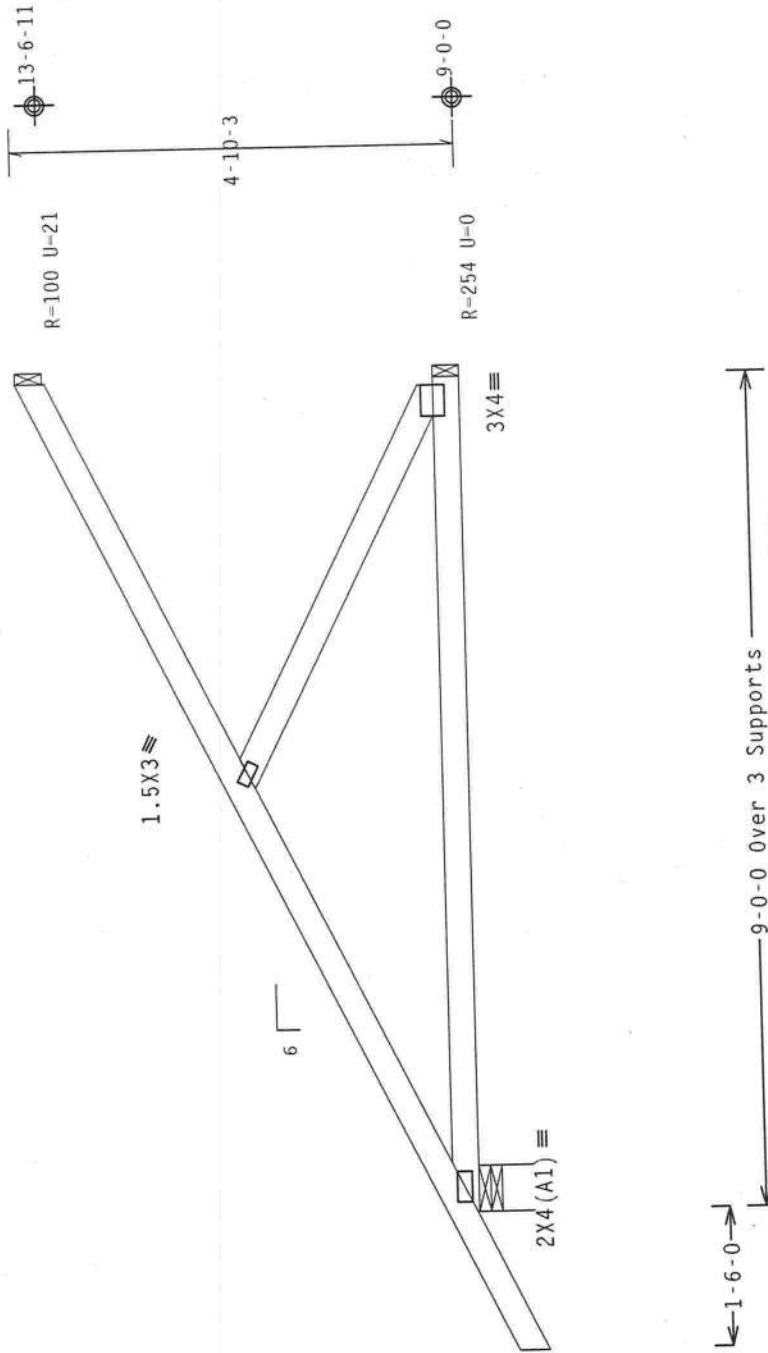

| | | | | |
|----------|----------|--------|-------------|----------|
| TC LL | 20.0 PSF | REF | R487-- | 44507 |
| TC DL | 10.0 PSF | DATE | 03/08/12 | |
| BC DL | 10.0 PSF | DRW | HCUSR487 | 12068038 |
| BC LL | 0.0 PSF | HC-ENG | DF/DF | |
| TOT.LD. | 40.0 PSF | SEQN- | 274288 | |
| DUR.FAC. | 1.25 | | | |
| SPACING | 24.0" | JREF- | 1UK8487_Z01 | |

Design Crit: FBC2010Res/TPI-2007 (STD)
 FT/RT=10%(0%)/0(0)

Scale = .5"/Ft.

PLT TYP. Wave

R=487 U=0 W=6"
 RL-86/-30

ALPINE

ITW Building Components Group Inc.
 Haines City, FL 33844
 FL COA #0 278


WARNING READ AND FOLLOW ALL NOTES ON THIS SHEET.
 FURNISH THIS DESIGN TO ALL CONTRACTORS INCLUDING INSTALLERS.
 Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to the latest edition of BCSI (Building Component Safety Information, or BCSI) for bracing per BCSI practices prior to performing these functions. Installers shall properly attach and brace the truss unless noted otherwise. Top chord shall have properly attached bracing for permanent lateral restraint. Webs shall have a properly attached rigid ceiling, bracing B7 or B10, as applicable.
 ITW Building Components Group Inc. (ITWBCG) shall be responsible for any deviation from the design. Any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installing or bracing of trusses. Apply plates per ANSI/TPI 1, or for handling, shipping, installing or bracing of trusses. Details, unless noted otherwise, shall be in accordance with ITWBCG drawings. The suitability and use of this design shall be the responsibility of the Building Designer per ANSI/TPI 1 Sec.2. Refer to drawings 160A-2 for standard plate positions. A seal on the general notes page: ITW-BCG: www.itwbcg.com; TPI: www.tpiinst.org; BCSI: www.bcsiindustry.com; ICC: www.iccsafe.org

(12-049--Fill in later BRYAN ZECHE/KOCH -- ** - CJ3)
 Top chord 2x4 SP M-30
 Bot chord 2x4 SP M-30

Roof overhang supports 2.00 psf soffit load.
 Bottom chord checked for 10.00 psf non-concurrent live load.
 Deflection meets L/240 live and L/180 total load. Creep increase factor for dead load is 1.50.

120 mph wind, 15.00 ft mean hgt, ASCE 7-10, CLOSED bldg. Located anywhere in roof. RISK CAT II, EXP B, wind TC DL=5.0 psf, wind BC DL=5.0 psf. GCPI(+/-)=0.18

Wind loads and reactions based on MWFRS with additional C&C member design.
 Provide (2) 16d common nails(0.162"x3.5"), toe nailed at Top chord.
 Provide (2) 16d common nails(0.162"x3.5"), toe nailed at Bot chord.

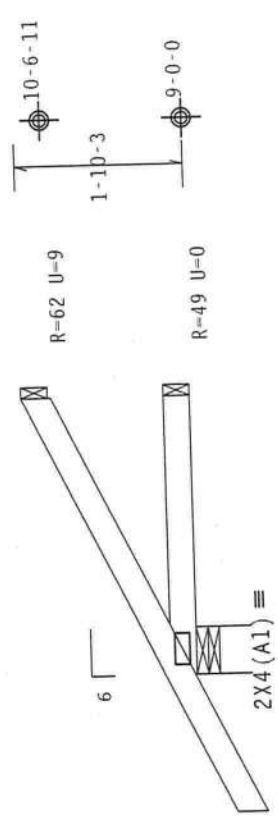

← 1'-6"-0 →
 3'-0"-0 Over 3 Supports
 R-262 U=2 W-6"
 RL=37

Design Crit: FBC2010Res/TPI-2007 (STD)
 FT/RT=10% (0%)/0(0)

| | |
|------------------|-----------------------|
| Scale = .5"/Ft. | REF R487-- 44508 |
| TC LL 20.0 PSF | DATE 03/08/12 |
| TC DL 10.0 PSF | DRW HCUSR487 12068039 |
| BC DL 10.0 PSF | HC-ENG DF/DF |
| BC LL 0.0 PSF | SEQN- 274291 |
| TOT.LD. 40.0 PSF | DUR.FAC. 1.25 |
| SPACING 24.0" | JREF- 1UK8487_Z01 |



****WARNING**** READ AND FOLLOW ALL NOTES ON THIS SHEET
****IMPORTANT**** FURNISH THIS DESIGN TO ALL CONTRACTORS INCLUDING INSTALLERS.
 Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to the following notes for details of BCSI (Building Component Safety Information, by TPI and NCCA) practices to be followed in performing these functions. Installers shall provide temporary bracing and bottom chord bracing as shown on this drawing. Top chord shall have properly attached structural latching and bottom chord shall have a properly attached rigid ceiling. Locations shown are for permanent lateral restraint of webs and shall have bracing installed per BCSI sections 85, 87 or 89, as applicable.
 IITW Building Components Group Inc. (IITWBCG) shall not be responsible for any deviation from the details shown on this drawing. IITWBCG shall not be responsible for handling, shipping, installing or any failure to build the truss in conformance with ANSI/TPI-2007 standard plate positions. A seal on the bottom of each face of each plate shall be in the position as shown above and on the Job. Details, unless noted otherwise, refer to IITWBCG Form 180A-2 for standard plate positions. The responsibility for the design shown. The suitability and use of this design for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2. For more information on IITWBCG, please refer to the notes page: IITW-BCG; www.iitwbcg.com; TPI: www.tpi-inst.org; NCCA: www.ncca.org; ICC: www.iccsafe.org

PLT TYP. Wave

IITW Building Components Group Inc.
 Haines City, FL 33844
 FL COA #0278

(12-049--F111 in later BRYAN ZECHER/KOCH -- ** - C.J5)
 Top chord 2x4 SP M-30
 Bot chord 2x4 SP M-30

Roof overhang supports 2.00 psf soffit load.


Bottom chord checked for 10.00 psf non-concurrent live load.

Deflection meets L/240 live and L/180 total load. Creep increase factor for dead load is 1.50.

120 mph wind, 15.00 ft mean hgt, ASCE 7-10, CLOSED bldg, not located within 4.50 ft from roof edge, RISK CAT II, EXP B, wind TC DL=5.0 psf, wind BC DL=5.0 psf. GCPI (+/-)=0.18

Wind loads and reactions based on MWFRS with additional C&C member design.

Provide (2) 16d common nails(0.162"x3.5"), toe nailed at Top chord. Provide (2) 16d common nails(0.162"x3.5"), toe nailed at Bot chord.

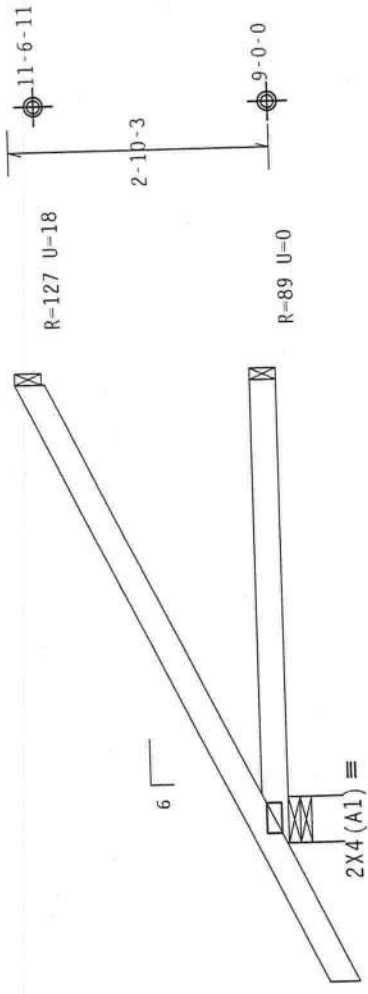

← 1-6-0 →
 ← 5-0-0 Over 3 Supports →
 R=331 U=0 W=6"
 RL=53/-23

Design Crit: FBC2010Res/TPI-2007(STD)
 FT/RT=10%(0%)/0(0)

| | |
|-------------------|-----------------------|
| Scale = .5" / Ft. | REF R487 -- 44509 |
| DATE 03/08/12 | DRW HCUSR487 12068040 |
| HC-ENG DF/DF | SEQN- 274294 |
| TOT.LD. 40.0 PSF | DUR.FAC. 1.25 |
| SPACING 2.4.0" | JREF- 1UK8487_Z01 |




****WARNING**** READ AND FOLLOW ALL NOTES ON THIS SHEET.
 FURNISH THIS DESIGN TO ALL COMPACTORS INCLUDING INSTALLERS.
****IMPORTANT****
 Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to the latest edition of the Building Component Safety Information, by TPI and MICA for the proper practices prior to erection of these functions. Installers shall provide temporary bracing in accordance with the manufacturer's instructions. Top chord shall have properly attached structural sheathing in bottom chord. Trusses shall have bracing installed per BCSI sections B3, B7 or B10, as applicable.
 TPI Building Components Group Inc. (TIBCO) shall not be responsible for any deviation from this design or any failure to build the truss in conformance with ANSI/TPI 1, for the design, shipping, installation or bracing of trusses. Apply plates to each face of Truss 2 for standard plate positions. A seal on the details, unless noted otherwise. Refer to drawing TIBCO-2 for standard plate positions. The drawing or cover page listing this drawing. The suitability and use of this design for any structure is the responsibility solely of the Building Designer per ANSI/TPI 1 Sec.2. For more information see: This job's general information: TIB-BCG: www.tibbcg.com; TPI: www.tpiinst.org; MICA: www.sbcindust7.com; ICC: www.iccsafe.org

PLT TYP. Wave

ALPINE
 rTW Building Components Group Inc.
 Haines City, FL 33844
 FL COA #0 278

(12-049--Fill in later BRYAN ZECHER/KOCH -- ** - EJ7)
 Top chord 2x4 SP M-30
 Bot chord 2x4 SP M-30

Roof overhang supports 2.00 psf soffit load.
 Bottom chord checked for 10.00 psf non-concurrent live load.
 Deflection meets L/240 live and L/180 total load. Creep increase factor for dead load is 1.50.

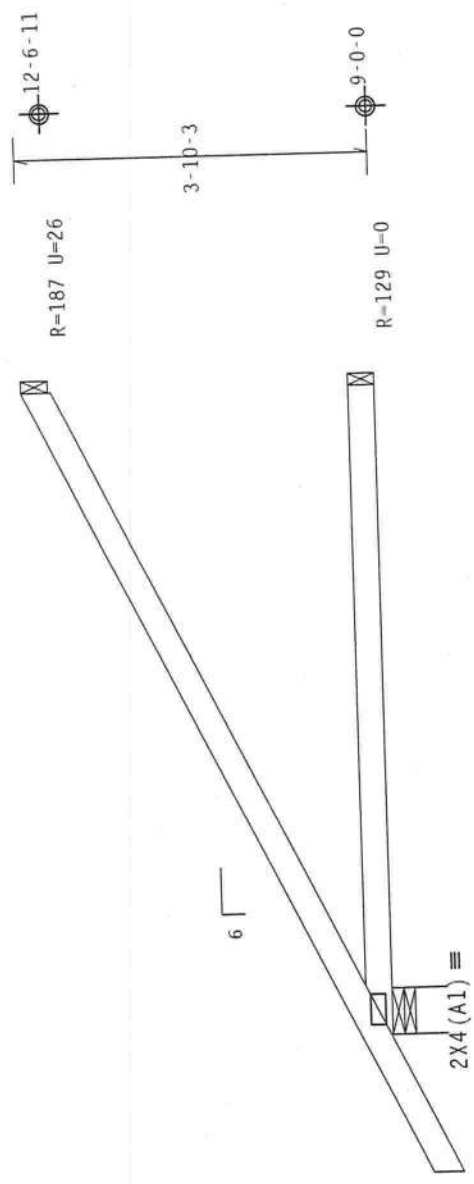


R-408 U=0 M=6"
 RL=70/-27

Design Crit: FBC2010Res/TPI-2007 (STD)
 FT/RT=10% (0%)/0(0)

| | |
|---------------|-------------------|
| PLT TYP. Wave | Scale = .5"/Ft. |
| TC LL | 20.0 PSF |
| TC DL | 10.0 PSF |
| BC DL | 10.0 PSF |
| BC LL | 0.0 PSF |
| TOT.LD. | 40.0 PSF |
| DUR.FAC. | 1.25 |
| SPACING | 24.0" |
| REF | R487-- 44510 |
| DATE | 03/08/12 |
| DRW | HCUSR487 12068041 |
| HC-ENG | DF/DF |
| SEQN- | 274297 |
| JREF- | 1UK8487_Z01 |



****WARNING**** READ AND FOLLOW ALL NOTES ON THIS SHEET
****IMPORTANT**** FURNISH THIS DESIGN TO ALL CONTRACTORS INCLUDING INSTALLERS.
 Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and listing website) practices to performing these functions. Installers shall provide temporary bracing and bottom chord bracing as noted otherwise. Top chord shall have properly attached structural latching and bottom chord shall have a properly attached rigid ceiling. Locations shown on drawings shall be used unless otherwise noted. Locations shown on drawings shall have bracing installed per BCSI sections B3, B7 or B10, as applicable.
 ITW Building Components Group Inc. (ITWBCG) shall not be responsible for any deviation from the design or any failure to build the truss in conformance with ANSI and position as shown above and on the Job. Details, unless noted otherwise, shall be in accordance with ITWBCG's 180A-2 for standard plate positions. A seal of approval or cover page listing the design shown. The suitability and use of this design for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2. For more information: This job's the responsible party. ITW-BCG: www.itwbcg.com; TPI: www.tpinstc.org; NICK: www.fctindustry.com; ICC: www.iccsafe.org




(12-049--F11) in later BRYAN ZECHER/KOCH -- ** - EJ7D)
 Top chord 2x4 SP M-30
 Bot chord 2x4 SP M-30
 Webs 2x4 SP #3

Roof overhang supports 2.00 psf soffit load.
 Bottom chord checked for 10.00 psf non-concurrent live load.
 MWFRS loads based on trusses located at least 15.00 ft. from roof edge.

Provide { 2 } 16d common nails (0.162"x3.5"); toe nailed at Top chord.
 Provide { 3 } 16d common nails (0.162"x3.5"); toe nailed at Bot chord.

Wind loads and reactions based on MWFRS with additional C&C member design.
 Deflection meets L/240 live and L/180 total load. Creep increase factor for dead load is 1.50.

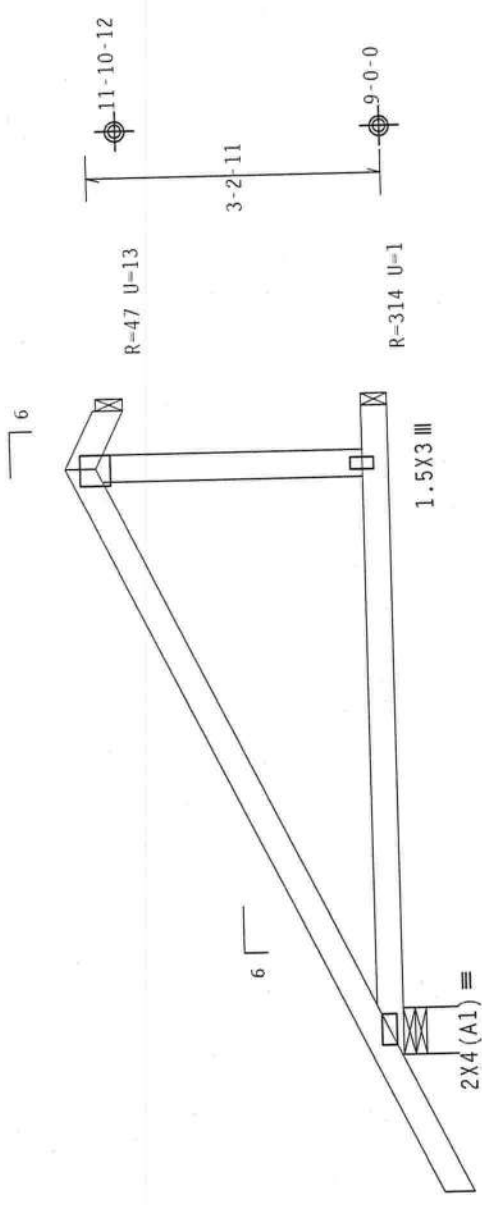

2X4 (A1)
 1.5X3 III
 4X4
 6
 6
 6-4-8
 7-0-0 Over 3 Supports
 0-7-8
 R=408 U=0 W=6"
 RL=44/-29

Design Crit: FBC2010Res/TPI-2007 (STD)
 FT/RT=10%(0%)/0(0)

| | | | |
|----------|----------|-----------------------|-----------------|
| TC LL | 20.0 PSF | FL/-/4/-/-/R/- | Scale = .5"/Ft. |
| TC DL | 10.0 PSF | REF R487-- 44511 | DATE 03/08/12 |
| BC DL | 10.0 PSF | DRW HCUSR487 12068042 | HC-ENG DF/DF |
| BC LL | 0.0 PSF | SEQN- 274304 | |
| TOT.LD. | 40.0 PSF | | |
| DUR.FAC. | 1.25 | | |
| SPACING | 24.0" | JREF- 1UK8487_Z01 | |



****WARNING**** READ AND FOLLOW ALL NOTES ON THIS SHEET.
 FURNISH THIS DESIGN TO ALL CONTRACTORS INCLUDING INSTALLERS.
****IMPORTANT**** Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to the latest edition of BCSI (Building Component Safety Information, PI and KICA) for details and practices prior to performing these functions. Installers shall follow the manufacturer's instructions. Unless noted otherwise, top chord shall have projections sheathed structural sheathing and bottom chord shall have a properly attached rigid ceiling. Trusses shall have bracing installed per BCSI sections B3, B7 or B10, as applicable.
 ITR Building Components Group Inc. (ITRBCG) shall not be responsible for any deviation from this design for any failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installing, or bracing of trusses. Apply bracing to each face of truss and position as shown above and on the joint details, unless otherwise noted. Refer to drawings 160A-2 for standard plate positions. A seal on the drawing, unless noted otherwise, indicates acceptance of professional responsibility for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Section 1.9. For more information see: This job's general notes page: ITR-BCG: www.itrbcg.com; TPI: www.tpi.net; NRC: www.nrcind.com; NICA: www.nicaind.com; ICC: www.iccsafe.org

PLT TYP. Wave

ITR Building Components Group Inc.
 Haines City, FL 33844
 FL COA #0278


(12-049--Fill in later BRYAN ZECHER/KOCH -- ** - HJ9)
 Top chord 2x4 SP M-30
 Bot chord 2x4 SP M-30
 Webs 2x4 SP #3

Hipjack supports 9-0-0 setback Jacks. Jacks up to 7' have no webs.
 Longer jacks supported to BC.

Deflection meets L/240 live and L/180 total load. Creep increase factor for dead load is 1.50.

120 mph wind, 15.00 ft mean hgt, ASCE 7-10, CLOSED bldg, Located anywhere in roof, RISK CAT II, EXP B, wind TC DL=5.0 psf, wind BC DL=5.0 psf, GCp1(+/-)=0.18

Wind loads and reactions based on MMFRS with additional C&C member design.

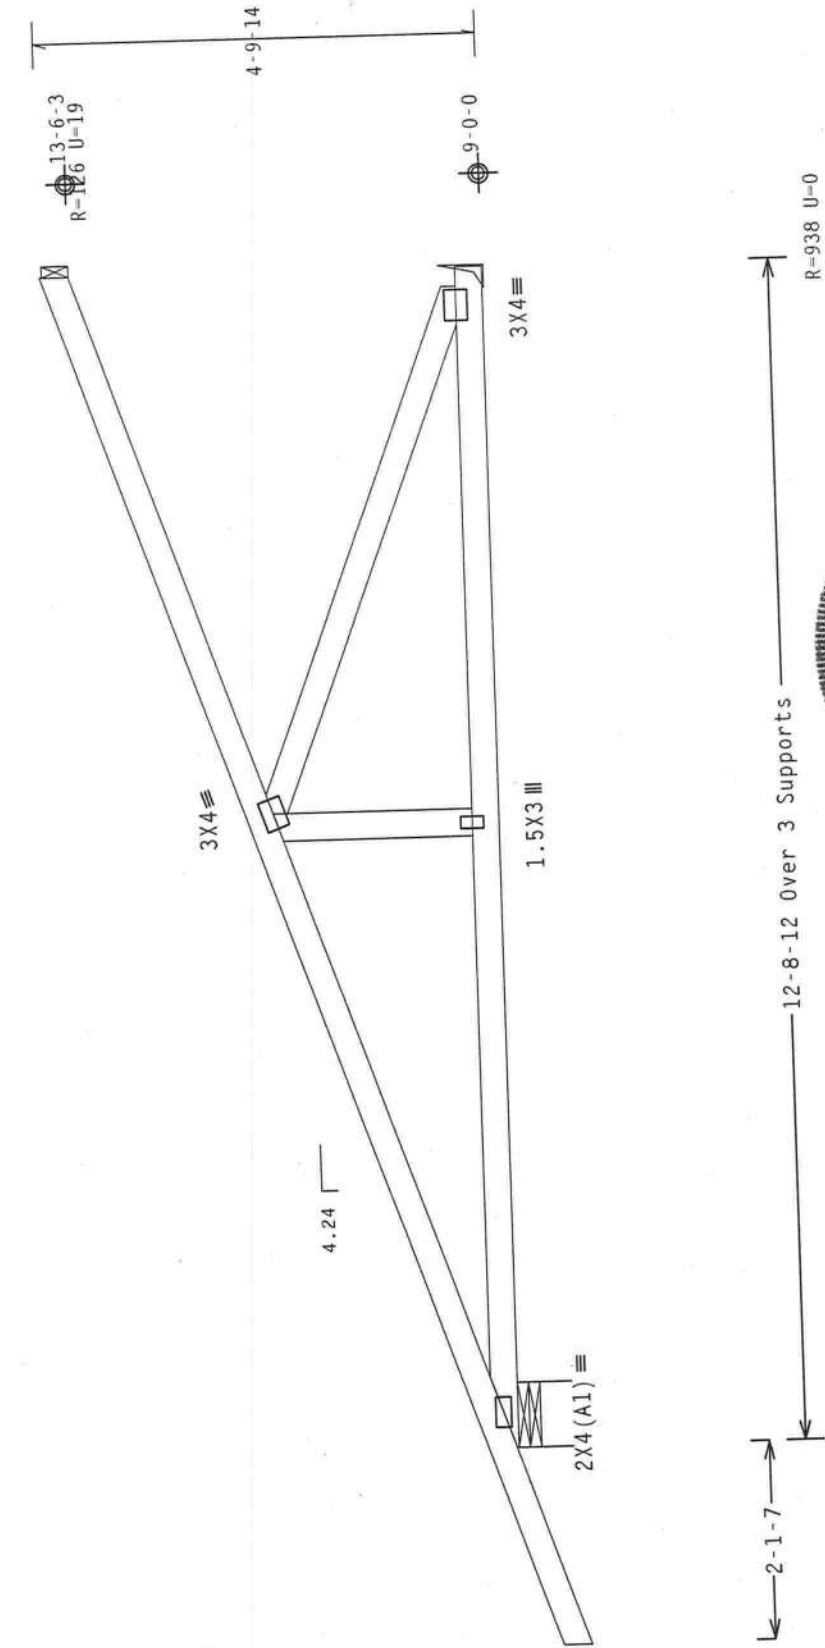

| | | | | |
|---------------|--|----------|-----------------|-----------------------|
| PLT TYP. Wave | Design Crit: FBC2010Res/TPI-2007 (STD) FT/RT=10%(0%)/0(0) | | Scale = .5"/Ft. | |
| | TC LL | 20.0 PSF | FL/-/4/-/-/R/- | REF R487-- 44512 |
| | TC DL | 10.0 PSF | | DATE 03/08/12 |
| | BC DL | 10.0 PSF | | DRW HCUSR487 12068043 |
| | BC LL | 0.0 PSF | | HC-ENG DF/DF |
| | TOT.LD. | 40.0 PSF | | SEQN- 274317 |
| | DUR.FAC. | 1.25 | | |
| | SPACING | 24.0" | | JREF- 1UK8487_Z01 |



****WARNING**** READ AND FOLLOW ALL NOTES ON THIS SHEET
 FURNISH THIS DESIGN TO ALL CONTRACTORS INCLUDING INSTALLERS.
****IMPORTANT**** Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Erectors must follow the latest edition of BCSI (Building Component Safety Information, by TPI and acting per BCSI practices) to performing these functions. Installers shall provide adequate bracing at the top and bottom chord. Top chord shall have a properly attached girder with permanent lateral restraint of web. Bottom chord shall have bracing installed per BCSI sections B3, B7 or B10, as applicable.
 ITW Building Components Group Inc. (ITWBCG) shall not be responsible for any deviation from the design shown. Apply plates to each face of top chord and position as shown above and on the bracing of trusses. Details, unless noted otherwise, refer to ITWBCG 180A-2 for standard plate positions. A seal or drawing or cover page listing the design shown. The suitability and use of this design for the responsibility of the Building Designer per ANSI/TPI 1 Sec.2. For more information, contact the responsible page: ITW-BCG: www.itwbcg.com; TPI: www.tpiinst.org; NCCA: www.nccaa.org; ICC: www.icccafe.org

ALPINE
ITW Building Components Group Inc.
 Haines City, FL 33844
 FL COA #0278

(12-049--Fill in later BRYAN ZECHER/KOCH -- ** - HJ9T)
 Top chord 2x4 SP M-30
 Bot chord 2x4 SP M-30
 Webs 2x4 SP #3 :W1 2x8 SP #1 Dense:


(H1) = (J) Hanger not calculated (2)2x6 SP SS supporting member.

Hipjack supports 9-0-0 setback jacks. Jacks up to 7' have no webs. Longer Jacks supported to BC.

120 mph wind, 15.00 ft mean hgt, ASCE 7-10, CLOSED bldg, Located anywhere in roof, RISK CAT 11, EXP B, wind TC DL=5.0 psf, wind BC DL=5.0 psf. Gcpl(+/-)=0.18

Wind loads and reactions based on MWFRS with additional C&C member design.

Deflection meets L/240 live and L/180 total load. Creep increase factor for dead load is 1.50.

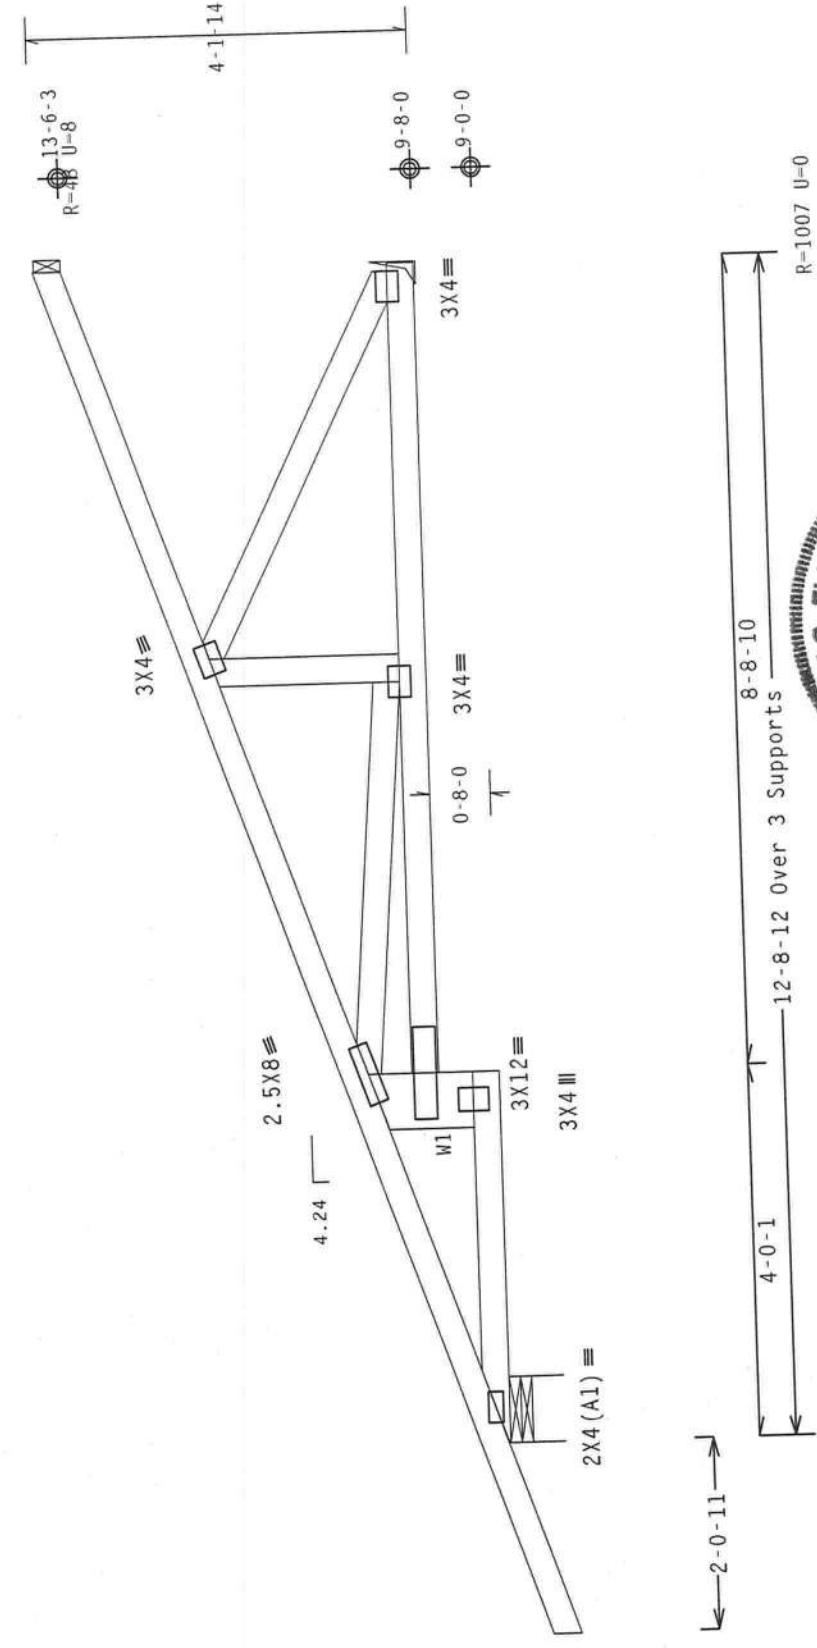

| | |
|------------------------|-----------------------|
| Scale = .5" / Ft. | REF R487 - - 44513 |
| FL / - / 4 / - / R / - | DATE 03/08/12 |
| TC LL 20.0 PSF | DRW HCUSR487 12068044 |
| TC DL 10.0 PSF | HC-ENG DF/DF |
| BC DL 10.0 PSF | SEQN- 274341 |
| BC LL 0.0 PSF | |
| TOT.LD. 40.0 PSF | |
| DUR.FAC. 1.25 | |
| SPACING 24.0" | JREF- 1UK8487_Z01 |



Design Crit: FBC2010Res/TPI-2007 (STD)
 FT/RT=10% (0%) / 0 (0)

PLT TYP. Wave

ALPINE

ITW Building Components Group Inc.
 Haines City, FL 33844
 FL COA #0 278

ITW Building Components Group Inc. logo

IMPORTANT FURNISH THIS DESIGN TO ALL CONTRACTORS INCLUDING INSTALLERS.
 Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Be sure to follow the instructions and details of the manufacturer's literature (including the IBCA) for the proper erection of the truss. Trusses shall be erected in accordance with the manufacturer's literature. If any other instructions are noted otherwise, top chord shall have properly attached and secured lateral bracing per detail. Trusses shall have a properly attached rigid ceiling. Location of bracing shall be as shown on the drawing. Trusses shall have bracing installed per BCSI sections 09, 07, 08, 09, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, as applicable.
 ITW Building Components Group Inc. (ITWBCG) shall not be responsible for any deviation from this design for any failure to build the truss in conformance with the design shown. The manufacturer shall be responsible for the design shown. The suitability and use of this design information is the responsibility of the Building Designer per ANSI/TPI 1 Sec.2. For more information see: This job's drawing or cover page. For more information see: www.itwbcg.com; TPI: www.tpinstruction.com; IBCA: www.ibca.org; ICFI: www.icfifa.org

(12-049--Fill in later BRYAN ZECHER/KOCH -- ** - HJ5)
 Top chord 2x4 SP M-30
 Bot chord 2x4 SP M-30


Hipjack supports 5-0-0 setback jacks with no webs.

Deflection meets L/240 live and L/180 total load. Creep increase factor for dead load is 1.50.

120 mph wind, 15.00 ft mean hgt, ASCE 7-10, CLOSED bldg, Located anywhere in roof, RISK CAT II, EXP B, wind TC DL=5.0 psf, wind BC DL=5.0 psf. GCp1(+/-)=0.18

Wind loads and reactions based on MWFRS with additional C&C member design.

Provide (2) 16d common nails(0.162"x3.5"), toe nailed at Top chord.
 Provide (2) 16d common nails(0.162"x3.5"), toe nailed at Bot chord.

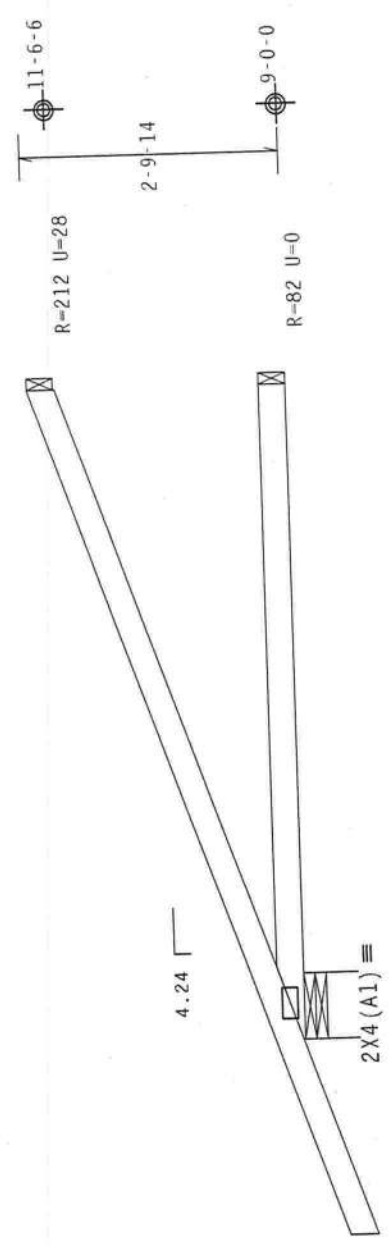

← 2-1-7 →
 ← 7-0-14 Over 3 Supports →
 R=307 U=9 W=8.485"



Design Crit: FBC2010Res/TPI-2007 (STD)
 FT/RT=10%(0%)/0(0)

| | | |
|----------------------------|-------------|-----------------------|
| Scale = .5" / Ft. | REF R487 -- | 44514 |
| FL / - / 4 / - / - / R / - | DATE | 03/08/12 |
| TC LL | 20.0 PSF | |
| TC DL | 10.0 PSF | |
| BC DL | 10.0 PSF | DRW HCUSR487 12068045 |
| BC LL | 0.0 PSF | HC-ENG DF/DF |
| TOT.LD. | 40.0 PSF | SEQN- 274344 |
| DUR.FAC. | 1.25 | |
| SPACING | 24.0" | JREF- 1UK8487_Z01 |

****IMPORTANT**** FURNISH THIS DESIGN TO ALL CONTRACTORS INCLUDING INSTALLERS.
 Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to the following edition of BCSI (Building Component Safety Information, published by NICA) for details. Trusses shall be braced in accordance with the BCSI manual. Temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached structural sheathing and bottom chord shall have a properly attached rigid ceiling. Temporary bracing shall be removed after structure shall have bracing installed per BCSI sections B3, B7 or B10, as applicable.
 ITW Building Components Group Inc. (ITWBCG) shall not be responsible for any deviation from the any failure to build the truss in conformance with the ANSI/TPI 1, or for handling, shipping, installing or bracing of trusses. Apply plates in accordance with the ANSI/TPI 1, or for handling, shipping, installing or bracing of trusses. Apply plates in accordance with the ANSI/TPI 1, or for handling, shipping, installing or bracing of trusses. Refer to drawings 160A-2 for standard plate positions. Refer to drawings 160A-2 for standard plate positions. Refer to drawings 160A-2 for standard plate positions. Refer to drawings 160A-2 for standard plate positions. The suitability and use of professional information for any structure is the responsibility of the Building Designer per ANSI/TPI 1. See more information see: This job's general notes page: ITW-BCG: www.itwbcg.com; TPI: www.tpi.net; NICA: www.nicaindustry.com; ICC: www.iccsafe.org

ALPINE
 ITW Building Components Group Inc.
 Haines City, FL 33844
 FL COA #0 278

PLT TYP. Wave

NAIL SPACING DETAIL

MINIMUM SPACING FOR SINGLE BLOCK IS SHOWN. DOUBLE NAIL SPACINGS AND STAGGER NAILING FOR TWO BLOCKS. GREATER SPACING MAY BE REQUIRED TO AVOID SPLITTING.

BLOCK LOCATION, SIZE, LENGTH, GRADE AND TOTAL NUMBER AND TYPE OF NAILS ARE TO BE SPECIFIED ON SEALED DESIGN REFERENCING THIS DETAIL.

LOAD PERPENDICULAR TO GRAIN

A - EDGE DISTANCE AND SPACING BETWEEN STAGGERED ROWS OF NAILS (6 NAIL DIAMETERS)

B - SPACING OF NAILS IN A ROW (12 NAIL DIAMETERS)

C - END DISTANCE (15 NAIL DIAMETERS)

LOAD PARALLEL TO GRAIN

A - EDGE DISTANCE (6 NAIL DIAMETERS)


C - SPACING OF NAILS IN A ROW AND END DISTANCE (15 NAIL DIAMETERS)

D - SPACING BETWEEN STAGGERED ROWS OF NAILS (7 1/2 NAIL DIAMETERS)

IF NAIL HOLES ARE PREBORED, SOME SPACING MAY BE REDUCED BY THE AMOUNTS GIVEN BELOW:

* SPACING MAY BE REDUCED BY 50%

** SPACING MAY BE REDUCED BY 33%

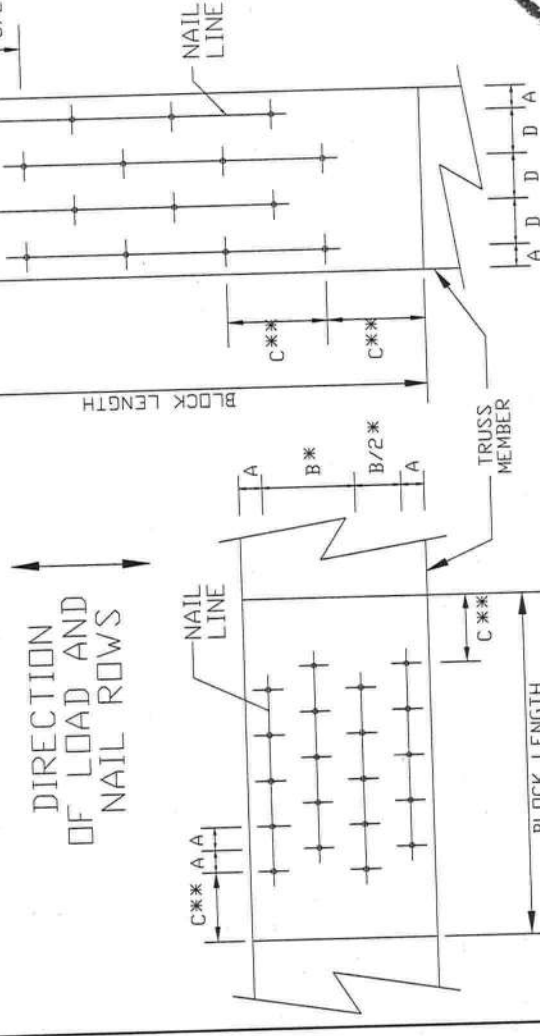


LOAD APPLIED PERPENDICULAR TO GRAIN

LOAD APPLIED PARALLEL TO GRAIN

MINIMUM NAIL SPACING DISTANCES

| NAIL TYPE | DISTANCES | | | |
|----------------------------------|-----------|--------|--------|--------|
| | A | B* | C** | D |
| 8d BOX (0.113" X 2.5", MIN) | 3/4" | 1 3/8" | 1 3/4" | 7/8" |
| 10d BOX (0.128" X 3", MIN) | 7/8" | 1 5/8" | 2" | 1" |
| 12d BOX (0.128" X 3.25", MIN) | 7/8" | 1 5/8" | 2" | 1" |
| 16d BOX (0.135" X 3.5", MIN) | 7/8" | 1 5/8" | 2 1/8" | 1 1/8" |
| 20d BOX (0.148" X 4", MIN) | 1" | 1 7/8" | 2 1/4" | 1 1/8" |
| 8d COMMON (0.131" X 2.5", MIN) | 7/8" | 1 5/8" | 2" | 1" |
| 10d COMMON (0.148" X 3", MIN) | 1" | 1 7/8" | 2 1/4" | 1 1/8" |
| 12d COMMON (0.148" X 3.25", MIN) | 1" | 1 7/8" | 2 1/4" | 1 1/8" |
| 16d COMMON (0.162" X 3.5", MIN) | 1" | 2" | 2 1/2" | 1 1/4" |
| GUN (0.120" X 2.5", MIN) | 3/4" | 1 1/2" | 1 7/8" | 1" |
| GUN (0.131" X 2.5", MIN) | 7/8" | 1 5/8" | 2" | 1" |
| GUN (0.120" X 3", MIN) | 3/4" | 1 1/2" | 1 7/8" | 1" |
| GUN (0.131" X 3", MIN) | 7/8" | 1 5/8" | 2" | 1" |

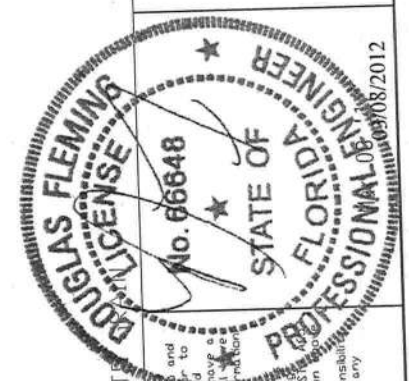

WARNING READ AND FOLLOW ALL NOTES ON THIS SHEET**
 Trusses require erection, handling, shipping, installing and bracing. Refer to the ITV Building Components Safety Information, by TPI and VTCB, for specific practices prior to installing these functions. Installers shall provide temporary panels and bottom chord bracing, otherwise, top chord shall have properly attached rigid ceiling. Location of permanent lateral restraint of webs shall be bracing installed per BC31 sections B5 & B7. See this job's general notes page for more information.

IMPORTANT FURNISH COPY OF THIS DESIGN TO INSTALLATION CONTRACTOR**
 ITV Building Components Group Inc. (ITV/BCG) shall not be held responsible for any deviation from the design, any failure to build the trusses in conformance with TPI or fabricating, handling, shipping, installing & bracing of trusses. BC31 Factor plates are made of 20/18/16GA UH/S/KO ASME grade 37/40/60 1872/1131 galv. steel. Apply plates to each face of truss, positioned as shown and on job site. This drawing or cover page indicates acceptance and professional engineering responsibility for the truss component design shown. The suitability for use of this component for any building is the responsibility of the Building Designer per ANSI/TPI 1 Sec. 2.

ITV-BCG: www.itvbcg.com, TPI: www.tpi.net, VTCB: www.vtcindustry.com, ICD: www.icdcsafe.org




Building Components Group Inc.

Earth City, MO 63045

| | |
|------|--------------|
| REF | NAIL SPACE |
| DATE | 1/1/09 |
| DRWG | CNNAILSP0109 |

Gable Detail For Let-in Verticals

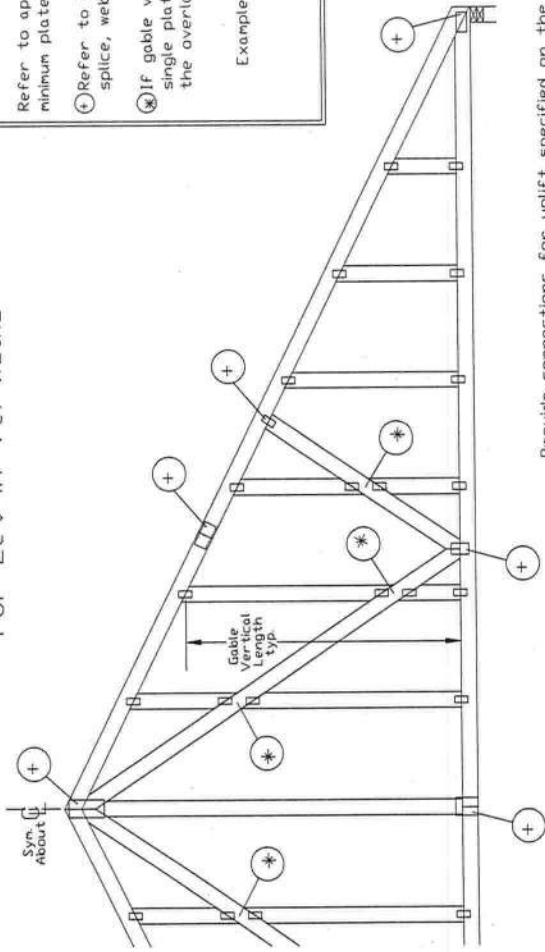

Gable Truss Plate Sizes



Refer to appropriate ITV gable detail for minimum plate sizes for vertical studs.

⊕ Refer to Engineered truss design for peak, splice, web, and heel plates.

⊗ If gable vertical plates overlap, use a single plate that covers the total area of the overlapped plates to span the web.



Example:

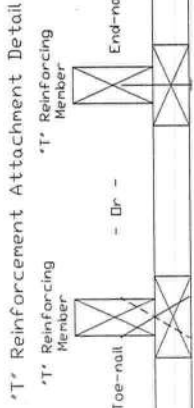

To convert from 'L' to 'T*' reinforcing members, multiply 'T*' increase by length (based on appropriate ITV gable detail).

Maximum allowable 'T*' reinforced gable vertical length is 14' from top to bottom chord. 'T*' reinforcing member material must match size, specie, and grade of the 'L' reinforcing member.

Web Length Increase w/ 'T*' Brace

| 'T*' Reinf. Mar. Size | 'T*' Increase % |
|-----------------------|-----------------|
| 2x4 | 30 % |
| 2x6 | 20 % |

Example:
 ASCE 7-10 Wind Speed = 120 mph
 Mean Roof Height = 30 ft, Kzt = 1.00
 Gable Vertical = 24' o.c. SP #3
 'T*' Reinforcing Member Size = 2x4
 'T*' Brace Increase (from Above) = 30% = 1.30
 Maximum 'T*' Reinforced Gable Vertical Length = 1.30 x 8' 7" = 11' 2"

Provide connections for uplift specified on the engineered truss design.

Attach each 'T*' reinforcing member with:
 End Driven Nails:
 10d Common (0.148"x 3.7" min) Nails at 4' o.c. plus
 (4) nails in the top and bottom chords.

Toenailed Nails:
 10d Common (0.148"x 3.7" min) Toenails at 4' o.c. plus
 (4) toenails in the top and bottom chords.

This detail to be used with the appropriate ITV gable detail for ASCE wind load.

- ASCE 7-98 Gable Detail Drawings
 A13015980109, A12015980109, A11015980109, A10015980109,
 A13030980109, A12030980109, A11030980109, A10030980109
- ASCE 7-02 Gable Detail Drawings
 A13015020109, A12015020109, A11015020109, A10015020109,
 A13030020109, A12030020109, A11030020109, A10030020109
- ASCE 7-05 Gable Detail Drawings
 A13015050109, A12015050109, A11015050109, A10015050109,
 A13030050109, A12030050109, A11030050109, A10030050109
- ASCE 7-10 Gable Detail Drawings
 A11515ENC100212, A12015ENC100212, A14015ENC100212,
 A18015ENC100212, A20015ENC100212, A20015ENC100212,
 A11530ENC100212, A12030ENC100212, A14030ENC100212,
 A18030ENC100212, A20030ENC100212, A20030ENC100212

See appropriate ITV gable detail for maximum wind speed.

WARNING READ AND FOLLOW ALL NOTES ON THIS DRAWING!
 IMPORTANT FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS.

Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI (Building Component Safety Information, by TPI and VITCA) for safety practices prior to performing these functions. Installers shall provide temporary bracing per BCSI. Unless noted otherwise, top chord shall have properly attached strapping for permanent lateral restraint. Chord shall have a properly attached strapping for permanent lateral restraint. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-Z for standard plate positions.

ITV Building Components Group Inc. shall not be responsible for any deviation from this drawing. Failure to follow these instructions may result in structural failure, injury or death. The liability of the professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the Building Designer per ANSI/TPI 1 Sec 2. For more information see this job's general notes page and these drawings. ITV BCSI: www.itvbcg.com, TPI: www.tpinet.org, VITCA: www.vitcaindustry.org, ICC: www.iccsafe.org

Professional Engineer
 State of Florida
 License No. 66648
 Expires 08/2012

| | |
|------|--------------|
| REF | LET-IN VERT |
| DATE | 2/16/12 |
| DRWG | GBLLETIN0212 |



Building Components Group Inc.

Earth City, MO 63046



ASCE 7-10: 120 mph, 30' Mean Height, Closed, Exposure C Common Residential Gable End Wind Bracing Requirements - Stiffeners

120 mph, 30ft. Mean Hgt, ASCE 7-10, Enclosed, Exp C, or
 100 mph, 30ft. Mean Hgt, ASCE 7-10, Enclosed, Exp D, or
 100 mph, 30ft. Mean Hgt, ASCE 7-10, Part. Enclosed, Exp C,
 Kzt = 1.00, Wind TC DL=5.0 psf, Wind BC DL=5.0 psf.

Lateral chord bracing requirements
 Top: Continuous roof sheathing
 Bot: Continuous ceiling diaphragm

See Engineer's sealed design referencing this detail
 for lumber, plates, and other information not shown
 on this detail.

Nails: 10d box or gun (0.128"x3",min) nails.

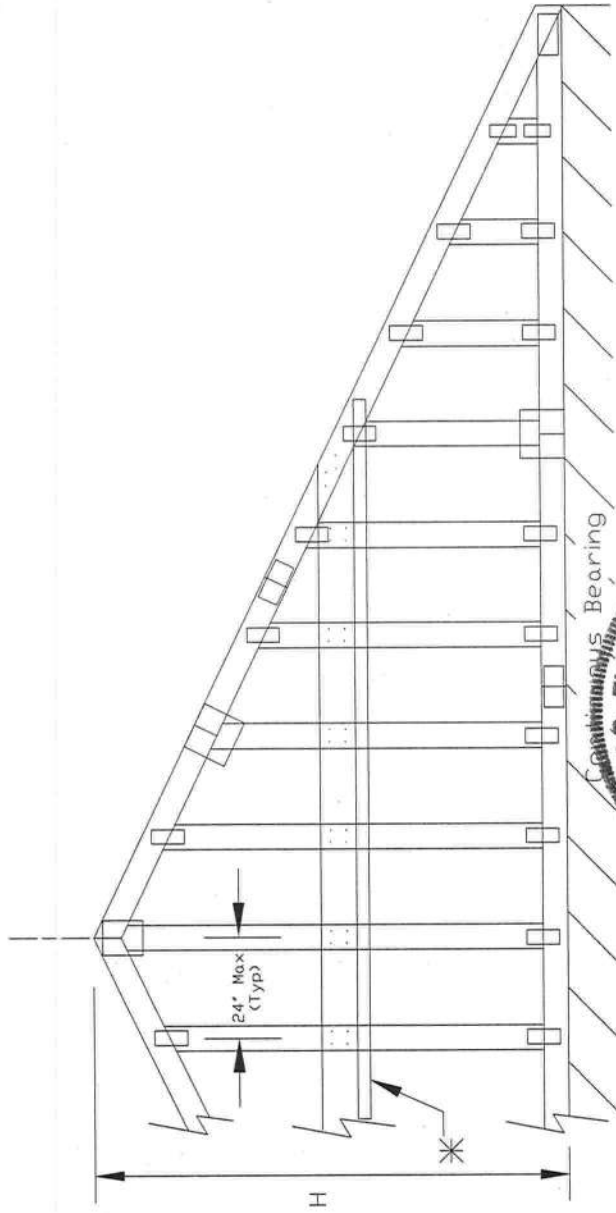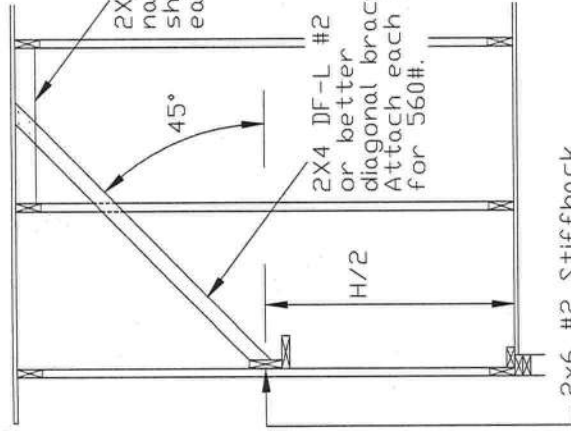

- H Less than 4'6" - no stud bracing required
- H Greater than 4'6" to 7'6" in length provide a 2x6 stiffback at mid-height and brace stiffback to roof diaphragm every 6'0" (see detail below or refer to DRWG A12030ENC10).
- H Greater than 7'6" to 12'0" max: provide a 2x6 stiffback at mid-height and brace to roof diaphragm every 4'0" (see detail below or refer to DRWG A12030ENC10).

* Optional 2x L-reinforcement attached to stiffback with 10d box or gun (0.128" x 3", min.) nails @ 6" o.c.



****WARNING** READ AND FOLLOW ALL NOTES ON THIS DRAWING!**
****IMPORTANT** FURNISH THIS DRAWING TO ALL CONTRACTORS INCLUDING THE INSTALLERS**
 Trusses require extreme care in fabricating, handling, shipping, installing and bracing. Refer to and follow the latest edition of BCSI Building Component Safety Information, by TPI and VICA for all practices prior to performing these functions. Installers shall provide appropriate bracing and blocking unless noted otherwise, and shall provide appropriate bracing and blocking for all trusses. Trusses or webs shall have bracing installed per BCSI sections B3, B7 or B10, as applicable. Apply plates to each face of truss and position as shown above and on the Joint Details, unless noted otherwise. Refer to drawings 160A-2 For standard plate positions.
 ITV Building Components Group Inc. shall not be responsible for any deviation from this drawing, or failure to build the truss in conformance with ANSI/TPI 1, or for handling, shipping, installation & bracing of trusses. A seal on this drawing or cover page listing this drawing, indicates acceptance of professional engineering responsibility solely for the design shown. The suitability and use of this drawing for any structure is the responsibility of the building designer per ANSI/TPI 1 Sec.2.
 For more information see this job's generation of the building designer per ANSI/TPI 1 Sec.2.
 ITV BCSI: www.itvbcsi.com | TPI: www.tpiusa.com | VICA: www.vicaindustry.org | ICC: www.iccsafe.org

| | | |
|----------------------|--------------|--------|
| REF | GE | WHALER |
| DATE | 2/14/12 | |
| DRWG | GABRST100212 | |
| MAX. TOT. LD. 60 PSF | | |
| MAX. SPACING | | |