

GENERAL NOTES
 INSTALLER TO PROVIDE COMPLETION PHOTOS OF MOUNTING/CONNECTION POINTS, WIRE ROUTING OVERALL ELEVATION, AND SEALED PENETRATIONS

THIS SIGN IS INTENDED TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF ARTICLE 600 OF THE NATIONAL ELECTRIC CODE AND/OR OTHER APPLICABLE LOCAL CODES THIS INCLUDES PROPER GROUNDING AND BONDING OF THE SIGN AND INSTALLING DISCONNECT SWITCHES IF NOT FACTORY INSTALLED ON THE SIGN

SIGN ASSEMBLY IS INTENDED FOR OUTDOOR WET LOCATION

INSTALLER TO BE SURE SIGNS ARE PROPERLY INSTALLED CONNECTED AND GROUNDED

THIS DRAWING IS TO BE USED FOR INSTALLATION PURPOSES ONLY NOT TO BE USED FOR MANUFACTURING

INSTALLATION INSTRUCTIONS


- 1 OPEN PACKAGING CAREFULLY AND INSPECT FOR DAMAGE
- 2 DETERMINE FRAME LOCATION AND TAPE UP THE TEMPLATE (IF PROVIDED) ON THE SURFACE TO WHICH IT WILL BE INSTALLED, RECEIVE CONFIRMATION FROM THE CLIENT
- 3 LAYOUT AND PRE-DRILL ALL MOUNTING AND ELECTRICAL HOLES REQUIRED FOR MOUNTING THE FRAME
- 4 FILL ALL HOLES WITH SILICONE PRIOR TO MOUNTING THE FRAME
- 5 ATTACH THE HORIZONTAL BLOCKING BEHIND WALL FRAMING SO ALL CONNECTION POINTS HAVE SUPPORT (IF REQUIRED).
- 6 ALIGN FRAME TO MATCHING PRE-DRILLED HOLES WHILE INSERTING FASTENERS THROUGH FRAME, WALL AND BLOCKING FASTEN WITH HARDWARE USE PVC SLEEVES TO PROTECT BUILDING FINISH IF NECESSARY
- 7 MAKE ELECTRICAL CONNECTIONS TO REMOTE POWER SUPPLY/PRIMARY WIRING THROUGH DRILLED ELECTRICAL HOLES
- 8 TEST THE SIGN FOR PROPER FUNCTION AND LIGHTING
- 9 PERFORM TOUCH-UP AS REQUIRED
- 10 CLEAN INSTALLATION WORK SITE OF ALL EXCESS MATERIALS AND DEBRIS DO NOT DISCARD ANY MATERIAL OR DEBRIS INTO ON SITE DUMPSTERS

SIGN SPECIFICATIONS

DIMENSIONS 3'-9" X 26'-0"
 LEDS:(134) PRINCIPAL STREET FIGHTER POD 3 LEDS
 TOTAL DRAW 176.88 WATTS (1.32 WATTS PER LED)
 POWER SUPPLY: (2) 12V 120W PRINCIPAL POWER SUPPLY
 POWER SUPPLY(S) MOUNTED REMOTELY

AREA 97.5 SQ.FT
 ESTIMATED WEIGHT 485 LBS

(36) Ø1/2" MOUNTING HOLES FOR Ø3/8" MTG HARDWARE (MOUNTING FRAME TO WALL) TYP

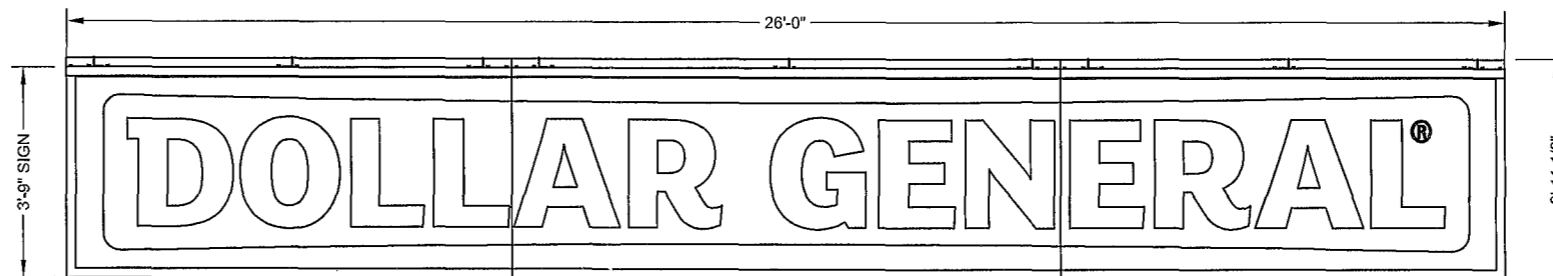

FRONT VIEW (w/FACE)
 SCALE 1.40

SIGN TO BE CONSTRUCTED TO 2020 NEC 600 STANDARD
 SIGN TO BEAR UL LABEL
 SIGN TO HAVE ELECTRICAL DISCONNECT ON THE EXTERIOR

FLORIDA BUILDING CODE,
 8th EDITION (2023)
 SECTION 16 WIND LOAD, ASCE 7-22
 120 MPH WIND LOAD, V_{ULT}
 RISK CATEGORY II
 EXPOSURE C

ENCON SERVICES, INC.
 1246 ACAPPELLA LN.
 APOLLO BEACH, FL 33572
 813-655-3373, FLEB #9394



NATHAN P. PRESNELL, PE 77696
 DATE SIGNED: 3/6/2026






INSTALLATION DRAWING

THESE DRAWINGS ARE THE EXCLUSIVE PROPERTY OF EVERBRITE, LLC. USE OF OR DUPLICATION IN ANY MANNER WITHOUT EXPRESS WRITTEN PERMISSION OF EVERBRITE, LLC. IS PROHIBITED

REV	DATE	BY	CHK	DESCRIPTION
B	01/15/26	CJB		UPDATED LIGHT BAR MOUNTING ON FACES, SHOWN IN ISOMETRIC VIEW
A	01/02/26	CJB		RELEASED FOR INSTALLATION

DRAWN BY	TECHNO-MCM	SITE	Dollar General 4924 NW US Highway 41 Lake City, FL 32055
DATE	01/02/26	SCALE	AS SHOWN
CHECKED BY	CJB	SHEET	1 OF 3
DATE	01/02/26		

TITLE	DOLLAR GENERAL DG 3'-9" X 26'-0" WALL W BAR ICE LOAD		
PROJECT NO	532168	DRAWING NO	IN532168A
REV			B

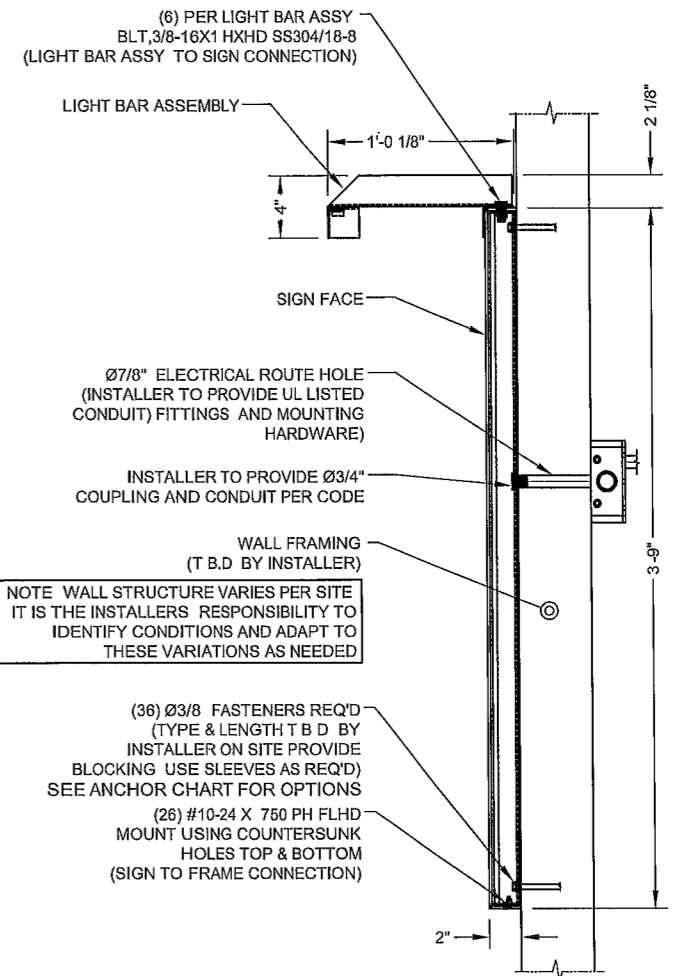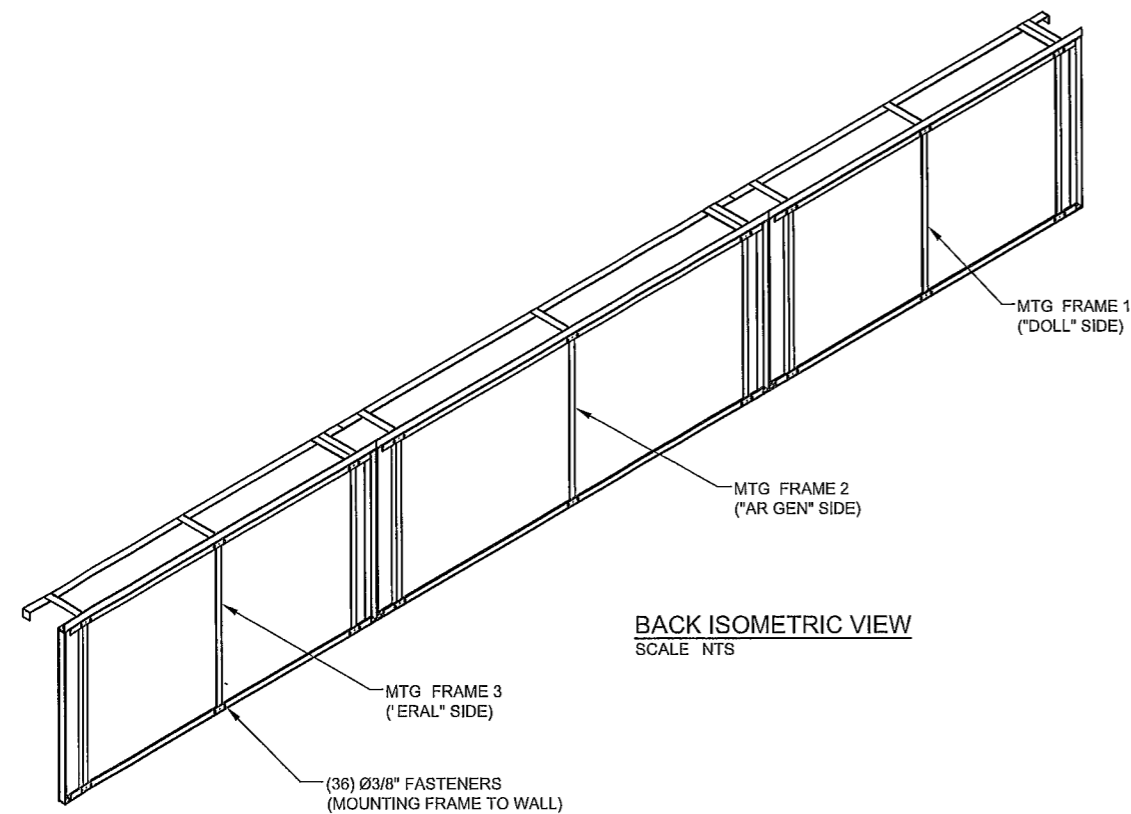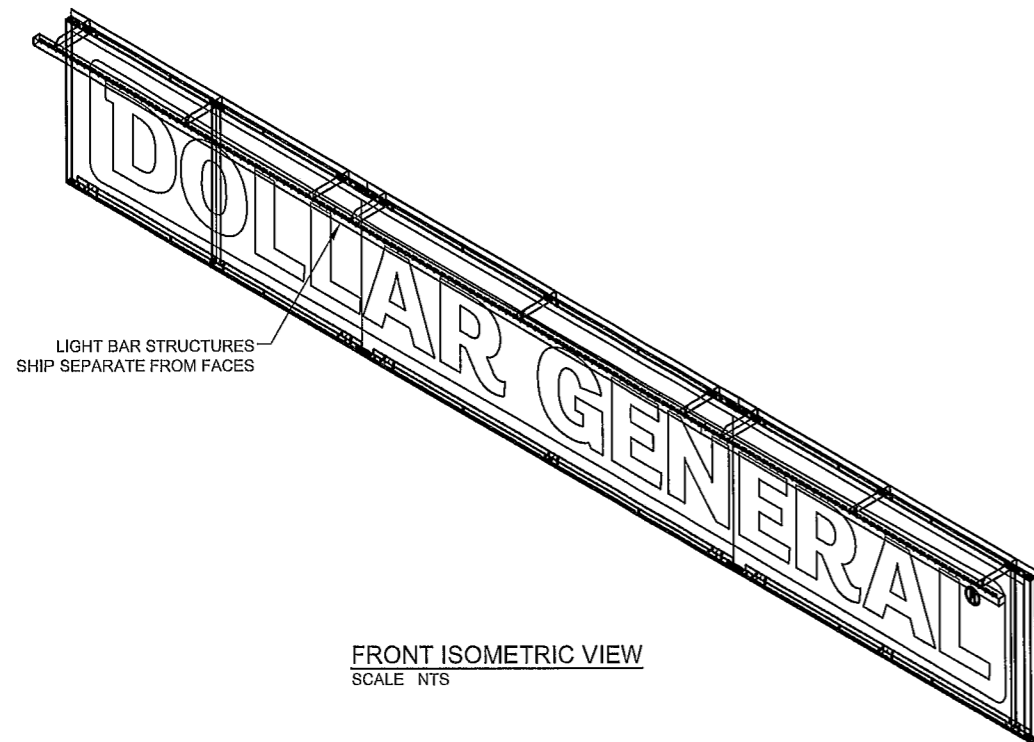


SIGN MOUNTING HEIGHT TO BE 30FT MAXIMUM
 ANCHOR TO BE THRU BOLTS IF POSSIBLE, ALTERNATE ANCHORS PER WALL TYPE SHOWN BELOW FOR USE IF THRU BOLTING IS NOT POSSIBLE

ANCHOR SCHEDULE 3/8" DIA ANCHORS	
QUANTITY AS SHOWN	
WALL STRUCTURE	ANCHOR TYPE
WOOD BLOCKING	LAG BOLT (3" EMBEDMENT) THRU BLOCKING
EIFS OVER 5/8 PLYWOOD	LIBERTY TOGGLE BOLT OR THRU BOLT WITH SLEEVE
HOLLOW CONCRETE BLOCK, BRICK	SLEEVE ANCHOR (1-1/2' EMBEDMENT)
SOLID CONCRETE	WEDGE ANCHOR (2-1/2' EMBEDMENT)
CMU, SOLID CONCRETE, BRICK	HILTI HIT ROD W/ HY-20 ADHESIVE (3 1/2' EMBEDMENT)

ALL ANCHORS SHALL BE CHOSEN AND PLACED IN ACCORDANCE WITH MANUFACTURERS INSTALLATION INSTRUCTIONS

ENCON SERVICES, INC.
 1246 ACAPPELLA LN.
 APOLLO BEACH, FL 33572
 813-655-3373, FLEB #9394

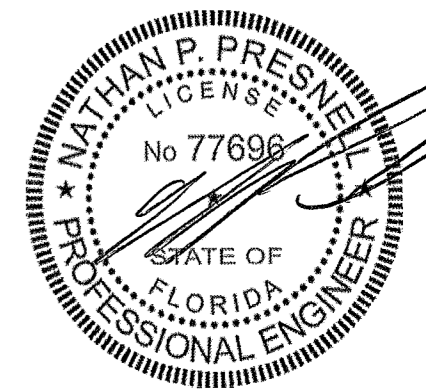

NATHAN P. PRESNELL, PE 77696
 DATE SIGNED: 3/6/2026



INSTALLATION DRAWING
 THESE DRAWINGS ARE THE EXCLUSIVE PROPERTY OF EVERBRITE, LLC USE OF OR DUPLICATION IN ANY MANNER WITHOUT EXPRESS WRITTEN PERMISSION OF EVERBRITE LLC IS PROHIBITED

REV	DATE	BY	CHK	DESCRIPTION
B	01/15/26	TECHNO	CJB	UPDATED LIGHT BAR MOUNTING ON FACES, SHOWN IN ISOMETRIC VIEW
A	01/02/26	TECHNO	CJB	RELEASED FOR INSTALLATION


DRAWN BY	TECHNO-MCM
DATE	01/02/26
CHECKED BY	CJB
DATE	01/02/26

SITE	Dollar General 4924 NW US Highway 41 Lake City, FL 32055
SCALE	AS SHOWN
SHEET	2 OF 3

TITLE	DOLLAR GENERAL DG 3'-9" X 26'-0" WALL W BAR ICE LOAD		
PROJECT NO	532168	DRAWING NO	IN532168A
REV			B


MOUNTING TO WALL

- 1 MOUNT THE MOUNTING STRUCTURES TO THE WALL USING MOUNTING HOLE LOCATION IMAGE FOR SPACING USING 3/8" HARDWARE MAKE NOTE THAT THE ANGLE WITH THE EXTRA RIVNUTS INSTALLED ON SHOULD BE TOWARDS THE TOP
- 2 MOUNT FACES TO THE MOUNTING STRUCTURES ATTACH FACES USING 10-24 COUNTERSUNK SCREWS TOP AND BOTTOM OF EACH FACES

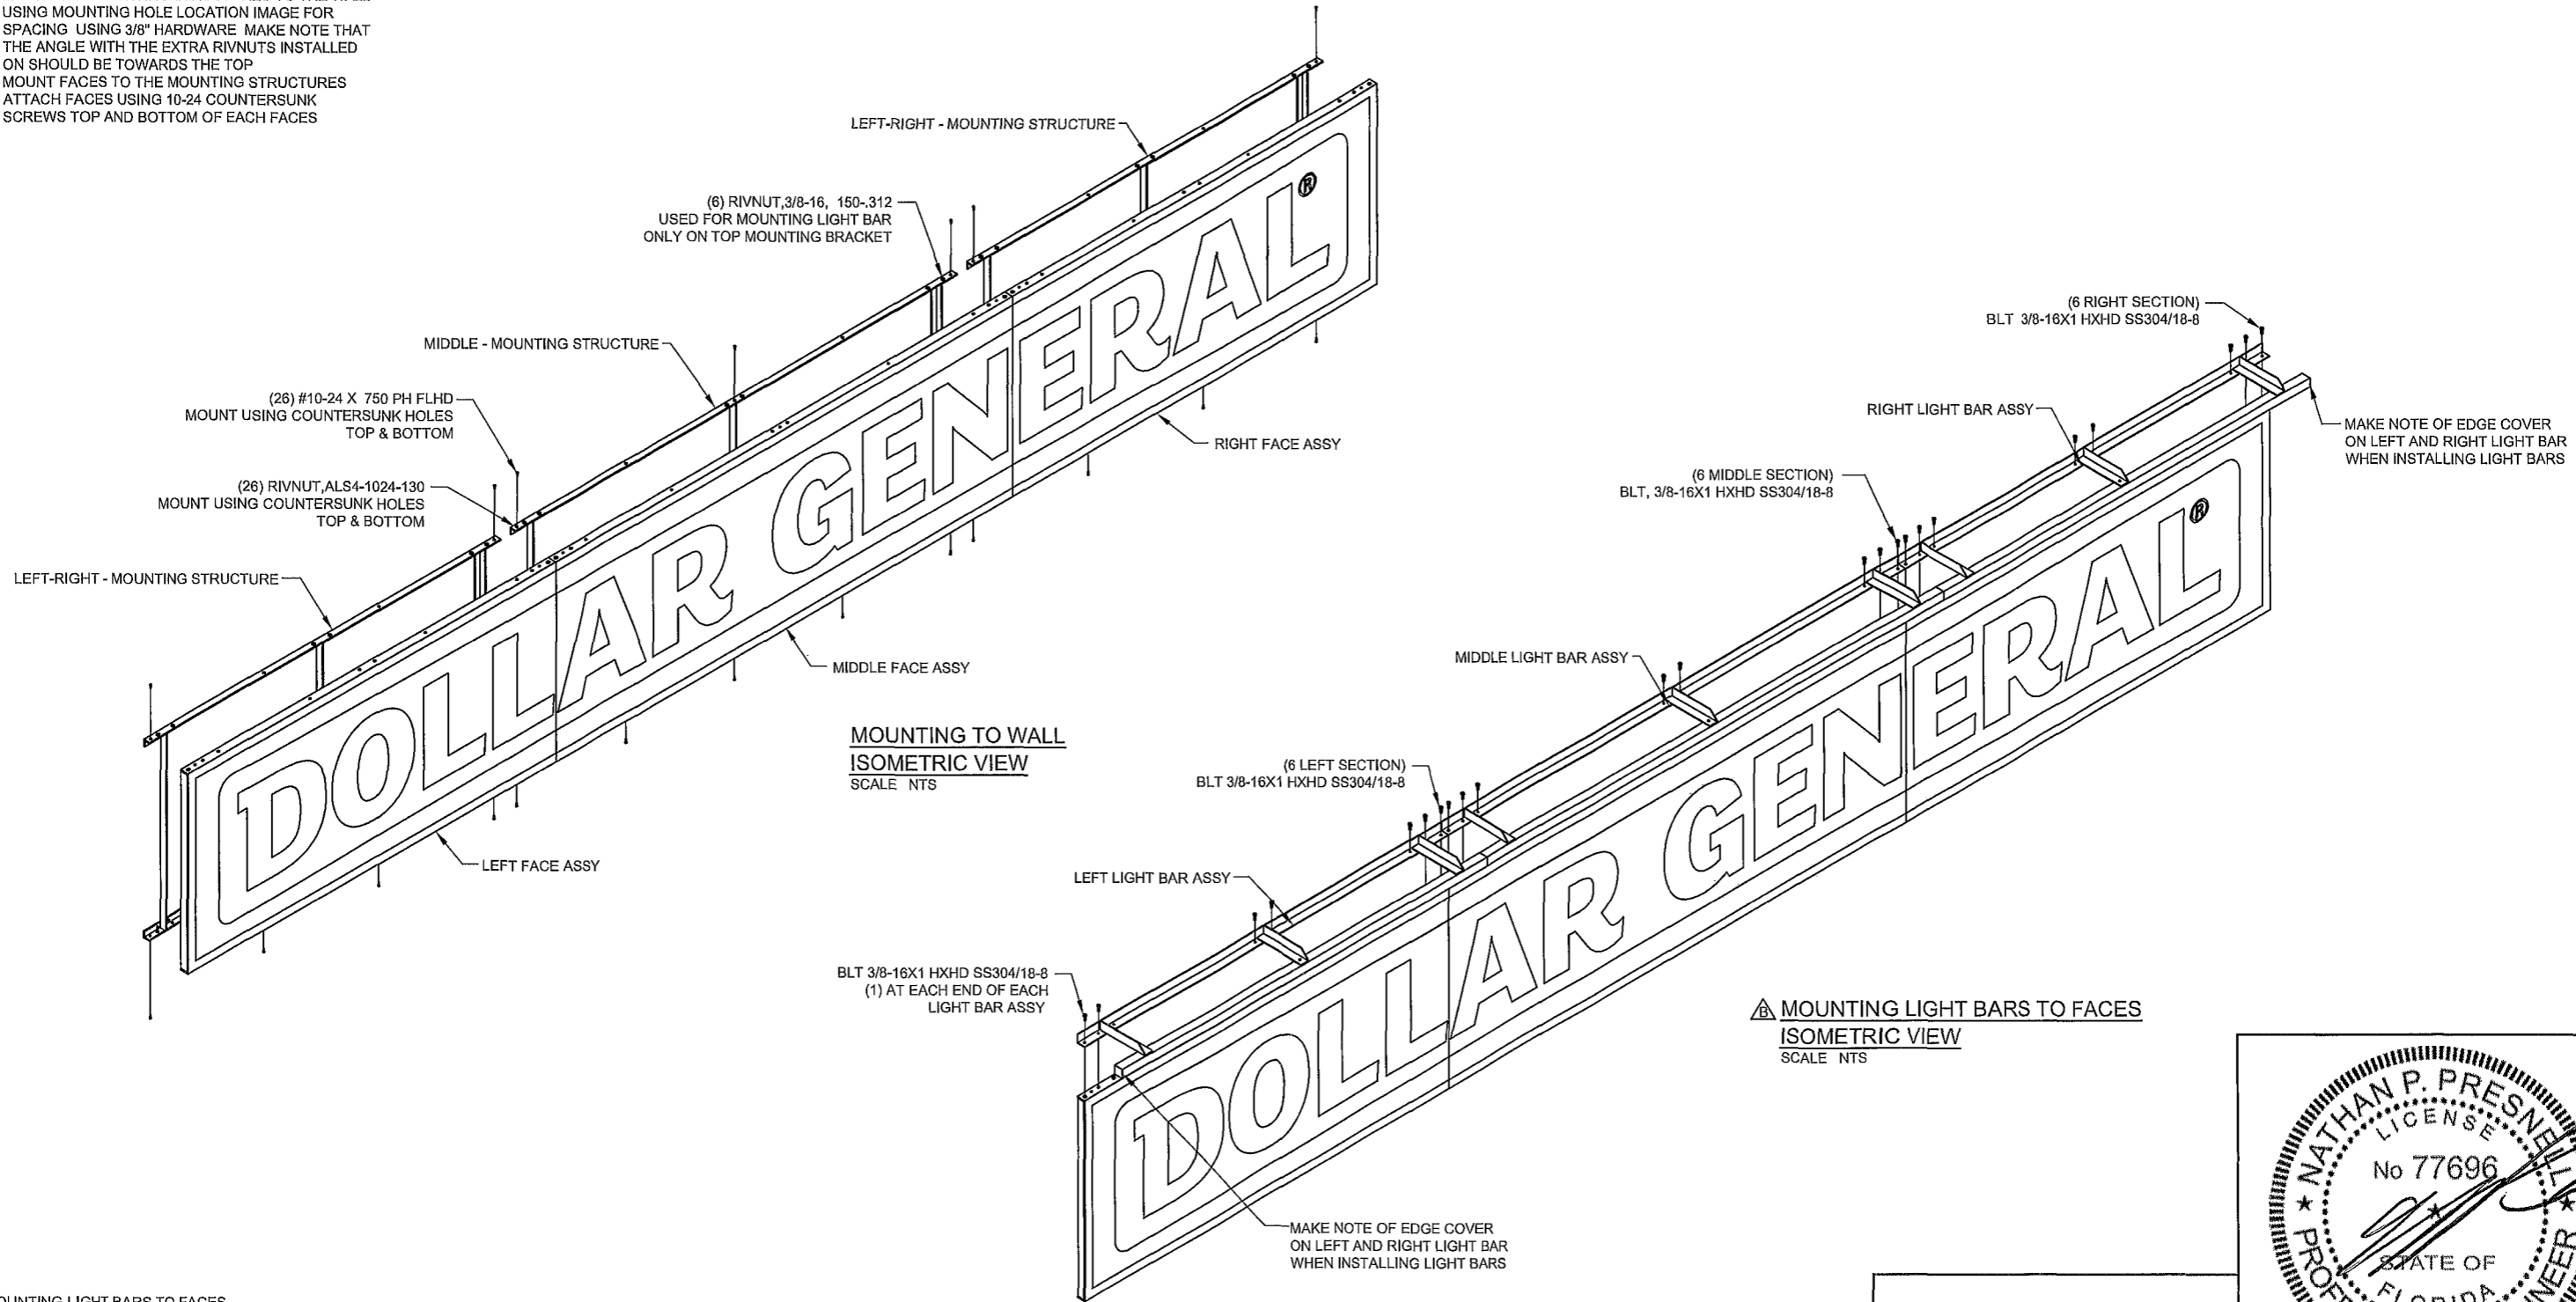


MOUNTING LIGHT BARS TO FACES

- 1 MOUNT LIGHT BARS TO TOP OF FACES LINE HOLES UP WITH HOLES ON TOP OF FACES MOUNT OUTER HOLES WITH 3/8" HARDWARE FOR EACH LIGHT BAR STRUCTURE.
- 2 USE 3/8" HARDWARE ON INNER HOLES FOR EACH LIGHT BAR STRUCTURE.
- 3 CONNECT WIRING FOR LIGHT BARS TO BUILDING

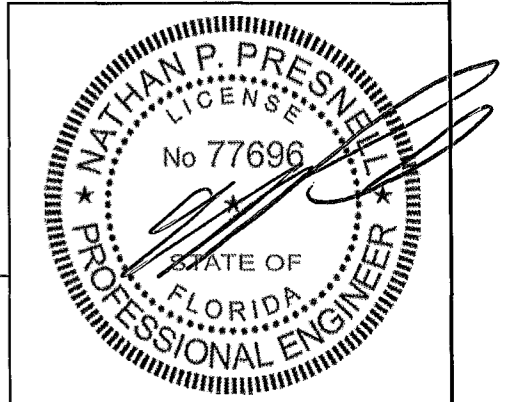

NATHAN P. PRESNELL, PE 77696
DATE SIGNED: 3/6/2026

ENCON SERVICES, INC.
1246 ACAPPELLA LN.
APOLLO BEACH, FL 33572
813-655-3373, FLEB #9394

 <p>4949 SO 110TH ST P O BOX 20020 GREENFIELD, WI 53220 414-529-3500</p>	INSTALLATION DRAWING		DRAWN BY TECHNO-MCM		SITE Dollar General 4924 NW US Highway 41 Lake City, FL 32055		TITLE DOLLAR GENERAL DG 3'-9" X 26'-0" WALL W BAR ICE LOAD									
	THESE DRAWINGS ARE THE EXCLUSIVE PROPERTY OF EVERBRITE, LLC USE OF, OR DUPLICATION IN ANY MANNER WITHOUT EXPRESS WRITTEN PERMISSION OF EVERBRITE LLC IS PROHIBITED		DATE	01/02/26	CHECKED BY		CJB									
	B	01/15/26	REMOVED	CJB	UPDATED LIGHT BAR MOUNTING ON FACES, SHOWN IN ISOMETRIC VIEW											
	A	01/02/26	REMOVED	CJB	RELEASED FOR INSTALLATION											
REV	DATE	BY	CHK	DESCRIPTION	DATE	01/02/26	SCALE	AS SHOWN	SHEET	3 OF 3	PROJECT NO	532168	DRAWING NO	IN532168A	REV	B