

8/12 PITCH - 18" OH

WARNING
Backcharges Will Not Be Accepted
Regardless of Fault Without Prior
Notification By Customer Within 48
Hours And Investigation By
Builders FirstSource.
NO EXCEPTIONS.

IMPORTANT

This Drawing Must Be Approved And
Returned Before Fabrication Will
Begin. For Your Protection Check All
Dimensions And Conditions Prior To
Approval Of Plan.
SIGNATURE BELOW INDICATES ALL
NOTES AND DIMENSIONS HAVE
BEEN ACCEPTED.

By _____ Date _____

FINAL LAYOUT FOR PRODUCTION

Initial: _____ Date: _____
Requested Delivery Date: _____

ROOF LOADING:
TCLL: 20.0 lb/ft²
TCCL: 10.0 lb/ft²
BCLL: 0.0 lb/ft²
BCCL: 10.0 lb/ft²
DURATION: 1.25

FLOOR LOADING:
TCLL: 40.0 lb/ft²
TCCL: 10.0 lb/ft²
BCLL: 0.0 lb/ft²
BCCL: 5.0 lb/ft²
DURATION: 1.00


5 PSF TCCL + 5 PSF BCCL USED TO RESIST UPLIFT
WIND_ASCE_HYBRID_22
ENCLOSED
EXPOSURE CATEGORY SuburbanAreas
OCCUPANCY CATEGORY
WIND LOAD 130 mph
WIND IMPORTANCE FACTOR 1.00

ROOF PITCH: 8/12
CEILING PITCH: 4/12
TOP CHORD SIZE: 2 X 4
BOTTOM CHORD SIZE: 2 X 4
OVERHANG LENGTH: 18"
END CUT: PLUMB
CANTILEVER: N/A
TRUSS SPACING: 24"
BUILDING CODE:FBC 2023

BEARING HEIGHT SCHEDULE	

BUILDER:	
FORREST ROSSBOROUGH	
MODEL:	CUSTOM
ELEV:	HIP
ADDRESS:	TBD
LOT / BLOCK:	33
SUBDIVISION:	FORREST ROSSBOROUGH
CITY:	Lake City
DRAWN BY:	Holloway, Kim
JOB # :	5331783
DATE:	3/20/2026
SCALE:	N.T.S.

REVISIONS:	

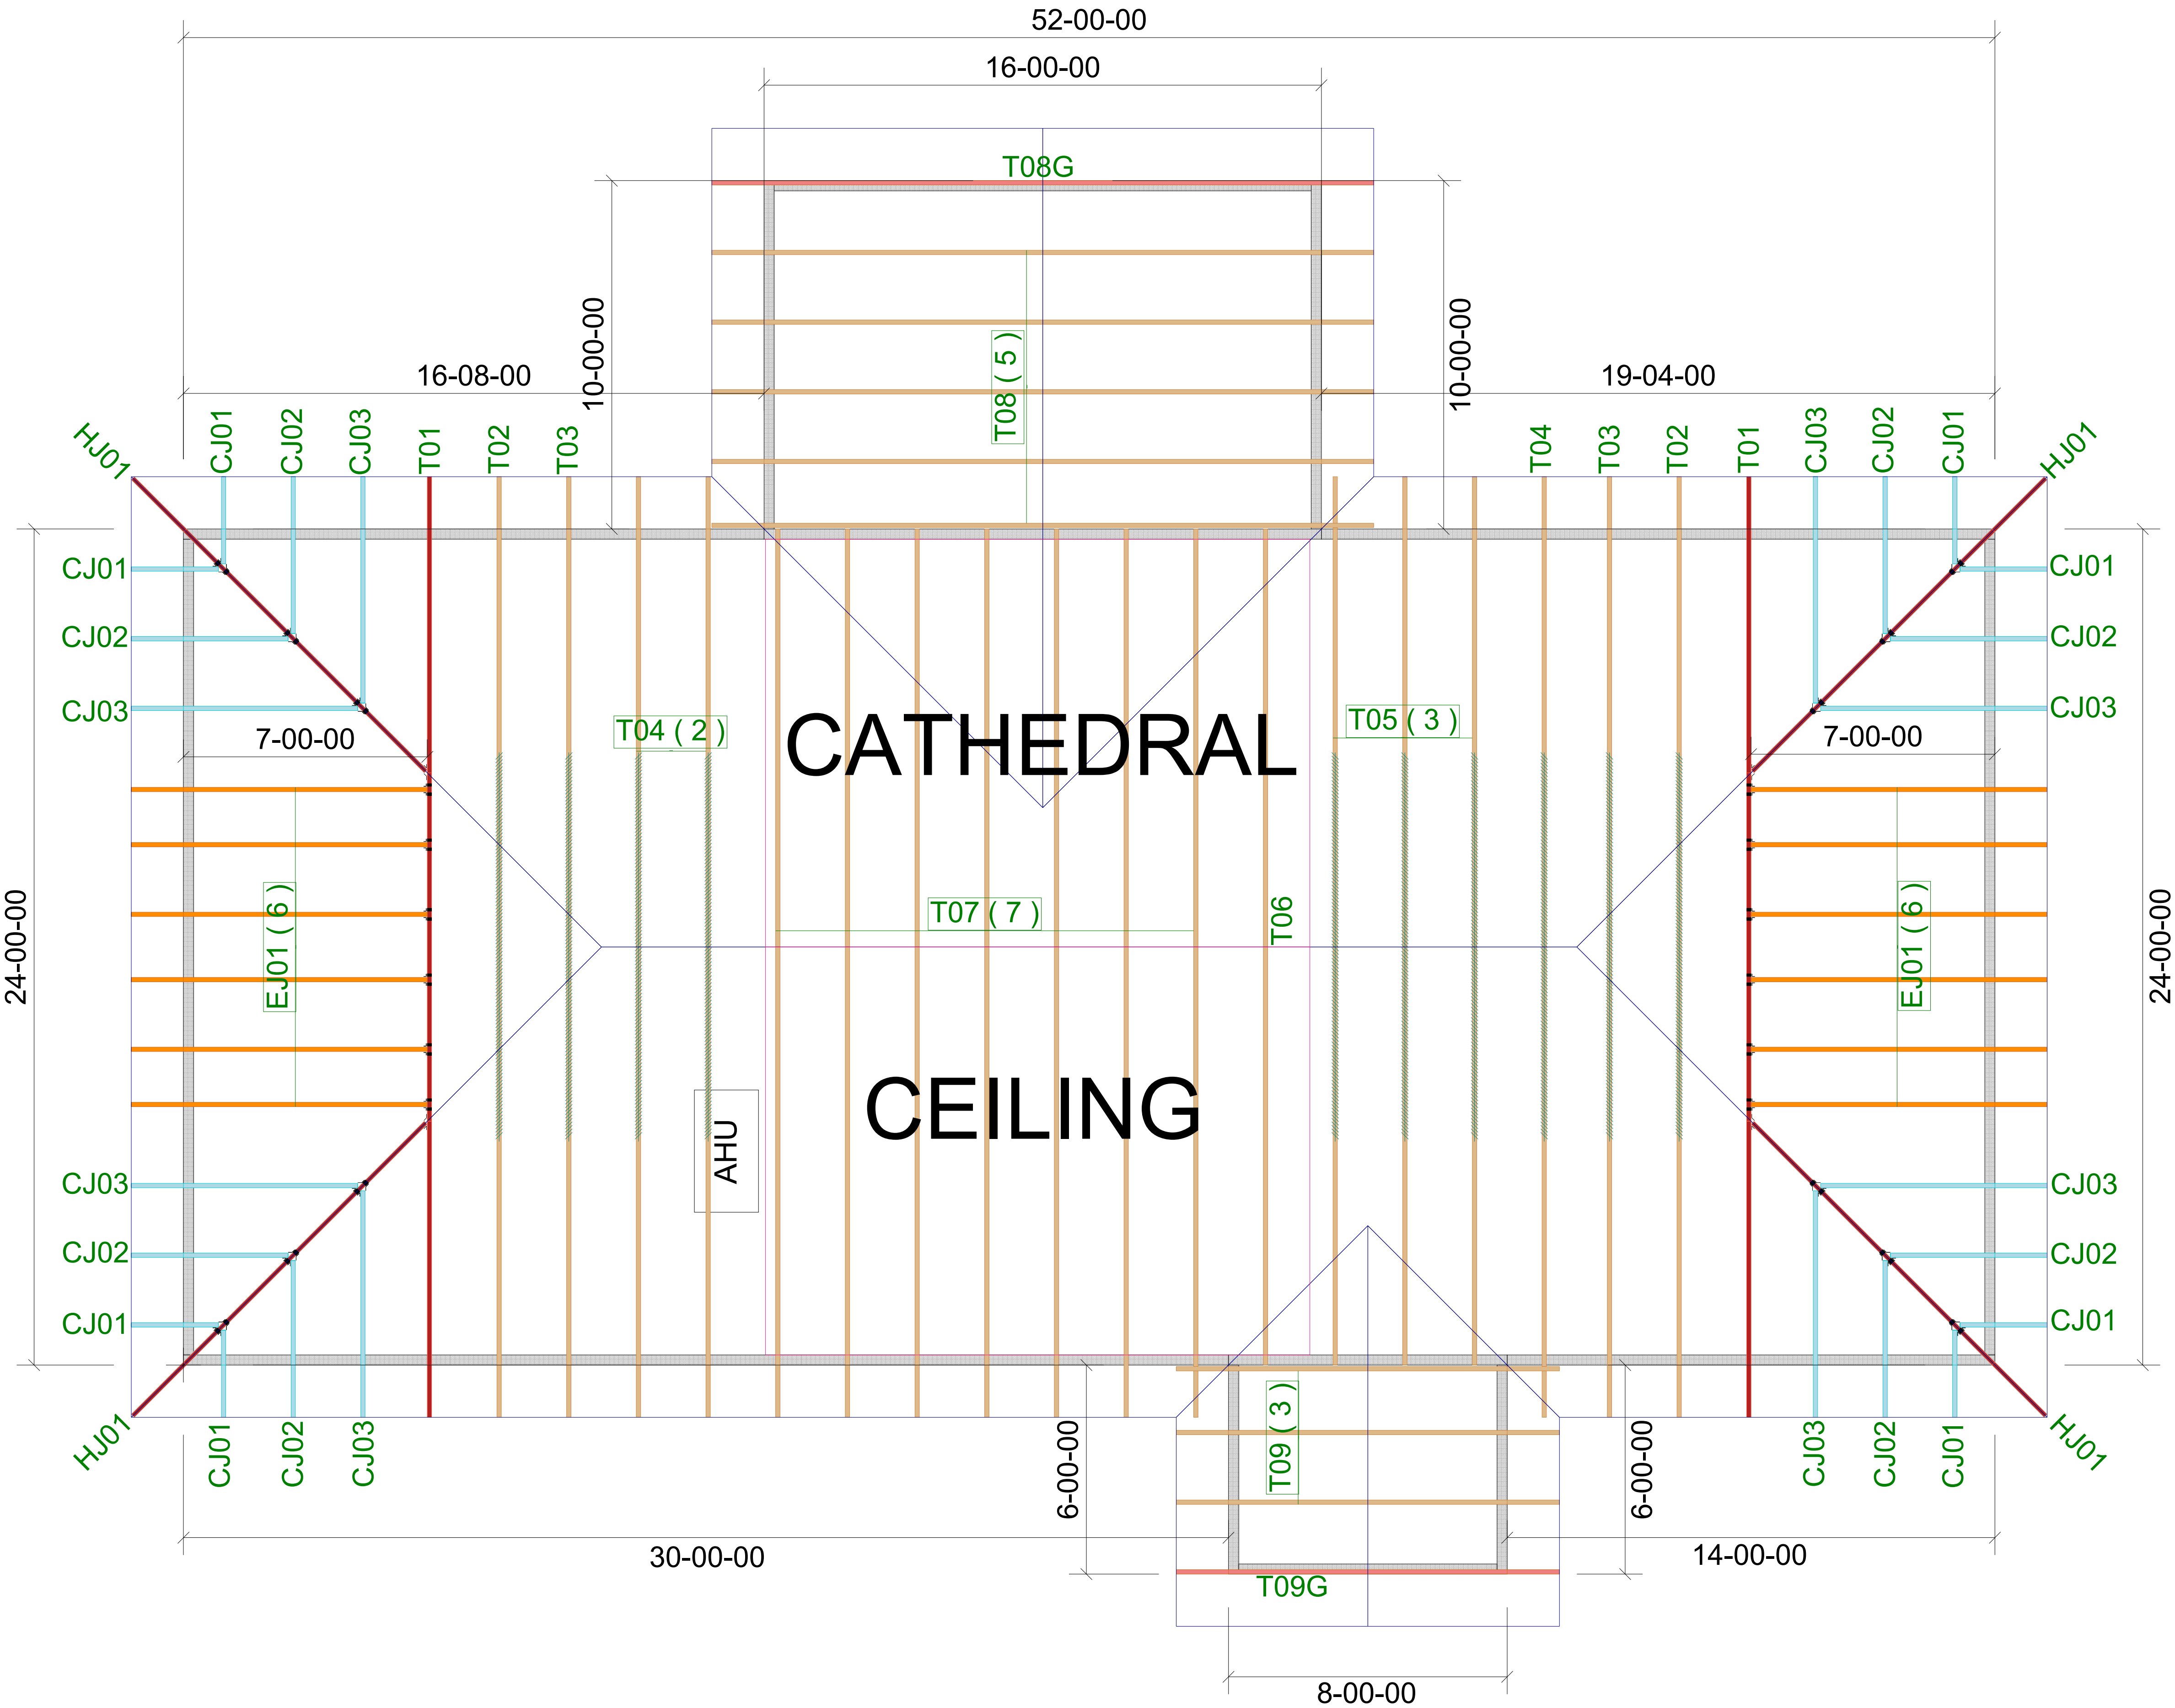

Summations of limited excerpts of the Code, ANSI/TPI 1-2014, and BCSI, and associated commentary, are provided within the truss submittal package in the Builders FirstSource Component Truss Responsibility and Liability Disclosure. These critical excerpts include, among other elements, critical safety information as well as specific Scope-of-Work assignments (and limitations of the same) for the Owner, Contractor, Building Designer, Truss Designer, and Truss Manufacturer. It is essential that ALL parties to the design and use of the Trusses review and become familiar with the information provided in the Builders FirstSource Component Truss Responsibility and Liability Disclosure, as well as the referenced sources, prior to performing work on the associated project.