



PROPOSED MANSARD SCREEN ENCLOSURE
PLAN/ ELEVATIONS SCALE: NTS

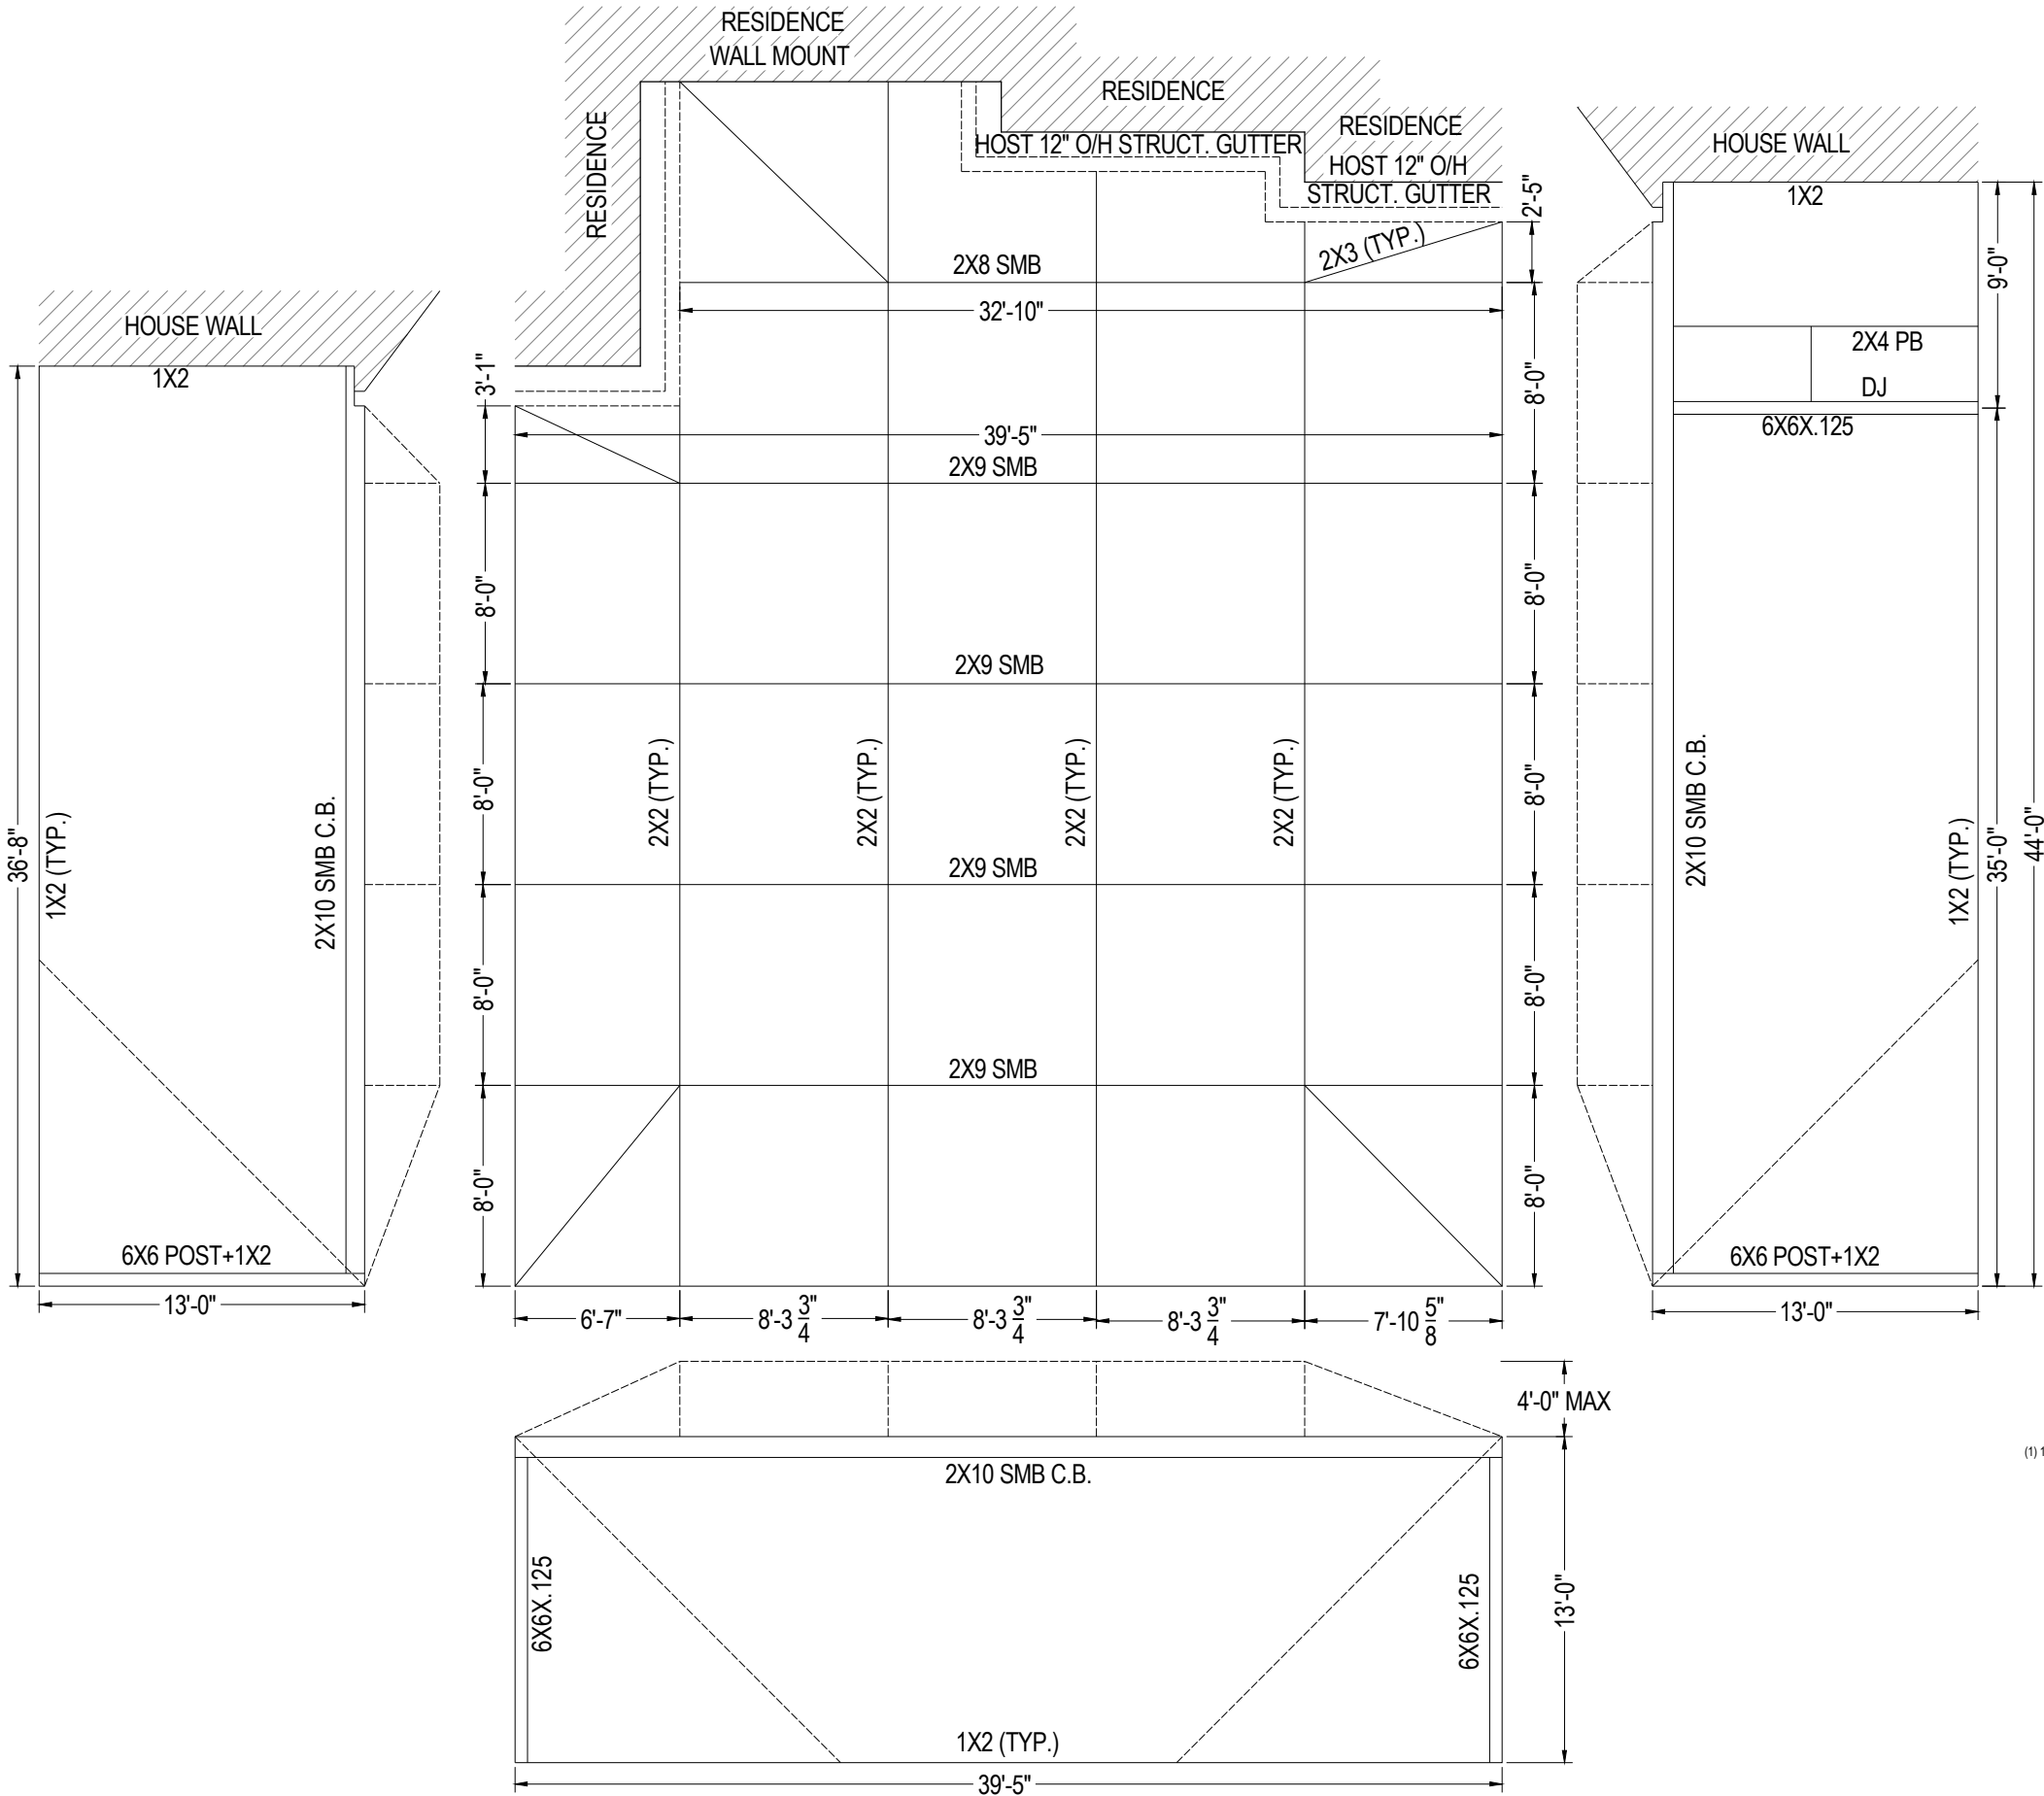

This item has been digitally signed and sealed by Richard E. Walker, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

HATCH/ SYMBOL LEGEND	
HATCH	INDICATES
	EXIST. STRUCTURE
NOTE: ALL MAY NOT APPLY	
FOUNDATION NOTES: EXISTING 12"X12" DEEP RIBBON FOOTER w/ 3000 PSI CONC. (MIN.)	

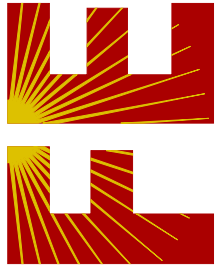

FLORIDA ENGINEERING LLC
4161 TAMiami TRAIL, UNIT 101
PORT CHARLOTTE, FLORIDA 33952
(941) 391-5980
FLEng.com
Orders@FLEng.com

PROJECT NO. 2613816-2

CA CERT. #30782

CONTRACTOR: ALPHA BUILDERS OF NORTH FLORIDA LLC	PROJECT ADDRESS: NEYLON 296 SE NATURE DR LAKE CITY FLORIDA, 32025	
	DESIGN DATE:	05/26/2026
	REVISION 1:	06/06/2026
	REVISION 2:	DATE
DRAWN BY:	JDG	SHEET:
SCALE:	NTS	02

NOTES:
1. FOR MOMENT CONNECTION SEE DETAIL "K" TABLE
"B-1"



1"x2" FASTEN TO COL. (INTERNAL)
w/(2) #10x1-1/2" SMS, FASTEN TO
EAVE RAILS ABOVE w/#10 1-1/2" SMS
24" O.C. AND 6" WITHIN COL.

TABLE "D"


BEAM	QTY/ SIZE EACH SIDE
2 x 3	(4)/ #12
2 x 4	(5)/ #12
2 x 5	(5)/ #12
2 x 6	(6)/ #12
2 x 7	(7)/ #12
2 x 8	(8)/ #14
2 x 9	(9)/ #14
2 x 10	(9)/ #14

MAINTAIN MIN. OF 5/8" SEPERATION
FROM EDGE OF BEAM SMS O.C.

DETAIL "E" - UPRIGHT TO BEAM
CONNECTION SCALE: NTS

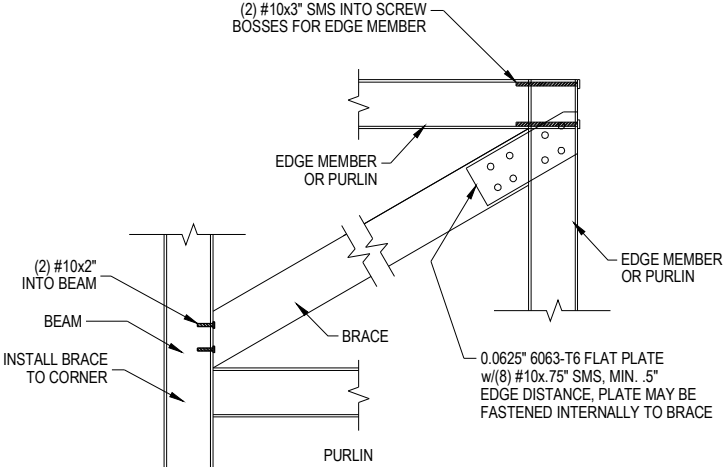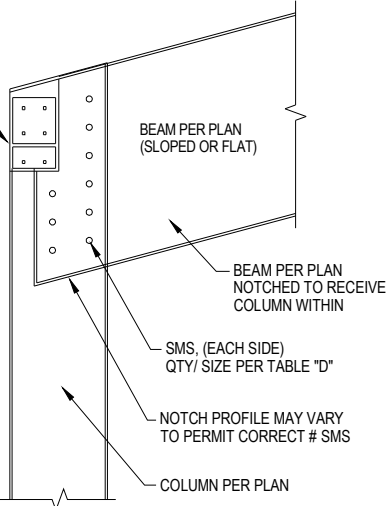

DETAIL "D" - ROOF BRACING CONNECTION
SCALE: NTS

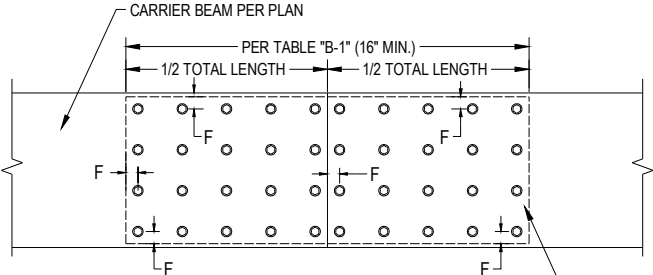

NOTES:
1. PROVIDE CAMBER IN BEAM (OVERALL LENGTH) NOT
TO EXCEED 1" TO PREVENT SELF WEIGHT DEFLECTION.
2. BEAM SPLICE TO BE PROVIDED WITHIN 1/4 TO 1/3
TOTAL SPAN.

TABLE B-1		
BEAM SIZE	BEAM TO BEAM QTY SMS EACH FACE/SIDE	GUSSET SIZE
2 x 4	(6) #12	16" X 3.75"
2 x 5	(6) #12	16" X 4.75
2 x 6	(10) #12	19" X 5.75"
2 x 7	(12) #12	22" X 6.75"
2 x 8	(12) #14	23" X 7.75"
2 x 9	(18) #14	23" X 8.75"
2 x 10	(18) #14	24" X 9.75"

NOTE F
INSTALL FASTENERS ALONG PERIMETER OF GUSSET
-BEAM JOINT 3/8" MIN. FROM EDGE. FASTENERS
MAY BE STAGGERED TO INSURE PROPER
QUANTITY PER TABLE B-1



FASTENER PATTERN MAY APPEAR DIFFERENT
FROM ILLUSTRATION.
MAINTAIN 5/8" SEPARATION BETWEEN FASTENERS.
MAINTAIN 3/8" MIN. FASTENER SEPARATION FROM
BEAM JOINT OR EDGE OF BEAM LAP
FASTENERS MAY BE EVENLY SPACED AROUND
EDGE OF GUSSET WITHIN 3/8" OF BEAM JOINT.
FASTENERS MAY BE STAGGERED TO INSURE
PROPER QUANTITY PER TABLE B-1

CARRIER BEAM SPLICE GUSSET CONNECTION
SCALE: NTS


TABLE "B-2" 2"x4" OR LARGER SELF MATING
UPRIGHT TO DECK DETAIL SPECIFICATIONS

UPRIGHT SIZE	MINIMUM NUMBER OF 1/4" Ø TAPCONS INTO CONCRETE EACH SIDE TYP.	QTY. #12x3/4" SMS INTO UPRIGHT EACH SIDE TYP.
2 x 4	(2) 1/4" Ø	(2) #12
2 x 5	(2) 1/4" Ø	(4) #12
2 x 6	(3) 1/4" Ø	(5) #12
2 x 7	(3) 1/4" Ø	(6) #12
2 x 8	(4) 1/4" Ø	(7) #12
2 x 9	(4) 1/4" Ø	(8) #12
2 x 10	(5) 1/4" Ø	(9) #12


DETAIL "B" NOTES:
1. QUANTITY ANCHORS SPECIFIED ON SCHEDULE TO
BE INSTALLED EACH SIDE OF UPRIGHT TYP.
2. WHERE PAVERS ARE PRESENT CONTRACTOR USE
3/8"Ø LDT OR 5/16" Ø XL (RED HEAD MFR.) x 5"-7" TO
PENETRATE INTO UNDERLYING CONCRETE FOOTING
2-1/4" (MIN.)
3. 2X3/ 1X2 CORNER COMBO SHALL BE FASTENED IN
SIMILAR MANNER AS 2X4.
4. FOR 2X3/ 2X2 DOOR SECONDARY ANGLE @ SLAB
(BEYOND) NOT REQUIRED.
5. FOR IN FILL UPRIGHT FASTENED TO LINTEL IN
SIMIALR MANNER AS SHOWN.
6. FOR WOOD APPLICATION USE 1/4" Ø X3" GALV. LAG
SCREWS INTO WOOD HOST (3-5/8" THICK MIN.) IN
LIEU OF MASONRY ANCHORS.

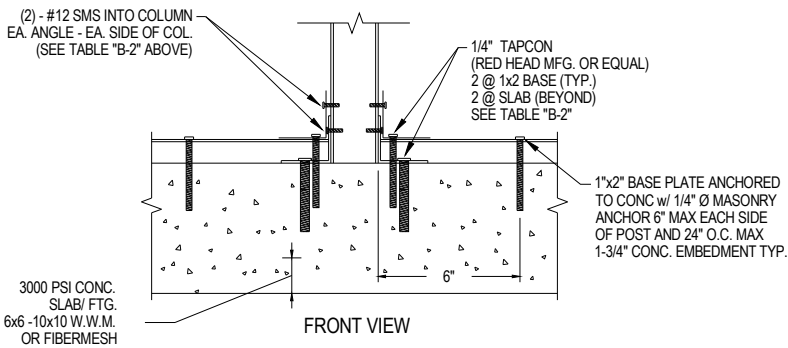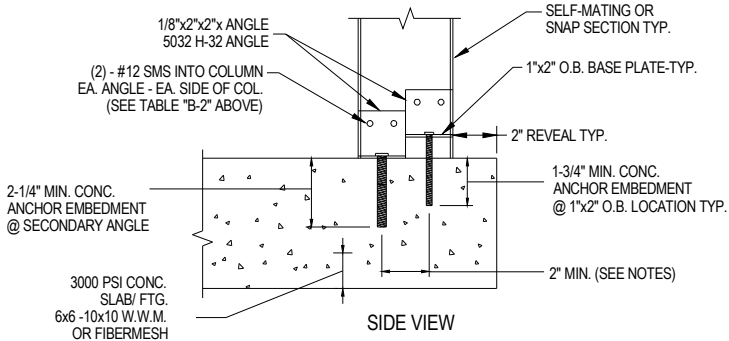


DETAIL "B" - 2"x4" OR LARGER SELF MATING
UPRIGHT TO DECK DETAILS SCALE: NTS

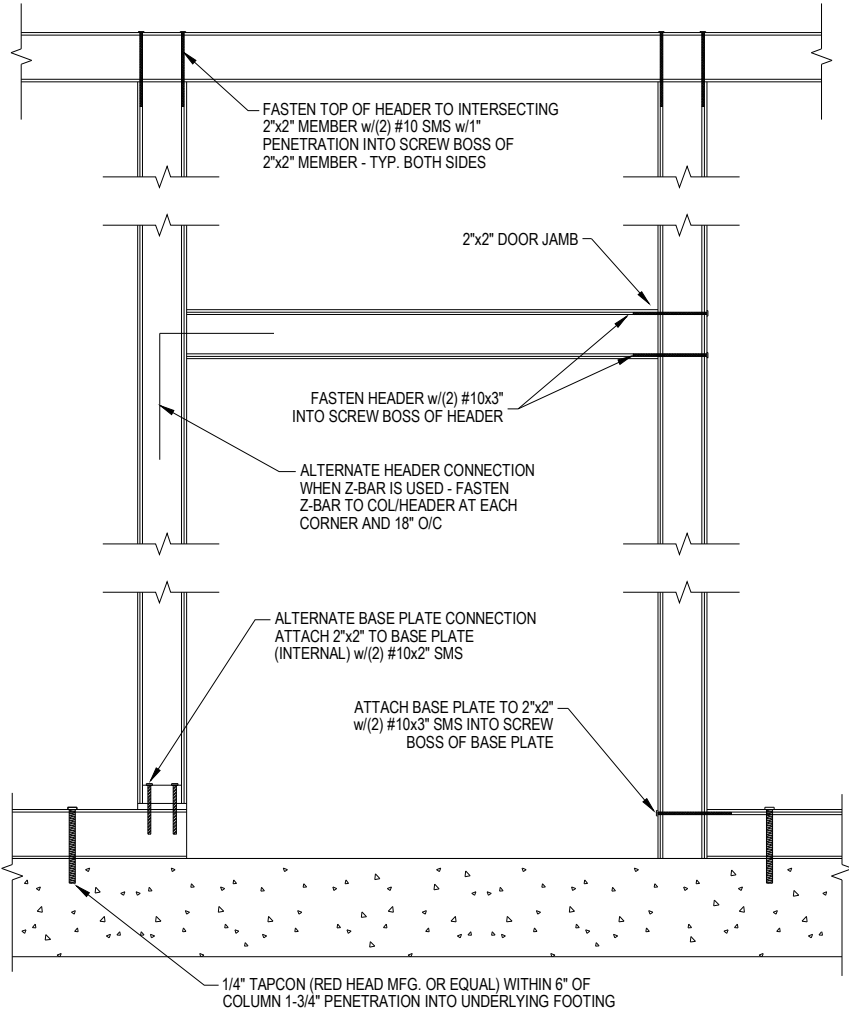

DETAIL "F" - DOOR JAMB & HEADER
CONNECTION SCALE: NTS

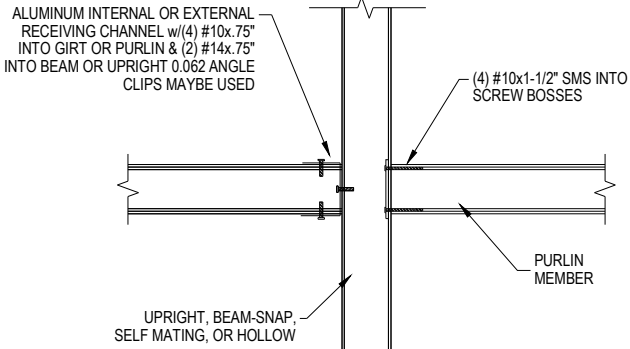


DETAIL "C" - GIRT OR PURLIN TO BEAM
OR POST DETAIL SCALE: NTS

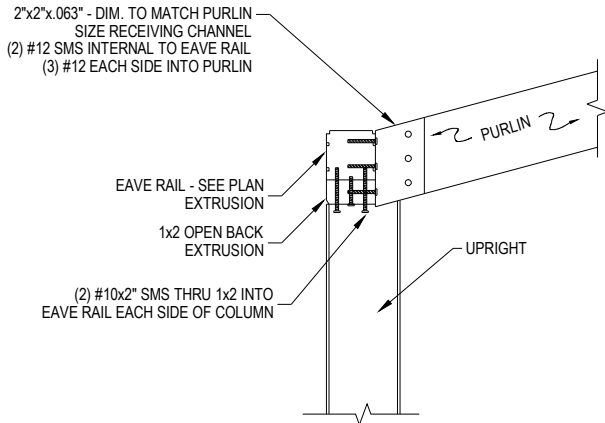

DETAIL "G" - SLOPED PURLIN
CONNECTION SCALE: NTS

This item has been digitally signed
and sealed by Richard E. Walker,
P.E. on the date adjacent to the seal.
Printed copies of this document are
not considered signed and sealed
and the signature must be verified on
any electronic copies.

FLORIDA ENGINEERING LLC
4161 TAMiami TRAIL, UNIT 101
PORT CHARLOTTE, FLORIDA 33952
(941) 391-5980
FLEng.com

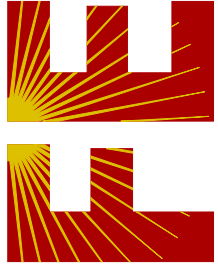

CONTRACTOR:
ALPHA BUILDERS OF NORTH
FLORIDA LLC

PROJECT ADDRESS:

NEYLON
296 SE NATURE DR
LAKE CITY FLORIDA, 32025

DESIGN DATE: 05/26/2026

REVISION 1: 06/06/2026

REVISION 2: DATE

DRAWN BY: JDG

SCALE: NTS

SHEET:

03

Orders@FLEng.com

PROJECT NO. 2613816-2

CA CERT. #30782

GIRT FASTENED INTERNALLY AT EACH END w/ #10x1.5" EACH SCREW GROOVE. FASTEN TO BEAM w/ 2"x2"x1/8" ANGLE (2) #12 SMS INTO BEAM & (2) #10x1.5 THRU ANGLE INTO GUTTER WHERE NO GIRT IS PRESENT, ATTACH ANGLE DIRECTLY TO GUTTER

1"x5"x2" WIDTH EXTRUDED GUTTER BRACKET (THICKNESS OF LEG @ WOOD SCREW SHALL BE 0.125" MIN., LONG LEG SHALL BE 0.072" MIN.) @ EACH BEAM w/(2) #12x3/4" SMS @ 1" SPACING INTO GUTTER LIP. FOR BEAMS ABOVE 2x8 INSTALL GUTTER BRACE AT MIDPOINT BETWEEN BEAMS & INCLUDE 2" GUTTER BRACE AT EACH BEAM LOCATION.


EXISTING HOST STRUCTURE (DESIGNED BY OTHERS)

(2) #14 WOOD SCREWS @ 1" SPACING @ EACH GUTTER BRACKET & (1) @ 18" O.C. MAX. MIN. EMBEDMENT SHALL BE 2"

CLOSE BOTTOM OF BEAM WHEN TRIMMED .044 RECEIVING CHANNEL, FASTEN w/(2) #10 SMS EACH SIDE OF BEAM (NO MORE THAN 6" MAY BE TRIMMED HORIZONTALLY)


FOR BEAM OVER 2x5 .044 RECEIVING CHANNEL FASTEN TO STRUCTURAL GUTTER INTERNALLY w/(2) #12 SMS ALTERNATELY 2x2x1/8" ANGLE BELOW GIRT, (2) #14 SMS INTO BEAM & (2) #12 SMS INTO STRUCTURAL GUTTER

SIDE VIEW

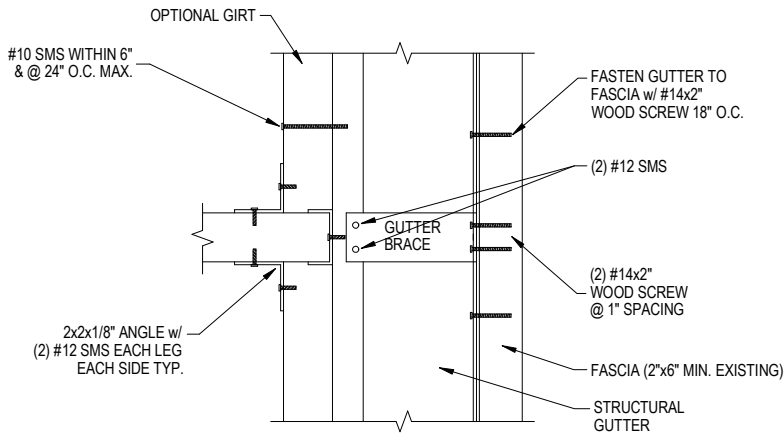

TOP VIEW

DETAIL "H" BEAM TO GUTTER CONNECTION SCALE: NTS

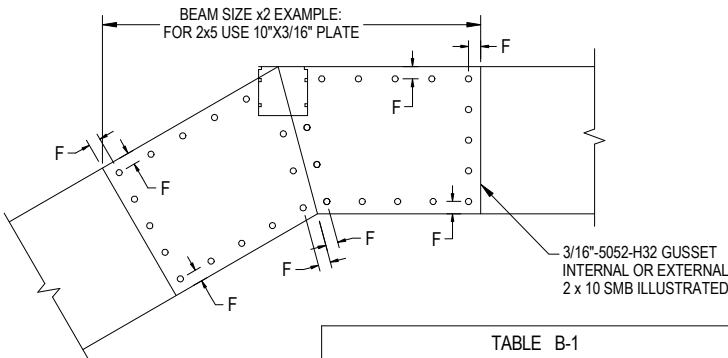


NOTE F
INSTALL FASTENERS ALONG PERIMETER OF GUSSET -BEAM JOINT 3/8" MIN. FROM EDGE. FASTENERS MAY BE STAGGERED TO INSURE PROPER QUANTITY PER TABLE B-1


FASTENER PATTERN MAY APPEAR DIFFERENT FROM ILLUSTRATION. MAINTAIN 1/2" SEPARATION BETWEEN FASTENERS. MAINTAIN 3/8" MIN. FASTENER SEPARATION FROM BEAM JOINT OR EDGE OF BEAM LAP. FASTENERS MAY BE EVENLY SPACED AROUND EDGE OF GUSSET WITHIN 3/8" OF BEAM JOINT. FASTENERS MAY BE STAGGERED TO INSURE PROPER QUANTITY PER TABLE B-1

DETAIL "K" GUSSET CONNECTION SCALE: NTS


TABLE B-1		
BEAM SIZE	COL. TO BEAM QTY SMS/ SIDE OF COL.	BEAM TO BEAM QTY SMS/ EA. FACE/SIDE
2 x 4	(5) #12	(9) #12
2 x 5	(5) #12	(9) #12
2 x 6	(7) #12	(9) #12
2 x 7	(10) #12	(10) #12
2 x 8	(12) #12	(14) #12
2 x 9	(14) #14	(14) #14
2 x 10	(16) #14	(15) #14

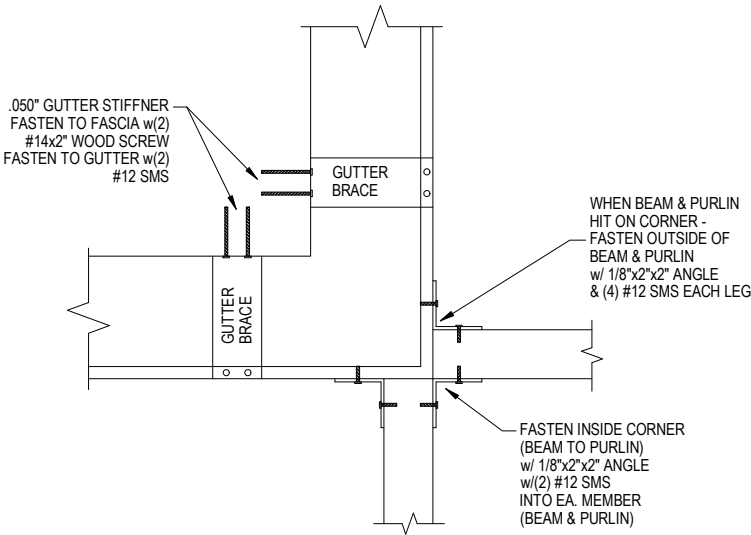

DETAIL "M" BEAM & PURLIN TO GUTTER CONNECTION SCALE: NTS

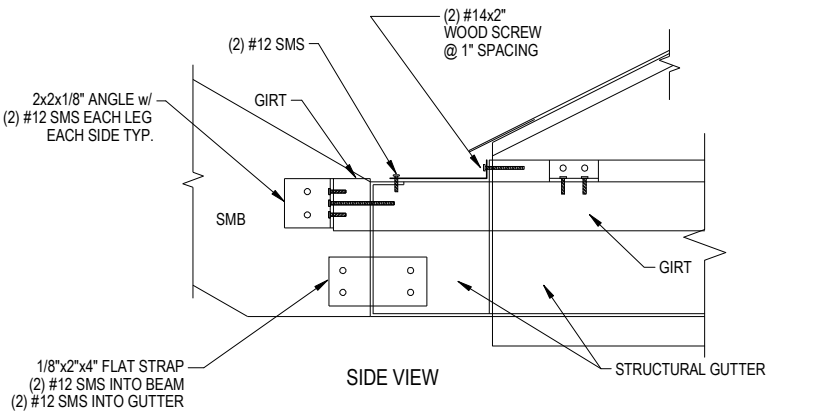


SIDE VIEW



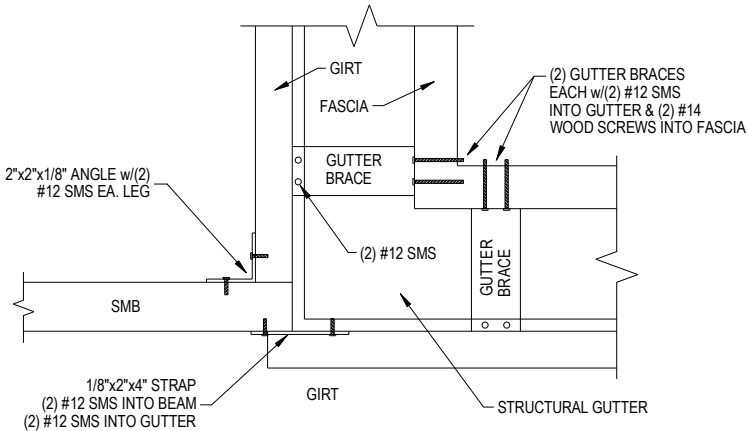


TOP VIEW

DETAIL "L" CORNER CONNECTION SCALE: NTS

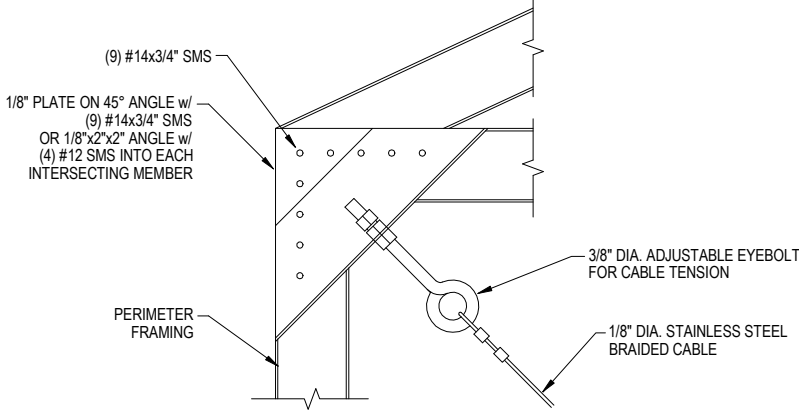

DETAIL "I-2" CABLE CONNECTION AT CORNER SCALE: NTS

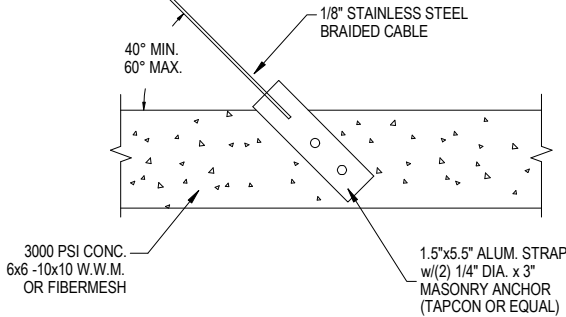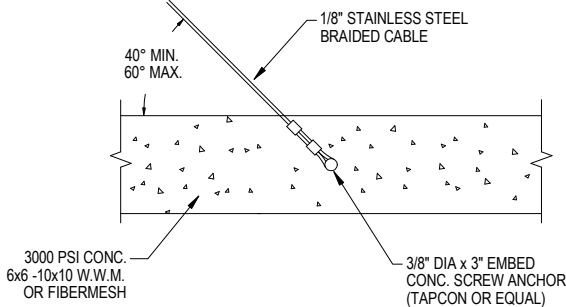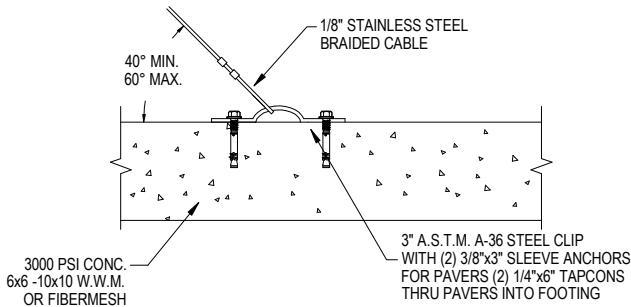

DETAIL "I-1" CABLE CONNECTION AT FOUNDATION SCALE: NTS

This item has been digitally signed and sealed by Richard E. Walker, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

FLORIDA ENGINEERING LLC
4161 TAMiami TRAIL, UNIT 101
PORT CHARLOTTE, FLORIDA 33952
(941) 391-5980
FLEng.com



CA CERT. #30782

Orders@FLEng.com

PROJECT NO. 2613816-2

CONTRACTOR:
ALPHA BUILDERS OF NORTH
FLORIDA LLC

PROJECT ADDRESS:

NEYLON
296 SE NATURE DR
LAKE CITY FLORIDA, 32025

DESIGN DATE: 05/26/2026

REVISION 1: 06/06/2026

REVISION 2: DATE

DRAWN BY: JDG

SCALE: NTS

SHEET:

04

