

PERMIT NUMBER

PERMIT WORKSHEET

Page 1 of 2

Installer: K&K
Installer Address: KODMOLE
Installer Phone: 384-397
License: 0880
E# 1038219

Identical number

LIVE OAK

Length x width

28x60/104

NOTE: If home is a subway within 750 feet of the shooting place (1 hour) is a triple or quadruple shot in remainder of home

1. Underwood Lateral Arm Systems cannot be used on any home (new or used) where this sidewalk has extended 5 ft. 4 in.


B112

ಹಾಳುಮೆಣಸಿನ ಬೀಜ

天下

Typical phor blocking

Shore locations of Longitudinal and Lateral Systems
(Just don't forget to show these locations)

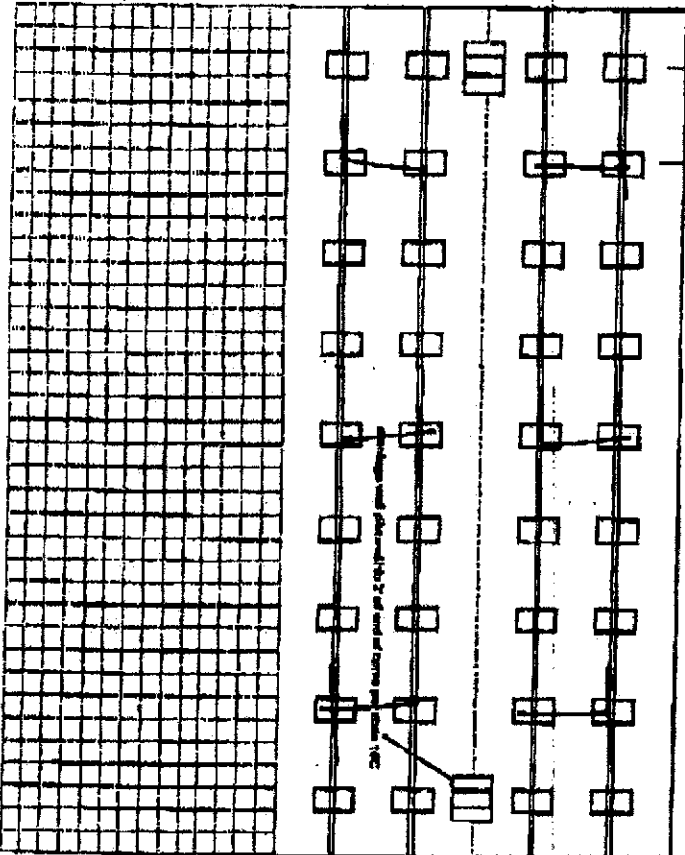

New Home	☒	Used Homes	☐
-----------------	-------------------------------------	-------------------	--------------------------

Home installed to the Manufacturer's Installation Manual
Home is installed in accordance with Rule 15-C ✓

DATE

Condition 10

Triple-Chained

Proof Systems:

Typical

Filmed

PIER SPACING TABLE FOR URBED HOMES

Load bearing capacity (kn/m ²)	15° x 15° (250)	18 1/2° x 18 1/2° (342)	20° x 20° (400)	22° x 22° (484)	24° x 24° (576)	26° x 26° (676)
3400 cast	3'	4'	5'	6'	7'	8'
1500 cast	4 1/2'	5'	7'	8'	9'	10'
2000 cast	5'	6'	8'	9'	10'	11'
2500 cast	7 1/2'	8'	10'	11'	12'	14'
3000 cast	8'	9'	11'	12'	14'	16'
3500 cast	9'	10'	12'	14'	16'	18'

Interpolated from Table 90C-1 plate spacing tables.

PERMANENT

Thermal Paper Band also

Postmaster: Please send no money

**Other player pad sizes
(required by the rule.)**

 Use the appropriate locations of manholes well openings 4 feet or greater. Use this symbol to show the point.

and their pier and system become.

Open/ing

Phone 828-2288

1285

THE KNOWN COMPONENTS

Longitudinal/Stratifying Device (LSD)
 Measurement
 Longitudinal/Stratifying Device w/ Latent Areas
 Measurement
 Only Use

Oliver Tech

OTHER TESTS

Side wall	Number
Longitudinal	- 18
Manicure wall	0
Shower stall	2 m
	2 m

५०५

PERMIT NUMBER

PERMIT WORKSHEET

POCKET PENETROMETER TEST

The pocket penetrometer tests are rounded down to 1500 psi or check here to declare 1000 lb. soil without testing.

X 5 X X

POCKET PENETROMETER TESTING METHOD

1. Test the perimeter of the home at 6 locations.
2. Take the reading at the depth of the footer.
3. Using 508 lb. increments, take the broad reading and round down to the increment.

X X X

TO ROUTE PROBE TEST

The results of the torque probe test is 110 ft. lb. per foot or check here if you are declaring 5' anchors without testing. A test showing 275 inch pounds or less will require 5 foot anchors.

Note: A state approved lateral arm system is being used and 4 ft. anchors are allowed at the sidewalk locations. 1' underground 5 ft. anchors are required at all cantilevered points where the torque test reading is 275 or less and where the middle frame manufacturer may require anchors with 4000 lb. holding capacity.

PK Installer's Initials

ALL TESTS MUST BE PERFORMED BY LICENSED INSTALLER

Installer Name

BUSH KNOWLES

Date Tested

4/18/25

Electrical

Connect electrical conduits between multi-wire units, but not to the main power source. This includes the bonding wire between multi-wire units. Pg. 15C1

Plumbing

Connect all sewer drains to an existing sewer tap or septic line. Pg. 15C1

Connect all potable water supply piping to an existing water meter, water tap, or other independent water supply system. Pg. 15C1

Site Preparation

Debris and organic material removed YES NO Other

Footings multi-wire units

Floor: Type Footing: 100K Length: 10' Spacing: 20'
Walls: Type Footing: 100K Length: 4' Spacing: 4'
Roof: Type Footing: 8Y 00K Length: 1 3/4' Spacing: 4'
For used homes 2' min 30 gage, 8' wide, galvanized metal strip will be carried over the peak of the roof and fastened with nails roofing nails at 2' on center on high edge of the rafters.

Grout fastenings and sealant

I understand a properly installed grout is a requirement of all new and used homes and that condensation, mold, mildew and buckled mortar joints are a result of a poorly installed or no grout being installed. I understand a strip of tape will not serve as a grout.

Installer's Initials PK

Type Grout Installed PK

15C1

Weatherproofing
Between Floors Yes ✓
Between Walls Yes ✓
Between Edges Yes ✓

The foundation will be repaired and/or tapered. Yes ✓ Pg. 15C1
Siding on walls is installed to manufacturer's specifications. Yes ✓
Fireplaces chimney installed so as not to allow intrusion of rain water. Yes ✓


Waterproofing

Slabbing to be finished. Yes ✓ No NA
Dryer vent installed outside of existing. Yes ✓ NA ✓
Range hood/vent installed outside of existing. Yes ✓ NA ✓
Drain lines supported at 4 foot intervals. Yes ✓
Electrical crossovers protected. Yes ✓
Other: NA

Installer verifies all information given with this permit worksheet is accurate and true based on the manufacturer's installation instructions and or Rule 15C-1 & 2

Installer Signature

Date 4/18/25

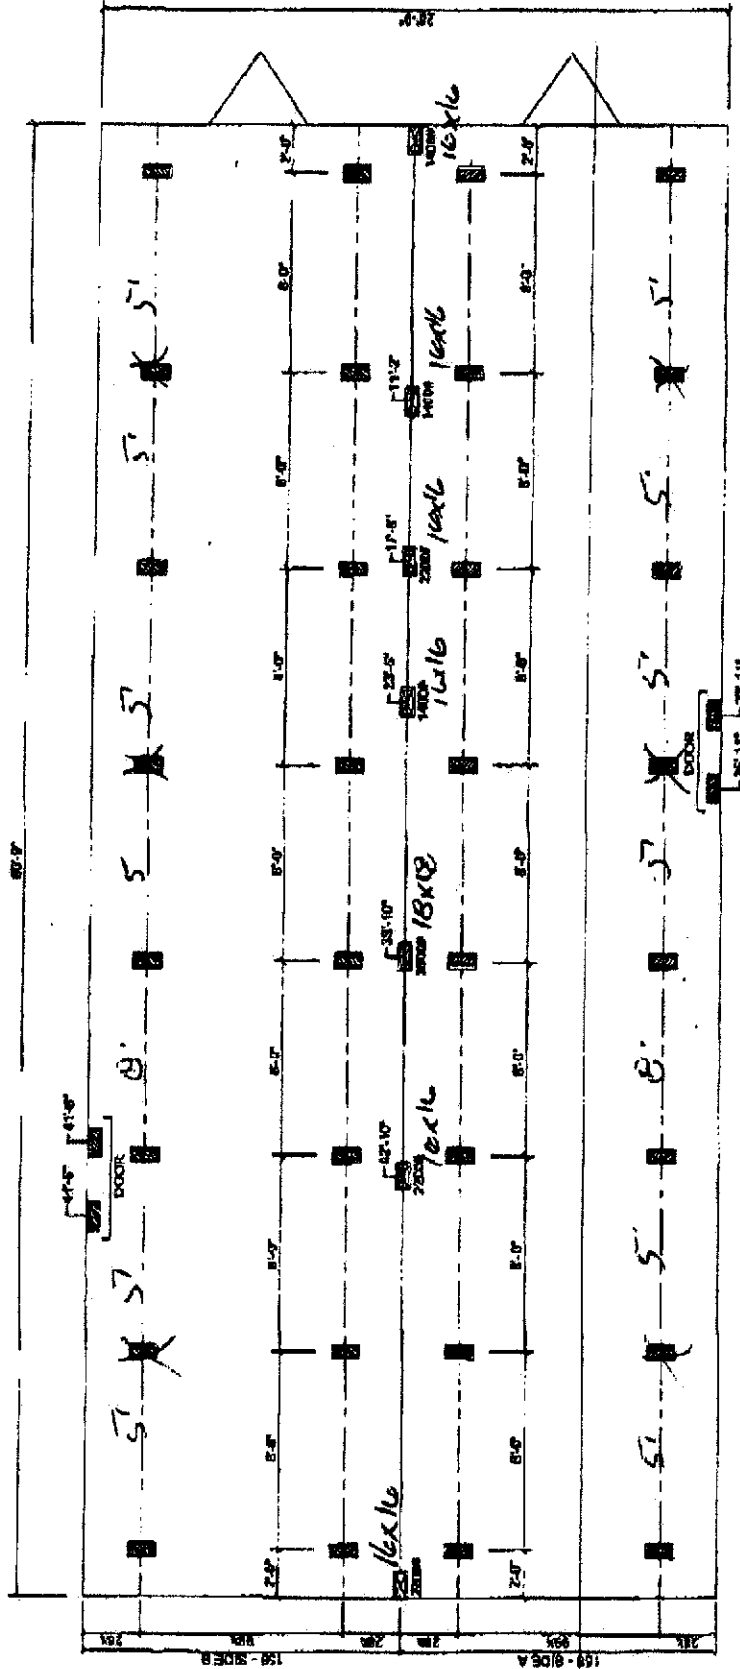

DES HARRING LINE OPENING SUPPORT PIER/TYP.
 DES SUPPORT PIER/TYP

1000023

FOUNDATION NOTES

- THIS DRAWING IS DESIGNED FOR THE STANDARD WIND ZONE AND IS TO BE USED IN CONJUNCTION WITH THE INSTALLATION MANUAL AND ITS SUPPLEMENTS.
- FOOTINGS ARE SHOWN FOR EXAMPLE ONLY. QUANTITY AND SPACING MAY VARY BASED ON PLOT TYPE, SOIL CONDITION, ETC.
- FOOTINGS ARE REQUIRED AT SUPPORT POSTS. SEE INSTALLATION MANUAL FOR REQUIREMENTS.

Live Oak Homes
MODEL: L-2604F - 28 X 60 (BOX)
4-BEDROOM / 2-BATH

(99-1/2" I-BEAM SPACING)
L-2604F

License Number: 111/1038219 / 1 Name: RUSTY L. KNOWLES

Order #: 6566

Label #: 119103

Manufacturer:

Homeowner:

Year Model:

Address:

Length & Width:

City/State/Zip:

Type Longitudinal System:

Phone #:

Type Lateral Arm System:

Date Installed:

New Home: _____ Used Home: _____

Installed Wind Zone:

Data Plate Wind Zone:

Note:

(Check Size of Home)

Single _____

Double _____

Triple _____

HUD Label #:

Soil Bearing / PSF:

Torque Probe / in-lbs:

Permit #:

STATE OF FLORIDA INSTALLATION CERTIFICATION LABEL

119103

LABEL #

DATE OF INSTALLATION

RUSTY L. KNOWLES

NAME

111/1038219 / 1

6566

LICENSE #

ORDER #

CERTIFIES THAT THE INSTALLATION OF THIS MOBILE HOME IS
IN ACCORDANCE WITH FLORIDA STATUTES 320.8249, 320.8325
AND RULES OF THE HIGHWAY SAFETY AND MOTOR VEHICLES.

INSTRUCTIONS

PLEASE WRITE DATE OF
INSTALLATION AND AFFIX
LABEL NEXT TO HUD LABEL.
USE PERMANENT INK PEN
OR MARKER ONLY.
COMPLETE INFORMATION
ABOVE AND KEEP ON FILE
FOR A MINIMUM OF 2 YEARS.
YOU ARE REQUIRED TO
PROVIDE COPIES WHEN
REQUESTED.