



# YOUR PROFESSIONAL-CLASS PRODUCT

Legacy 20-Gauge Smooth Steel Entry Door with Clear Glass




OUTSIDE VIEW




INSIDE VIEW

## SIZING

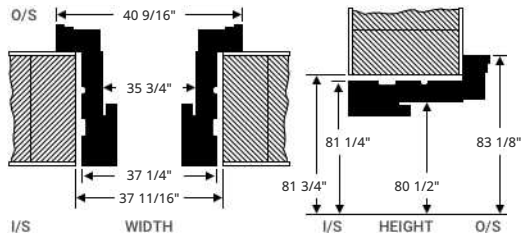

## HANDING



Installation Instructions



## ENERGY

### ENERGY PERFORMANCE RATINGS

U-Factor (U.S./I-P) Solar Heat Gain Coefficient

0.23 0.07

### ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance

0.15 -

Air Infiltration (cfm/ft2)

<= 0.04



ENERGY STAR® Certified  
In All 50 States.

CPD: PRD-N-88-32738-00001

DP+/-: 45/-50; NAMI: NI011593.04



800.669.4711  
2150 State Route 39  
Sugar Creek, OH 44681

## QUOTE INFORMATION

Job: 04815008russell

Tag: Front

PO #04815008RUSSELL

Order #15467202-1

Qty: 1

## DETAILS

### Legacy Single Entry Door in PermaTech Composite Frame

Wind Load Rated (Non-Impact) (FL#12463.15)

37 1/4" Custom Unit Width

81 1/4" Custom Unit Height

Unit Size: 37 1/4" W x 81 1/4" H

Frame Depth: 4 9/16"

2" PermaTech Flat Brickmold - Shipped Unattached

Right Hand Outswing - Outside Looking In

2 Panel 240 Style 20-Gauge Smooth Steel Door

Clear Glass with Comfortech DLA-UV

Smooth Plugless Trim

Snow Mist White Inside / Vallis Red Outside

### Hardware

All Hardware in Satin Nickel Finish

Accent/Addison Lockset

Key Order Alike

Addison Thumbturn Deadbolt

Key Order Alike

### Frame

Textured Snow Mist White Aluminum Brickmold Cladding - In Separate Box

Snow Mist White Inside Frame

2 Tubes of Snow Mist White Caulk

Mill Finish ADA Compliant Threshold

5 5/8" Threshold Depth

Stainless Steel Ball Bearing Hinges

4 Hinges

Security Plate

Sell Price: \$13,814.14

## INFORMATION AND WARNINGS

Outswing doors include stainless steel hinges.

For this product configuration, the cladding cannot be shipped attached.

On outswing doors with brickmold and cladding, ProVia recommends that caulking be applied where the brickmold meets the frame.