

MEMBER OF
The
North Central
Florida Water
Well...

Clyatt Well Drilling, Inc.
(Established in 1971)
POST OFFICE BOX 180
WORTHINGTON SPRINGS, FLORIDA 32697

K. Melaine
"Red" Clyatt

Telephone Number (386)496-2488
FAX Number (386)496-4640

June 2, 2014

Columbia County Building Department
Post Office Box 1529
Lake City, Florida 32056

To Whom It May Concern:

As required by building code regulations for Columbia County in order that a building permit can be issued, the following well information is provided with regard to the above-referenced well:

Size of Pump Motor:	1-1/2 Horse Power
Size of Pressure Tank:	220 Gallon Equivalent
Cycle Stop Valve Used:	No

Should you require any additional information, please do not hesitate to contact us.

Respectfully,

CLYATT WELL DRILLING, INC.

K. Melaine "Red" Clyatt
President

MEMBER OF
The
North Central
Florida Water
Works

Clyatt Well Drilling, Inc.
(Established in 1971)
POST OFFICE BOX 180
WORTHINGTON SPRINGS, FLORIDA 32697

K. Melaine
"Red" Clyatt

Telephone Number (386)496-2488
FAX Number (386)496-4640

**PUMP AND TANK SPECIFICATIONS FOR
STANDARD 4" RESIDENTIAL WELLS**


PUMPS

1 Horse Power Submersible Pump
20 Gallons Per Minute
Voltage: 240
Phase: (Single) 1

1.5 Horse Power Submersible Pump
25 Gallons Per Minute
Voltage: 240
Phase: (Single) 1

TANK

WF-255 Captive Air Tank
Capacity 81 Gallons
Equivalent 220 Gallons
Draw Down 25 Gallons

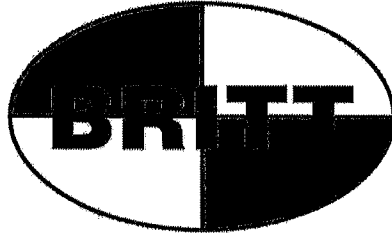

Britt Surveying and Mapping, LLC
2086 SW Main Blvd Ste 112 • Lake City, FL 32025
386-752-7163 P • 386-752-5573 F • www.brittsurvey.com

07/09/14

Permit # 32014

L-23187

Re: Lot 3 May-Fair Unit 3

Stanley Crawford Construction

To Whom It May Concern:


The elevation of the top of the foundation is found to be 164.73 feet. The minimum floor elevation is established to be 164.00 feet. The highest adjacent grade to the residence is 164.1 feet and the lowest adjacent grade is 163.2 feet. The elevations shown are based on the pat datum.

Sincerely,

A handwritten signature in black ink, appearing to read "L. Scott Britt", written in a cursive style.

L. Scott Britt
LS 5757

OK
BLK
10 July 2014

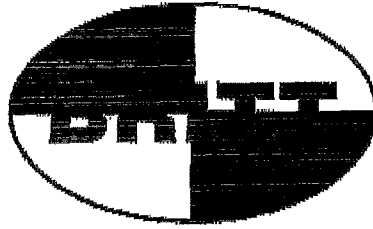

Britt Surveying and Mapping, LLC
2086 SW Main Blvd Ste 112 • Lake City, FL 32025
386-752-7163 P • 386-752-5573 F • www.brittsurvey.com

07/09/14

Permit # 32014

L-23187

Re: Lot 3 May-Fair Unit 3

Stanley Crawford Construction


To Whom It May Concern:

The elevation of the top of the foundation is found to be 164.73 feet. The minimum floor elevation is established to be 164.00 feet. The highest adjacent grade to the residence is 164.1 feet and the lowest adjacent grade is 163.2 feet. The elevations shown are based on the pat datum.


Sincerely,

A handwritten signature in black ink, appearing to read "L. Scott Britt", is written over a circular embossed seal.

L. Scott Britt
LS 5757



Clyatt Well Drilling, Inc.
(Established in 1971)
POST OFFICE BOX 180
WORTHINGTON SPRINGS, FLORIDA 32697



Telephone Number (386)496-2488
FAX Number (386)496-4640

May 27, 2014

Columbia County Building Department
Post Office Box 1529
Lake City, Florida 32056

To Whom It May Concern:

As required by building code regulations for Columbia County in order that a building permit can be issued, the following well information is provided with regard to the above-referenced well:

Size of Pump Motor:	1-1/2 Horse Power
Size of Pressure Tank:	220 Gallon Equivalent
Cycle Stop Valve Used:	No

Should you require any additional information, please do not hesitate to contact us.

Respectfully,

CLYATT WELL DRILLING, INC.

K. Melaine "Red" Clyatt
President

MEMBER OF
The
North Central
Florida Water
Well

Clyatt Well Drilling, Inc.
(Established in 1971)
POST OFFICE BOX 180
WORTHINGTON SPRINGS, FLORIDA 32697

K. Melaine
"Red" Clyatt

Telephone Number (386)496-2488
FAX Number (386)496-4640

**PUMP AND TANK SPECIFICATIONS FOR
STANDARD 4" RESIDENTIAL WELLS**

PUMPS

1 Horse Power Submersible Pump
20 Gallons Per Minute
Voltage: 240
Phase: (Single) 1

1.5 Horse Power Submersible Pump
25 Gallons Per Minute
Voltage: 240
Phase: (Single) 1

TANK

WF-255 Captive Air Tank
Capacity 81 Gallons
Equivalent 220 Gallons
Draw Down 25 Gallons