

DATE 07/20/2005

Columbia County Building Permit

PERMIT

This Permit Expires One Year From the Date of Issue

000023395

APPLICANT MATT CASON PHONE 752-5152
 ADDRESS 1531 SW COMMERCIAL GLEN LAKE CITY FL 32025
 OWNER ROBERT & MARIA ROSSIGNOL PHONE 752-5152
 ADDRESS 403 SW BURNETT LANE LAKE CITY FL 32024
 CONTRACTOR STANLEY CRAWFORD PHONE 752-5152

LOCATION OF PROPERTY 47S, TR ON CR242, TL ON LAPAZ, TL ON BURNETT, 2ND LOT ON LEFT

TYPE DEVELOPMENT SFD, UTILITY ESTIMATED COST OF CONSTRUCTION 71250.00

HEATED FLOOR AREA 1425.00 TOTAL AREA 1609.00 HEIGHT .00 STORIES 1

FOUNDATION CONC WALLS FRAMED ROOF PITCH 6/12 FLOOR SLAB

LAND USE & ZONING RR MAX. HEIGHT 15

Minimum Set Back Requirments: STREET-FRONT 25.00 REAR 15.00 SIDE 10.00

NO. EX.D.U. 0 FLOOD ZONE X DEVELOPMENT PERMIT NO. _____

PARCEL ID 26-4S-16-03181-013 SUBDIVISION _____

LOT _____ BLOCK _____ PHASE _____ UNIT _____ TOTAL ACRES _____

00000745 RG0042896
 Culvert Permit No. Culvert Waiver Contractor's License Number Applicant/Owner/Contractor
CULVERT Waiver 05-0692-N BK Y
 Driveway Connection Septic Tank Number LU & Zoning checked by Approved for Issuance New Resident

COMMENTS: ONE FOOT ABOVE THE ROAD, NOC ON FILE

ALTERNATE TERMIT TREATMENT RECEIVED _____

Check # or Cash 6902

FOR BUILDING & ZONING DEPARTMENT ONLY

(footer/Slab)

Temporary Power _____ Foundation _____ Monolithic _____
date/app. by date/app. by date/app. by

Under slab rough-in plumbing _____ Slab _____ Sheathing/Nailing _____
date/app. by date/app. by date/app. by

Framing _____ Rough-in plumbing above slab and below wood floor _____
date/app. by date/app. by

Electrical rough-in _____ Heat & Air Duct _____ Peri. beam (Lintel) _____
date/app. by date/app. by date/app. by

Permanent power _____ C.O. Final _____ Culvert _____
date/app. by date/app. by date/app. by

M/H tie downs, blocking, electricity and plumbing _____ Pool _____
date/app. by date/app. by

Reconnection _____ Pump pole _____ Utility Pole _____
date/app. by date/app. by date/app. by

M/H Pole _____ Travel Trailer _____ Re-roof _____
date/app. by date/app. by date/app. by

BUILDING PERMIT FEE \$ 360.00 CERTIFICATION FEE \$ 8.04 SURCHARGE FEE \$ 8.04

MISC. FEES \$.00 ZONING CERT. FEE \$ 50.00 FIRE FEE \$ _____ WASTE FEE \$ _____

FLOOD ZONE DEVELOPMENT FEE \$ _____ CULVERT FEE \$ _____ TOTAL FEE 426.08

CK# 6402 CK# 6903
Mar. 28 2005 04:37PM P1
426.08 W-AIU

Columbia County Building Permit Application

Revised 9-23-04

For Office Use Only Application # 0507-07 Date Received 7/5/05 By JW Permit # 745/23395
 Application Approved by - Zoning Official BLK Date 7-7-05 Plans Examiner OK JTH Date 7-13-05
 Flood Zone X Development Permit N/A Zoning RR Land Use Plan Map Category RES. V. 2 DEN.
 Comments * - ~~Proof of Ownership~~ *

Applicants Name Matt Cason / SCCI Phone 752-5152
 Address 1531 SW Commercial Glen LC FL 32025
 Owners Name Robert & Maria Rossignol Phone 752-5152
 911 Address 403 SW Burnett Ln LC, FL 32024
 Contractors Name Stanley Crawford Construction Inc Phone 752-5152
 Address 1531 SW Commercial Glen LC FL 32025
 Fee Simple Owner Name & Address _____
 Bonding Co. Name & Address _____
 Architect/Engineer Name & Address Nicholas Geisler Rt 17 Box 1038 LC, FL 32055
 Mortgage Lenders Name & Address _____

Circle the correct power company - FL Power & Light - Clay Elec. - Suwannee Valley Elec. - Progressive Energy
 Property ID Number 26-45 16-03181-013 Estimated Cost of Construction 76000
 Subdivision Name _____ Lot _____ Block _____ Unit _____ Phase _____
 Driving Directions SR 47 South, TR on CR 242, TL on Lopez, TL on Burnett, 2nd lot on left.

Type of Construction Residential, Single Fam Number of Existing Dwellings on Property 0
 Total Acreage .908 Lot Size _____ Do you need a - Culvert Permit or Culvert Waiver or Have an Existing Drive
 Actual Distance of Structure from Property Lines - Front 50' Side 60' Side 90' Rear 113'
 Total Building Height 15' 8" Number of Stories 1 Heated Floor Area 1425.5 Roof Pitch 6/12
Porches 183 TOTAL 1609

Application is hereby made to obtain a permit to do work and installations as indicated. I certify that no work or installation has commenced prior to the issuance of a permit and that all work be performed to meet the standards of all laws regulating construction in this jurisdiction.

OWNERS AFFIDAVIT: I hereby certify that all the foregoing information is accurate and all work will be done in compliance with all applicable laws and regulating construction and zoning.

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOU PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING. CONSULT WITH YOUR LENDER OR ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

Stanley Crawford
 Owner Builder or Agent (Including Contractor)

Stanley Crawford
 Contractor Signature
 Contractors License Number RG-0042896
 Competency Card Number 5225
 NOTARY STAMP/SEAL

STATE OF FLORIDA
 COUNTY OF COLUMBIA
 Sworn to (or affirmed) and subscribed before me
 this 5th day of July 2005.
 Personally known or Produced Identification _____

Janet L. Cheek
 Notary Signature



COLUMBIA COUNTY 9-1-1 ADDRESSING

263 NW Lake City Ave. * P. O. Box 1787 * Lake City, FL 32056-1787
PHONE: (386) 758-1125 * FAX: (386) 758-1365 * Email: ron_croft@columbiacountyfla.com

Addressing Maintenance

To maintain the Countywide Addressing Policy you must make application for a 9-1-1 Address at the time you apply for a building permit. The established standards for assigning and posting numbers to all principal buildings, dwellings, businesses and industries are contained in Columbia County Ordinance 2001-9. The addressing system is to enable Emergency Service Agencies to locate you in an emergency, and to assist the United States Postal Service and the public in the timely and efficient provision of services to residents and businesses of Columbia County.

DATE ISSUED: June 29 2005

ENHANCED 9-1-1 ADDRESS:

403 SW BURNETT LN (LAKE CITY, FL 32024)

Addressed Location 911 Phone Number: NOT AVAIL.

OCCUPANT NAME: NOT AVAIL.

OCCUPANT CURRENT MAILING ADDRESS: _____

PROPERTY APPRAISER MAP SHEET NUMBER: 72


PROPERTY APPRAISER PARCEL NUMBER: 26-4S-16-03181-013

Other Contact Phone Number (If any): _____

Building Permit Number (If known): _____

Remarks: _____

Address Issued By: _____


Columbia County 9-1-1 Addressing / GIS Department


NOTICE: THIS ADDRESS WAS ISSUED BASED ON LOCATION INFORMATION RECEIVED FROM THE REQUESTER. SHOULD, AT A LATER DATE, THE LOCATION INFORMATION BE FOUND TO BE IN ERROR, THIS ADDRESS IS SUBJECT TO CHANGE.

COLUMBIA COUNTY
9-1-1 ADDRESSING
APPROVED

Application for Onsite Sewage Disposal System Construction Permit. Part II Site Plan
Permit Application Number: 05-0692N


ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH UNIT

ROSSIGNOL/CR 04-2907

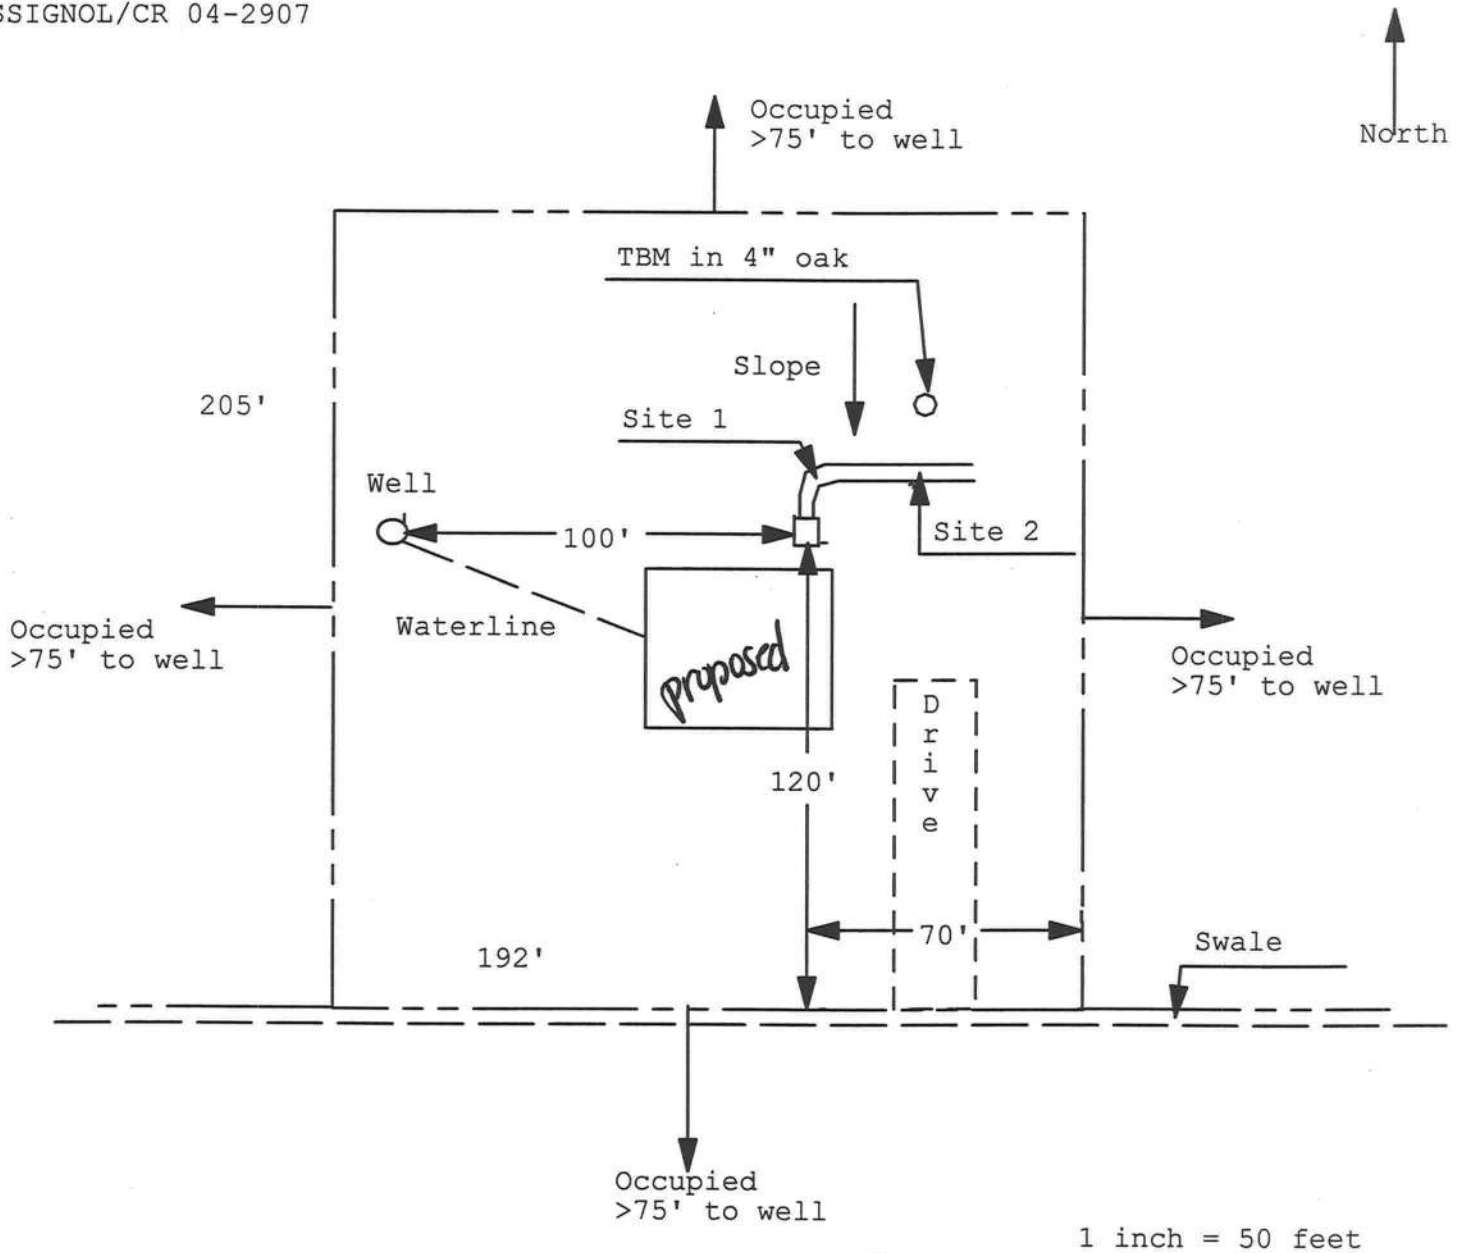

Site Plan Submitted By *Paul Lloyd* Date 6/23/05
 Plan Approved Not Approved Date 6-29-05
 By *Sallie Ghaddy, ESI, COLUMBIA* CPHU

Notes: _____

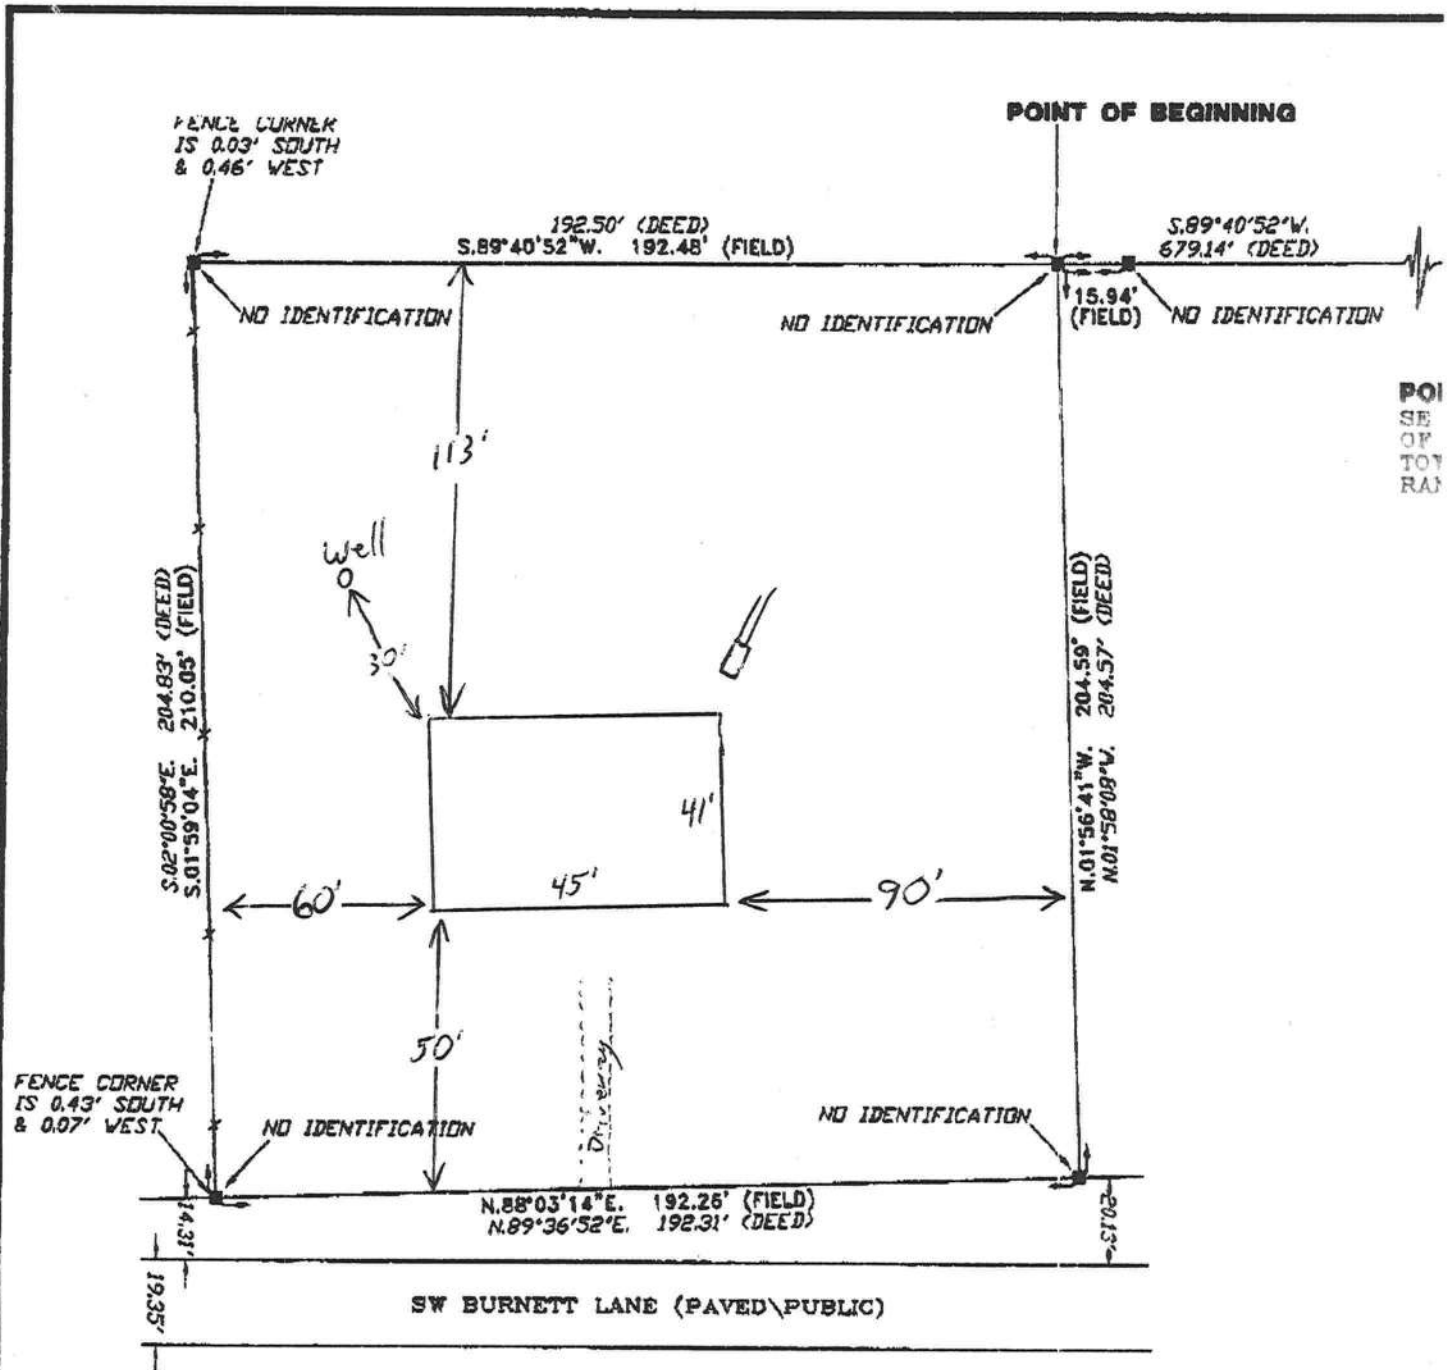

CERTIFIED TO:
 ROBERT ROSSIGNOL
 FIRST FEDERAL SAVINGS BANK OF FLORIDA
 TITLE OFFICES, LLC
 TICOR TITLE INSURANCE COMPANY

FIELD BOOK 278 PAGE(S) 16

SURVEYOR'S CERTIFICATION

I HEREBY CERTIFY THAT THIS SURVEY WAS MADE UNDER MY PERSONAL SUPERVISION AND IN ACCORDANCE WITH THE TECHNICAL STANDARDS AS SET FORTH BY THE FLORIDA BOARD OF PROFESSIONAL SURVEYORS IN CHAPTER 64G17-6, FLORIDA ADMINISTRATIVE CODE, PURSUANT TO

06/01/05 06/07/05
 FIELD SURVEY DATE DRAWING DATE

NOTE: UNLESS IT BEARS THE SIGNATURE AND THE ORIGINAL RAISED SEAL OF THE SURVEYOR, THIS DRAWING, SKETCH, PLAN OR MAP IS FOR INFORMATIONAL PURPOSES ONLY.

THIS INSTRUMENT WAS PREPARED BY:
FIRST FEDERAL SAVINGS BANK OF FLORIDA
4705 WEST U.S. HIGHWAY 90
P.O. BOX 2029
LAKE CITY, FLORIDA 32056

Inst:2005013767 Date:06/13/2005 Time:10:19
MK DC,P.Dewitt Cason,Columbia County B:1048 P:1888

PERMIT NO. _____

TAX FOLIO NO. _____

NOTICE OF COMMENCEMENT

STATE OF FLORIDA
COUNTY OF COLUMBIA

The undersigned hereby gives notice that improvement will be made to certain real property, and in accordance with Chapter 713, Florida Statutes, the following information is provided in this Notice of Commencement.

1. Description of property: SEE EXHIBIT "A" ATTACHED

2. General description of improvement: **Construction of Dwelling**
3. Owner information:
 - a. Name and address: ROBERT J. ROSSIGNOL
648 SW AMBERWOOD LOOP 107, LAKE CITY, FL 32025
 - b. Interest in property: **Fee Simple**
 - c. Name and address of fee simple title holder (if other than Owner): **NONE**
4. Contractor (name and address): STANLEY CRAWFORD CONSTRUCTION
885 SW SISTERS WELCOME ROAD, LAKE CITY, FL 32025
5. Surety:
 - a. Name and address: _____

 - b. Amount of bond: _____

05Y-04157JK

Exhibit A

TOWNSHIP 4 SOUTH – RANGE 16 EAST

SECTION 26: COMMENCE AT THE SOUTHEAST CORNER OF THE NORTHEAST QUARTER OF THE NORTHEAST QUARTER (NE ¼ OF NE ¼), SECTION 26, TOWNSHIP 4 SOUTH, RANGE 16 EAST, AND RUN THENCE S 89°40'52" W, ALONG THE SOUTH LINE OF THE NORTHEAST QUARTER OF THE NORTHEAST QUARTER (NE ¼ OF NE ¼), SECTION 26, 679.14 FEET TO THE POINT OF BEGINNING; CONTINUE THENCE S 89°40'52" W, ALONG SAID SOUTH LINE 192.50 FEET; RUN THENCE S 2°00'58" E, 204.83 FEET; THENCE N 89°36'52" E, 192.31 FEET; THENCE N 01°58'08" W, 204.57 FEET TO THE POINT OF BEGINNING.

Inst:2005013767 Date:06/13/2005 Time:10:19

_____DC,P.Dewitt Cason,Columbia County B:1048 P:1889

FORM 600A-2001

FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION

Florida Department of Community Affairs
Residential Whole Building Performance Method A

Project Name: ROSSIGNOL RES Address: City, State: Owner: Climate Zone: North	Builder: STANLY CRAWFORD Permitting Office: Permit Number: 23395 Jurisdiction Number: 221000
---	---

<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">1. New construction or existing</td> <td style="width: 10%; text-align: center;">New</td> <td style="width: 40%; text-align: right;">___</td> </tr> <tr> <td>2. Single family or multi-family</td> <td style="text-align: center;">Single family</td> <td style="text-align: right;">___</td> </tr> <tr> <td>3. Number of units, if multi-family</td> <td style="text-align: center;">1</td> <td style="text-align: right;">___</td> </tr> <tr> <td>4. Number of Bedrooms</td> <td style="text-align: center;">3</td> <td style="text-align: right;">___</td> </tr> <tr> <td>5. Is this a worst case?</td> <td style="text-align: center;">Yes</td> <td style="text-align: right;">___</td> </tr> <tr> <td>6. Conditioned floor area (ft²)</td> <td style="text-align: center;">1425.5 ft²</td> <td style="text-align: right;">___</td> </tr> <tr> <td>7. Glass area & type</td> <td style="text-align: center;">Single Pane Double Pane</td> <td style="text-align: right;">___</td> </tr> <tr> <td> a. Clear glass, default U-factor</td> <td style="text-align: center;">0.0 ft² 191.0 ft²</td> <td style="text-align: right;">___</td> </tr> <tr> <td> b. Default tint</td> <td style="text-align: center;">0.0 ft² 0.0 ft²</td> <td style="text-align: right;">___</td> </tr> <tr> <td> c. Labeled U or SHGC</td> <td style="text-align: center;">0.0 ft² 0.0 ft²</td> <td style="text-align: right;">___</td> </tr> <tr> <td>8. Floor types</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td> a. Slab-On-Grade Edge Insulation</td> <td style="text-align: center;">R-4.0, 216.0(p) ft</td> <td style="text-align: right;">___</td> </tr> <tr> <td> b. N/A</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td> c. N/A</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td>9. Wall types</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td> a. Frame, Wood, Exterior</td> <td style="text-align: center;">R=13.0, 1728.0 ft²</td> <td style="text-align: right;">___</td> </tr> <tr> <td> b. N/A</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td> c. N/A</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td> d. N/A</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td> e. N/A</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td>10. Ceiling types</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td> a. Under Attic</td> <td style="text-align: center;">R=30.0, 1425.5 ft²</td> <td style="text-align: right;">___</td> </tr> <tr> <td> b. N/A</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td> c. N/A</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td>11. Ducts</td> <td></td> <td style="text-align: right;">___</td> </tr> <tr> <td> a. Sup: Unc. Ret: Unc. AH: Interior</td> <td style="text-align: center;">Sup. R=6.0, 85.0 ft</td> <td style="text-align: right;">___</td> </tr> <tr> <td> b. N/A</td> <td></td> <td style="text-align: right;">___</td> </tr> </table>	1. New construction or existing	New	___	2. Single family or multi-family	Single family	___	3. Number of units, if multi-family	1	___	4. Number of Bedrooms	3	___	5. Is this a worst case?	Yes	___	6. Conditioned floor area (ft ²)	1425.5 ft ²	___	7. Glass area & type	Single Pane Double Pane	___	a. Clear glass, default U-factor	0.0 ft ² 191.0 ft ²	___	b. Default tint	0.0 ft ² 0.0 ft ²	___	c. Labeled U or SHGC	0.0 ft ² 0.0 ft ²	___	8. Floor types		___	a. Slab-On-Grade Edge Insulation	R-4.0, 216.0(p) ft	___	b. N/A		___	c. N/A		___	9. Wall types		___	a. Frame, Wood, Exterior	R=13.0, 1728.0 ft ²	___	b. N/A		___	c. N/A		___	d. N/A		___	e. N/A		___	10. Ceiling types		___	a. Under Attic	R=30.0, 1425.5 ft ²	___	b. N/A		___	c. N/A		___	11. Ducts		___	a. Sup: Unc. Ret: Unc. AH: Interior	Sup. R=6.0, 85.0 ft	___	b. N/A		___	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">12. Cooling systems</td> <td style="width: 50%;"></td> </tr> <tr> <td> a. Central Unit</td> <td style="text-align: right;">Cap: 30.0 kBtu/hr SEER: 10.00</td> </tr> <tr> <td> b. N/A</td> <td style="text-align: right;">___</td> </tr> <tr> <td> c. N/A</td> <td style="text-align: right;">___</td> </tr> <tr> <td>13. Heating systems</td> <td></td> </tr> <tr> <td> a. Electric Heat Pump</td> <td style="text-align: right;">Cap: 28.0 kBtu/hr HSPF: 7.00</td> </tr> <tr> <td> b. N/A</td> <td style="text-align: right;">___</td> </tr> <tr> <td> c. N/A</td> <td style="text-align: right;">___</td> </tr> <tr> <td>14. Hot water systems</td> <td></td> </tr> <tr> <td> a. Electric Resistance</td> <td style="text-align: right;">Cap: 40.0 gallons EF: 0.88</td> </tr> <tr> <td> b. N/A</td> <td style="text-align: right;">___</td> </tr> <tr> <td> c. Conservation credits (HR-Heat recovery, Solar DHP-Dedicated heat pump)</td> <td style="text-align: right;">___</td> </tr> <tr> <td>15. HVAC credits (CF-Ceiling fan, CV-Cross ventilation, HF-Whole house fan, PT-Programmable Thermostat, MZ-C-Multizone cooling, MZ-H-Multizone heating)</td> <td style="text-align: right;">___</td> </tr> </table>	12. Cooling systems		a. Central Unit	Cap: 30.0 kBtu/hr SEER: 10.00	b. N/A	___	c. N/A	___	13. Heating systems		a. Electric Heat Pump	Cap: 28.0 kBtu/hr HSPF: 7.00	b. N/A	___	c. N/A	___	14. Hot water systems		a. Electric Resistance	Cap: 40.0 gallons EF: 0.88	b. N/A	___	c. Conservation credits (HR-Heat recovery, Solar DHP-Dedicated heat pump)	___	15. HVAC credits (CF-Ceiling fan, CV-Cross ventilation, HF-Whole house fan, PT-Programmable Thermostat, MZ-C-Multizone cooling, MZ-H-Multizone heating)	___
1. New construction or existing	New	___																																																																																																										
2. Single family or multi-family	Single family	___																																																																																																										
3. Number of units, if multi-family	1	___																																																																																																										
4. Number of Bedrooms	3	___																																																																																																										
5. Is this a worst case?	Yes	___																																																																																																										
6. Conditioned floor area (ft ²)	1425.5 ft ²	___																																																																																																										
7. Glass area & type	Single Pane Double Pane	___																																																																																																										
a. Clear glass, default U-factor	0.0 ft ² 191.0 ft ²	___																																																																																																										
b. Default tint	0.0 ft ² 0.0 ft ²	___																																																																																																										
c. Labeled U or SHGC	0.0 ft ² 0.0 ft ²	___																																																																																																										
8. Floor types		___																																																																																																										
a. Slab-On-Grade Edge Insulation	R-4.0, 216.0(p) ft	___																																																																																																										
b. N/A		___																																																																																																										
c. N/A		___																																																																																																										
9. Wall types		___																																																																																																										
a. Frame, Wood, Exterior	R=13.0, 1728.0 ft ²	___																																																																																																										
b. N/A		___																																																																																																										
c. N/A		___																																																																																																										
d. N/A		___																																																																																																										
e. N/A		___																																																																																																										
10. Ceiling types		___																																																																																																										
a. Under Attic	R=30.0, 1425.5 ft ²	___																																																																																																										
b. N/A		___																																																																																																										
c. N/A		___																																																																																																										
11. Ducts		___																																																																																																										
a. Sup: Unc. Ret: Unc. AH: Interior	Sup. R=6.0, 85.0 ft	___																																																																																																										
b. N/A		___																																																																																																										
12. Cooling systems																																																																																																												
a. Central Unit	Cap: 30.0 kBtu/hr SEER: 10.00																																																																																																											
b. N/A	___																																																																																																											
c. N/A	___																																																																																																											
13. Heating systems																																																																																																												
a. Electric Heat Pump	Cap: 28.0 kBtu/hr HSPF: 7.00																																																																																																											
b. N/A	___																																																																																																											
c. N/A	___																																																																																																											
14. Hot water systems																																																																																																												
a. Electric Resistance	Cap: 40.0 gallons EF: 0.88																																																																																																											
b. N/A	___																																																																																																											
c. Conservation credits (HR-Heat recovery, Solar DHP-Dedicated heat pump)	___																																																																																																											
15. HVAC credits (CF-Ceiling fan, CV-Cross ventilation, HF-Whole house fan, PT-Programmable Thermostat, MZ-C-Multizone cooling, MZ-H-Multizone heating)	___																																																																																																											

Glass/Floor Area: 0.13	Total as-built points: 23378 Total base points: 24709	PASS
------------------------	--	------

I hereby certify that the plans and specifications covered by this calculation are in compliance with the Florida Energy Code.

PREPARED BY: SUNCOAST INSULATORS


DATE: 6/7/5

I hereby certify that this building, as designed, is in compliance with the Florida Energy Code.

OWNER/AGENT: _____

DATE: _____

Review of the plans and specifications covered by this calculation indicates compliance with the Florida Energy Code. Before construction is completed this building will be inspected for compliance with Section 553.908 Florida Statutes.



BUILDING OFFICIAL: _____

DATE: _____

FORM 600A-2001

WINTER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,	PERMIT #:
----------------	-----------

BASE	AS-BUILT																																												
GLASS TYPES .18 X Conditioned X BWPM = Points Floor Area	Overhang Ornt Len Hgt Area X WPM X WOF = Point																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">.18</td> <td style="width: 15%;">1426.6</td> <td style="width: 15%;">12.74</td> <td style="width: 15%;">3289.0</td> </tr> </table>	.18	1426.6	12.74	3289.0	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>Type/SC</th> <th>Ornt</th> <th>Len</th> <th>Hgt</th> <th>Area</th> <th>X WPM</th> <th>X WOF</th> <th>= Point</th> </tr> <tr> <td>Double, Clear</td> <td>W</td> <td>2.0</td> <td>6.0</td> <td>82.0</td> <td>20.73</td> <td>1.04</td> <td>1772.3</td> </tr> <tr> <td>Double, Clear</td> <td>E</td> <td>2.0</td> <td>6.0</td> <td>89.0</td> <td>18.79</td> <td>1.06</td> <td>1773.8</td> </tr> <tr> <td>Double, Clear</td> <td>N</td> <td>2.0</td> <td>6.0</td> <td>20.0</td> <td>24.58</td> <td>1.00</td> <td>493.9</td> </tr> <tr> <td colspan="4">As-Built Total:</td> <td>191.0</td> <td></td> <td></td> <td>4040.0</td> </tr> </table>	Type/SC	Ornt	Len	Hgt	Area	X WPM	X WOF	= Point	Double, Clear	W	2.0	6.0	82.0	20.73	1.04	1772.3	Double, Clear	E	2.0	6.0	89.0	18.79	1.06	1773.8	Double, Clear	N	2.0	6.0	20.0	24.58	1.00	493.9	As-Built Total:				191.0			4040.0
.18	1426.6	12.74	3289.0																																										
Type/SC	Ornt	Len	Hgt	Area	X WPM	X WOF	= Point																																						
Double, Clear	W	2.0	6.0	82.0	20.73	1.04	1772.3																																						
Double, Clear	E	2.0	6.0	89.0	18.79	1.06	1773.8																																						
Double, Clear	N	2.0	6.0	20.0	24.58	1.00	493.9																																						
As-Built Total:				191.0			4040.0																																						
WALL TYPES Area X BWPM = Points	Type R-Value Area X WPM = Points																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Adjacent Exterior</td> <td style="width: 15%;">0.0</td> <td style="width: 15%;">0.00</td> <td style="width: 15%;">0.0</td> </tr> <tr> <td></td> <td>1728.0</td> <td>3.70</td> <td>6393.6</td> </tr> <tr> <td colspan="2">Base Total:</td> <td>1728.0</td> <td>6393.6</td> </tr> </table>	Adjacent Exterior	0.0	0.00	0.0		1728.0	3.70	6393.6	Base Total:		1728.0	6393.6	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Frame, Wood, Exterior</td> <td style="width: 15%;">13.0</td> <td style="width: 15%;">1728.0</td> <td style="width: 15%;">3.40</td> <td style="width: 15%;">5875.2</td> </tr> <tr> <td colspan="2">As-Built Total:</td> <td>1728.0</td> <td></td> <td>6875.2</td> </tr> </table>	Frame, Wood, Exterior	13.0	1728.0	3.40	5875.2	As-Built Total:		1728.0		6875.2																						
Adjacent Exterior	0.0	0.00	0.0																																										
	1728.0	3.70	6393.6																																										
Base Total:		1728.0	6393.6																																										
Frame, Wood, Exterior	13.0	1728.0	3.40	5875.2																																									
As-Built Total:		1728.0		6875.2																																									
DOOR TYPES Area X BWPM = Points	Type Area X WPM = Points																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Adjacent Exterior</td> <td style="width: 15%;">0.0</td> <td style="width: 15%;">0.00</td> <td style="width: 15%;">0.0</td> </tr> <tr> <td></td> <td>58.0</td> <td>12.30</td> <td>713.4</td> </tr> <tr> <td colspan="2">Base Total:</td> <td>58.0</td> <td>713.4</td> </tr> </table>	Adjacent Exterior	0.0	0.00	0.0		58.0	12.30	713.4	Base Total:		58.0	713.4	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Exterior Insulated</td> <td style="width: 15%;">58.0</td> <td style="width: 15%;">8.40</td> <td style="width: 15%;">487.2</td> </tr> <tr> <td colspan="2">As-Built Total:</td> <td>58.0</td> <td>487.2</td> </tr> </table>	Exterior Insulated	58.0	8.40	487.2	As-Built Total:		58.0	487.2																								
Adjacent Exterior	0.0	0.00	0.0																																										
	58.0	12.30	713.4																																										
Base Total:		58.0	713.4																																										
Exterior Insulated	58.0	8.40	487.2																																										
As-Built Total:		58.0	487.2																																										
CEILING TYPES Area X BWPM = Points	Type R-Value Area X WPM X WCM = Points																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Under Attic</td> <td style="width: 15%;">1425.5</td> <td style="width: 15%;">2.05</td> <td style="width: 15%;">2922.3</td> </tr> <tr> <td colspan="2">Base Total:</td> <td>1425.5</td> <td>2922.3</td> </tr> </table>	Under Attic	1425.5	2.05	2922.3	Base Total:		1425.5	2922.3	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Under Attic</td> <td style="width: 15%;">30.0</td> <td style="width: 15%;">1425.5</td> <td style="width: 15%;">2.05 X 1.00</td> <td style="width: 15%;">2922.3</td> </tr> <tr> <td colspan="2">As-Built Total:</td> <td>1425.5</td> <td></td> <td>2922.3</td> </tr> </table>	Under Attic	30.0	1425.5	2.05 X 1.00	2922.3	As-Built Total:		1425.5		2922.3																										
Under Attic	1425.5	2.05	2922.3																																										
Base Total:		1425.5	2922.3																																										
Under Attic	30.0	1425.5	2.05 X 1.00	2922.3																																									
As-Built Total:		1425.5		2922.3																																									
FLOOR TYPES Area X BWPM = Points	Type R-Value Area X WPM = Points																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Slab Raised</td> <td style="width: 15%;">216.0(p)</td> <td style="width: 15%;">8.9</td> <td style="width: 15%;">1922.4</td> </tr> <tr> <td></td> <td>0.0</td> <td>0.00</td> <td>0.0</td> </tr> <tr> <td colspan="2">Base Total:</td> <td>1922.4</td> <td></td> </tr> </table>	Slab Raised	216.0(p)	8.9	1922.4		0.0	0.00	0.0	Base Total:		1922.4		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">Slab-On-Grade Edge Insulation</td> <td style="width: 15%;">4.0</td> <td style="width: 15%;">216.0(p)</td> <td style="width: 15%;">8.45</td> <td style="width: 15%;">1825.2</td> </tr> <tr> <td colspan="2">As-Built Total:</td> <td>216.0</td> <td></td> <td>1825.2</td> </tr> </table>	Slab-On-Grade Edge Insulation	4.0	216.0(p)	8.45	1825.2	As-Built Total:		216.0		1825.2																						
Slab Raised	216.0(p)	8.9	1922.4																																										
	0.0	0.00	0.0																																										
Base Total:		1922.4																																											
Slab-On-Grade Edge Insulation	4.0	216.0(p)	8.45	1825.2																																									
As-Built Total:		216.0		1825.2																																									
INFILTRATION Area X BWPM = Points	Area X WPM = Points																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">1425.5</td> <td style="width: 15%;">-0.59</td> <td style="width: 15%;">-841.0</td> </tr> </table>	1425.5	-0.59	-841.0	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">1425.5</td> <td style="width: 15%;">-0.59</td> <td style="width: 15%;">-841.0</td> </tr> </table>	1425.5	-0.59	-841.0																																						
1425.5	-0.59	-841.0																																											
1425.5	-0.59	-841.0																																											
Winter Base Points: 14379.6	Winter As-Built Points: 14308.9																																												
Total Winter X System = Heating Points Multiplier Points	Total X Cap X Duct X System X Credit = Heating Component Ratio Multiplier Multiplier Multiplier Points <small>(DM x DSM x AHU)</small>																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">14379.6</td> <td style="width: 15%;">0.6274</td> <td style="width: 15%;">9021.8</td> </tr> </table>	14379.6	0.6274	9021.8	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">14308.9</td> <td style="width: 15%;">1.000</td> <td style="width: 15%;">(1.069 x 1.169 x 0.93)</td> <td style="width: 15%;">0.487</td> <td style="width: 15%;">1.000</td> <td style="width: 15%;">8101.0</td> </tr> <tr> <td>14308.9</td> <td>1.000</td> <td>1.162</td> <td>0.487</td> <td>1.000</td> <td>8101.0</td> </tr> </table>	14308.9	1.000	(1.069 x 1.169 x 0.93)	0.487	1.000	8101.0	14308.9	1.000	1.162	0.487	1.000	8101.0																													
14379.6	0.6274	9021.8																																											
14308.9	1.000	(1.069 x 1.169 x 0.93)	0.487	1.000	8101.0																																								
14308.9	1.000	1.162	0.487	1.000	8101.0																																								

FORM 600A-2001

WATER HEATING & CODE COMPLIANCE STATUS

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT							
WATER HEATING											
Number of Bedrooms	X	Multiplier	= Total	Tank Volume	EF	Number of Bedrooms	X	Tank X Ratio	Multiplier X Credit	= Total Multiplier	
3		2746.00	8238.0	40.0	0.88	3		1.00	2746.00	1.00	8238.0
										As-Built Total:	8238.0

CODE COMPLIANCE STATUS

BASE				AS-BUILT					
Cooling Points	+	Heating Points	+ Hot Water Points	= Total Points	Cooling Points	+	Heating Points	+ Hot Water Points	= Total Points
7449		9022	8238	24709	7039		8101	8238	23378

PASS



FORM 600A-2001

Code Compliance Checklist

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,	PERMIT #:
----------------	-----------

6A-21 INFILTRATION REDUCTION COMPLIANCE CHECKLIST

COMPONENTS	SECTION	REQUIREMENTS FOR EACH PRACTICE	CHECK
Exterior Windows & Doors	606.1.ABC.1.1	Maximum: 3 cfm/sq. ft. window area; 5 cfm/sq. ft. door area.	
Exterior & Adjacent Walls	606.1.ABC.1.2.1	Caulk, gasket, weatherstrip or seal between windows/doors & frames, surrounding wall; foundation & wall sole or sill plate; joints between exterior wall panels at corners; utility penetrations; between wall panels & top/bottom plates; between walls and floor. EXCEPTION: Frame walls where a continuous infiltration barrier is installed that extends from, and is sealed to, the foundation to the top plate.	
Floors	606.1.ABC.1.2.2	Penetrations/openings > 1/8" sealed unless backed by truss or joint members. EXCEPTION: Frame floors where a continuous infiltration barrier is installed that is sealed to the perimeter, penetrations and seams.	
Ceilings	606.1.ABC.1.2.3	Between walls & ceilings; penetrations of ceiling plane of top floor; around shafts, chases, soffits, chimneys, cabinets sealed to continuous air barrier; gaps in gyp board & top plate; attic access. EXCEPTION: Frame ceilings where a continuous infiltration barrier is installed that is sealed at the perimeter, at penetrations and seams.	
Recessed Lighting Fixtures	606.1.ABC.1.2.4	Type IC rated with no penetrations, sealed; or Type IC or non-IC rated, installed inside a sealed box with 1/2" clearance & 3" from insulation; or Type IC rated with < 2.0 cfm from conditioned space, tested.	
Multi-story Houses	606.1.ABC.1.2.5	Air barrier on perimeter of floor cavity between floors.	
Additional Infiltration reqts	606.1.ABC.1.3	Exhaust fans vented to outdoors, dampers; combustion space heaters comply with UFPA, have combustion air.	

6A-22 OTHER PRESCRIPTIVE MEASURES (must be met or exceeded by all residences.)

COMPONENTS	SECTION	REQUIREMENTS	CHECK
Water Heaters	612.1	Comply with efficiency requirements in Table 6-12. Switch or clearly marked circuit breaker (electric) or cutoff (gas) must be provided. External or built-in heat trap required.	
Swimming Pools & Spas	612.1	Spas & heated pools must have covers (except solar heated). Non-commercial pools must have a pump timer. Gas spa & pool heaters must have a minimum thermal efficiency of 78%.	
Shower heads	612.1	Water flow must be restricted to no more than 2.5 gallons per minute at 80 PSIG.	
Air Distribution Systems	610.1	All ducts, fittings, mechanical equipment and plenum chambers shall be mechanically attached, sealed, insulated, and installed in accordance with the criteria of Section 610. Ducts in unconditioned attics: R-6 min. insulation.	
HVAC Controls	607.1	Separate readily accessible manual or automatic thermostat for each system.	
Insulation	604.1, 602.1	Ceilings-Min. R-19. Common walls-Frame R-11 or CBS R-3 both sides. Common ceiling & floors R-11.	

ENERGY PERFORMANCE LEVEL (EPL) DISPLAY CARD

ESTIMATED ENERGY PERFORMANCE SCORE* = 83.4

The higher the score, the more efficient the home.

1. New construction or existing	New	12. Cooling systems	
2. Single family or multi-family	Single family	a. Central Unit	Cap: 30.0 kBtu/hr
3. Number of units, if multi-family	1		SEER: 10.00
4. Number of Bedrooms	3	b. N/A	
5. Is this a worst case?	Yes	c. N/A	
6. Conditioned floor area (ft ²)	1425.5 ft ²		
7. Glass area & type	Single Pane Double Pane	13. Heating systems	
a. Clear - single pane	0.0 ft ² 191.0 ft ²	a. Electric Heat Pump	Cap: 28.0 kBtu/hr
b. Clear - double pane	0.0 ft ² 0.0 ft ²		HSPF: 7.00
c. Tint/other SHGC - single pane	0.0 ft ² 0.0 ft ²	b. N/A	
d. Tint/other SHGC - double pane		c. N/A	
8. Floor types		14. Hot water systems	
a. Slab-On-Grade Edge Insulation	R-4.0, 216.0(p) ft	a. Electric Resistance	Cap: 40.0 gallon
b. N/A			EF: 0.89
c. N/A		b. N/A	
9. Wall types		c. Conservation credits	
a. Frame, Wood, Exterior	R-13.0, 1728.0 ft ²	(HR-Heat recovery, Solar	
b. N/A		DHP-Dedicated heat pump)	
c. N/A		15. HVAC credits	
d. N/A		(CF-Ceiling fan, CV-Cross ventilation,	
e. N/A		HF-Whole house fan,	
10. Ceiling types		PT-Programmable Thermostat,	
a. Under Attic	R-30.0, 1425.5 ft ²	MZ-C-Multizone cooling,	
b. N/A		MZ-H-Multizone heating)	
c. N/A			
11. Ducts			
a. Sup: Unc. Ret: Unc. AH: Interior	Sup. R=6.0, 85.0 ft		
b. N/A			

I certify that this home has complied with the Florida Energy Efficiency Code For Building Construction through the above energy saving features which will be installed (or exceeded) in this home before final inspection. Otherwise, a new EPL Display Card will be completed based on installed Code compliant features.

Builder Signature: _____ Date: _____

Address of New Home: _____ City/FL Zip: _____



*NOTE: The home's estimated energy performance score is only available through the FLA/RES computer program. This is not a Building Energy Rating. If your score is 80 or greater (or 86 for a US EPA/DOE EnergyStar[®] designation), your home may qualify for energy efficiency mortgage (EEM) incentives if you obtain a Florida Energy Gauge Rating. Contact the Energy Gauge Hotline at 321/638-1492 or see the Energy Gauge web site at www.fsec.ucf.edu for information and a list of certified Raters. For information about Florida's Energy Efficiency Code For Building Construction, contact the Department of Community Affairs at 850/487-1824.

EnergyGauge[®] (Version: FLRCSB v3.30)

Columbia County Property Appraiser

DB Last Updated: 6/2/2005

2005 Proposed Values

Parcel: 26-4S-16-03181-013

Owner & Property Info

Search Result: 1 of 1

Owner's Name	MURRILL JESSE L
Site Address	
Mailing Address	ROUTE 19 BOX 1712 LAKE CITY, FL 320259492
Brief Legal	COMM 679.14 FT W OF NE COR OF SE1/4 OF NE1/4 FOR POB, RUN W 192.50 FT, S 204.83 FT, E

Use Desc. (code)	VACANT (000000)
Neighborhood	26416.01
Tax District	2
UD Codes	MKTA01
Market Area	01
Total Land Area	0.908 ACRES

Property & Assessment Values

Mkt Land Value	cnt: (1)	\$8,000.00
Ag Land Value	cnt: (0)	\$0.00
Building Value	cnt: (0)	\$0.00
XFOB Value	cnt: (0)	\$0.00
Total Appraised Value		\$8,000.00

Just Value	\$8,000.00
Class Value	\$0.00
Assessed Value	\$8,000.00
Exempt Value	\$0.00
Total Taxable Value	\$8,000.00

Sales History

Sale Date	Book/Page	Inst. Type	Sale Vlmp	Sale Qual	Sale RCode	Sale Price
2/6/1995	801/986	WD	V	U	02	\$0.00
10/21/1994	797/1131	WL	V	U	11	\$0.00

Building Characteristics

Bldg Item	Bldg Desc	Year Blt	Ext. Walls	Heated S.F.	Actual S.F.	Bldg Value
NONE						

Extra Features & Out Buildings

Code	Desc	Year Blt	Value	Units	Dims	Condition (% Good)
NONE						

Land Breakdown

Lnd Code	Desc	Units	Adjustments	Eff Rate	Lnd Value
000000	VAC RES (MKT)	1.000 LT - (.908AC)	1.00/1.00/1.00/1.00	\$8,000.00	\$8,000.00

Columbia County Property Appraiser

DB Last Updated: 6/2/2005

1 of 1

MEMBER OF
The
North Central
Florida Water
Well

Clyatt Well Drilling, Inc.
(Established in 1971)
POST OFFICE BOX 180
WORTHINGTON SPRINGS, FLORIDA 32697

K. Melaine
"Red" Clyatt

Telephone Number (386)496-2488
FAX Number (386)496-4640

June 18, 2002

Columbia County Building Department
Post Office Box 1529
Lake City, Florida 32056

To Whom It May Concern:

As required by building code regulations for Columbia County in order that a building permit can be issued, the following well information is provided with regard to the above-referenced well:

Size of Pump Motor:	1-1/2 Horse Power
Size of Pressure Tank:	220 Gallon Equivalent
Cycle Stop Valve Used:	No

Should you require any additional information, please do not hesitate to contact us.

Respectfully,

CLYATT WELL DRILLING, INC.



K. Melaine "Red" Clyatt
President

Clyatt Well Drilling, Inc.

(Established in 1971)

**POST OFFICE BOX 180
WORTHINGTON SPRINGS, FLORIDA 32697**

Telephone Number (386)496-2488

FAX Number (386)496-4640

MEMBER OF

The

North Central

Florida Water

Well

K. Melaine

"Red" Clyatt

**PUMP AND TANK SPECIFICATIONS FOR
STANDARD 4" RESIDENTIAL WELLS**

PUMPS

**1 Horse Power Submersible Pump
20 Gallons Per Minute
Voltage: 240
Phase: (Single) 1**

**1.5 Horse Power Submersible Pump
25 Gallons Per Minute
Voltage: 240
Phase: (Single) 1**

TANK

**WF-255 Captive Air Tank
Capacity 81 Gallons
Equivalent 220 Gallons
Draw Down 25 Gallons**

COLUMBIA COUNTY BUILDING DEPARTMENT

**RESIDENTIAL MINIMUM PLAN REQUIREMENTS AND CHECKLIST
 FLORIDA BUILDING CODE 2001
 ONE (1) AND TWO (2) FAMILY DWELLINGS
ALL REQUIREMENTS ARE SUBJECT TO CHANGE
 EFFECTIVE MARCH 1, 2002**

ALL BUILDING PLANS MUST INDICATE THE FOLLOWING ITEMS AND INDICATE COMPLIANCE WITH CHAPTER 1606 OF THE FLORIDA BUILDING CODE 2001 BY PROVIDING CALCULATIONS AND DETAILS THAT HAVE THE SEAL AND SIGNATURE OF A CERTIFIED ARCHITECT OR ENGINEER REGISTERED IN THE STATE OF FLORIDA, OR ALTERNATE METHODOLOGIES, APPROVED BY THE STATE OF FLORIDA BUILDING COMMISSION FOR ONE-AND-TWO FAMILY DWELLINGS. FOR DESIGN PURPOSES THE FOLLOWING BASIC WIND SPEED AS PER FIGURE 1606 SHALL BE USED.


WIND SPEED LINE SHALL BE DEFINED AS FOLLOWS: THE CENTERLINE OF INTERSTATE 75.

1. ALL BUILDINGS CONSTRUCTED EAST OF SAID LINE SHALL BE ----- 100 MPH
2. ALL BUILDINGS CONSTRUCTED WEST OF SAID LINE SHALL BE -----110 MPH
3. NO AREA IN COLUMBIA COUNTY IS IN A WIND BORNE DEBRIS REGION

APPLICANT – PLEASE CHECK ALL APPLICABLE BOXES BEFORE SUBMITTAL

GENERAL REQUIREMENTS: Two (2) complete sets of plans containing the following:

<u>Applicant</u>	<u>Plans Examiner</u>	
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	All drawings must be clear, concise and drawn to scale ("Optional " details that are not used shall be marked void or crossed off). Square footage of different areas shall be shown on plans.
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Designers name and signature on document (FBC 104.2.1). If licensed architect or engineer, official seal shall be affixed.
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>Site Plan including:</u> a) Dimensions of lot b) Dimensions of building set backs c) Location of all other buildings on lot, well and septic tank if applicable, and all utility easements. d) Provide a full legal description of property.
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>Wind-load Engineering Summary, calculations and any details required</u> a) Plans or specifications must state compliance with FBC Section 1606 b) The following information must be shown as per section 1606.1.7 FBC a. Basic wind speed (MPH) b. Wind importance factor (I) and building category c. Wind exposure – if more than one wind exposure is used, the wind exposure and applicable wind direction shall be indicated d. The applicable internal pressure coefficient e. Components and Cladding. The design wind pressure in terms of psf (kN/m ²), to be used for the design of exterior component and cladding materials not specifiably designed by the registered design professional
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<u>Elevations including:</u> a) All sides b) Roof pitch c) Overhang dimensions and detail with attic ventilation d) Location, size and height above roof of chimneys e) Location and size of skylights f) Building height e) Number of stories

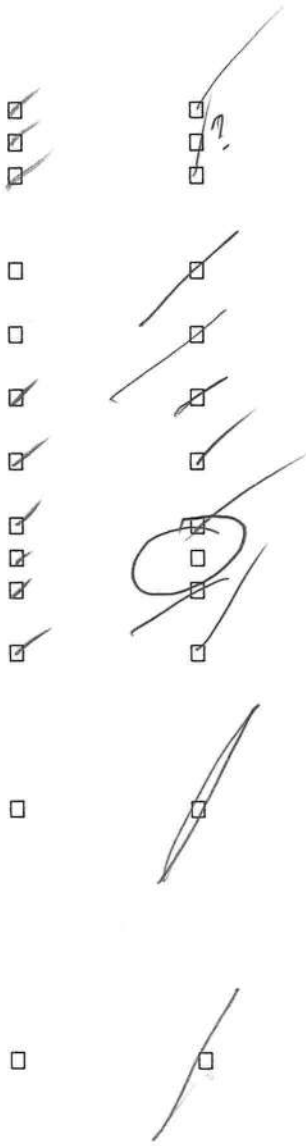

Floor Plan including:

- a) Rooms labeled and dimensioned
- b) Shear walls
- c) Windows and doors (including garage doors) showing size, mfg., approval listing and attachment specs. (FBC 1707) and safety glazing where needed (egress windows in bedrooms to be shown)
- d) Fireplaces (gas appliance) (vented or non-vented) or wood burning with hearth
- e) Stairs with dimensions (width, tread and riser) and details of guardrails and handrails
- f) Must show and identify accessibility requirements (accessible bathroom)

Foundation Plan including:

- a) Location of all load-bearing wall with required footings indicated as standard Or monolithic and dimensions and reinforcing
- b) All posts and/or column footing including size and reinforcing
- c) Any special support required by soil analysis such as piling - 1500/1000
- d) Location of any vertical steel

Roof System:

- a) Truss package including:
 1. Truss layout and truss details signed and sealed by Fl. Pro. Eng.
 2. Roof assembly (FBC 104.2.1 Roofing system, materials, manufacturer, fastening requirements and product evaluation with wind resistance rating)
- b) Conventional Framing Layout including:
 1. Rafter size, species and spacing
 2. Attachment to wall and uplift
 3. Ridge beam sized and valley framing and support details
 4. Roof assembly (FBC 104.2.1 Roofing systems, materials, manufacturer, fastening requirements and product evaluation with wind resistance rating)

Wall Sections including:

- a) Masonry wall
 1. All materials making up wall
 2. Block size and mortar type with size and spacing of reinforcement
 3. Lintel, tie-beam sizes and reinforcement
 4. Gable ends with rake beams showing reinforcement or gable truss and wall bracing details
 5. All required connectors with uplift rating and required number and size of fasteners for continuous tie from roof to foundation
 6. Roof assembly shown here or on roof system detail (FBC 104.2.1 Roofing system, materials, manufacturer, fastening requirements and product evaluation with resistance rating)
 7. Fire resistant construction (if required)
 8. Fireproofing requirements
 9. Shoe type of termite treatment (termiticide or alternative method)
 10. Slab on grade
 - a. Vapor retarder (6mil. Polyethylene with joints lapped 6 inches and sealed)
 - b. Must show control joints, synthetic fiber reinforcement or Welded fire fabric reinforcement and supports
 11. Indicate where pressure treated wood will be placed
 12. Provide insulation R value for the following:
 - a. Attic space
 - b. Exterior wall cavity
 - c. Crawl space (if applicable)

-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-

- b) Wood frame wall
1. All materials making up wall
 2. Size and species of studs
 3. Sheathing size, type and nailing schedule
 4. Headers sized
 5. Gable end showing balloon framing detail or gable truss and wall hinge bracing detail
 6. All required fasteners for continuous tie from roof to foundation (truss anchors, straps, anchor bolts and washers)
 7. Roof assembly shown here or on roof system detail (FBC104.2.1 Roofing system, materials, manufacturer, fastening requirements and product evaluation with wind resistance rating)
 8. Fire resistant construction (if applicable)
 9. Fireproofing requirements
 10. Show type of termite treatment (termiticide or alternative method)
 11. Slab on grade
 - a. Vapor retarder (6Mil. Polyethylene with joints lapped 6 inches and sealed)
 - b. Must show control joints, synthetic fiber reinforcement or welded wire fabric reinforcement and supports
 12. Indicate where pressure treated wood will be placed
 13. Provide insulation R value for the following:
 - a. Attic space
 - b. Exterior wall cavity
 - c. Crawl space (if applicable)

c) Metal frame wall and roof (designed, signed and sealed by Florida Prof. Engineer or Architect)

Floor Framing System:

- a) Floor truss package including layout and details, signed and sealed by Florida Registered Professional Engineer
- b) Floor joist size and spacing
- c) Girder size and spacing
- d) Attachment of joist to girder
- e) Wind load requirements where applicable

Plumbing Fixture layout

Electrical layout including:

- a) Switches, outlets/receptacles, lighting and all required GFCI outlets identified
- b) Ceiling fans
- c) Smoke detectors
- d) Service panel and sub-panel size and location(s)
- e) Meter location with type of service entrance (overhead or underground)
- f) Appliances and HVAC equipment
- g) Arc Fault Circuits (AFCI) in bedrooms

*NO AMP
NO LOCATION*

HVAC information

- a) Manual J sizing equipment or equivalent computation
- b) Exhaust fans in bathroom

Energy Calculations (dimensions shall match plans)

Gas System Type (LP or Natural) Location and BTU demand of equipment

Disclosure Statement for Owner Builders

Notice Of Commencement


Private Potable Water

- a) Size of pump motor
- b) Size of pressure tank
- c) Cycle stop valve if used

THE FOLLOWING ITEMS MUST BE SUBMITTED WITH BUILDING PLANS

1. **Building Permit Application:** A current Building Permit Application form is to be completed and submitted for all residential projects.
2. **Parcel Number:** The parcel number (Tax ID number) from the Property Appraiser (386) 758-1084 is required. A copy of property deed is also requested.
3. **Environmental Health Permit or Sewer Tap Approval:** A copy of the Environmental Health permit, existing septic approval or sewer tap approval is required before a building permit can be issued. (386) 758-1058 (**Toilet facilities shall be provided for construction workers**)
4. **City Approval:** If the project is to be located within the city limits of the Town of Fort White, prior approval is required. The Town of Fort White approval letter is required to be submitted by the owner or contractor to this office when applying for a Building Permit.
5. **Flood Information:** All projects within the Floodway of the Suwannee or Santa Fe Rivers shall require permitting through the Suwannee River Water Management District, before submitting application to this office. Any project located within a flood zone where the base flood elevation (100 year flood) has been established shall meet the requirements of Section 8.8 of the Columbia County Land Development Regulations. Any project located within a flood zone where the base flood elevation has not been established (Zone A) shall meet the requirements of Section 8.7 of the Columbia County Land Development Regulations. **CERTIFIED FINISHED FLOOR ELEVATIONS WILL BE REQUIRED ON ANY PROJECT WHERE THE BASE FLOOD ELEVATION (100 YEAR FLOOD) HAS BEEN ESTABLISHED.**
A development permit will also be required. Development permit cost is \$10.00
6. **Driveway Connection:** If the property does not have an existing access to a public road, then an application for a culvert permit (\$5.00) must be made. If the applicant feels that a culvert is not needed, they may apply for a culvert waiver (\$25.00). All culvert waivers are sent to the Columbia County Public Works Department for approval or denial.
7. **911 Address:** If the project is located in an area where the 911 address has been issued, then the proper paperwork from the 911 Addressing Department must be submitted. (386) 758-8787

ALL REQUIRED INFORMATION IS TO BE SUBMITTED FOR REVIEW. YOU WILL BE NOTIFIED WHEN YOUR APPLICATION AND PLANS ARE APPROVED AND READY TO PERMIT. PLEASE DO NOT EXPECT OR REQUEST THAT PERMIT APPLICATIONS BE REVIEWED OR APPROVED WHILE YOU ARE HERE – TIME WILL NOT ALLOW THIS –PLEASE DO NOT ASK

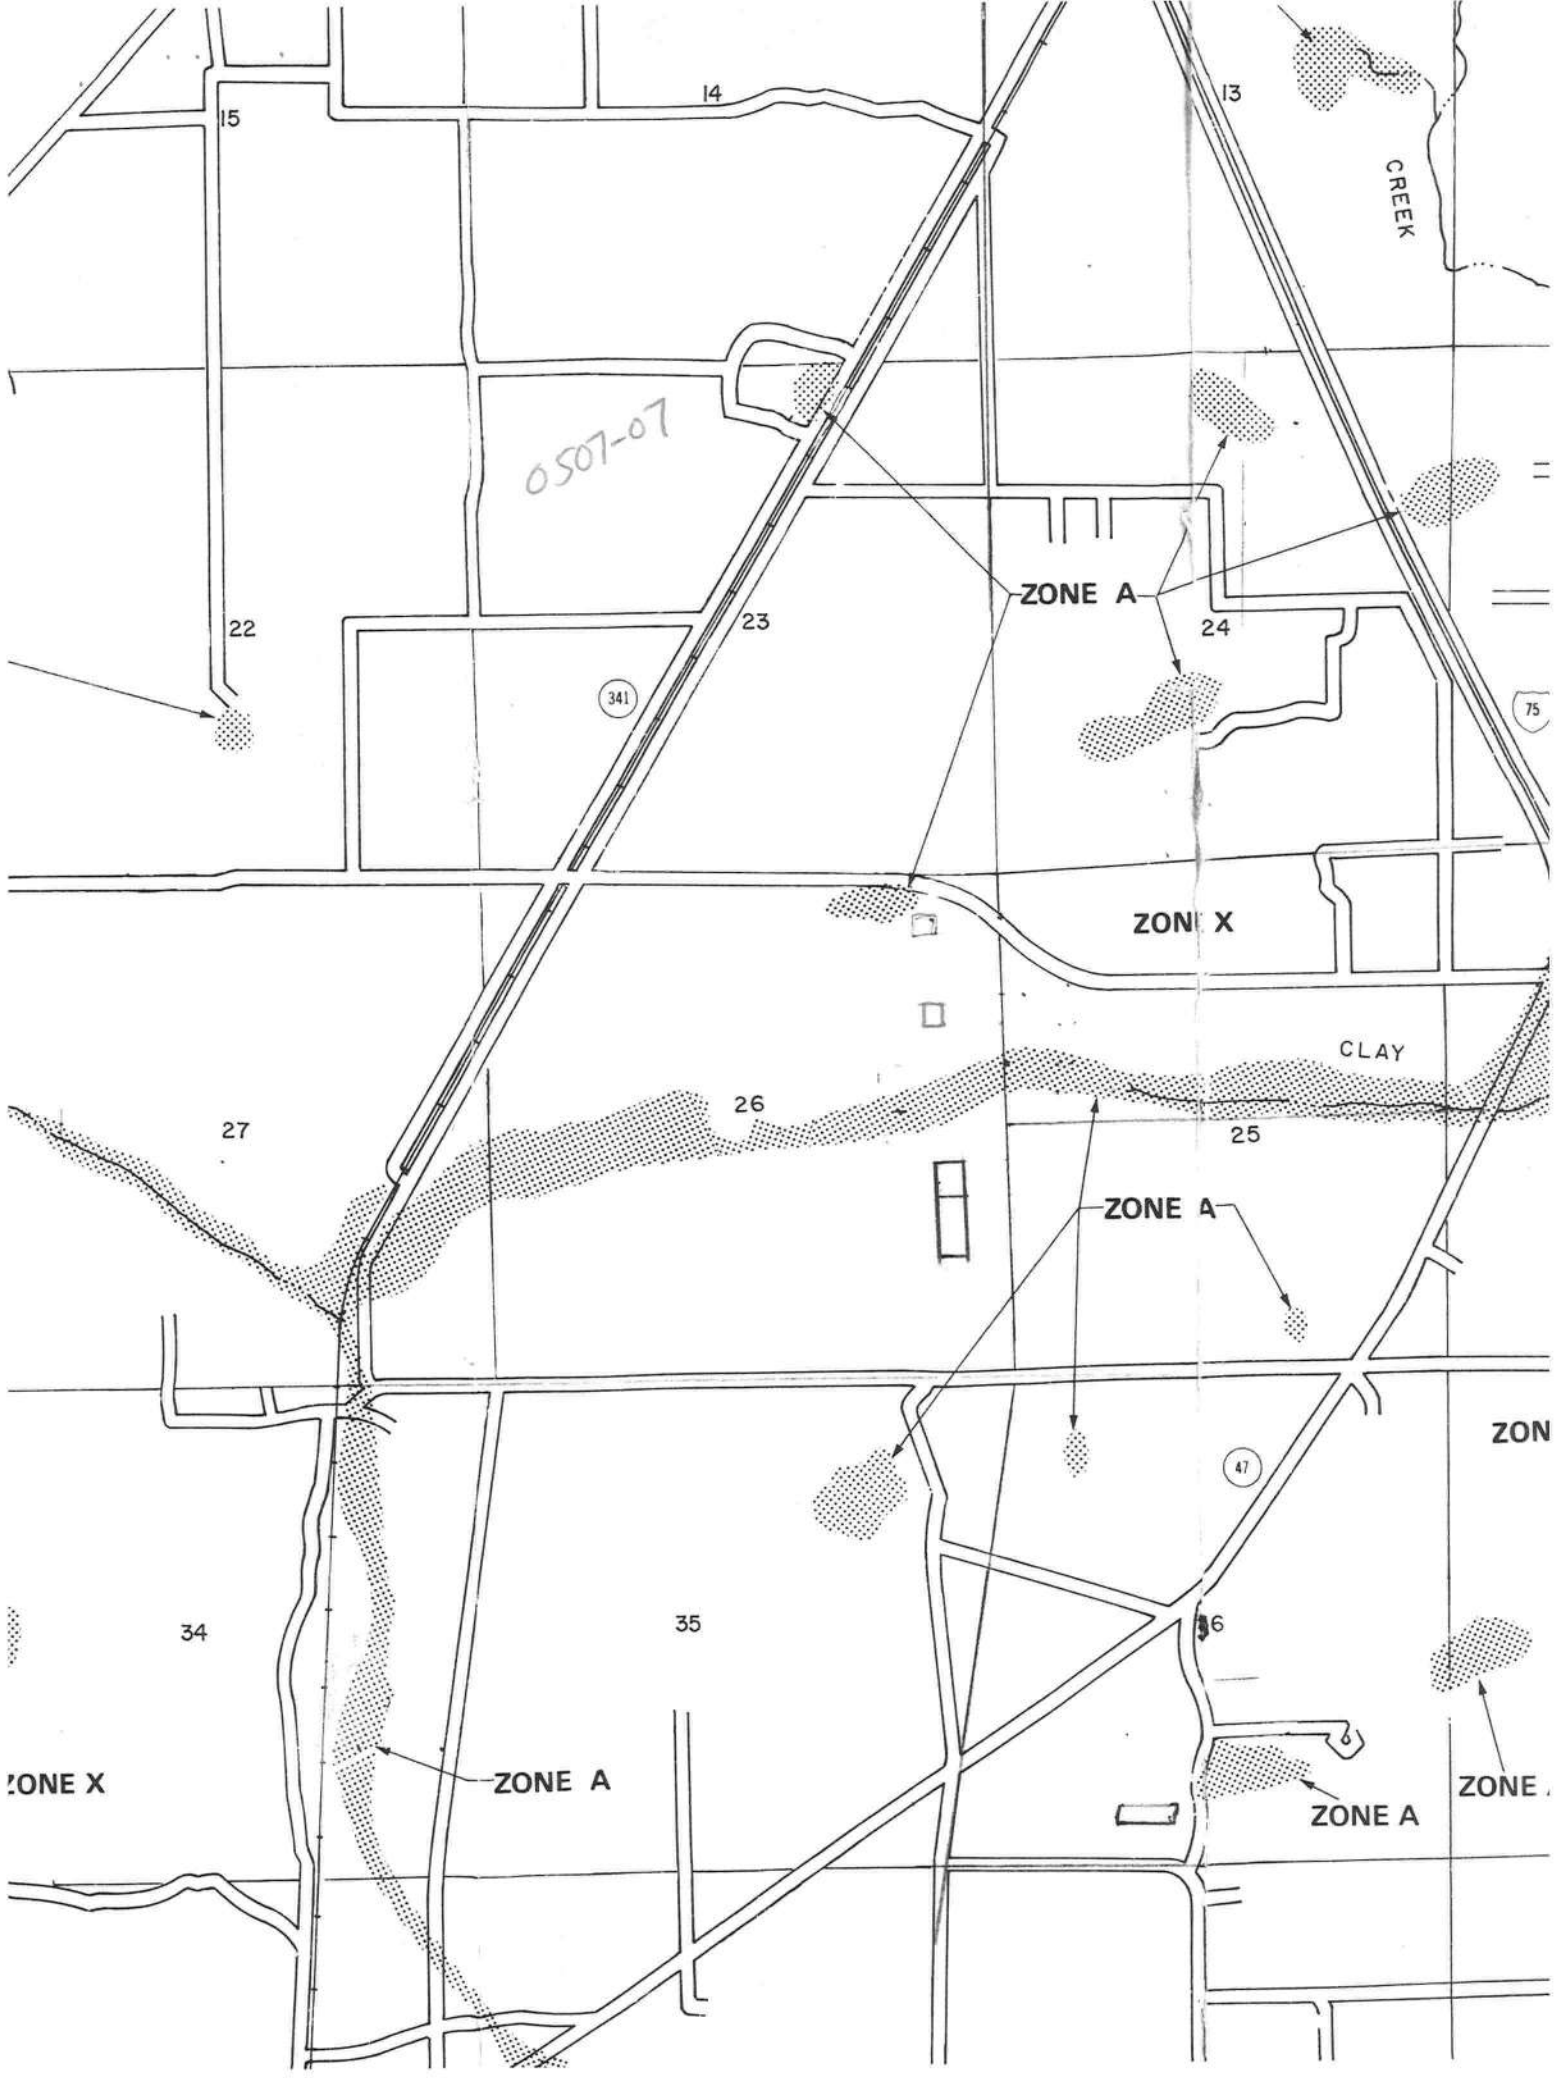

This Instrument Prepared by & return to:
Name: **JOYCE KIRPACH, an employee of**
TITLE OFFICES, LLC
Address: **1089 SW MAIN BLVD.**
LAKE CITY, FLORIDA 32025
File No. 05X-04157JK

Inst:2005013764 Date:06/13/2005 Time:10:19
Doc Stamp-Deed : 90.70
JK DC, F. DeWitt Cason, Columbia County B:1048 P:1859

Parcel I.D. #: 03182-013

SPACE ABOVE THIS LINE FOR PROCESSING DATA

SPACE ABOVE THIS LINE FOR RECORDING DATA

THIS WARRANTY DEED Made the 3rd day of June, A.D. 2005, by

JESSE L. MURRILL, married hereinafter called the grantor, to

ROBERT J. ROSSIGNOL, married

whose post office address is **648 SW AMBERWOOD LOOP 107, LAKE CITY, FL 32025**, hereinafter called the grantee:

(Whoever used herein in terms "grantor" and "grantee" include all the parties to this instrument, singular and plural, the heirs, legal representatives and assigns of individuals, and the successors and assigns of corporations, wherever the context so admits or requires.)

Witnesseth: That the grantor, for and in consideration of the sum of \$10.00 and other valuable consideration, receipt whereof is hereby acknowledged, does hereby grant, bargain, sell, alien, remise, release, convey and confirm unto the grantee all that certain land situate in **Columbia County, State of FLORIDA**, viz:

TOWNSHIP 4 SOUTH - RANGE 16 EAST

SECTION 26: COMMENCE AT THE SOUTHEAST CORNER OF THE NORTHEAST QUARTER OF THE NORTHEAST QUARTER (NE 1/4 OF NE 1/4), SECTION 26, TOWNSHIP 4 SOUTH, RANGE 16 EAST. AND RUN THENCE S 89°40'52" W, ALONG THE SOUTH LINE OF THE NORTHEAST QUARTER OF THE NORTHEAST QUARTER (NE 1/4 OF NE 1/4), SECTION 26, 679.14 FEET TO THE POINT OF BEGINNING; CONTINUE THENCE S 89°40'52" W, ALONG SAID SOUTH LINE 192.50 FEET; RUN THENCE S 2°00'58" E, 204.83 FEET; THENCE N 89°36'52" E, 192.31 FEET; THENCE N 01°58'08" W, 204.57 FEET TO THE POINT OF BEGINNING.

THE ABOVE DESCRIBED PROPERTY IS NOT THE HOMESTEAD PROPERTY TO GRANTOR.

DANIEL W MURRILL and BETTY JO MURRILL, his wife, were married continuously and without interruption by divorce from 4/29/1975 up to and including the date of her death.

Together with all the tenements, hereditaments and appurtenances thereto belonging or in anywise appertaining.

To Have and to Hold the same in fee simple forever.

And the grantor hereby covenants with said grantee that he is lawfully seized of said land in fee simple; that he has good right and lawful authority to sell and convey said land, and hereby fully warrants the title to said land and will defend the same against the lawful claims of all persons whomsoever, and that said land is free of all encumbrances, except taxes accruing subsequent to December 31, 2004

In Witness Whereof, the said grantor has signed and sealed these presents, the day and year first above written

Signed, sealed and delivered in the presence of:

[Handwritten Signature]
Witness Signature
STAN BATTEN
Printed Name

[Handwritten Signature] L.S.
JESSE L. MURRILL
Address:
RT 19 BOX 1712, LAKE CITY, FL 32025

Roxanne Maxson
Witness Signature
Roxanne Maxson
Printed Name

STATE OF FLORIDA
COUNTY OF COLUMBIA

The foregoing instrument was acknowledged before me this 3rd day of June, 2005, by JESSE L. MURRILL, who is known to me or who has produced _____ as identification.

[Handwritten Signature]
[Handwritten Signature]
Notary Public
My commission expires _____



Martha Bryan
Commission # DD232534
Expires August 10, 2007
Notary Public - Insurance, Inc. 689485-7019

Inst:2005013764 Date:05/13/2005 Time:10:19
Doc Stamp-Due: 98.70
mk DC, P. Dewitt Cason, Columbia County B:040 P:1070

WEGGIE

**Columbia County Building Department
Culvert Waiver**

**Culvert Waiver No.
000000745**

DATE: 07/20/2005 BUILDING PERMIT NO. 23395

APPLICANT MATT CASON PHONE 752-5152

ADDRESS 1531 SW COMMERCIAL GLEN LAKE CITY FL 32025

OWNER ROBERT & MARIA ROSSIGNOL PHONE 752-5152

ADDRESS 403 SW BURNETT LANE LAKE CITY FL 32024

CONTRACTOR STANLEY CRAWFORD PHONE 752-5152

LOCATION OF PROPERTY 47S, TR ON CR 242, TL ON LAPAZ, TL ON BURNETT, 2ND LOT ON LEFT

SUBDIVISION/LOT/BLOCK/PHASE/UNIT _____

PARCEL ID # 26-4S-16-03181-013

I HEREBY CERTIFY THAT I UNDERSTAND AND WILL FULLY COMPLY WITH THE DECISION OF THE COLUMBIA COUNTY PUBLIC WORKS DEPARTMENT IN CONNECTION WITH THE HEREIN PROPOSED APPLICATION.

SIGNATURE: _____

A SEPARATE CHECK IS REQUIRED
MAKE CHECKS PAYABLE TO BCC

Amount Paid 50.00

PUBLIC WORKS DEPARTMENT USE ONLY

I HEREBY CERTIFY THAT I HAVE EXAMINED THIS APPLICATION AND DETERMINED THAT THE CULVERT WAIVER IS:

APPROVED NOT APPROVED - NEEDS A CULVERT PERMIT

COMMENTS: _____

SIGNED: [Signature] DATE: 7/20/05

ANY QUESTIONS PLEASE CONTACT THE PUBLIC WORKS DEPARTMENT AT 386-752-5955.

COLUMBIA COUNTY

135 NE Hernando Ave., Suite B-21
Lake City, FL 32055
Phone: 386-758-1008 Fax: 386-758-2160

JUL 25 2005
PUBLIC WORKS DEPT.





Cal-Tech Testing, Inc.

- Engineering
- Geotechnical
- Environmental

P.O. Box 1625 • Lake City, FL 32056 • 625 • Tel(386)755-3633 • Fax(386)752-5456
6919 Distribution Ave. S., Unit #5, Jacksonville, FL 32257 • Tel(904)262-4046 • Fax(904)4047

Permit #: 2339

JOB NO.: 05-328
DATE TESTED: 7/12/2005
DATE REPORTED: 7/18/2005

REPORT OF IN-PLACE DENSITY TEST

PROJECT:	Rossignol Residence, Lake City, Florida
CLIENT:	Stanley Crawford Construction, 1531 SW Commercial Glen, Lake City, FL 32025
GENERAL CONTRACTOR:	Stanley Crawford Construction
EARTHWORK CONTRACTOR:	Stanley Crawford Construction
INSPECTOR:	Clay Allen
ASTM METHOD (D-2922) Nuclear	SOIL USE BUILDING FILL
SPECIFICATION REQUIREMENTS: 95%	

TEST NO.	TEST LOCATION	TEST DEPTH	WET DENSITY (lb/ft ³)	MOISTURE PERCENT	DRY DENSITY (lb/ft ³)	PROCTOR TEST NO.	PROCTOR VALUE	% MAXIMUM DENSITY
1	15' NE from SW Corner of Pad	0 - 12"	115.1	6.5	108.1	1	103.6	104.3%
2	20' SE from NW Corner of Pad	0 - 12"	115.7	6.1	109.0	1	103.6	105.3%
3	Center Most Point of Pad	0 - 12"	114.8	6.8	107.5	1	103.6	103.8%

REMARKS: The Above Tests Meet Specification Requirements.

PROCTORS

TEST NO.	SOIL DESCRIPTION	MAXIMUM DRY UNIT WEIGHT (lb/ft ³)	OPT. MOIST.	TYPE
1	Tan Fine Sand	103.6	12.2	MODIFIED (ASTM D-1557)

Respectfully Submitted,
CAL-TECH TESTING, INC.

Linda M. Creamer
President - CEO

Reviewed By:

John C. Dorman, P.E., PhD
Florida Registration No.: 52612

Date: 7/18/05

The test results presented in this report are specific only to the samples tested at the time of testing. The tests were performed in accordance with generally accepted methods and standards. Since material constants can vary between test locations and

"Excellence in Engineering & Geoscience"

Spoke w/ Janet
ORIGINAL NEEDED



Cal-Tech Testing, Inc.

• Engineering

P.O. Box 1625 - Lake City, FL 32056-1625 - Tel(386)755-3632 - Fax(386)752-5456

• Geotechnical

6919 Distribution Ave. B., Unit #6, Jacksonville, FL 32257 Tel(904)262-4040 - Fax:904)4047

• Environmental


REPORT OF LABORATORY COMPACTION TEST

Permit #: 23395

Client:
Project Name:
Project Location:
Contractor:

Stanley Crawford Construction, 1531 SW Commercial Glen, Lake City, FL 32025
Rossignol Residence, Lake City, Florida
Lake City, Florida
Stanley Crawford Construction

File No: 05-328
Date: 7/12/2005
Lab No: 7682

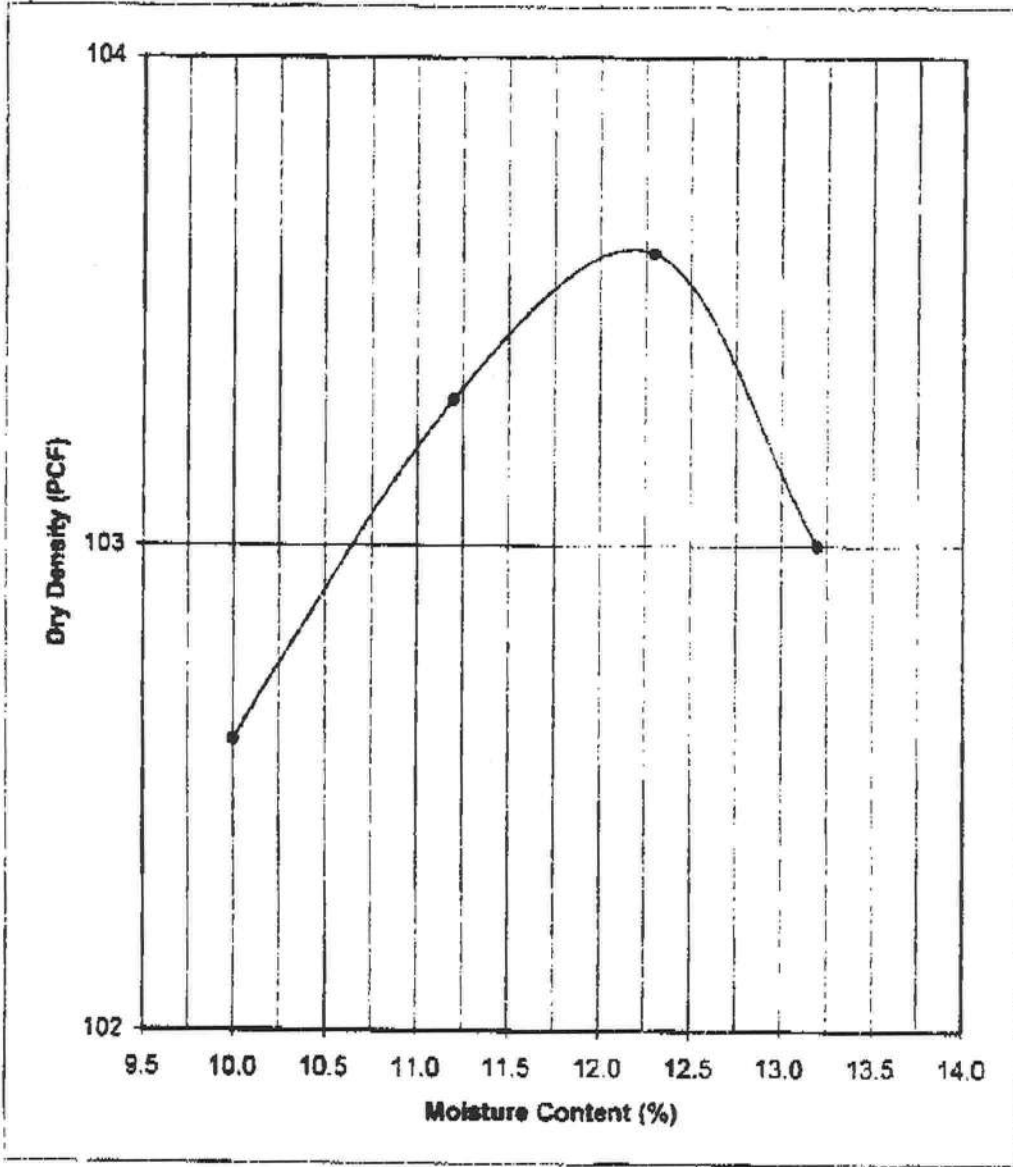

PROCTOR DATA

Proctor No.: 1

Modified Proctor
(ASTM D-1557)

Standard Proctor
(ASTM D-698)

Maximum Dry
Dens. Pcf 103.6

Optimum Moisture
Percent 12.2

The test results presented in this report are specific only to the samples tested at the time of testing. The tests were performed in accordance with generally accepted methods and standards. Since material conditions can vary between test locations and change with time, sound judgement should be exercised with regard to the use and interpretation of the data.

Sample Description: 7 in Fine Sand
 Sample Location: Site
 Proposed Use: Building Fill
 Sampled By: Clay Allen Date: 7/12/2005
 Tested By: William McCollum Date: 7/15/2005
 Remarks: 1cc: Client
1cc: File

Linda Creamer
 Linda M. Creamer
 President - CEO
 Reviewed By: *[Signature]*
 Date: 7/15/05
 FL Registration No: 52612

CHERRYBROOK CALVERT OPEN

OCCUPANCY

COLUMBIA COUNTY, FLORIDA

Department of Building and Zoning Inspection

This Certificate of Occupancy is issued to the below named permit holder for the building and premises at the below named location, and certifies that the work has been completed in accordance with the Columbia County Building Code.

Parcel Number 26-4S-16-03181-013

Building permit No. 000023395

Use Classification SFD, UTILITY

Fire: 59.20

Permit Holder STANLEY CRAWFORD


Waste: 122.50

Owner of Building ROBERT & MARIA ROSSIGNOL

Total: 181.70

Location: 403 SW BURNETT LANE, LAKE CITY, FL

Date: 12/01/2005

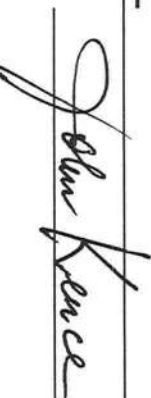

Building Inspector



POST IN A CONSPICUOUS PLACE
(Business Places Only)

Notice of Treatment 11545

Applicator: Florida Pest Control & Chemical Co. (www.flapest.com)

Address: 3449 Ave. C Phone 252-1703

City: Greenville

Site Location: Subdivision _____

Lot # _____ Block # _____ Permit # 23395

Address 403 SW Barnett Ln

Product used Active Ingredient % Concentration
 Dursban TC Chlorpyrifos 0.5%

Terimidor Fipronil 0.06%

Bora-Care Disodium Oclaborate Tetrahydrate 23.0%

Type treatment: Soil Wood

Area Treated	Square feet	Linear feet	Gallons Applied
<u>Building</u>	<u>1609</u>	<u>554</u>	<u>4</u>
_____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____

As per Florida Building Code 104.2.6 – If soil chemical barrier method for termite prevention is used, final exterior treatment shall be completed prior to final building approval.

If this notice is for the final exterior treatment, initial this line _____.

Date 9-6-05 Time 1445 Print Technician's Name ES54

Remarks: _____

Kossiga

Notice of Intent for Preventative Treatment for Termites

(As required by Florida Building Code 104.2.6)

Date: 7/12/05

403 SW Burnett Lane

Lake City

(Address of Treatment or Lot/Block of Treatment)

City

Florida Pest Control & Chemical Co.

www.flapest.com

Product to be used: Bora-Care Termiticide (Wood Treatment)

Chemical to be used: 23% Disodium Octaborate Tetrahydrate

Application will be performed onto structural wood at dried-in stage of construction. Bora-Care Termiticide application shall be applied according to EPA registered directions as stated in the Florida Building Code Section 1861.1.8

(Information to be provided to local building code offices prior to concrete foundation installation.)