

**Addendum 1**  
**Ft. White Senior Center Pavilion**  
**Bid No. 2017-M**

**Questions:**


1. Does the LVL beam to wrap with plywood / T1-11
2. Are there specs for the metal roofing / lighting / ceiling fan and painting
3. Do the soffits/plywood under the truss need to be painted
4. Are there any soffit vents
5. Can you please verify the post connection from the 6x6 to the LVL on the above project.

**Answers:**

1. The LVL beams should not be wrapped but will be painted.
2. The soffit, plywood ceiling and the gable ends will be painted.
3. The colors for the paint and the metal roof will be selected at a later time. See attached informational specs.
4. There should be a continuous screen vent in the soffit except on the gable end over hangs.
5. The metal connector that should be used to connect the beam and the 6x6 post is indicated on the second page of the structural specifications provided by the engineer that are in the bid documents.

## GULFRIB™ EXPOSED FASTENER METAL ROOFING

A Gulfrib™ Metal Roofing System from GulfCoast Supply is a strong, durable, and energy efficient roofing system. *Its most common uses are residential, small commercial and agricultural buildings.* The Gulfrib™ exposed fastener metal roofing profile comes in a standard 3 ft wide metal roofing panel, making it one of our most economical roofing options.

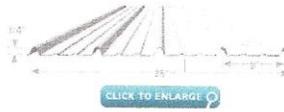

The strong rib metal roofing features vertical ribs that are trapezoidal in shape and spaced 9 inches on center with engineering that provides enough strength to exceed the stringent wind rating requirements of Miami-Dade County, one of the toughest building codes in the world. [MORE >>](#)

## SPECIFICATIONS

### GULFRIB™ EXPOSED FASTENER METAL ROOFING SPECIFICATIONS

Colors:	40 Colors, including 20 Colors of Ultra-Fade-Resistive Kynar500® & Mill Finished Gulfalume Available
Coverage:	36" Net Coverage
Material:	26 & 24 Gauge Steel <i>29 Gauge</i>
Substrate/Warranty:	AZ-50 Gulfalume / 35/30 Year Premium Paint Finish AZ-50 Gulfalume / 40/30 Year Standard Paint Finish Warranty AZ-55 Gulfalume / 25 Year Unpainted Mill Finish Warranty
Approvals:	Miami-Dade NOA: 14-0520.01, 14-0520.04 FL Product Approval No. 11651.21, 11651.22, 11651.23, 11651.24, 11651.25, 11651.26, 11651.27, 11651.28, 16646.1
Minimum Slope:	3:12 <i>*For applications on lower slopes, contact Gulf Coast Supply</i>
Substructure:	15/32" (min.) Plywood, 7/16" (min.) OSB and/or 1"x4" SYP Purlins on Plywood and/or OSB

## FLORIDA PRODUCT APPROVALS

### GULFRIB™ EXPOSED FASTENER METAL ROOFING FLORIDA PRODUCT APPROVALS

- [FL#11651.21 R2](#) (NON HVHZ Metal Roof Florida Product Approval)  
26 Ga. Gulfrib over 1x4 Wood Purlins over 15/32" Plywood
- [FL#11651.22 R2](#) (NON HVHZ Metal Roof Florida Product Approval)  
26 Ga. Gulfrib over 15/32" Plywood
- [FL#11651.23 R2](#) (HVHZ Metal Roof Florida Product Approval)  
26 Ga. Gulfrib over 15/32" Plywood
- [FL#11651.24 R2](#) (HVHZ Metal Roof Florida Product Approval)  
26 Ga. Gulfrib over 1x4 Wood Purlins over 15/32" Plywood
- [FL#11651.25 R2](#) (NON HVHZ Metal Roof Florida Product Approval)  
29 Ga. Gulfrib over 1x4 Wood Purlins over 15/32" Plywood
- [FL#11651.26 R2](#) (NON HVHZ Metal Roof Florida Product Approval)  
29 Ga. Gulfrib over 15/32" Plywood
- [FL#11651.27 R2](#) (NON HVHZ Metal Roof Florida Product Approval)  
29 Ga. Gulfrib over 1x4 Wood Purlins over 7/16" O.S.B.
- [FL#11651.28 R2](#) (NON HVHZ Metal Roof Florida Product Approval)  
29 Ga. Gulfrib over 7/16" O.S.B.
- [FL#16646.1 R1](#) (NON HVHZ Metal Roof Florida Product Approval)  
29 Ga. Gulfrib™ Roof Panel Installed over 15/32" Plywood
- [NOA#14-0520.01](#) (Miami Dade Notice of Acceptance)  
26 Ga. Gulfrib over min. 15/32" Plywood
- [NOA#14-0520.04](#) (Miami Dade Notice of Acceptance)  
26 Ga. Gulfrib over 1x4 Wood Purlins over min. 15/32" Plywood

Like Share 11 people like this. Sign Up to see what your friends like.

D63AT13

Call 866-344-3875

 Live Chat

Login

 My Lists



### Energy Information at High Speed

Airflow  
**5,443**  
Cubic Feet  
Per Minute

Electricity Use  
**65**  
Watts  
(excludes lights)

Airflow Efficiency  
**84**  
Cubic Feet Per  
Minute Per Watt

### Brand Information

- Brand: Quorum
- Collection: Estate Patio
- SKU: 143525-6
- UPC: 190808050069

### Dimensions and Weight

- Backplate/Canopy Width: 0.00 in.

### Other Specifications


- Ships Via: UPS ( FREE SHIPPING )
- System: 5 Blades Included
- Included Lead Wire: 80.00
- Warranty: Limited Lifetime

### Design Information

- Category: Outdoor F
- Finish: White
- Glass: none

### Fan Information

- Light Kit Included: No
- Fan Blade Finish: White
- Fan Blade Pitch: 14.00
- Fan Blade Span: 52.0000
- Number of Blades: 5
- Additional Fan Details:
  - AMPS .57/.39/.21
  - RPM 168/112/65
  - Motor Size 153x15
  - Motor Poles 140
  - Motor Pull Switch Type Hi/Med/Low/Off
  - Motor Reverse Switch Type Slide
  - Downrod Length 1 4
  - Downrod Length 2 6
  - Overall Fan Height 14.25
  - Ceiling to Lower Edge of Blade 11.5
  - Fan Housing Width 11.02
  - Fan Wattage 65/29/8

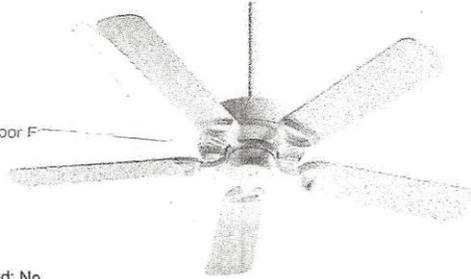

### Product Rating

- Safety Rating: Wet

### Quorum's Catalogs

Click on the catalog to view the PDF in your browser or right-click and hit "Save As" to save the PDF to your computer.

Have a question about this product? Ask us!

Live Chat

Submit a Question



## FEATURES & SPECIFICATIONS

### INTENDED USE

For applications that require the clean appearance of a flat-bottom diffuser. Provides high light levels for storage rooms, offices or retail applications. **Certain airborne contaminants can diminish integrity of acrylic.** [Click here for Acrylic Environmental Compatibility table for suitable uses.](#)

### CONSTRUCTION

Linear side prisms control brightness, pyramidal bottom prisms minimize lamp image. Diffuser hinges open from either side for easy maintenance. Full depth, white enamel end plates.

Die-formed from code-gauge cold-rolled steel. Channel cover snaps into place without the use of tools. Full end cap factory installed to reduce job site labor. Diffuser is extruded clear acrylic.

Five-stage iron-phosphate pretreatment ensures superior paint adhesion and rust resistance. Finished with high-gloss, baked white enamel.

### ELECTRICAL

Thermally protected, resetting, Class F, HFE, UL listed, CSA Certified ballast is standard. Energy saving and electronic ballasts are sound rated A.

Luminaire is suitable for damp locations. AVM, TFN or THHN wire used throughout, rated for required temperatures.

**MVOLT ballasts are full light output - reduced energy. Less than 10% THD. Multi-volt operation, 120-277V.**

### INSTALLATION

For surface or stem mounting, individual or row installation.

### LISTING

UL and C-UL Listed (standard).

### WARRANTY

2-year limited warranty. Complete warranty terms located at


[www.aculbybrands.com/CustomResources/Terms\\_and\\_conditions.aspx](http://www.aculbybrands.com/CustomResources/Terms_and_conditions.aspx)

NOTE: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.

Catalog Number	SB432 MV
Notes	
Type	

## Square-Basket Wraps

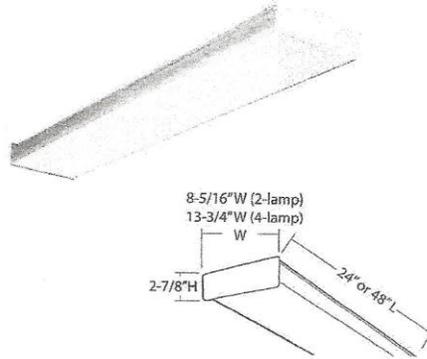


### ORDERING INFORMATION

Catalog Number	UPC	Description	# of Lamps	# of Ballasts	Wattage	Voltage	Ballast Type	ENERGY STAR Qualified	Lamp Included	Pallet Qty	Standard Carton Qty
SB232 MV	745972082633	Wraparound	2	1	32	120-277	Electronic, instant start	N	N	70	1
SB432 MV	745972083619	Wraparound	4	1	52	120-277	Electronic, instant start	N	N	42	1
SB212 MV	745972145168	Wraparound	2	1	17	120-277	Electronic, instant start	N	N	140	1

# Square-Basket Wraps

## DIMENSIONS

All dimensions are inches (millimeters). Specifications subject to change without notice.

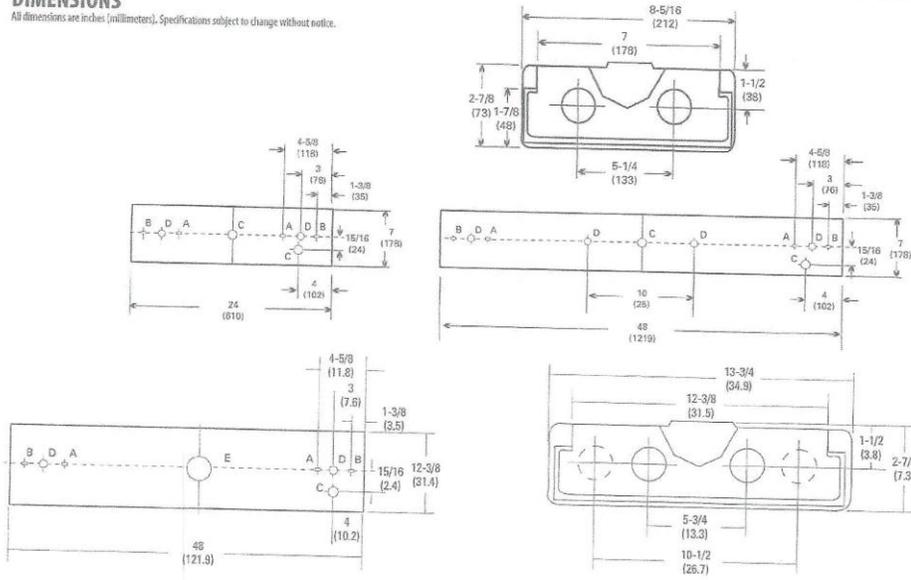

## PHOTOMETRICS

Calculated using the zonal cavity method in accordance with IESNA LM79 procedure. Floor reflectance are 20%. Lamp configurations shown are typical. All data based on 25°C. Full photometric data on these and other configurations available upon request.

### SB232 MV

Test # BAL16519 Lumens per lamp = 2950

S/MH (along) 1.23 (across) 1.38

pc	pw	Coefficients of Utilization											
		80%				50%				20%			
		50%	30%	10%	0%	50%	30%	10%	0%	50%	30%	10%	0%
0	107	107	107	97	97	97	90	90	90	84	84	84	82
1	93	90	88	86	82	79	79	77	75	74	73	71	68
2	82	76	71	75	70	66	62	58	54	59	55	52	49
3	73	65	60	66	61	56	52	48	45	53	48	45	43
4	65	57	51	59	53	48	44	41	38	47	42	39	37
5	58	50	44	53	47	42	38	35	32	41	36	33	31
6	52	44	39	48	42	37	33	30	27	36	31	28	26
7	47	40	34	44	38	33	29	26	23	32	27	24	22
8	43	36	31	40	34	29	25	22	19	28	23	20	18
9	40	32	28	37	31	27	23	20	17	26	21	18	16
10	37	30	25	34	28	24	20	17	14	24	19	16	14

### Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixture
0° - 30°	1444.3	24.5	26.6
0° - 40°	2374.5	40.2	43.7
0° - 60°	3953.3	67.0	72.8
0° - 90°	4821.6	81.7	88.8
90° - 180°	610.2	10.3	11.2
0° - 180°	5431.9	92.1	100.0

### SB432 MV

Report LTL 5659 - Lumens per lamp = 2900

S/MH (along) 1.2 (across) 1.3

### Coefficient of Utilization

Cavity	Coefficients of Utilization											
	80%				50%				20%			
Utilization	50%	30%	10%	0%	50%	30%	10%	0%	50%	30%	10%	0%
0	83	83	83	81	81	81	76	76	76	76	76	65
1	77	73	71	74	71	69	67	65	63	65	63	55
2	70	65	61	68	63	59	60	56	54	58	54	48
3	65	58	53	63	56	52	54	49	46	54	46	41
4	60	52	46	58	51	45	48	44	40	48	40	36
5	55	46	40	53	45	40	43	38	34	43	34	31
6	51	42	36	49	41	35	39	34	30	38	30	27
7	47	38	32	45	37	31	35	30	27	34	27	24
8	43	34	28	42	33	28	32	27	23	31	23	21
9	40	30	25	38	30	24	28	24	20	28	20	18
10	37	28	22	36	27	22	26	21	18	26	18	16

### Zonal Lumens Summary

Zone	Lumens	% Lamp	% Fixture
0-30	2289	19.7	27.7
0-40	3753	32.4	45.4
0-60	6182	53.3	74.7
0-90	7541	65.0	91.1
90-180	733	6.3	8.9
0-180	8275	71.3	100.0



SQUARE\_BASKET\_WRAPS



**SHERWIN  
WILLIAMS.**

109.31

## EXTERIOR OIL-BASED Wood Primer

Y24W8020 (US)  
Y24WQ8820 (Canada)

As of 03/01/2017, Complies with:			
OTC	Yes	LEED® 09 CI	No
OTC Phase II	No	LEED® 09 NC	No
SCAQMD	No	LEED® 09 CS	No
CARB	Yes	LEED® V4 Emissions	No
CARB SCM2007	No	LEED® V4 VOC	No
Canada	Yes	MPI®	Yes

DESCRIPTION	CHARACTERISTICS	SURFACE PREPARATION
<p><b>Exterior Oil-Based Wood Primer</b> is designed for blocking tannin, water, and other stains on exterior wood, manufactured siding, hardboard, rough sawn siding, and trim as a spot primer or overall primer.</p> <ul style="list-style-type: none"> <li>Penetrates and seals bare wood for strong adhesion and a long lasting finish</li> <li>Blocks stains from water, wood tannins and knots</li> <li>Resists mildew</li> </ul> <p><b>For use on these surfaces:</b></p> <ul style="list-style-type: none"> <li>Pine</li> <li>Fir</li> <li>Cedar</li> <li>Redwood</li> <li>Oak</li> <li>Maple</li> <li>Ash</li> <li>Hardboard</li> <li>Primed Metal</li> <li>Previously Painted Surfaces</li> </ul> <p><b>Mildew Resistant</b> This coating contains agents which inhibit the growth of mildew on the surface of this coating film.</p>	<p><b>Color:</b> White</p> <p><b>Coverage:</b> 350 - 400 sq ft/gal @ 4 mils wet; 2.3 mils dry</p> <p><b>Drying Time, @ 50% RH:</b> @ 35-45°F @ 45°F+ Touch: 4-8 hours 2-4 hours Recoat: 24-48 hours 24 hours Drying and recoat times are temperature, humidity and film thickness dependent.</p> <p><b>Flash Point:</b> 115°F, PMCC <b>Finish:</b> 0-18 units @ 85° <b>Vehicle Type:</b> Alkyd</p> <p><b>Y24W08020</b> <b>VOC (less exempt solvents):</b> 317 g/L; 2.64 lb/gal As per 40 CFR 59.406 and SOR/2009-264, s.12</p> <p><b>Volume Solids:</b> 59 ± 2% <b>Weight Solids:</b> 77 ± 2% <b>Weight per Gallon:</b> 11.42 lb <b>WVP Perms (US)</b> 2.7 grains/(hr ft<sup>2</sup> in Hg)</p> <p><b>Tinting</b> Requires Blend-A-Color Toner for tinting. For best color development, use the recommended "P"-shade primer. If desired, up to 4 oz per gallon of Blend-A-Color Toner can be used to approximate the topcoat color. Check color before use.</p> <p>When spot priming on some surfaces, a non-uniform appearance of the final coat may result, due to differences in holdout between primed and unprimed areas. To avoid this, prime the entire surface rather than spot priming.</p> <p>For exterior exposure, this primer must be topcoated within 14 days with architectural latex or oil finishes.</p>	<p><b>WARNING!</b> Removal of old paint by sanding, scraping or other means may generate dust or fumes that contain lead. Exposure to lead dust or fumes may cause brain damage or other adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For more information, call the National Lead Information Center at <b>1-800-424-LEAD</b> (in US) or contact your local health authority.</p> <p>Remove all surface contamination by washing with an appropriate cleaner, rinse thoroughly and allow to dry. Scrape and sand peeled or checked paint to a sound surface. Sand glossy surfaces dull. Recognize that any surface preparation short of total removal of the old coating may compromise the service length of the system.</p> <p>Seal stains from water, smoke, ink, pencil, grease, etc. with an appropriate primer sealer.</p> <p><b>Wood, Composition Board -</b> Sand any exposed wood to a fresh surface. Patch all holes and imperfections with a wood filler or putty and sand smooth. Spot prime knots and sap streaks.</p> <p>On woods that present potential tannin bleeding, such as redwood and cedar, Exterior Oil-Based Wood Primer can be used. Care must be taken to determine if tannins will be activated by the solvent in the coating. To test for bleeding, coat a 4 foot by 4 foot section with the primer. If no bleeding is evident within 4 hours, proceed with complete priming. If bleeding occurs, use Exterior Latex Wood Primer.</p>



**SHERWIN  
WILLIAMS.**

109.31

## EXTERIOR OIL-BASED Wood Primer

Y24W8020 (US)  
Y24WQ8820 (Canada)

As of 03/01/2017, Complies with:			
OTC	Yes	LEED® 09 CI	No
OTC Phase II	No	LEED® 09 NC	No
SCAQMD	No	LEED® 09 CS	No
CARB	Yes	LEED® V4 Emissions	No
CARB SCM2007	No	LEED® V4 VOC	No
Canada	Yes	MPI®	Yes

DESCRIPTION	CHARACTERISTICS	SURFACE PREPARATION
<p><b>Exterior Oil-Based Wood Primer</b> is designed for blocking tannin, water, and other stains on exterior wood, manufactured siding, hardboard, rough sawn siding, and trim as a spot primer or overall primer.</p> <ul style="list-style-type: none"> <li>Penetrates and seals bare wood for strong adhesion and a long lasting finish</li> <li>Blocks stains from water, wood tannins and knots</li> <li>Resists mildew</li> </ul> <p><b>For use on these surfaces:</b></p> <ul style="list-style-type: none"> <li>Pine</li> <li>Fir</li> <li>Cedar</li> <li>Redwood</li> <li>Oak</li> <li>Maple</li> <li>Ash</li> <li>Hardboard</li> <li>Primed Metal</li> <li>Previously Painted Surfaces</li> </ul> <p><b>Mildew Resistant</b> This coating contains agents which inhibit the growth of mildew on the surface of this coating film.</p>	<p><b>Color:</b> White</p> <p><b>Coverage:</b> 350 - 400 sq ft/gal @ 4 mils wet; 2.3 mils dry</p> <p><b>Drying Time, @ 50% RH:</b> @ 35-45°F @ 45°F+ Touch: 4-8 hours 2-4 hours Recoat: 24-48 hours 24 hours Drying and recoat times are temperature, humidity and film thickness dependent.</p> <p><b>Flash Point:</b> 115°F, PMCC <b>Finish:</b> 0-18 units @ 85° <b>Vehicle Type:</b> Alkyd</p> <p><b>Y24W08020</b> <b>VOC (less exempt solvents):</b> 317 g/L; 2.64 lb/gal As per 40 CFR 59.406 and SOR/2009-264, s.12</p> <p><b>Volume Solids:</b> 59 ± 2% <b>Weight Solids:</b> 77 ± 2% <b>Weight per Gallon:</b> 11.42 lb <b>WVP Perms (US)</b> 2.7 grains/(hr ft<sup>2</sup> in Hg)</p> <p><b>Tinting</b> Requires Blend-A-Color Toner for tinting. For best color development, use the recommended "P"-shade primer. If desired, up to 4 oz per gallon of Blend-A-Color Toner can be used to approximate the topcoat color. Check color before use.</p> <p>When spot priming on some surfaces, a non-uniform appearance of the final coat may result, due to differences in holdout between primed and unprimed areas. To avoid this, prime the entire surface rather than spot priming.</p> <p>For exterior exposure, this primer must be topcoated within 14 days with architectural latex or oil finishes.</p>	<p><b>WARNING!</b> Removal of old paint by sanding, scraping or other means may generate dust or fumes that contain lead. Exposure to lead dust or fumes may cause brain damage or other adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For more information, call the National Lead Information Center at <b>1-800-424-LEAD</b> (in US) or contact your local health authority.</p> <p>Remove all surface contamination by washing with an appropriate cleaner, rinse thoroughly and allow to dry. Scrape and sand peeled or checked paint to a sound surface. Sand glossy surfaces dull. Recognize that any surface preparation short of total removal of the old coating may compromise the service length of the system.</p> <p>Seal stains from water, smoke, ink, pencil, grease, etc. with an appropriate primer sealer.</p> <p><b>Wood, Composition Board -</b> Sand any exposed wood to a fresh surface. Patch all holes and imperfections with a wood filler or putty and sand smooth. Spot prime knots and sap streaks.</p> <p>On woods that present potential tannin bleeding, such as redwood and cedar, Exterior Oil-Based Wood Primer can be used. Care must be taken to determine if tannins will be activated by the solvent in the coating. To test for bleeding, coat a 4 foot by 4 foot section with the primer. If no bleeding is evident within 4 hours, proceed with complete priming. If bleeding occurs, use Exterior Latex Wood Primer.</p>



102.10

# SUPERPAINT<sup>®</sup>

Exterior Latex  
Satin  
A89-1100 Series

As of 06/30/2015, Complies with:			
OTC	Yes	LEED® 09 CI	N/A
SCAQMD	Yes	LEED® 09 NC	N/A
CARB	Yes	LEED® 09 CS	N/A
CARB SCM 2007	Yes	LEED® H	N/A
MPI	-	NGBS	N/A

CHARACTERISTICS	SPECIFICATIONS	SURFACE PREPARATION															
<p>SuperPaint Exterior Latex Satin, with improved resistance to early dirt pick up, provides outstanding performance on properly prepared aluminum and vinyl siding, wood, hardboard, masonry, cement, brick, block, stucco, and metal down to a surface and air temperature of 35°F.</p> <p><b>VinylSafe™ Color Technology</b> allows the use of many darker colors on vinyl siding that cannot be made in most other coatings.</p> <p><b>Color:</b> Most colors To optimize hide and color development, always use the recommended P-Shadow primer</p> <p><b>Coverage:</b> 350 - 400 sq ft/gal @ 4 mils wet; 1.5 mils dry</p> <p><b>Drying Time, @ 50% RH:</b> @ 35-45°F @ 45°F + Touch: 2 hour 2 hours Recoat: 24-48 hours 4 hours</p> <p>Drying and recoat times are temperature, humidity, and film thickness dependent</p> <p><b>Flash Point:</b> N/A <b>Finish:</b> 10-20 units @ 60°</p> <p><b>Tinting with CCE:</b></p> <table border="1"> <thead> <tr> <th>Base</th> <th>oz/gal</th> <th>Strength</th> </tr> </thead> <tbody> <tr> <td>Extra White</td> <td>0-6</td> <td>100%</td> </tr> <tr> <td>Deep Base</td> <td>4-12</td> <td>100%</td> </tr> <tr> <td>Ultradeep Base</td> <td>4-12</td> <td>100%</td> </tr> <tr> <td>Light Yellow</td> <td>4-12</td> <td>100%</td> </tr> </tbody> </table> <p><b>Vehicle Type:</b> Acrylic Extra White A89W01151</p> <p><b>VOC (less exempt solvents):</b> &lt;50 g/L; &lt;0.42 lb/gal As per 40 CFR 59.406 and SOR/2009-264, s.12</p> <p><b>Volume Solids:</b> 38 ± 2% <b>Weight Solids:</b> 49 ± 2% <b>Weight per Gallon:</b> 10.19 lb <b>WVP Perms (US)</b> 22.8 grains/(hr ft<sup>2</sup> in Hg)</p> <p><b>Mildew Resistant</b> This coating contains agents which inhibit the growth of mildew on the surface of this coating film.</p>	Base	oz/gal	Strength	Extra White	0-6	100%	Deep Base	4-12	100%	Ultradeep Base	4-12	100%	Light Yellow	4-12	100%	<p>SuperPaint Exterior Latex Satin can be self-priming when used directly over existing coatings, or bare drywall, plaster and masonry (with a cured pH of less than 8). The first coat acts like a coat of primer and the second coat provides the final appearance and performance. Please note that some specific surfaces require specialized treatment.</p> <p><b>Aluminum &amp; Aluminum Siding<sup>1</sup>, Galvanized Steel<sup>1</sup>, Vinyl Siding</b> 2 cts. SuperPaint Exterior Latex</p> <p><b>Concrete Block, CMU, Split face Block</b> 1 ct. Loxon Block Surfacers 2 cts. SuperPaint Exterior Latex</p> <p><b>Brick</b> 1 ct. Loxon Conditioner<sup>2</sup> 2 cts. SuperPaint Exterior Latex</p> <p><b>Cement Composition Siding/Panels</b> 1 ct. Loxon Concrete &amp; Masonry Primer<sup>2</sup> or Loxon Conditioner<sup>2</sup> 2 cts. SuperPaint Exterior Latex</p> <p><b>Stucco, Cement, Concrete</b> 1 ct. Loxon Concrete &amp; Masonry Primer<sup>2</sup> 2 cts. SuperPaint Exterior Latex</p> <p><b>Plywood</b> 1 ct. Exterior Latex Wood Primer 2 cts. SuperPaint Exterior Latex</p> <p><b>Wood (Cedar, Redwood)<sup>3</sup></b> 1 ct. Exterior Oil-Based Wood Primer<sup>2</sup> 2 cts. SuperPaint Exterior Latex</p> <p><sup>1</sup> On large expanses of metal siding, the air, surface, and material temperatures must be 50°F or higher. <sup>2</sup> Not for use at temperatures under 50°F. See specific primer label for that product's application conditions. <sup>3</sup> Knots and some woods, such as redwood and cedar, contain a high amount of tannin, a colored wood extract. For best results on these woods, use a coat of Exterior Oil-Based Wood Primer.</p> <p>Other primers may be appropriate. Standard latex primers cannot be used below 50°F. See specific primer label for that product's application conditions.</p> <p>When repainting involves a drastic color change, a coat of primer will improve the hiding performance of the topcoat color.</p>	<p><b>WARNING!</b> Removal of old paint by sanding, scraping or other means may generate dust or fumes that contain lead. Exposure to lead dust or fumes may cause brain damage or other adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For more information, call the National Lead Information Center at 1-800-424-LEAD (in US) or contact your local health authority.</p> <p>Remove all surface contamination by washing with an appropriate cleaner, rinse thoroughly and allow to dry. Scrape and sand peeled or checked paint to a sound surface. Sand glossy surfaces dull. Seal stains from water, smoke, ink, pencil, grease, etc. with the appropriate primer/sealer.</p> <p><b>Aluminum and Galvanized Steel</b> Wash to remove any oil, grease, or other surface contamination. All corrosion must be removed with sandpaper, wire brush, or other abrading method.</p> <p><b>Cement Composition Siding/Panels</b> Remove all dirt, dust, grease, oil, loose particles, laitance, foreign material, and peeling or defective coatings. Allow the surface to dry thoroughly. If the surface is new, test it for pH, if the pH is higher than 8, prime with Loxon Concrete &amp; Masonry Primer.</p>
Base	oz/gal	Strength															
Extra White	0-6	100%															
Deep Base	4-12	100%															
Ultradeep Base	4-12	100%															
Light Yellow	4-12	100%															



102.10

**SUPERPAINT®**  
 Exterior Latex  
 Satin  
 A89-1100 Series

<u>SURFACE PREPARATION</u>	<u>SURFACE PREPARATION</u>	<u>CAUTIONS</u>
<p><b>Masonry, Concrete, Cement, Block</b>            All new surfaces must be cured according to the supplier's recommendations—usually about 30 days. Remove all form release and curing agents. Rough surfaces can be filled to provide a smooth surface. If painting cannot wait 30 days, allow the surface to cure 7 days and prime the surface with Loxon Concrete &amp; Masonry Primer. Cracks, voids, and other holes should be repaired with an elastomeric patch or sealant.</p> <p><b>Steel</b>            Rust and mill scale must be removed using sandpaper, wire brush, or other abrading method. Bare steel must be primed the same day as cleaned.</p> <p><b>Stucco</b>            Remove any loose stucco, efflorescence, or laitance. Allow new stucco to cure at least 30 days before painting. If painting cannot wait 30 days, allow the surface to dry 7 days and prime with Loxon Concrete &amp; Masonry Primer. Repair cracks, voids, and other holes with an elastomeric patch or sealant.</p> <p><b>Vinyl</b>            Clean the surface thoroughly by scrubbing with warm, soapy water. Rinse thoroughly.</p> <p><b>Wood, Plywood, Composition Board</b>            Sand any exposed wood to a fresh surface. Patch all holes and imperfections with a wood filler or putty and sand smooth. All patched areas must be primed.</p> <p><b>Caulking</b>            Gaps between windows, doors, trim, and other through-wall openings can be filled with the appropriate caulk after priming the surface.</p>	<p><b>Mildew</b>            Remove before painting by washing with a solution of 1 part liquid bleach and 3 parts water. Apply the solution and scrub the mildewed area. Allow the solution to remain on the surface for 10 minutes. Rinse thoroughly with water and allow the surface to dry before painting. Wear protective eyewear, waterproof gloves, and protective clothing. Quickly wash off any of the mixture that comes in contact with your skin. Do not add detergents or ammonia to the bleach/water solution.</p> <p style="text-align: center;"><b><u>APPLICATION</u></b></p> <p>When the air temperature is at 35°F, substrates may be colder; prior to painting, check to be sure the <b>air, surface, and material temperature</b> are above 35°F and at least 5°F above the dew point. Avoid using if rain or snow is expected within 2-3 hours.</p> <p>Do not apply at air or surface temperatures below 35°F or when air or surface temperatures may drop below 35°F within 48 hours.</p> <p>No reduction necessary.</p> <p><b>Brush</b>            Use a nylon/polyester brush.</p> <p><b>Roller</b>            Use a 3/8" - 3/4" nap synthetic cover.</p> <p><b>Spray—Airless</b>            Pressure..... 2000 psi            Tip..... .015"-.019"</p> <p style="text-align: center;"><b><u>CLEANUP INFORMATION</u></b></p> <p>Clean spills, splatters, hands and tools immediately after use with soap and warm water. After cleaning, flush spray equipment with a compliant cleanup solvent to prevent rusting of the equipment. Follow manufacturer's safety recommendations when using solvents.</p>	<p>For exterior use only.            Protect from freezing.            Non-photochemically reactive.            Not for use on floors.</p> <p><b>CAUTION</b> contains <b>CRYSTALLINE SILICA</b> and <b>ZINC</b>. Use only with adequate ventilation. To avoid overexposure, open windows and doors or use other means to ensure fresh air entry during application and drying. If you experience eye watering, headaches, or dizziness, increase fresh air, or wear respiratory protection (NIOSH approved) or leave the area. Adequate ventilation required when sanding or abrading the dried film. If adequate ventilation cannot be provided wear an approved particulate respirator (NIOSH approved). Follow respirator manufacturer's directions for respirator use. Avoid contact with eyes and skin. Wash hands after using. Keep container closed when not in use. Do not transfer contents to other containers for storage. <b>FIRST AID:</b> In case of eye contact, flush thoroughly with large amounts of water. Get medical attention if irritation persists. If swallowed, call Poison Control Center, hospital emergency room, or physician immediately. <b>DELAYED EFFECTS FROM LONG TERM OVEREXPOSURE.</b> Abrading or sanding of the dry film may release crystalline silica which has been shown to cause lung damage and cancer under long term exposure. <b>WARNING:</b> This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. <b>DO NOT TAKE INTERNALLY. KEEP OUT OF THE REACH OF CHILDREN.</b></p> <p>HOTW 06/30/2015 A89W01151 31 37</p> <p>Viet, KOR</p> <p>The information and recommendations set forth in this Product Data Sheet are based upon tests conducted by or on behalf of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your Sherwin-Williams representative or visit <a href="http://www.paintdocs.com">www.paintdocs.com</a> to obtain the most current version of the PDS and/or an SDS.</p>