

Mobile Home Permit Worksheet

Installer: Randy Lakind License # I H 107825

Address of home being installed _____

Manufacturer Line Oak Length x width 28 x 44

NOTE: If home is a single wide fill out one half of the blocking plan
if home is a triple or quad wide sketch in remainder of home
I understand Lateral Arm Systems cannot be used on any home (new or used)
where the sidewall ties exceed 5 ft 4 in.

Installer's initials RKL

Typical pier spacing



Show locations of Longitudinal and Lateral Systems
(use dark lines to show these locations)



Application Number: _____ Date: _____

New Home ☒ Used Home ☐

Home installed to the Manufacturer's Installation Manual
Home is installed in accordance with Rule 15-C ☒

Single wide ☐ Wind Zone II ☐ Wind Zone III ☐

Double wide ☒ Installation Decal # 01000

Triple/Quad ☐ Serial # 0000

PIER SPACING TABLE FOR USED HOMES

Load bearing capacity	Footing size (sq in)	16" x 16" (256)	18 1/2" x 18 1/2" (342)	20" x 20" (400)	22" x 22" (484)*	24" x 24" (576)*	28" x 28" (676)
1000 psf		3'	4'	5'	6'	7'	8'
1500 psf		4' 6"	6'	7'	8'	8'	8'
2000 psf		6'	8'	8'	8'	8'	8'
2500 psf		7' 6"	8'	8'	8'	8'	8'
3000 psf		8'	8'	8'	8'	8'	8'
3500 psf		8'	8'	8'	8'	8'	8'

* Interpolated from Rule 15C-1 pier spacing table.

PIER PAD SIZES

I-beam pier pad size 17.5 x 25.5
Perimeter pier pad size NA
Other pier pad sizes (required by the mfg.) NA

Draw the approximate locations of marriage wall openings 4 foot or greater. Use this symbol to show the piers.

List all marriage wall openings greater than 4 foot and their pier pad sizes below.

Opening	Pier pad size
<u>18.5</u>	<u>24 x 24</u>
_____	_____
_____	_____

POPULAR PAD SIZES

Pad Size	Sq in
16 x 16	256
16 x 18	288
18.5 x 18.5	342
16 x 22.5	360
17 x 22	374
13 1/4 x 26 1/4	348
20 x 20	400
17 3/16 x 25 3/16	441
17 1/2 x 25 1/2	448
24 x 24	576
26 x 26	676

ANCHORS

4 ft ☒ 5 ft ☒

FRAME TIES

within 2' of end of home spaced at 5' 4" oc NA

OTHER TIES

Number

Sidewall
Longitudinal
Marriage wall
Shearwall

16
10
10
10

TIEDOWN COMPONENTS

Longitudinal Stabilizing Device (LSD)
Manufacturer _____
Longitudinal Stabilizing Device w/ Lateral Arms
Manufacturer Oliver Tech

Mobile Home Permit Worksheet

Application Number: _____ Date: _____

POCKET PENETROMETER TEST

The pocket penetrometer tests are rounded down to 1500 psf or check here to declare 1000 lb. soil _____ without testing.

X 15 X _____ X _____

POCKET PENETROMETER TESTING METHOD

1. Test the perimeter of the home at 6 locations.
2. Take the reading at the depth of the footer.
3. Using 500 lb. increments, take the lowest reading and round down to that increment.

X _____ X _____ X _____

TORQUE PROBE TEST

The results of the torque probe test is N/A 1101K inch pounds or check here if you are declaring 5' anchors without testing _____. A test showing 275 inch pounds or less will require 5 foot anchors.

Note: A state approved lateral arm system is being used and 4 ft anchors are allowed at the sidewall locations. I understand 5 ft anchors are required at all centerline tie points where the torque test reading is 275 or less and where the mobile home manufacturer may require anchors with 4000 lb holding capacity.

RKC Installer's initials

ALL TESTS MUST BE PERFORMED BY A LICENSED INSTALLER

Installer Name Brenty L. [Signature]

Date Tested 1-13-25

Electrical

Connect electrical conductors between multi-wide units, but not to the main power source. This includes the bonding wire between multi-wide units. Pg. 15C1

Plumbing

Connect all sewer drains to an existing sewer tap or septic tank. Pg. 15C1

Connect all potable water supply piping to an existing water meter, water tap, or other independent water supply systems. Pg. 15C1

Site Preparation

Debris and organic material removed ☒
 Water drainage: Natural _____ Swale _____ Pad ☒ Other _____

Fastening multi wide units

Floor: Type Fastener: Lags Length: 6" Spacing: 20"
 Walls: Type Fastener: anchors Length: 4" Spacing: 24"
 Roof: Type Fastener: Straps Length: 134mm Spacing: 2800
 For used homes a min. 30 gauge, 8" wide, galvanized metal strip will be centered over the peak of the roof and fastened with galv. roofing nails at 2" on center on both sides of the centerline.

Gasket (weatherproofing requirement)

I understand a properly installed gasket is a requirement of all new and used homes and that condensation, mold, mildew and buckled marriage walls are a result of a poorly installed or no gasket being installed. I understand a strip of tape will not serve as a gasket.

Installer's initials RKC

Type gasket factory Installed:
 Pg. 15C1 Between Floors Yes ☒
 Between Walls Yes ☒
 Bottom of ridgebeam Yes ☒

Weatherproofing

The bottomboard will be repaired and/or taped. Yes ☒ Pg. 15C1
 Siding on units is installed to manufacturer's specifications. Yes ☒
 Fireplace chimney installed so as not to allow intrusion of rain water. Yes ☒

Miscellaneous


Skirting to be installed. Yes ☒ No _____
 Dryer vent installed outside of skirting. Yes _____ N/A _____
 Range downflow vent installed outside of skirting. Yes ☒ N/A _____
 Drain lines supported at 4 foot intervals. Yes ☒
 Electrical crossovers protected. Yes ☒
 Other: _____

Installer verifies all information given with this permit worksheet is accurate and true based on the manufacturer's installation instructions and or Rufe 15C-1 & 2

Installer Signature [Signature] Date 1-13-25



800-999-1079 C.A. MORGAN



www.lac2omes.com

REFER TO THE JACOBSEN HOMES SETUP MANUAL AND/OR
APPENDIX FOR COMPLETE INSTALLATION INSTRUCTIONS

INSTALLING A MANUFACTURED STRUCTURE/RERAILING CAN BE **EXTREMELY DANGEROUS**. ONLY QUALIFIED PERSONNEL SHOULD ATTEMPT TO INSTALL A MANUFACTURED STRUCTURE/RERAILING. IMPROPER PROCEDURES AND/OR TECHNIQUES COULD RESULT IN PERSONAL INJURY OR DEATH. IN ADDITION TO THE DANGER TO PERSONNEL, IMPROPER SETTING/INSTALLATION COULD RESULT IN THE STRUCTURE BEING DAMAGED TO THE BUILDING STRUCTURE. NEVER ATTEMPT INSTALLATION IF YOU ARE NOT QUALIFIED AND/OR DO NOT HAVE THE PROPER TOOLS AND/OR EQUIPMENT.

MANUFACTURED BUILDINGS STRUCTURES CAN WEIGH SEVERAL TONS. IT IS VERY IMPORTANT THAT ALL PERSONNEL, ON THE JOB SITE, BE QUALIFIED AND PROPERLY/ADEQUATELY TRAINED. A STATE LICENSED SETUP CONTRACTOR IS REQUIRED TO BE RESPONSIBLE FOR ALL SAFETY INITIATIVES, PROGRAMS, POLICIES, AND/OR PROCEDURES THAT MAY BE MANDATED BY OSHA AND/OR ANY OTHER LOCAL, STATE, AND/OR FEDERAL CODES AND/OR REQUIREMENTS. THE CONTRACTOR SHALL INSURE/INSURE THAT SAFE AND PROPER TECHNIQUES ARE UTILIZED

1. REFER TO THE WFOHS APPROVAL FOR PLAT SPECIAL INFORMATION.
2. REFER TO THE DISCLOSURE NOTES RELEVANT AND ADDITIONAL FOR COMPLETE INSTALLATION INFORMATION. PERS CAN BE LOCATED AFTER SPAN INCREASED FOR THE SETUP-MANUAL.
3. REFER TO 80-01-PIN FOR ADDITIONAL PER-REQUIREMENTS ALL CONTAINING ALONG THE WFOHALLS MATERIALS REQUIRE MANUAL.
4. REFER TO THE APPROVED FLOOR PLAN FOR PERMISSIBLE LOCATIONS.
5. REFER TO 80-01-PIN FOR INSTALLATION APPLICATIONS AND THE-CONSOLE.
6. REFER TO THE APPROVED FLOOR PLAN FOR PERMISSIBLE LOCATIONS. COLUMN PERS SHALL BE LOCATED WITHIN 8" OF CENTER SIDE OF THE COLUMN. MATERIALS PERS MAY BE REMOVED ADDITIONAL WFOHALLS MANUAL FOR SPACING DELIVERABLES CONCRETE.
7. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
8. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
9. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
10. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
11. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
12. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
13. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
14. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
15. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
16. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
17. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
18. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
19. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
20. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
21. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
22. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
23. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
24. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
25. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
26. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
27. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
28. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
29. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
30. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
31. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
32. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
33. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
34. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
35. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
36. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
37. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
38. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
39. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
40. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
41. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
42. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
43. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
44. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
45. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
46. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
47. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
48. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
49. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
50. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
51. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.
52. ALL 14" WFOHALLS REQUIRE MANUAL FOR SPACING DELIVERABLES CONCRETE MANUAL.</

COLUMN PAD - MINIMUM Size (sq. in.)

COL. NUM.	SPAN (n.) / LOAD (lbs)	ANCHOR (SEE TABLE)
1	22" 4575 - lbs	94100 ANCHOR SEE AD-TD-0000
2	22" 4575 - lbs	94100 ANCHOR SEE AD-TD-0000
3	NA 0 - lbs	NA SEE AD-TD-0001
4	NA 0 - lbs	NA SEE AD-TD-0000
5	NA 0 - lbs	NA SEE AD-TD-0000
6	NA 0 - lbs	NA SEE AD-TD-0000
7	NA 0 - lbs	NA SEE AD-TD-0000
8	NA 0 - lbs	NA SEE AD-TD-0000
9	NA 0 - lbs	NA SEE AD-TD-0000
10	NA 0 - lbs	NA SEE AD-TD-0000

[illegible]

Use NOW with YOUR pad span

A	258.000 (sq. in.)
B	342.250 (sq. in.)
C	386.000 (sq. in.)
D	400.000 (sq. in.)
E	432.875 (sq. in.)
F	578.000 (sq. in.)
G	676.000 (sq. in.)

1000 net BOD.	1500 net BOD.	2000 net BOD.	2500 net BOD.	3000 net BOD.	3500 net BOD.
------------------	------------------	------------------	------------------	------------------	------------------

1000 psi (ksi)	1500 psi (ksi)	2000 psi (ksi)	2500 psi (ksi)	3000 psi (ksi)	3500 psi (ksi)
30"	48 1/8"	66 1/2"	85"	N11	N11
42"	66 1/2"	86 1/2"	N11	N11	N15
48"	77 1/2"	N11	N11	N11	N19
48 1/2"	78 1/2"	N11	N11	N15	N19
54"	85"	N11	N11	N15	N19
74"	N11	N11	N11	N11	N15
87 1/8"	N11	N15	N11	N11	N15

1000 per box.	1500 per box.	2000 per box.	2500 per box.	3000 per box.	3500 per box.
-------------------------	-------------------------	-------------------------	-------------------------	-------------------------	-------------------------

[illegible]

1000 per box.	1500 per box.	2000 per box.	2500 per box.	3000 per box.	3500 per box.
------------------	------------------	------------------	------------------	------------------	------------------

[illegible]



2022, LACOSTE HOMES, SAFETY MARION, FLORIDA, ALL RIGHTS RESERVED

[HUD] WIND ZONE - 2
[HUD] EXPOSURE - C

Serial Number: 39038 # PAGE 2 OF 2

REFERS TO BU-0020, BU-01-0007, AND/OR OTHER DETAILS IN THE SET-UP MANUAL FOR MAXIMUM HEIGHT
THIS CLOSING DIAGRAM IS NOT DESIGNED, NOR IS IT INTENDED, TO BE USED AS A STILT FOUNDATION


THIS BLOCKING DIAGRAM IS PROVIDED AS A COURTESY ONLY. THE LICENSEE SET-UP CONTRACTOR (INSTALLER) SHALL REVIEW THE DETAIL AND VERIFY COMPLIANCE. THE INSTALLER IS SOLELY RESPONSIBLE AND/OR LIABLE FOR ALL INSTALLATION.

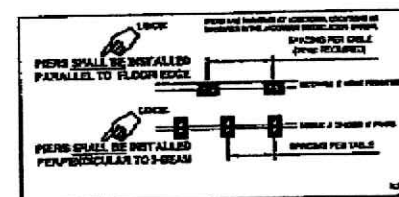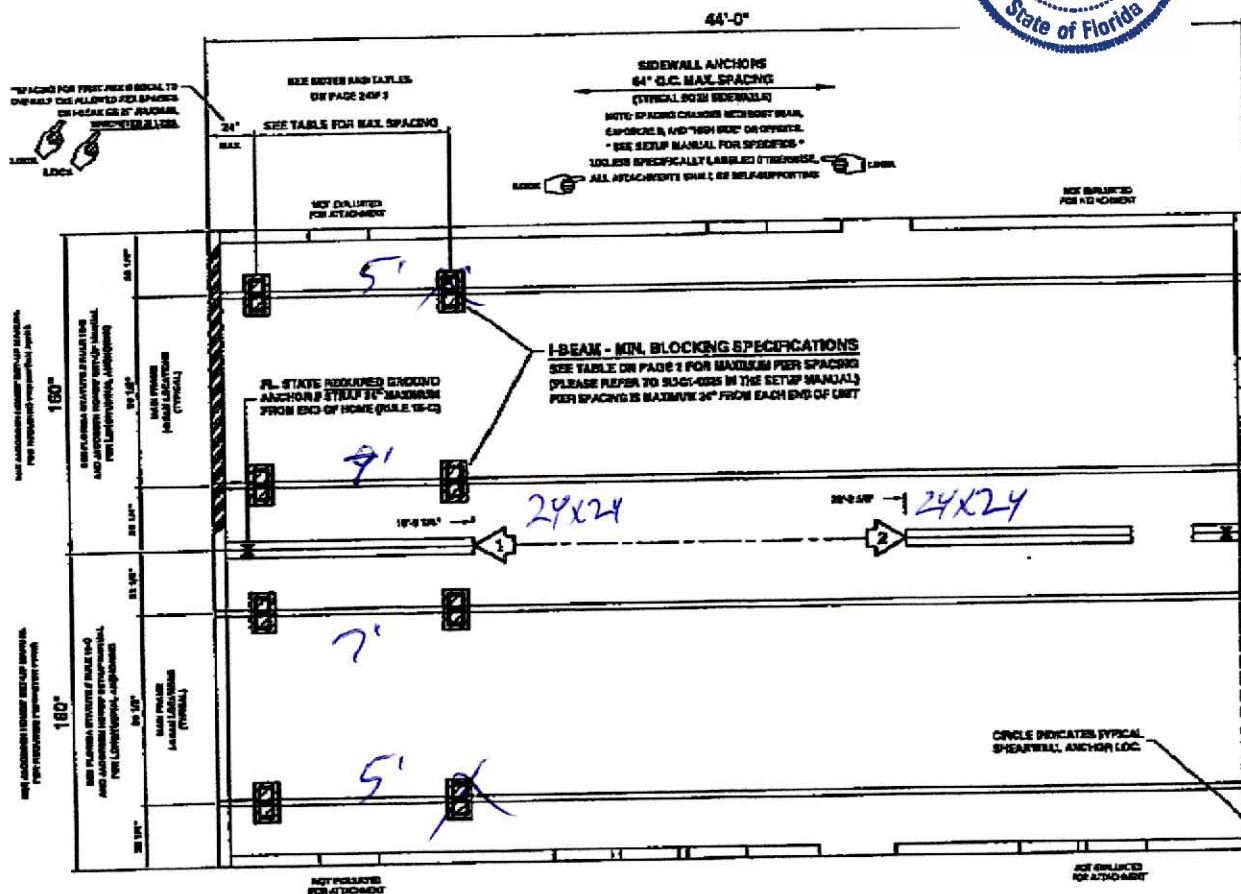[illegible]

SHEARWALL TIE-DOWN STRAPS ARE NOT INSTALLED AT THE FACTORY, WHEN SHEARWALL IS LOCATED DIRECTLY OVER BOLD BEAM HEADER. SET-UP IS PROVIDED TO INSTALL THE SHEARWALL STRAPS OVER THE BEAM HEADER PER A10-70800 IN THE SET-UP MANUAL, ADDENDUM STRAPS AND TIEES SHALL BE INSTALLED AT BOTH ENDS OF THE HEADER.

SEE NOTES AND TABLES ON PAGE 2 OF 2

SEE NOTES AND TABLES ON PAGE 2
SEE WARNINGS AND CAUTIONS ON PAGE 2



JACOBSEN HOMES
P.O. BOX 368 # 600 PACKARD CT.
SAFETY HARBOR, FLORIDA 34685

(727) 726-1138
www.jachomes.com

REFER TO SU-01-0020, SU-01-0021, AND/OR OTHER DETAILS IN THE SET-UP MANUAL FOR MAXIMUM HEIGHT
(THIS BLOCKING DIAGRAM IS NOT DESIGNED, NOR IS IT INTENDED, TO BE USED AS A STILT FOUNDATION)

REFER TO SU-01-0005 FOR
ADD'L PIER REQUIREMENTS

REFER TO THE JACUZZI® HOMES SETUP MANUAL AND/OR
ADDENDUM FOR COMPLETE INSTALLATION INSTRUCTIONS

PAGE 1 OF 2

THIS BLOCKING DIAGRAM IS PROVIDED AS A COURTESY ONLY. THE LICENSED SET-UP CONTRACTOR (INSTALLER) SHALL REVIEW THIS DETAIL AND VERIFY COMPLIANCE. THE LICENSED INSTALLER IS SOLELY RESPONSIBLE AND/OR LIABLE FOR ALL INSTALLATION

**SHEAR
WALLS:
PIN AND
TIED
WOOD PL
DOWEL
JOINTS FOR
SPLITTING
BRICKS
AND
CONCRETE
BLOCKS
EACH WALL
IS 12" THICK**

ALL
COLLEGE
FIND AND
TEACHING
-TECHNICAL
DOWN U.S.
ECONOMY
BY U.S.
[NUD]
[NUD]

DMT-35,036
 10/10/1981 12:00
 10/10/1981 12:00
JACOBSEV HON
DMT-44408-0
 10/10/1981 12:00

[HUD] WIND ZONE - 2
[HUD] EXPOSURE - C