

# COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS

## AGENDA ITEM REQUEST FORM

---

Department: Public Works

Meeting Date: 10/1/2026

---

1. Nature and purpose of agenda item:

Utility permit from Windstream requesting to install cable at SW Riverside and SW Utah Ave.

2. Recommended Motion/Action:

Approve

3. Fiscal impact on current budget:

This item has no effect on the current budget.

**COLUMBIA COUNTY BOARD OF COUNTY COMISSIONERS  
UTILITY PERMIT**

Date: 08/17/2026 Permit No. 260102 County Road \_\_\_\_\_ Section No. \_\_\_\_\_

Permittee Kinetic/Windstream c/o Ervin Cable Construction

Address 450 Pryor Blvd. Sturgis, KY 42459

Telephone Number 215-378-8319

Requesting permission from Columbia County, Florida, hereinafter called the County, to contract, operate and maintain Placing approximately 34 feet of fiber optic line to be placed via underground bore.

Location: Southwest Riverside Avenue, near intersection of Southwest Utah Street

FROM: 09/17/2026

TO: 12/12/2026

Submitted for the Utility Owner by: Caylon Joiner- Coordinator, Permitting Caylon Joiner 08/17/2026  
Typed Name & Title Signature Date

1. Permittee declares that prior to filing this application it has determined the location of all existing utilities, both aerial and underground and the accurate locations are shown on the plans attached hereto and made a part of this application. Proposed work is within corporate limits of Municipality: YES ☒ NO ( ). If YES: LAKE CITY ( ) FORT WHITE ☒. A letter of notification was mailed on \_\_\_\_\_ to the following utility owners \_\_\_\_\_

2. The Columbia County Public Works Director shall be notified twenty-four (24) hours prior to starting work and again immediately upon completion of work. The Public Works Director is Kevin Kirby, located at 607 NW Quinton St. Lake City, FL. Telephone Number 386-758-1019. The PERMITTEE's employee responsible for Maintenance of Traffic is Trawick Construction Company, LLC Travis Baxter Telephone Number 386-205-2858 (This name may be provided at the time of the 24 hour notice to starting work.) Travisbaxter@trawickconstruction.com

3. This PERMITTEE shall commence actual construction in good faith within 30 days after issuance of permit, and shall be completed within 90 days after permitted work has begun. If the beginning date is more than 60 days from date of permit approval, then PERMITTEE must review the permit with the Columbia County Public Works Director to make sure no changes have occurred in the transportation facility that would affect the permitted construction.

4. The construction and maintenance of such utility shall not interfere with the property and rights of a prior PERMITTEE.

5. It is expressly stipulated that this permit is a license for permissive use only and that the placing of utilities upon public property pursuant to this permit shall not operate to create or vest any property right in said holder.

6. Pursuant to Section 337-403(1), Florida Statutes, whenever necessary for the construction, repair, improvement, maintenance, safe and efficient operation, alteration or relocation of all, or any portion of said transportation facility as determined by the Columbia County Public Works Director and/or County Engineer, any or all utilities and appurtenances authorized hereunder, shall be immediately removed from said transportation facility or reset or

relocated thereon as required by the Columbia County Public Works Director and/or County Engineer and at the expense of the PERMITTEE.

7. In case of non-compliance with the County's requirements in effect as of the approval date of this permit, this permit void and the facility will have to be brought into compliance or removed from the right of way at no cost to the County.

8. It is understood and agreed that the rights and privileges herein set out are granted only to the extent of the County's right, title and interest in the land to be entered upon and used by the PERMITTEE, and the PERMITTEE will, at all times, and to the extent permitted by law, assume all risk of and indemnify, defend, and save harmless Columbia County, Florida from any and all loss, damage, cost or expense arising in any manner on account of the exercise or attempted exercise by said PERMITTEE of the aforesaid right and privileges.

9. During construction, all safety regulations of the County shall be observed and the PERMITTEE must take measures, including pacing and the display of safety devices that may be necessary in order to safely conduct the public through the project area in accordance with the Federal Manual on Uniform Traffic Control Devices, as amended for highways.

10. Should the PERMITTEE be desirous of keeping its utilities in place and out of service, the PERMITTEE, by execution of this permit acknowledges its present and continuing ownership of its utilities located between \_\_\_\_\_ and \_\_\_\_\_ within the County's right of way as set forth above. PERMITTEE, as its sole expense, shall promptly remove said out of service utilities whenever Columbia County Public Works Director and/or County Engineer determines said removal is in the public interest.

11. Special instructions: Minimum cover of thirty inches (30") will be required at all locations. Columbia County will not be financially responsible for any damage to facilities with less than thirty inches (30") cover. Cables shall not be located within driveway ditches.

12. Additional Stipulations: \_\_\_\_\_

\_\_\_\_\_

\* This permit does not give permission for work outside of Columbia County Right of Way.

\_\_\_\_\_

Permission must be obtained from land owner to work on private property.

\_\_\_\_\_

It is understood and agreed that commencement by the PERMITTEE is acknowledgment and acceptance of the binding nature of these specialist instructions.

Submitted By: Kinetic/Windstream c/o Ervin Cable Construction  
Permittee

Place Corporate Seal

Caylon Joiner Coordinator, Permitting  
Signature and Title

\_\_\_\_\_  
Attested

Utilities Permit  
Page three  
Revised: 8/17/00

Recommended for Approval:

Signature: \_\_\_\_\_

Title: \_\_\_\_\_

Date: \_\_\_\_\_

A handwritten signature in blue ink, consisting of stylized, overlapping strokes, is written over the signature line.

Approval by Board of County Commissioners, Columbia County, Florida:

YES ( )      NO ( )

Date Approved: \_\_\_\_\_

Chairman's Signature: \_\_\_\_\_

# SHEET INDEX:

- A.0 TITLE SHEET
- A.1 CONSTRUCTION NOTES
- A.2 TABLE SHEET
- A.3 PLAN OVERVIEW MAP
- A.4 LEGEND
- A.5 MAP SERIES
- A.6 TYPICALS

**PERMIT ID:**  
PERMA125767360

**DATE:**  
8/17/2026

## TRAFFIC CONTROL:

ALL TRAFFIC CONTROL DEVICES AND SIGNING SHALL CONFORM AND BE INSTALLED IN ACCORDANCE WITH THE CURRENT FDOT REQUIREMENTS, INCLUDING THE LATEST FIELD MANUAL FOR TEMPORARY TRAFFIC CONTROL ZONE LAYOUTS.

**TOTAL FIBER FOOTAGE:**  
34 FT


**JOB NUMBER:**  
704762471

**PURCHASE ORDER ID:**  
FTWHFLXA

**WORK ORDER ID:**  
SEFH11261

| REV. | DATE / DESCRIPTION |
|------|--------------------|
| 1    | 8/17/2026          |
| 2    | 8/17/2026          |
| 3    | 8/17/2026          |

**TITLE SHEET:**  
A.0

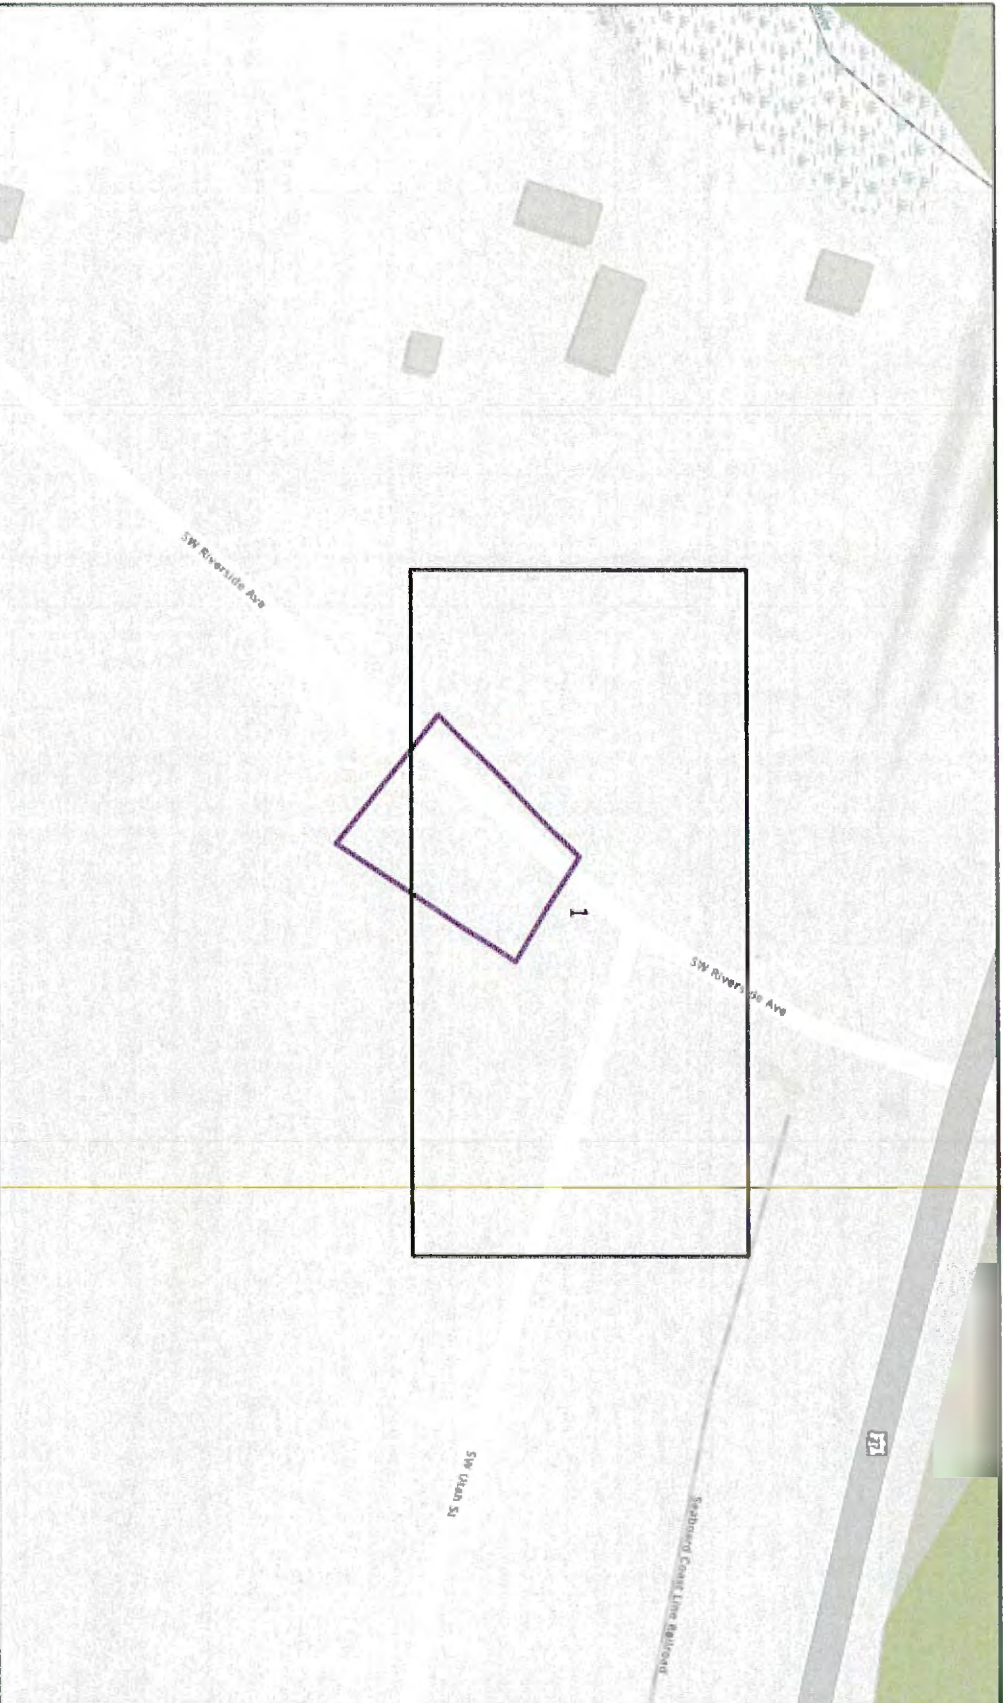

**WARNING:**  
LOCATION OF UNDERGROUND UTILITIES TO BE VERIFIED BY CONTRACTOR. CALL BEFORE DIGGING.



**PERMIT AUTHORITY:** COLUMBIA COUNTY

**SITE LOCATION MAP**

**SCALE:** 1 IN : 100 FT



# GENERAL NOTES:

- 1. UTILITY LOCATES & NOTIFICATIONS:**
  - CALL FLORIDA 811 AT LEAST 72 HOURS BEFORE TRENCHING OR DIGGING TO IDENTIFY ALL UTILITIES AND DRAINAGE.
  - NOTIFY FDOT AT LEAST 2 BUSINESS DAYS IN ADVANCE BEFORE CLOSING LANES OR STARTING WORK WITHIN FDOT RIGHT-OF-WAY.
- 2. COORDINATION & COMPLIANCE:**
  - COORDINATE WITH FDOT INSPECTORS TO CONFIRM THE DEPTH OF DIRECTIONAL BORING BEFORE BEGINNING.
  - ENSURE COMPLIANCE WITH CURRENT ADA STANDARDS AND FDOT DESIGN SPECIFICATIONS.
  - MAINTAIN UNINTERRUPTED ACCESS TO SIDE STREETS, PROPERTIES, AND SIDEWALKS UNLESS OTHERWISE PERMITTED.
- 3. DIRECTIONAL BORING & EXCAVATION:**
  - USE THE NORMAL DIRECTIONAL OR GUIDED BORING METHOD FOR ALL BORING OPERATIONS.
- 4. UTILITY CROSSINGS:**
  - FOR OVERHEAD CROSSINGS, MAINTAIN A CLEARANCE OF AT LEAST 16.5 FEET FOR LOCAL ROADS, AT LEAST 18 FEET ABOVE THE HIGHEST POINT OF FDOT MAINTAINED ROADS UNLESS OTHERWISE SPECIFIED. FOR ALL CROSSING AND LONGITUDINAL UTILITY DEPTH UNDER ALL PAVEMENT SURFACE WILL BE 48" AND UNDER UNPAVED SURFACE WILL BE 36" UNLESS OTHERWISE SPECIFIED. TRENCHING/PILOW OPERATIONS FOR INNERDUCT INSTALLATIONS MINIMUM 12" WHERE ALLOWED UNLESS OTHERWISE SPECIFIED
- 5. TRAFFIC CONTROL & SAFETY:**
  - PROVIDE SAFE PEDESTRIAN ACCESS FOLLOWING FDOT STANDARD (PART 6 OF MUTCD STANDARDS).
  - ADHERE TO FDOT EXCAVATION REGULATIONS WHEN WORKING IN TRAFFIC CONTROL ZONES.
- 6. DRAINAGE & STRUCTURAL CONSIDERATIONS:**
  - A CERTIFIED PERSON MUST SUPERVISE TRAFFIC.
  - INSTALL CABLES AND CONDUITS AT LEAST 12 INCHES BELOW SWALES AND DITCHES.
  - VAULTS AND HANDHOLES MUST HAVE TRAFFIC-BEARING COVERS.
- 7. RESTORATION & PERMITS:**
  - RESTORE THE RIGHT-OF-WAY TO A CONDITION THAT IS EQUAL TO OR BETTER THAN THE ORIGINAL STATE ONCE THE PROJECT IS FINISHED.
  - SUBMIT AN ENGINEER'S CERTIFICATION AND AS-BUILTS WITHIN 30 DAYS OF PROJECT COMPLETION IF REQUIRED.
- 8. GAS & UTILITY SAFETY:**
  - LOCATE AND VERIFY GAS LINES BEFORE BEGINNING CONSTRUCTION.

# NOTE TO CONSTRUCTION:

- 1. AFTER EXISTING FACILITIES ARE LOCATED, POTHOLE EACH UTILITY TO CONFIRM LOCATION OF FACILITIES.**
- 2. NO PITS TO BE LEFT OPEN UNATTENDED OR OVERNIGHT**
- 3. RIGHTS-OF-WAY ARE DEPICTED BASED ON FIELD OBSERVATION AND THE LATEST COUNTY RECORDS AVAILABLE. IF FURTHER ACCURACY IS REQUIRED, LAND SURVEYS WILL BE NECESSARY.**
- 4. ALL UTILITY LOCATIONS SHOWN ARE APPROXIMATE. CALL FOR LOCATES 72 HRS PRIOR TO CONSTRUCTION START.**
- 5. ERYIN CABLE CONSTRUCTION DOES NOT WARRANT INDENTITY OR LOCATION OF EXISTING UNDERGROUND, BURIED, HIDDEN OR OTHERWISE NON VISIBLE FACILITIES OR OBSTRUCTIONS WHICH MAY EXIST IN ON OR AROUND SITE IF PLANNED CONSTRUCTION AND OR FACILITIES AND OR FACILITIES PLACEMENT.**
- 6. PLACING CONTRACTOR/COMPANY SHALL LOCATE AND VERIFY ALL SUCH FACILITIES AND OBSTRUCTIONS BEFORE PLACING BEGINS.**

# CAUTION NOTES:

\*NO PITS TO BE LEFT OPEN UNATTENDED OR OVERNIGHT NO PITS TO BE LEFT OPEN UNATTENDED OR OVERNIGHT

# DATA DICTIONARY:

|         |                               |
|---------|-------------------------------|
| ECOP    | Edge of Pavement              |
| R/W:    | Right of Way                  |
| BOC:    | Back of Curb                  |
| PULE:   | Public Utility Easement       |
| PE:     | Private Easement              |
| OG:     | Overhead Guy                  |
| Distro: | Distribution                  |
| MH:     | Manhole                       |
| HH:     | Handhole                      |
| M:      | Existing Manhole              |
| P:      | Existing Pedestal             |
| V:      | Vault                         |
| G:      | Gas Pipeline                  |
| S:      | Sewer Line                    |
| W:      | Water Valve                   |
| CAB:    | Cabinet                       |
| DBD:    | Direct Bury Drop              |
| UG:     | Underground                   |
| AER:    | Aerial                        |
| PB:     | Pull Box                      |
| TF:     | Transformer                   |
| RL:     | Running Line (Dimension Line) |
| W:      | Water (Dimension Line)        |
| R/W:    | R/W (Dimension Line)          |
| S:      | Sewer (Dimension Line)        |
| ECOP:   | Edge of Pavement (Dim Line)   |

**WARNING:**  
LOCATION OF UNDERGROUND UTILITIES TO BE VERIFIED BY CONTRACTOR. CALL BEFORE DIGGING



# PERMIT AUTHORITY: COLUMBIA COUNTY

|                       |                             |
|-----------------------|-----------------------------|
| <b>PERMIT ID:</b>     | <b>DATE:</b>                |
| PERMA125767360        | 8/17/2026                   |
| <b>WORK ORDER ID:</b> | <b>TOTAL FIBER FOOTAGE:</b> |
| SEFH11281             | 34 FT                       |

| REV. | DATE / DESCRIPTION |
|------|--------------------|
| 1    | Initial            |
| 2    | Revised            |
| 3    | Revised            |
| 4    | Revised            |

**GENERAL / CONSTRUCTION NOTES:**


**A.1**

# CPH CHALLENGER SERIES PEDESTALS

## PART NUMBER MATRIX


| Challenger Pedestal Mounting         |                                                                | CPH                            | XXXX | CX | BX | SX | LXX | AXX |
|--------------------------------------|----------------------------------------------------------------|--------------------------------|------|----|----|----|-----|-----|
| Size                                 | 911 9" x 11" (230mm x 280mm)<br>920 9" x 20" (230mm x 510mm)   | 1022 10" x 22" (250mm x 560mm) |      |    |    |    |     |     |
| Color                                | C1 Light Green<br>C2 Beige<br>C3 Dark Green                    |                                |      |    |    |    |     |     |
| Brackery                             | B1 Standard Brackery Included in Scales<br>B2 Stacked Brackery |                                |      |    |    |    |     |     |
| Scale Configuration                  | S1 No Scales (Ground Sluit)<br>S2 Scales                       |                                |      |    |    |    |     |     |
| Self-Lock® Security System Lock Type | L00 Her-Held<br>L01 Standard<br>L01 Challenger Pattern 11      |                                |      |    |    |    |     |     |
| Accessories                          | A0 No Accessory Options<br>A1 Wintemal Drop                    |                                |      |    |    |    |     |     |

## DIMENSIONS

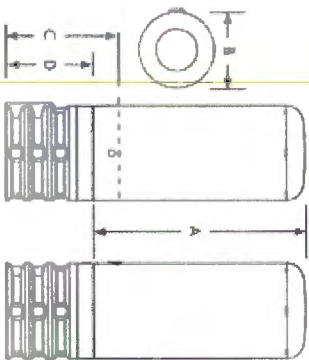

|          | A             | B              | C             | D             |
|----------|---------------|----------------|---------------|---------------|
| CPH 911  | 13.0" (330mm) | 9.5" (240mm)   | 14.5" (370mm) | 10.5" (265mm) |
| CPH 920  | 22.0" (560mm) | 9.5" (240mm)   | 14.5" (370mm) | 10.5" (265mm) |
| CPH 1022 | 24.0" (610mm) | 10.75" (273mm) | 14.5" (370mm) | 10.5" (265mm) |

Note: Dimensions in inches (mm)



## FEATURES

- 9" and 10" diameter round profiles provide maximum workspace and bend radius provisions for all passives, cables and connectors
- Round pedestal style maintains a consistent look with legacy pedestals in the field
- Constructed of durable, high-strength materials for maximum security and long service life
- Universal equipment mounting bracket for passives facilitates installation
- Optional stake mounting provision for joint trench or other special applications

Designed specifically for housing passive equipment, these special versions of the Channell CPH911, CPH920, and CPH1022 pedestals feature direct-bury bases with a high rib design that are less likely to lean or tilt and do not require stakes for installation. A special self-locating cover ensures that the pedestals lock properly without additional alignment. The covers include Channell's Self-Lock® security hardware.

**WARNING:**  
LOCATION OF UNDERGROUND UTILITIES TO BE VERIFIED BY CONTRACTOR. CALL BEFORE DIGGING.



ERVIN CABLE CONSTRUCTION, LLC  
PERMITTING MANAGER, LAMBERT TERMINAL  
816 350001 AVE.  
KANSAS CITY, MO 64108

PERMIT AUTHORITY: COLUMBIA COUNTY

PERMIT ID: PERMA125767360

DATE: 8/17/2026

WORK ORDER ID: SEFH11261

TOTAL FIBER FOOTAGE: 34 FT

A.1

GENERAL / CONSTRUCTION NOTES:

| CONDUIT               |           |
|-----------------------|-----------|
| Installation Method   | Footage   |
| Bore                  | 0         |
| Innerduct             | 34        |
| Pipe                  | 0         |
| Missile               | 0         |
| Micro Trench          | 0         |
| Tunnel                | 0         |
| Rock Saw              | 0         |
| Existing              | 0         |
| Handscape Open Trench | 0         |
| Softscape Open Trench | 0         |
| <b>TOTAL</b>          | <b>34</b> |

| FIBER CABLE    |           |
|----------------|-----------|
| Cable Category | Footage   |
| Access         | 34        |
| Distribution   | 0         |
| Backbone       | 0         |
| Jumper Cable   | 0         |
| <b>TOTAL</b>   | <b>34</b> |

| SPAN            |          |
|-----------------|----------|
| Physical Status | Footage  |
| New Build       | 0        |
| Existing        | 0        |
| Leased          | 0        |
| Future          | 0        |
| Replaced        | 0        |
| <b>TOTAL</b>    | <b>0</b> |

| STRUCTURES       |          |
|------------------|----------|
| Vault Type       | Count    |
| Handhole         | 0        |
| Manhole          | 0        |
| Pedestal         | 1        |
| Direct Bury Drop | 0        |
| Pull Box         | 0        |
| <b>TOTAL</b>     | <b>1</b> |

| POLES           |          |
|-----------------|----------|
| Physical Status | Count    |
| New Build       | 0        |
| Existing        | 0        |
| Leased          | 0        |
| Future          | 0        |
| Replaced        | 0        |
| <b>TOTAL</b>    | <b>0</b> |



**WARNING:**  
LOCATION OF UNDERGROUND UTILITIES TO BE  
VERIFIED BY CONTRACTOR. CALL BEFORE  
DIGGING.



**PERMIT AUTHORITY:** COLUMBIA COUNTY

**PERMIT ID:** PERMA125767360

**DATE:** 8/17/2026

**WORK ORDER ID:** SEPH11281


**TOTAL FIBER FOOTAGE:** 34 FT

**REV. DATE / DESCRIPTION**

|   |           |               |
|---|-----------|---------------|
| # | DATE      | DESCRIPTION   |
| 1 | 8/17/2026 | Initial Issue |

**TABLE SHEET:**

**A.2**

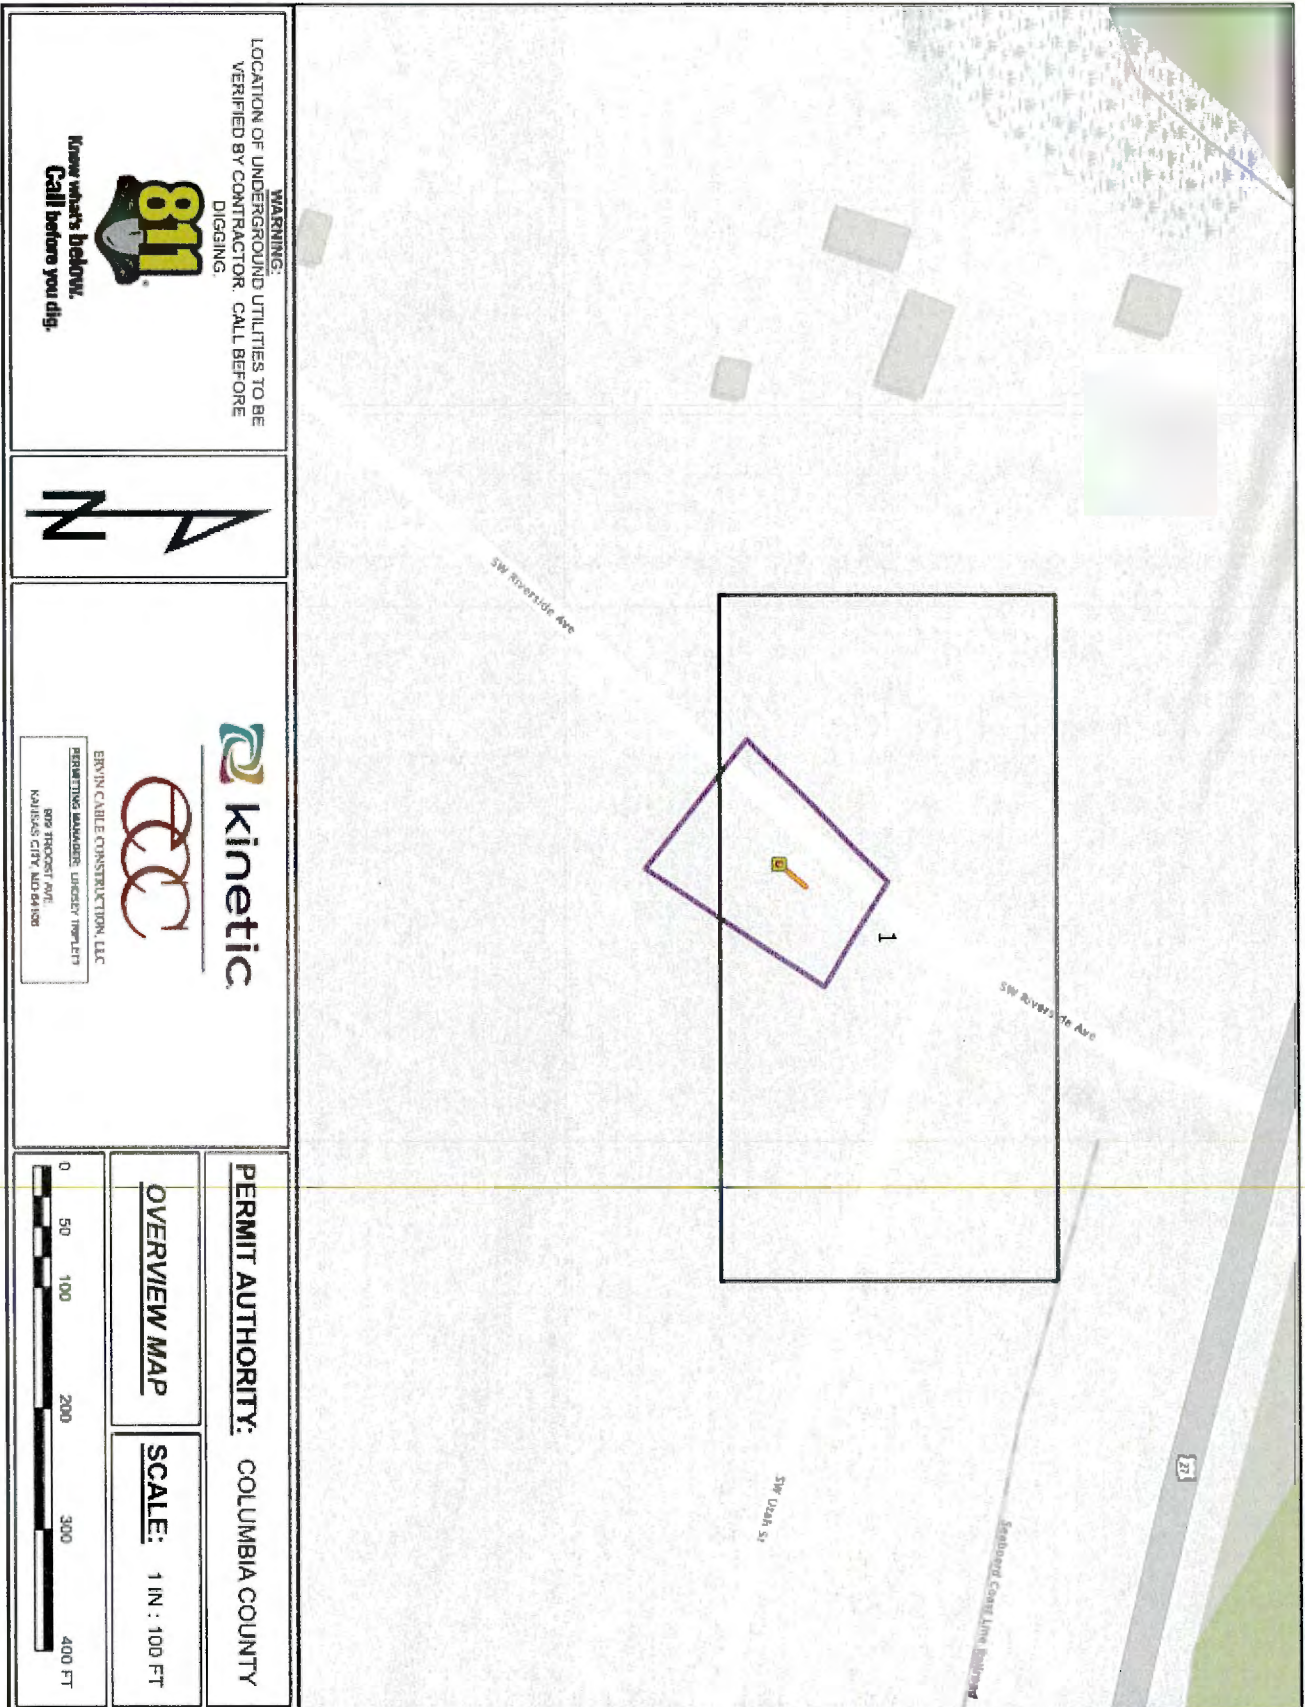

**WARNING:**  
LOCATION OF UNDERGROUND UTILITIES TO BE  
VERIFIED BY CONTRACTOR. CALL BEFORE  
DIGGING.



**kinetic**  
ERWIN CABLE CONSTRUCTION, LLC  
PERMITTING MANAGER, UNDERGROUND  
800 3300ST AVE.  
KANSAS CITY, MO 64108

**PERMIT AUTHORITY:** COLUMBIA COUNTY  
**OVERVIEW MAP**  
**SCALE:** 1 IN : 100 FT  
0 50 100 200 300 400 FT

## STRUCTURES

- HANDHOLE
- PEDESTAL
- FIBER STRUCTURE
- POLE
- ADDRESS

## EXISTING STRUCTURES

- EXISTING HANDHOLE
- EXISTING MANHOLE
- EXISTING PED
- PULL BOX
- FDH LOCATION
- TRANSFORMER
- ENCLOSURE
- SUBSTATION

## BOUNDARY

- ROW LINES
- BACK OF CURB
- EDGE OF PAVEMENT
- PUBLIC UTILITY EASEMENT
- PRIVATE EASEMENT
- SIDEWALK
- GUARDRAIL
- DRIVEWAY
- EASEMENT
- FENCE
- RAILROAD
- STREET CENTERLINE
- PARCEL
- GRIDS
- PERMIT AREA

## FIBER CABLE, SPAN &amp; CONDUIT

- AERIAL - DROP - NEW BUILD - FIBER
- AERIAL - ACCESS - NEW BUILD - FIBER
- AERIAL - BACKBONE - NEW BUILD - FIBER
- AERIAL - DISTRIBUTION - NEW BUILD - FIBER
- AERIAL - DROP - EXISTING - FIBER
- AERIAL - ACCESS - EXISTING - FIBER
- AERIAL - DISTRIBUTION - EXISTING - FIBER
- AERIAL - BACKBONE - EXISTING - FIBER
- UNDERGROUND - DROP - NEW BUILD - FIBER
- UNDERGROUND - ACCESS - NEW BUILD - FIBER
- UNDERGROUND - DISTRIBUTION - NEW BUILD - FIBER
- UNDERGROUND - DROP - EXISTING - FIBER
- UNDERGROUND - ACCESS - EXISTING - FIBER
- UNDERGROUND - DISTRIBUTION - EXISTING - FIBER
- UNDERGROUND - BACKBONE - EXISTING - FIBER
- UNDERGROUND - JUMPER CABLE - NEW BUILD - FIBER
- AERIAL - SPAN - NEW BUILD
- AERIAL - SPAN - EXISTING
- CONDUIT - BORE - NEW BUILD
- CONDUIT - INNERDUCT - NEW BUILD
- CONDUIT - MICROTRENCH - NEW BUILD
- CONDUIT - HARDSCAPE OPEN TRENCH - NEW BUILD
- CONDUIT - SOFTSCAPE OPEN TRENCH - NEW BUILD
- CONDUIT - TUNNEL - NEW BUILD
- CONDUIT - MISSILE - NEW BUILD
- CONDUIT - PLOW - NEW BUILD
- CONDUIT - EXISTING - BORE
- CONDUIT - EXISTING - INNERDUCT
- CONDUIT - EXISTING - MICROTRENCH
- CONDUIT - EXISTING - HARDSCAPE OPEN TRENCH
- CONDUIT - EXISTING - SOFTSCAPE OPEN TRENCH
- CONDUIT - EXISTING - TUNNEL
- CONDUIT - EXISTING - MISSILE
- CONDUIT - EXISTING - PLOW

## UTILITY LINES

- ELECTRIC POWER LINES
- OIL AND GAS
- SEWER AND DRAIN
- COMMUNICATIONS
- IRRIGATION
- STORMWATER
- POTABLE WATER
- TEMPORARY SURVEY MARKINGS
- STREET LIGHT CIRCUIT
- DROP
- PROPOSED EXCAVATION
- UTILITY EASEMENT
- NA
- OTHER

## EXISTING SITES

- WATER TANK CELL SITE
- TOWER CELL SITE
- ROOFTOP CELL SITE
- POLE SMALL CELL SITE

## UTILITY LOCATES

- GAS LOCATE
- POWER LOCATE
- OTHER LOCATE
- COMMUNICATION LOCATE
- SEWER LOCATE
- WATER LOCATE

## UTILITY POINTS

- ADA CURBS
- BOC
- BRIDGE ATTACHMENT
- CATCH BASIN
- CULVERT
- EXISTING ANCHOR
- EXISTING SIDEWALK ANCHOR
- PROPOSED ANCHOR
- PROPOSED SIDEWALK ANCHOR
- OVERHEAD GUY
- POWER POLE
- STREET LIGHT POLE
- GAS METER
- GAS PIPELINE
- GAS VALVE
- WATER METER
- WATER VALVE
- FIRE HYDRANT
- RR CROSSING POINT

## OTHER

- SIMPLE DIMENSION LINE
- MIDSPAN POINT
- STATION
- POINT STATION LABEL
- STATION LINE

## LABELS

- VAULT/POLE/CABINET LABEL
- CONDUIT LABEL
- SPAN LABEL
- UNDERGROUND FIBER LABEL
- AERIAL FIBER LABEL

## WARNING:

LOCATION OF UNDERGROUND UTILITIES TO BE VERIFIED BY CONTRACTOR, CALL BEFORE DIGGING.



Know what's below.  
Call before you dig.



ERVIN CABLE CONSTRUCTION, LLC  
PERMITTING MANAGER: LINDSEY HUBBETT  
ONE PROSPECT AVE  
KATLAS CITY, MD 21108

## PERMIT AUTHORITY: COLUMBIA COUNTY

PERMIT ID:

PERMA125767360

DATE:

8/17/2026

WORK ORDER ID:

SEFH11261

TOTAL FIBER FOOTAGE:

34 FT

## LEGEND:

A.4



**WARNING:**  
LOCATION OF UNDERGROUND UTILITIES TO BE  
VERIFIED BY CONTRACTOR. CALL BEFORE  
DIGGING.



**kinetic**

ERWIN CABLE CONSTRUCTION, LLC

PROJECTING MANAGER: LINDSEY TRANFET

805 TROOST AVE

NATICKS CITY, MA 04556

|                                          |                           |
|------------------------------------------|---------------------------|
| <b>PERMIT AUTHORITY: COLUMBIA COUNTY</b> |                           |
| <b>PERMIT ID:</b> PERMA125767360         | <b>FIBER:</b> 34 FT       |
| <b>WORK ORDER ID:</b> SEFH11261          | <b>UG SPAN:</b> 34 FT     |
| <b>SCALE:</b> 1 IN : 35 FT               | <b>AERIAL SPAN:</b> 0 FT  |
|                                          |                           |
| <b>REV.</b>                              | <b>DATE / DESCRIPTION</b> |
| 1                                        | 8/17/2026                 |
| <b>GRID:</b>                             | <b>1 of 1</b>             |
| <b>DATE:</b>                             | <b>8/17/2026</b>          |
| <b>MAP SERIES:</b>                       | <b>A.5</b>                |