

**ADDENDUM #8  
BID NO. 2009-V**

**Issue Date: September 25, 2009**

**Project: Ellisville Water System Improvement – Expansion to US 441**

This ADDENDUM is issued to institute the included changes, additions and/or deletions to the Plans and Specifications for the construction of the **ELLISVILLE WATER SYSTEM IMPROVEMENTS – EXPANSION TO HWY 441** for **COLUMBIA COUNTY** and hereby becomes a part of said Plans and Specifications. Where an item on the original Plans and Specifications is amended, voided, or superseded by a modification contained in the ADDENDUM, the provisions of such item not specifically amended, voided, or superseded shall remain in effect.

**Response to Request for Additional Information #2**

Attached are responses to Requests for Additional Information on the above referenced project. Each bidder shall familiarize themselves with the information provided herein prior to the submission of their bid.

**Each bid submitted in response to this Request for Bids shall include an acknowledgement of this addendum.**

EUTAW UTILITIES, INC.  
Project Development...Concept to Completion



**Date: September 25, 2009**

**To: All Bidders**

**From: Eutaw Utilities**

**RE: Ellisville Water System Improvement  
Expansion to U.S. Highway 441  
Request for Additional Information #2**

The following questions were submitted in respect to the above referenced project.

1. In the specifications for both the 441 and I-75 projects, it is stated that the contractor is responsible for providing a project sign. The specs go on to say that the sign will be in accordance with the enclosed drawing and that the sign will be erected at the System office. You can find this on page 00400-3 for the I-75 and 441 projects.

- a. I don't see the enclosed drawing for the design of the sign. Do you have this?

**Attached to this addenda is a sample of the required sign.**

- b. Is the contractor responsible for providing a job site trailer for each project? If so, what are the specs for the trailer?

**A project trailer is not required for these projects.**

- c. Is the System office and the job site trailer the same thing? If so, where will this be located for each project?

**No office is provided. If office space is required by the contractor, the contractor should make provisions for providing their required space.**

2. I've gotten a few unsolicited quotes for construction videos and photography for both the 441 & I-75 projects. I have doubled checked the specs and don't see this called out. Is video & photography required for either of the projects?

**Project video and photography is required for each project to establish existing conditions of the job site.**

3. Where can I get a copy of the soil report for both projects (I-75 and US 441)?

**No subsurface investigation has been performed for these projects.**

4. The project specifications call for C110 fittings. Can C153 fittings be utilized in lieu of C110 fittings?

**C153 fittings will be acceptable for both projects.**

5. Are all of the permits received on this project?

**FDOT and FDEP permits have been obtained. The Contractor shall be responsible for obtaining the NPDES permit prior to construction.**

6. Can the Jack & Bore have a directional drill alternate?

**This will be subject to FDOT approval and may be substituted during construction at the bid price for directional drilling included in the contractor's bid.**

7. With the addition of 6" pipe down Wire Road, the Addendum did not show any additional right-of-way restoration. Will there be any additional ROW restoration?

**The pipe on Wire Road will be within the existing dirt road. Right-of-way restoration on this segment will not require seeding & mulching or sodding.**

8. As-built drawings states basically red line drawings will be turned in to the engineer, but the bid schedule indicates certified as-builts by RLS. Please clarify.

**Requirements for As-built information are detailed on Sheet 13, requiring certification by an engineer or surveyor registered as such in the State of Florida.**


9. Will water be available for use at the wellfield for flushing and testing of the pipelines, and if so, what would be the costs?

**It is uncertain at this time whether chlorinated water will be available at the well site by the time testing will be required. A Bid Alternate has been added to the Bid Form for the contractor to supply water for testing purposes. If the well site is unable to provide disinfected water, the contractor will be required to provide the required water under the Bid Alternate price.**

10. It appears to me that the footage of 15,300lf of 12" WM INCLUDES the footage of the 1050lf of 12" directional drill.

**The quantities for directional drill, water main and other items in the Bid Form have been revised. The updated Bid Form will be issued under separate Addenda (#9)**

# Temporary construction sign for American Recovery and Reinvestment Act (ARRA) projects

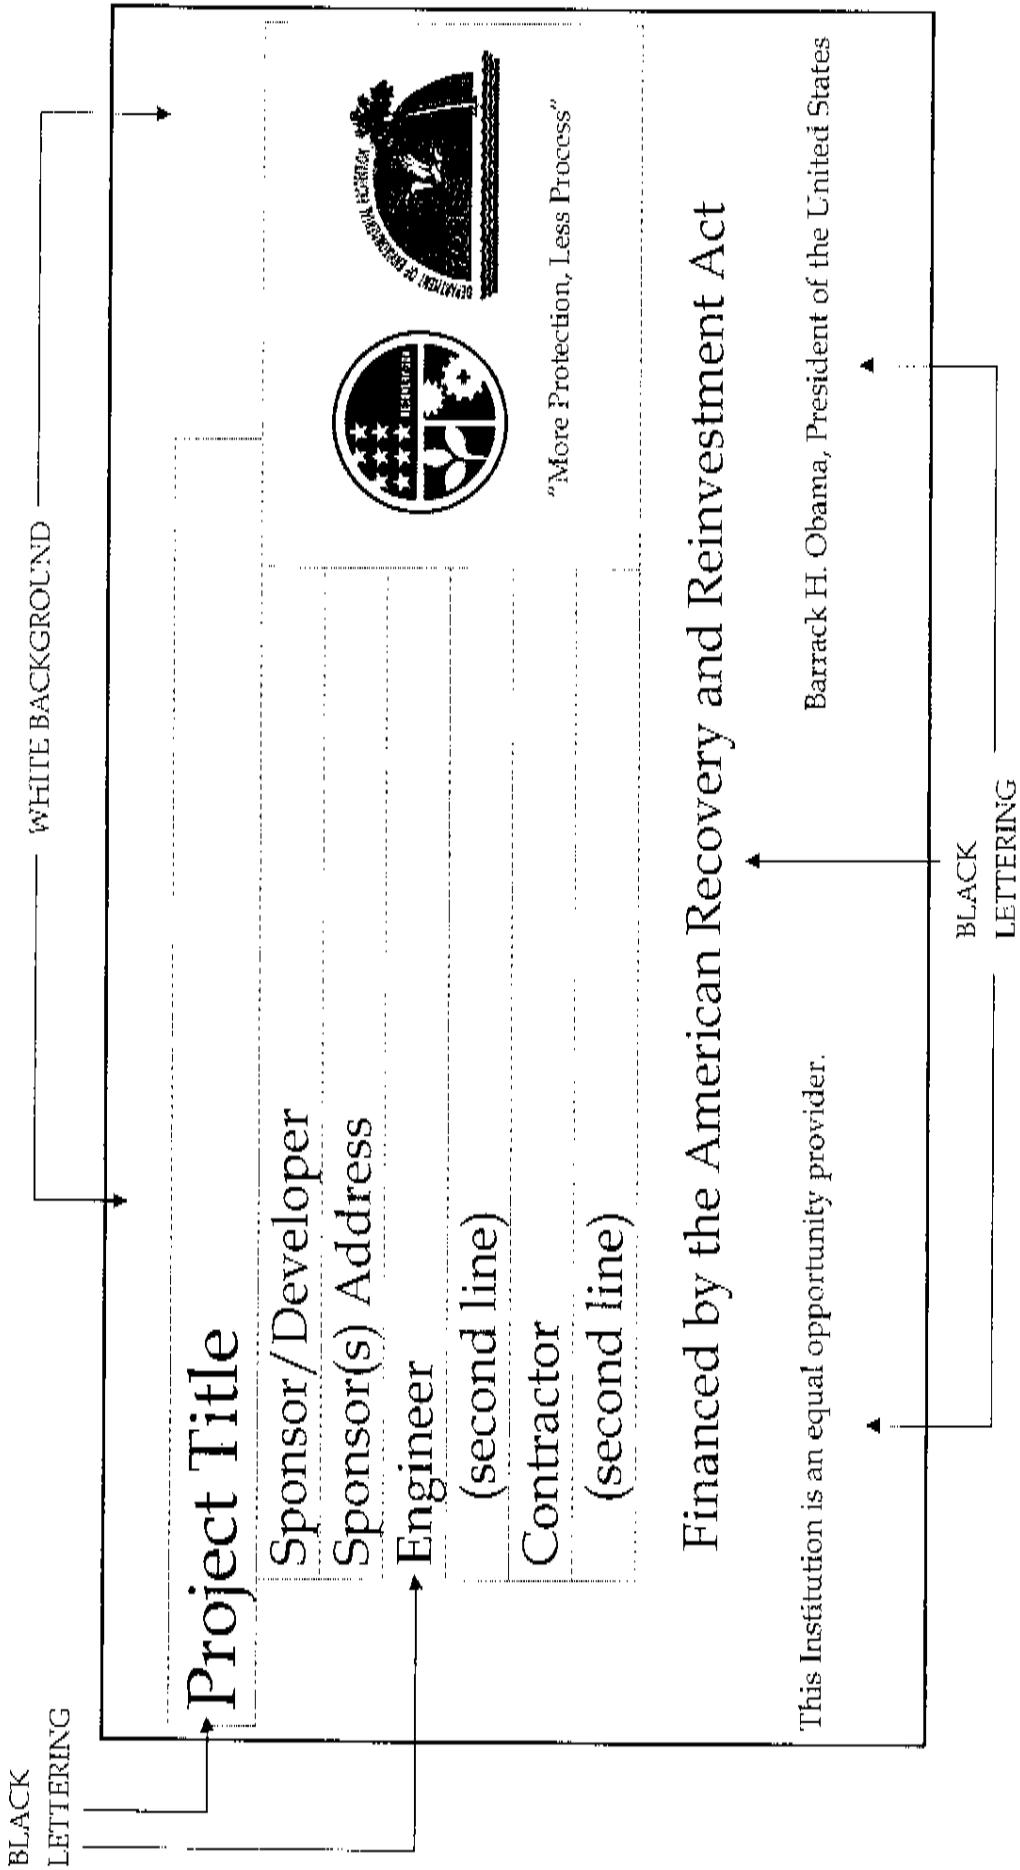

SIGN DIMENSIONS: 1200mm x 2400mm x 19mm (approximately 4' x 8' x 3/4")  
 PLYWOOD PANEL (APA RATED A-B GRADE EXTERIOR)