

BID TABULATION

Columbia County Board of County Commissioners

Date: July 23, 2026

Project Bid No: T26-19

Addendums Issued: 0

Company Name

Bid Amount

1. Anderson Columbia Co. \$ 395,430.14

2. Curt's Construction Inc. \$ 530,862.52

3. CA Boone Construction Inc. \$ 483,339.00

4. _____ \$ _____

5. _____ \$ _____

6. _____ \$ _____

7. _____ \$ _____

8. _____ \$ _____

Witnessed by 

COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS

PROJECT NUMBER T26-19 2025-2026 Annual Resurfacing – D4 SE Adams Str

BID PROPOSAL

THE UNDERSIGNED hereby proposes to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices

	ITEM	UNIT	QUANTITY	UNIT COST	TOTAL
1	Mobilization	LS	1	\$34,714.14	\$34,714.14
2	Maintenance of Traffic	LS	1	\$24,162.74	\$24,162.74
3	Silt Fence	LF	800	\$4.04	\$3,232.00
4	Mixing Existing Pavement (+/- 10")	SY	16222	\$1.11	\$18,006.42
5	Finishing Mixed Base and Shoulder	SY	21000	\$1.54	\$32,340.00
6	Borrow	CY	200	\$40.11	\$8,022.00
7	Subsoil Excavation	CY	2500	\$15.92	\$39,800.00
8	Asphaltic Conc SP 12 5 - Structural	TN	1380	\$136.13	\$187,859.40
9	Seed and Mulch	LS	1	\$3,563.82	\$3,563.82
10	Sod - 42"	SY	5700	\$2.67	\$15,219.00
11	Painted Pavement Markings	LS	1	\$28,510.62	\$28,510.62
TOTAL:				\$395,430.14	

Anderson Columbia Co., Inc.

Contractor Name (PRINT): E. Tony Williams Jr., Vice President

Contractor Signature

PAY ITEM NOTES

MOT

Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing/offsets, and any edge of pavement reclamation where required

Silt Fence

Shall be placed at all areas of potential stormwater runoff as directed by the Engineer

Mixing Existing Pavement

Average depth shall be 8-10 inches and shall be achieved with a mixing machine or engineer approved equivalent Mixing depth shall be to the bottom of the existing base layer/top of subgrade

Finishing Mixed Base/Shoulder

Includes construction layouts required, scarifying, shaping, shoulder clipping, compacting, finishing, and priming for placement of asphalt and sod 2% cross slope shall be maintained If roadway is in superelevation, cross slopes shall match existing superelevation slopes

Borrow

Shall be placed at direction of engineer

Subsoil Exc.

Item includes cost to remove 2' of unsuitable material and replace with suitable fill in 6" lifts meeting density requirements and shall be performed at direction of engineer

Asphalt 12.5

Includes placement of SP 12 5 @ +/-165 lb/sy To maintain level access to driveways, an apron shall be required at all driveway locations unless other directed by engineer and will be paid for under this item

Seed and Mulch

Shall be placed at all disturbed areas not sodded, as directed by the engineer

Sod

Includes cost to place sod in areas directed by the engineer

COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS


PROJECT NUMBER T26-19 2025-2026 Annual Resurfacing – D4 SE Adams Str

BID PROPOSAL

THE UNDERSIGNED hereby proposes to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices

	ITEM	UNIT	QUANTITY	UNIT COST	TOTAL
1	Mobilization	LS	1	27,559.00	27,559.00
2	Maintenance of Traffic	LS	1	21,800.00	21,800.00
3	Silt Fence	LF	800	1.00	800.00
4	Mixing Existing Pavement (+/- 10")	SY	16222	3.66	59,372.52
5	Finishing Mixed Base and Shoulder	SY	21000	2.67	56,070.00
6	Borrow	CY	200	17.50	3,500.00
7	Subsoil Excavation	CY	2500	19.25	48,125.00
8	Asphaltic Conc. SP 12.5 - Structural	TN	1380	185.00	255,300.00
9	Seed and Mulch	LS	1	3,000.00	3,000.00
10	Sod - 42"	SY	5700	4.98	28,386.00
11	Painted Pavement Markings	LS	1	26,950.00	26,950.00
TOTAL:					530,862.52

Contractor Name (PRINT): Curt's Construction, Inc.

Contactor Signature: 

PAY ITEM NOTES

MOT

Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing/offsets, and any edge of pavement reclamation where required

Silt Fence

Shall be placed at all areas of potential stormwater runoff as directed by the Engineer

Mixing Existing Pavement

Average depth shall be 8-10 inches and shall be achieved with a mixing machine or engineer approved equivalent. Mixing depth shall be to the bottom of the existing base layer/top of subgrade

Finishing Mixed Base/Shoulder

Includes construction layouts required, scarifying, shaping, shoulder clipping, compacting, finishing, and priming for placement of asphalt and sod 2% cross slope shall be maintained. If roadway is in superelevation, cross slopes shall match existing superelevation slopes

Borrow

Shall be placed at direction of engineer

Subsoil Exc.

Item includes cost to remove 2' of unsuitable material and replace with suitable fill in 6" lifts meeting density requirements and shall be performed at direction of engineer

Asphalt 12.5

Includes placement of SP 12.5 @ +/-165 lb/sy. To maintain level access to driveways, an apron shall be required at all driveway locations unless other directed by engineer and will be paid for under this item

Seed and Mulch

Shall be placed at all disturbed areas not sodded, as directed by the engineer

Sod

Includes cost to place sod in areas directed by the engineer

COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS

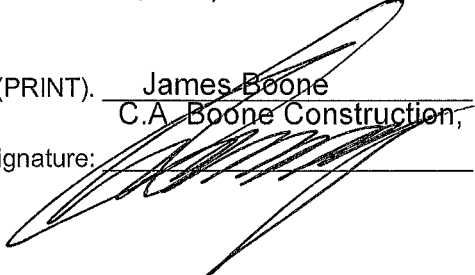
PROJECT NUMBER T26-19 2025-2026 Annual Resurfacing – D4 SE Adams Str

BID PROPOSAL

THE UNDERSIGNED hereby proposes to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices.

	ITEM	UNIT	QUANTITY	UNIT COST	TOTAL
1	Mobilization	LS	1	\$29,256.00	\$29,256.00
2	Maintenance of Traffic	LS	1	\$23,000.00	\$23,000.00
3	Silt Fence	LF	800	\$2.00	1,600.00
4	Mixing Existing Pavement (+/- 10")	SY	16222	\$1.50	\$24,333.00
5	Finishing Mixed Base and Shoulder	SY	21000	\$1.00	\$21,000.00
6	Borrow	CY	200	\$15.00	\$ 3,000.00
7	Subsoil Excavation	CY	2500	\$25.00	\$62,500.00
8	Asphaltic Conc SP 12 5 - Structural	TN	1380	\$190.00	\$262,200.00
9	Seed and Mulch	LS	1	\$3,500.00	\$3,500.00
10	Sod - 42"	SY	5700	\$3.50	\$19,950.00
11	Painted Pavement Markings	LS	1	\$33,000.00	\$33,000.00
TOTAL:				\$483,339.00	

Contractor Name (PRINT). James Boone
C.A. Boone Construction, Inc

Contractor Signature: 

PAY ITEM NOTES

MOT

Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing/offsets, and any edge of pavement reclamation where required

Silt Fence

Shall be placed at all areas of potential stormwater runoff as directed by the Engineer

Mixing Existing Pavement

Average depth shall be 8-10 inches and shall be achieved with a mixing machine or engineer approved equivalent. Mixing depth shall be to the bottom of the existing base layer/top of subgrade

Finishing Mixed Base/Shoulder

Includes construction layouts required, scarifying, shaping, shoulder clipping, compacting, finishing, and priming for placement of asphalt and sod. 2% cross slope shall be maintained. If roadway is in superelevation, cross slopes shall match existing superelevation slopes

Borrow

Shall be placed at direction of engineer

Subsoil Exc.

Item includes cost to remove 2' of unsuitable material and replace with suitable fill in 6" lifts meeting density requirements and shall be performed at direction of engineer

Asphalt 12.5

Includes placement of SP 12.5 @ +/- 165 lb/sy. To maintain level access to driveways, an apron shall be required at all driveway locations unless otherwise directed by engineer and will be paid for under this item

Seed and Mulch

Shall be placed at all disturbed areas not sodded, as directed by the engineer

Sod

Includes cost to place sod in areas directed by the engineer