

JEANETTE POWELL RESIDENCE

553 NORTHWEST HIGH POINT DRIVE  
LAKE CITY, FL 32055

PROJECT DESCRIPTION

INSTALL A ROOF MOUNTED SOLAR PHOTOVOLTAIC SYSTEM AT THE JEANETTE POWELL RESIDENCE.

SYSTEM SPECIFICATIONS

|                      |                            |
|----------------------|----------------------------|
| AHJ:                 | COUNTY OF COLUMBIA         |
| UTILITY COMPANY:     | FPL                        |
| SYSTEM SIZE:         | 10.800kW DC<br>7.830kW AC  |
| SOLAR MODULES MAKE:  | Q CELLS                    |
| MODEL:               | Q.PEAK DUO BLK ML-G10+ 400 |
| QUANTITY:            | 27                         |
| MICROINVERTERS MAKE: | ENPHASE                    |
| MODEL:               | IQ8PLUS-72-2-US            |
| QUANTITY:            | 27                         |

VICINITY MAP



GENERAL NOTES:

- THESE CONSTRUCTION DOCUMENTS HAVE BEEN BASED ON FIELD INSPECTIONS AND OTHER INFORMATION AVAILABLE AT THE TIME. ACTUAL FIELD CONDITIONS MAY REQUIRE MODIFICATIONS IN CONSTRUCTION DETAILS.
- CONTRACTOR HAS THE FULL RESPONSIBILITY TO CHECK AND VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS. ANY DISCREPANCIES SHALL BE REPORTED TO THE ENGINEER BEFORE PROCEEDING WITH THE WORK. ANY WORK STARTED BEFORE CONSULTATION AND ACCEPTANCE BY THE ENGINEER SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR AND SHALL BE SUBJECT TO CORRECTION BY THEM WITHOUT ADDITIONAL COMPENSATION.
- THE CONTRACTOR SHALL BE HELD RESPONSIBLE FOR THE PROPER INSTALLATION AND COMPLETION OF THE WORK WITH APPROVED MATERIALS.
- THE EQUIPMENT AND ALL ASSOCIATED WIRING AND INTERCONNECTION SHALL BE INSTALLED ONLY BY QUALIFIED PEOPLE. A QUALIFIED PERSON IS ONE WHO HAS SKILLS AND KNOWLEDGE RELATED TO THE CONSTRUCTION AND OPERATION OF THE ELECTRICAL EQUIPMENT AND INSTALLATIONS AND HAS RECEIVED SAFETY TRAINING TO RECOGNIZE AND AVOID THE HAZARDS INVOLVED. (NEC 690.4(C), NEC 2017).
- NEW CONDUIT ROUTING SHOWN IS ESSENTIALLY SCHEMATIC. CONTRACTOR SHALL LAY OUT RUNS TO SUIT FIELD CONDITIONS AND THE COORDINATION REQUIREMENTS OF OTHER TRADES.
- ARRAY WIRING SHOULD NOT BE READILY ACCESSIBLE EXCEPT TO QUALIFIED PERSONNEL.
- THE AC DISCONNECT MUST BE ACCESSIBLE TO QUALIFIED UTILITY PERSONNEL, BE LOCKABLE, AND BE A VISIBLE-BREAK SWITCH.



2023.04.25  
13:58:32  
04'00'

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY OMAR TIRADO ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT VCONSIDERED SIGNED AND SEAL, AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES



SHEET INDEX

|                  |                       |
|------------------|-----------------------|
| TS001            | TITLE SHEET           |
| E001             | ROOF PLAN             |
| E002             | LINE DIAGRAM          |
| E003             | LABELS                |
| S001             | ATTACHMENT PLAN       |
| MSD              | DATA SHEETS           |
|                  |                       |
|                  |                       |
|                  |                       |
|                  |                       |
|                  |                       |
|                  |                       |
|                  |                       |
|                  |                       |
|                  |                       |
| Governing Codes  |                       |
| Electrical Code  | 2017 NEC              |
| Fire Code        | 2018 NFPA / 2020 FFPC |
| Building Code    | 2020 FBC              |
| Residential Code | 2018 IRC              |



ATLANTIC KEY ENERGY  
12600 CHALLENGER PKWY,  
STE 200  
ORLANDO, FL 32826  
1 (407) 988-0273



|                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------|
| LOCATION                                                                                                                           |
| JEANETTE POWELL<br>RESIDENCE<br>PROJECT #: P-0075231<br>553 NORTHWEST HIGH POINT DRIVE<br>LAKE CITY, FL, 32055<br>METER #: ACD4658 |


|             |  |          |     |
|-------------|--|----------|-----|
| DRAWN BY:   |  | D.S.     |     |
| DATE:       |  | 04/25/23 |     |
| REVISIONS   |  |          |     |
| DESCRIPTION |  | DATE     | REV |
|             |  |          |     |
|             |  |          |     |
|             |  |          |     |

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |


|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |

|             |              |
|-------------|--------------|
| SHEET TITLE | SHEET NUMBER |
| TITLE SHEET | TS001        |

|     |                      |                                                                  |                          |
|-----|----------------------|------------------------------------------------------------------|--------------------------|
| X   | - MODULE STRING ID   | SUB                                                              | - SUBPANEL               |
| (E) | - EXISTING           | JB                                                               | - JUNCTION BOX           |
| (N) | - NEW                | SCT                                                              | - STRING CENTER TAP      |
| M   | - UTILITY METER      | <hr style="border: 1px solid red;"/> - APPROX. CONDUIT/ATTIC RUN |                          |
| MSP | - MAIN SERVICE PANEL | BAT                                                              | - ENERGY STORAGE         |
| ACD | - AC DISCONNECT      | ICD                                                              | - INTERCONNECTION DEVICE |
| CB  | - COMBINER BOX       | BUL                                                              | - BACK UP LOADS PANEL    |
| ⋯   | - FIRE CODE SETBACKS |                                                                  |                          |

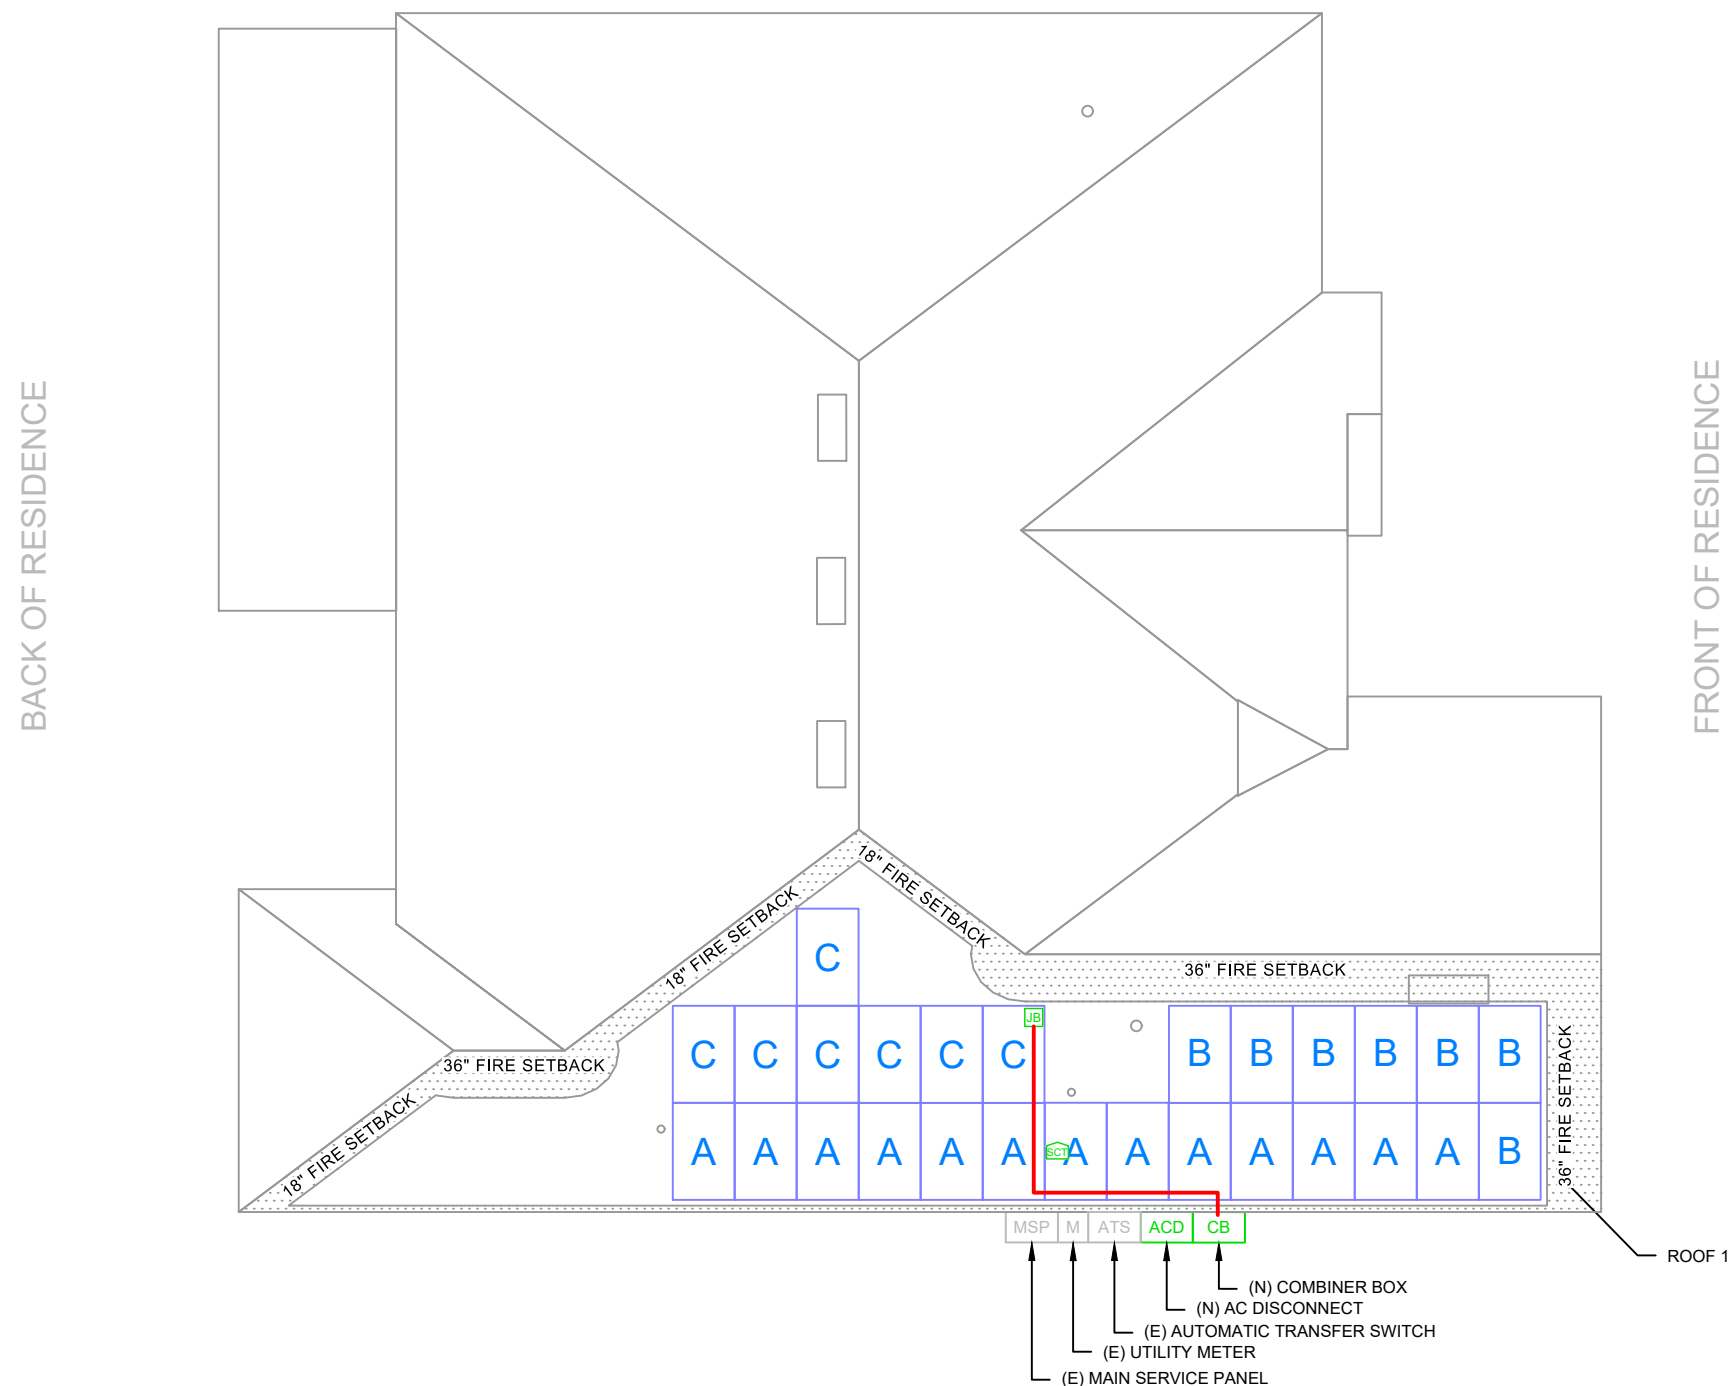

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY OMAR  
TIRADO ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES  
OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEAL, AND  
THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES



SCALE:  $3/32" = 1'-0"$



ATLANTIC KEY ENERGY  
12600 CHALLENGER PKWY,  
STE 200  
ORLANDO, FL 32826  
1 (407) 988-0273



LOCATION

JEANETTE POWELL  
RESIDENCE  
PROJECT #: P-0075231  
553 NORTHWEST HIGH POINT DRIVE  
LAKE CITY, FL, 32055  
METER #: ACD4658

|           |          |
|-----------|----------|
| DRAWN BY: | D.S.     |
| DATE:     | 04/25/20 |


## REVISIONS

| DESCRIPTION | DATE | REV |
|-------------|------|-----|
|             |      |     |
|             |      |     |
|             |      |     |

| SHEET TITLE  | SHEET NUMBER |
|--------------|--------------|
| ROOF<br>PLAN | B001         |

| ID | INITIAL CONDUCTOR LOCATION | FINAL CONDUCTOR LOCATION | MIN. CONDUCTOR SIZE (AWG) |               | MIN. DIA CONDUIT SIZE (IN.) | # OF PARALLEL CIRCUITS | CURRENT-CARRYING CONDUCTORS IN CONDUIT | OCPD (A) | MIN. EGC SIZE (AWG) |               | TEMP. CORR. FACTOR |      | CONDUIT FILL FACTOR | CONT. CURRENT (A) | MAX. CURRENT (A) | BASE AMP. (A) | DERATED AMP. (A) | TERM. AMP. RATING (A) | LENGTH (FT) | VOLTAGE DROP (%) |
|----|----------------------------|--------------------------|---------------------------|---------------|-----------------------------|------------------------|----------------------------------------|----------|---------------------|---------------|--------------------|------|---------------------|-------------------|------------------|---------------|------------------|-----------------------|-------------|------------------|
| 1  | STRING A                   | JUNCTION BOX             | 12                        | Q CABLE       | N/A                         | 1                      | 2                                      | N/A      | 6                   | BARE COPPER   | 0.76               | 55°C | N/A                 | 15.73             | 19.66            | 30            | N/A              | N/A                   | 61.00       | 0.64             |
| 2  | STRING B                   | JUNCTION BOX             | 12                        | Q CABLE       | N/A                         | 1                      | 2                                      | N/A      | 6                   | BARE COPPER   | 0.76               | 55°C | N/A                 | 8.47              | 10.59            | 30            | N/A              | N/A                   | 32.00       | 0.45             |
| 3  | STRING C                   | JUNCTION BOX             | 12                        | Q CABLE       | N/A                         | 1                      | 2                                      | N/A      | 6                   | BARE COPPER   | 0.76               | 55°C | N/A                 | 8.47              | 10.59            | 30            | N/A              | N/A                   | 28.00       | 0.39             |
| 4  | JUNCTION BOX               | COMBINER BOX             | 10                        | THWN-2 COPPER | 0.75 LTNM                   | 3                      | 6                                      | 20       | 10                  | THWN-2 COPPER | 0.76               | 55°C | 0.8                 | 15.73             | 19.66            | 40            | 24.3             | 35                    | 35.00       | 0.57             |
| 5  | COMBINER BOX               | AC DISCONNECT            | 8                         | THWN-2 COPPER | 0.75 LTNM                   | 1                      | 3                                      | 50       | 10                  | THWN-2 COPPER | 0.96               | 34°C | 1                   | 32.67             | 40.84            | 55            | 52.8             | 50                    | 5.00        | 0.11             |
| 6  | AC DISCONNECT              | MSP                      | 6                         | THWN-2 COPPER | 0.75 LTNM                   | 1                      | 3                                      | N/A      | -                   | -             | 0.96               | 34°C | 1                   | 32.67             | 40.84            | 75            | 72.0             | 65                    | 5.00        | 0.07             |

| LIST OF EQUIPMENT |     |                                                       |
|-------------------|-----|-------------------------------------------------------|
| EQUIPMENT         | QTY | DESCRIPTION                                           |
| SOLAR PV MODULE   | 27  | Q CELLS Q.PEAK DUO BLK ML-G10+ 400                    |
| MICROINVERTER     | 27  | ENPHASE IQ8PLUS-72-2-US                               |
| JUNCTION BOX      | 1   | JUNCTION BOX, NEMA 3R, UL LISTED                      |
| COMBINER BOX      | 1   | ENPHASE IQ COMBINER 4/4C W/ IQ ENVOY (X-IQ-AM1-240-4) |
| AC DISCONNECT     | 1   | 60A FUSED AC DISCONNECT, 240V, NEMA 3R, UL LISTED     |

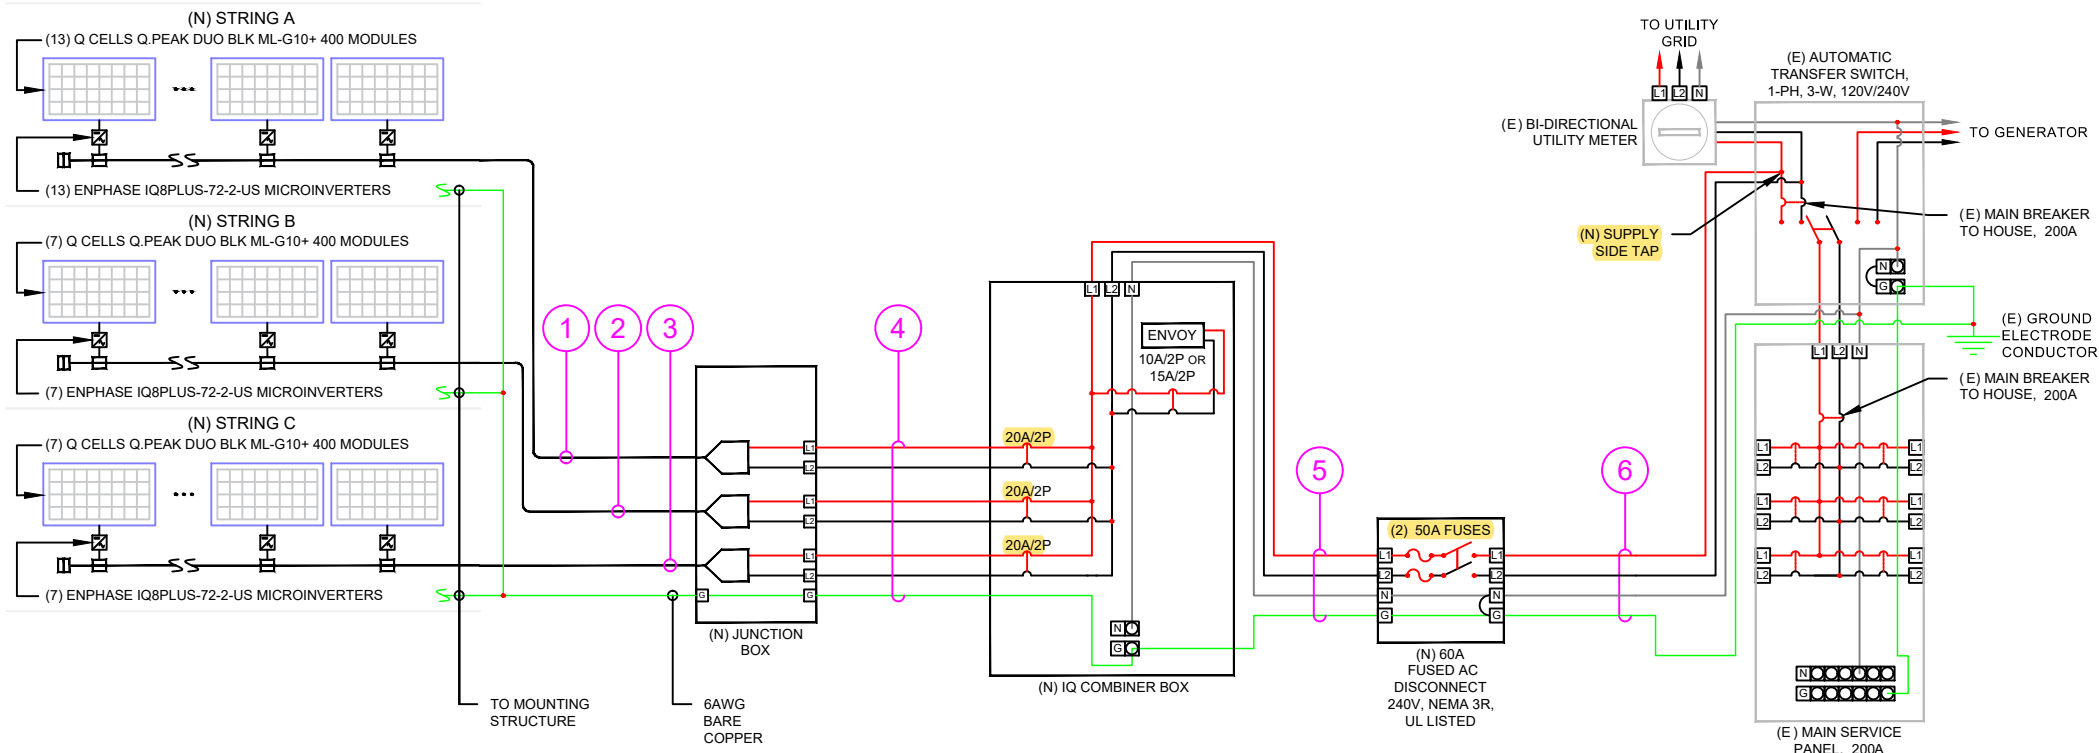

DESIGN TEMPERATURE SPECIFICATIONS

|                               |      |
|-------------------------------|------|
| RECORD LOW TEMP               | -5°C |
| AMBIENT TEMP. (HIGH TEMP. 2%) | 34°C |
| CONDUIT HEIGHT                | 1.0" |
| CONDUCTOR TEMP. RATE (ROOF)   | 55°C |



THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY OMAR TIRADO ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEAL, AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES



ATLANTIC KEY ENERGY  
12600 CHALLENGER PKWY,  
STE 200  
ORLANDO, FL 32826  
1 (407) 988-0273



LOCATION

JEANETTE POWELL  
RESIDENCE  
PROJECT #: P-0075231  
553 NORTHWEST HIGH POINT DRIVE  
LAKE CITY, FL, 32055  
METER #: ACD4658

|             |  |          |     |
|-------------|--|----------|-----|
| DRAWN BY:   |  | D.S.     |     |
| DATE:       |  | 04/25/23 |     |
| REVISIONS   |  |          |     |
| DESCRIPTION |  | DATE     | REV |
|             |  |          |     |
|             |  |          |     |
|             |  |          |     |

|             |              |
|-------------|--------------|
| SHEET TITLE | SHEET NUMBER |
|-------------|--------------|

3-LINE  
DIAGRAM

E003






| ARRAY DESCRIPTION |              |         |               |            |               |               |
|-------------------|--------------|---------|---------------|------------|---------------|---------------|
| ROOF              | # OF MODULES | AZIMUTH | TILT          | TRUSS SIZE | TRUSS SPACING | ROOF MATERIAL |
| #1                | 27           | 195     | 7/12 (30.26°) | 2X4        | 24"O.C.       | COMP SHINGLE  |

| ROOF'S GENERAL NOTES                                                                                                                                                                                                                                                                                                                                                                                                                     |  |  |  |  |  |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|
| 1- CONTRACTOR/INSTALLER TO VERIFY ROOF CONDITIONS FOR PROPPER INSTALLATION OF THE PV SYSTEM.<br>2- CONTRACTOR/INSTALLER TO NOTIFY THE OWNER IMMEDIATELY OF ANY ROOF DEFICIENCIES AND/OR REPAIR REQUIRED TO INSTALL THE PV SYSTEM.<br>3- EOR DOES NOT ASSUME ANY RESPONSIBILITY FOR THE INSTALLATION OF ANY PV SYSTEM ON DEFICIENT ROOFS.<br>4- CONTRACTOR/INSTALLER ASSUMES ALL RESPONSIBILITY TO INSTALL AS PER MANUFACTURER STANDARDS. |  |  |  |  |  |  |

BACK OF RESIDENCE

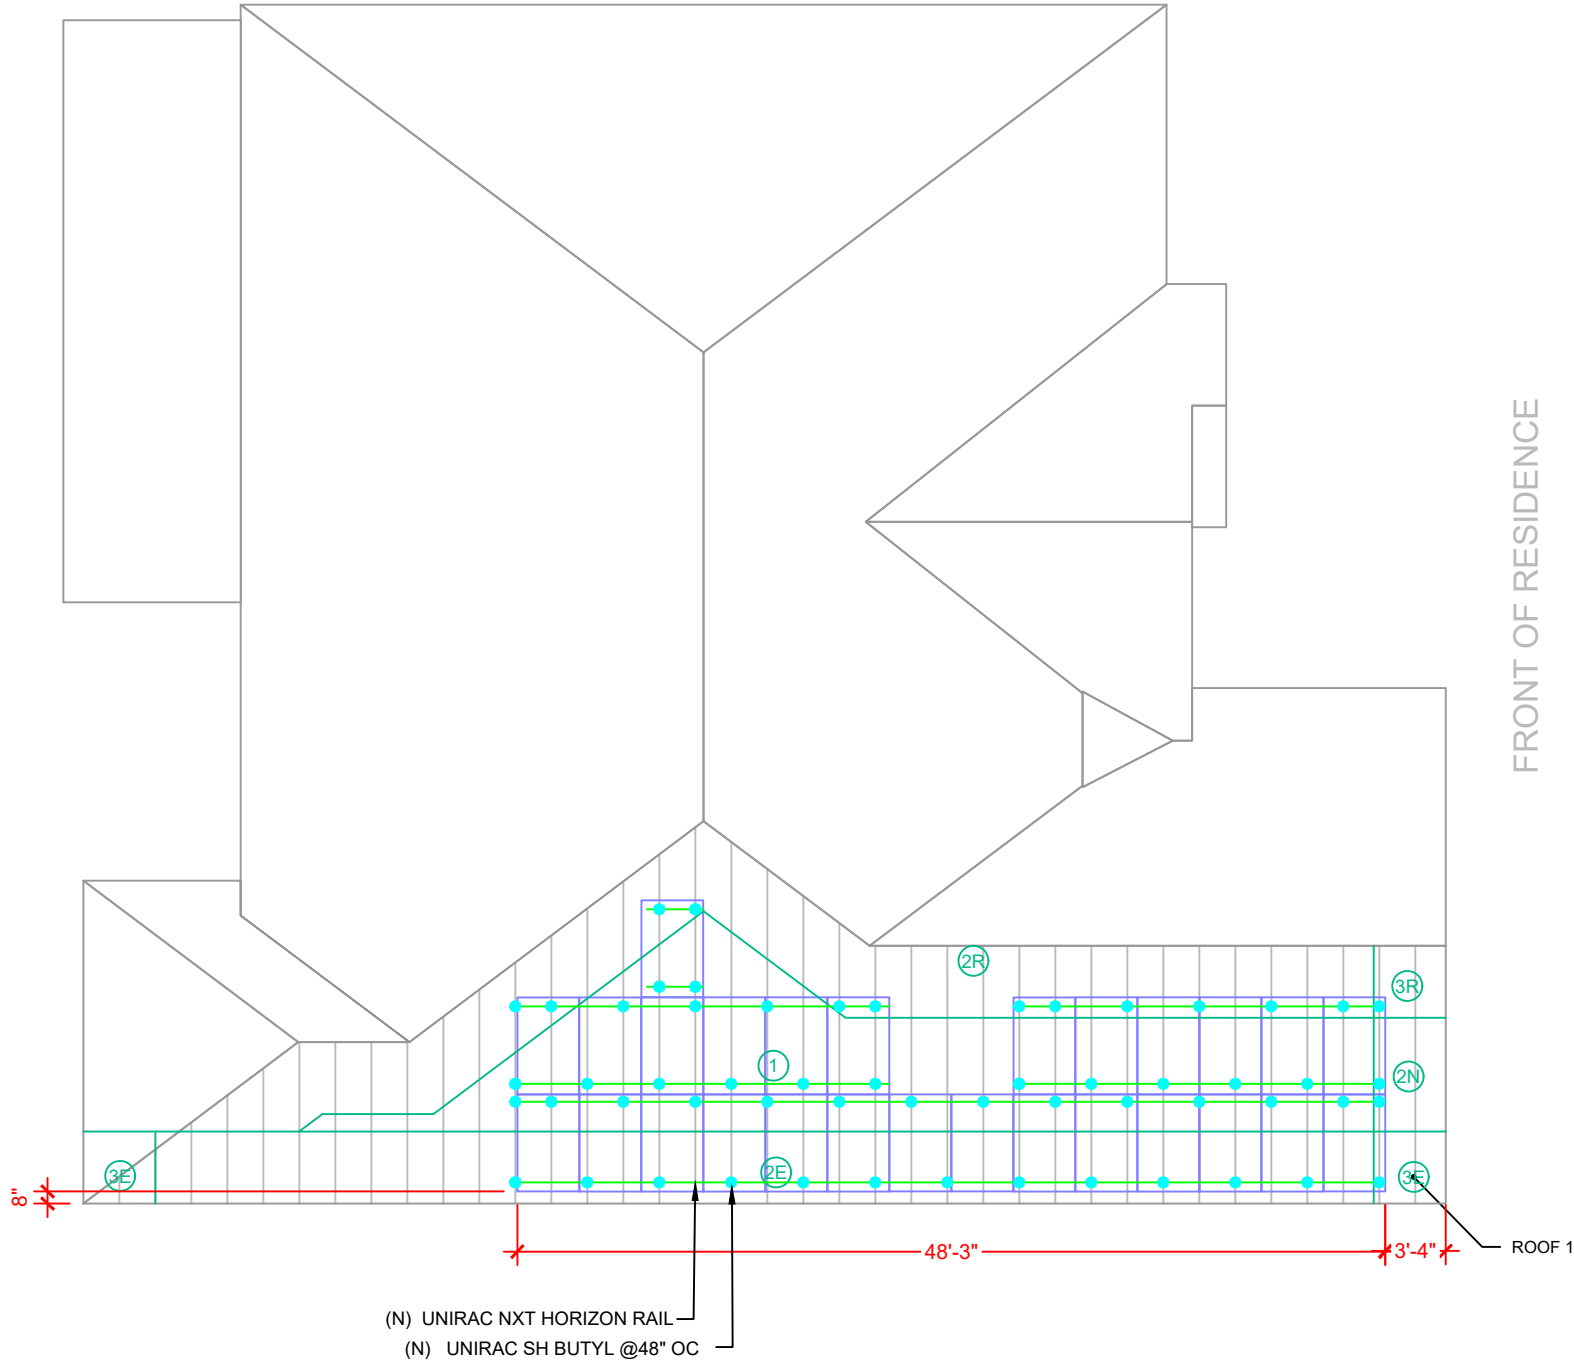

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY OMAR TIRADO ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEAL, AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

| DESIGN SPECIFICATION   |             |
|------------------------|-------------|
| RISK CATEGORY          | II          |
| CONSTRUCTION           | SFD         |
| ZONING                 | RESIDENTIAL |
| SNOW LOAD (ASCE 7-16)  | 0 PSF       |
| EXPOSURE CATEGORY      | B           |
| WIND SPEED (ASCE 7-16) | 120 MPH     |

ROOF PLAN  
SCALE: 3/32" = 1'-0"



ATLANTIC KEY ENERGY  
12600 CHALLENGER PKWY,  
STE 200  
ORLANDO, FL 32826  
1 (407) 988-0273



LOCATION  
  
JEANETTE POWELL  
RESIDENCE  
PROJECT #: P-0075231  
553 NORTHWEST HIGH POINT DRIVE  
LAKE CITY, FL, 32055  
METER #: ACD4658

|             |      |          |     |
|-------------|------|----------|-----|
| DRAWN BY:   |      | D.S.     |     |
| DATE:       |      | 04/25/23 |     |
| REVISIONS   |      |          |     |
| DESCRIPTION | DATE |          | REV |
|             |      |          |     |
|             |      |          |     |
|             |      |          |     |

| SHEET TITLE  |  | SHEET NUMBER |  |
|--------------|--|--------------|--|
| ATTACH. PLAN |  | S001         |  |





# Q.peak Duo Blk ML-G10+ 385-405

ENDURING HIGH  
PERFORMANCE



## BREAKING THE 20% EFFICIENCY BARRIER

Q.antum Duo Z Technology with zero gap cell layout boosts module efficiency up to 20.9%.



## THE MOST THOROUGH TESTING PROGRAMME IN THE INDUSTRY

Q CELLS is the first solar module manufacturer to pass the most comprehensive quality programme in the industry: The new "Quality Controlled PV" of the independent certification institute TÜV Rheinland.



## INNOVATIVE ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behavior.



## ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID Technology, Anti PID Technology<sup>1</sup>, Hot-Spot Protect and Traceable Quality Tra.Q<sup>TM</sup>.



## EXTREME WEATHER RATING

High-tech aluminum alloy frame, certified for high snow (5400 Pa) and wind loads (4000 Pa).



## A RELIABLE INVESTMENT

Inclusive 25-year product warranty and 25-year linear performance warranty<sup>2</sup>.

<sup>1</sup> APT test according to IEC/TS 62804-1:2015, method A (-1500 V, 95%)  
<sup>2</sup> See data sheet on rear for further information.

THE IDEAL SOLUTION FOR:




Rooftop areas on  
essential buildings

Engineered in Germany

Q CELLS

## MECHANICAL SPECIFICATION

|              |                                                                                                           |
|--------------|-----------------------------------------------------------------------------------------------------------|
| Format       | 74.0 in x 41.1 in x 1.26 in (including frame)<br>(1879 mm x 1045 mm x 32 mm)                              |
| Weight       | 48.5 lbs (22.0 kg)                                                                                        |
| Front Cover  | 0.13 in (3.2 mm) thermally pre-stressed glass with<br>anti-reflection technology                          |
| Back Cover   | Composite film                                                                                            |
| Frame        | Black anodized aluminum                                                                                   |
| Cell         | 6x22 monocrystalline Q.antum solar half cells                                                             |
| Junction Box | 2.06-3.99 in x 1.26-2.86 in x 0.50-0.71 in<br>(53-101 mm x 32-60 mm x 13-18 mm), IP67, with bypass diodes |
| Cable        | 4 mm <sup>2</sup> Solar cable; (+) ≥ 49.2 in (1250 mm), (-) ≥ 49.2 in (1250 mm)                           |
| Connector    | Stäubli MC4, IP68                                                                                         |

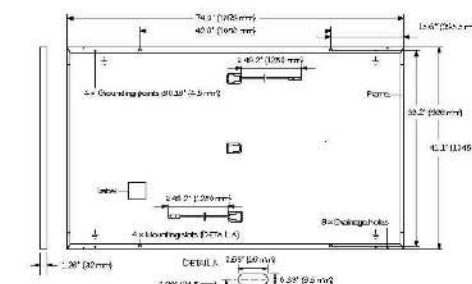


## ELECTRICAL CHARACTERISTICS

| POWER CLASS                                                                                     |                                    | 385                  | 390    | 395    | 400    | 405    |
|-------------------------------------------------------------------------------------------------|------------------------------------|----------------------|--------|--------|--------|--------|
| MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC <sup>1</sup> (POWER TOLERANCE +5 W / -0 W) |                                    |                      |        |        |        |        |
| Minimum                                                                                         | Power at MPP <sup>2</sup>          | P <sub>MPP</sub> [W] | 385    | 390    | 395    | 400    |
|                                                                                                 | Short Circuit Current <sup>1</sup> | I <sub>SC</sub> [A]  | 11.04  | 11.07  | 11.10  | 11.14  |
|                                                                                                 | Open Circuit Voltage <sup>1</sup>  | V <sub>OC</sub> [V]  | 43.18  | 43.23  | 43.27  | 43.30  |
|                                                                                                 | Current at MPP                     | I <sub>MPP</sub> [A] | 10.69  | 10.65  | 10.71  | 10.83  |
|                                                                                                 | Voltage at MPP                     | V <sub>MPP</sub> [V] | 36.86  | 36.62  | 36.88  | 37.08  |
|                                                                                                 | Efficiency <sup>1</sup>            | η [%]                | ≥ 19.6 | ≥ 19.9 | ≥ 20.1 | ≥ 20.4 |
| MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT <sup>3</sup>                           |                                    |                      |        |        |        |        |
| Minimum                                                                                         | Power at MPP                       | P <sub>MPP</sub> [W] | 388.8  | 392.6  | 396.8  | 400.1  |
|                                                                                                 | Short Circuit Current <sup>1</sup> | I <sub>SC</sub> [A]  | 8.90   | 8.92   | 8.96   | 8.97   |
|                                                                                                 | Open Circuit Voltage               | V <sub>OC</sub> [V]  | 42.62  | 42.65  | 42.68  | 42.72  |
|                                                                                                 | Current at MPP                     | I <sub>MPP</sub> [A] | 8.35   | 8.41   | 8.46   | 8.51   |
|                                                                                                 | Voltage at MPP                     | V <sub>MPP</sub> [V] | 34.59  | 34.81  | 35.03  | 35.25  |

<sup>1</sup> Measurement tolerances: P<sub>MPP</sub> ± 0.5%; I<sub>SC</sub> ± 0.5%; V<sub>OC</sub> ± 0.5%; at STC: 1000 W/m<sup>2</sup>, 25 ± 2°C, AM 1.5 according to IEC 60804-3 + 800 W/m<sup>2</sup>, NMOT, spectrum AM 1.5


## Q CELLS PERFORMANCE WARRANTY



At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 83.5% of nominal power up to 10 years. At least 80% of nominal power up to 25 years.

All data with measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organization of your respective country.

## PERFORMANCE AT LOW IRRADIANCE



Typical module performance under low irradiance conditions in comparison to STC conditions (25°C, 1000 W/m<sup>2</sup>)

## TEMPERATURE COEFFICIENTS

|                                             |   |       |       |                                            |      |       |                      |
|---------------------------------------------|---|-------|-------|--------------------------------------------|------|-------|----------------------|
| Temperature Coefficient of I <sub>SC</sub>  | α | [%/K] | -0.04 | Temperature Coefficient of V <sub>OC</sub> | β    | [%/K] | -0.27                |
| Temperature Coefficient of P <sub>MPP</sub> | γ | [%/K] | -0.34 | Nominal Module Operating Temperature       | NMOT | [°F]  | 109 ± 5.4 (43 ± 3°C) |

## PROPERTIES FOR SYSTEM DESIGN

|                                          |                        |                            |                                                 |                                           |
|------------------------------------------|------------------------|----------------------------|-------------------------------------------------|-------------------------------------------|
| Maximum System Voltage V <sub>sys</sub>  | [V]                    | 1000 (IEC)/1000 (UL)       | PV module classification                        | Class I                                   |
| Maximum Series Fuse Rating               | [A DC]                 | 20                         | Fire Rating based on ANSI/UL 61730              | TYPE 2                                    |
| Max. Design Load, Push/Pull <sup>1</sup> | [lbs/ft <sup>2</sup> ] | 75 (3600 Pa)/55 (2600 Pa)  | Permitted Module Temperature on Continuous Duty | -40°F up to +135°F<br>(-40°C up to +55°C) |
| Max. Test Load, Push/Pull <sup>2</sup>   | [lbs/ft <sup>2</sup> ] | 113 (5400 Pa)/84 (4000 Pa) |                                                 |                                           |

<sup>1</sup> See Installation Manual

## QUALIFICATIONS AND CERTIFICATES

UL 6170, CE-compliant  
Quality Controlled PV - TÜV Rheinland  
IEC 61215/IEC 61730, IEC 61730-2:2016  
US Patent No. 9,893,215 (solar cells)  
QCPV Certified technology



|  | Horizontal packaging | 75.4 in<br>1940 mm | 43.3 in<br>1100 mm | 48.0 in<br>1220 mm | 165 lbs<br>75 kg | 24<br>palets | 24<br>pellets | 32<br>modules |
|--|----------------------|--------------------|--------------------|--------------------|------------------|--------------|---------------|---------------|
|--|----------------------|--------------------|--------------------|--------------------|------------------|--------------|---------------|---------------|

**Notes:** Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Harwin Q CELLS America Inc.  
400 Spectrum Center Drive, Suite 1400, Irvine, CA 92618, USA | TEL +1 949 748 59 86 | EMAIL inquiry@us.q-cells.com | WEB www.q-cells.us

Typical conditions all electrical technical drawings © Q CELLS Q.peak Duo Blk ML-G10+ 385-405 2021-05\_Rev01\_RNA





# IQ8 Series Microinverters

Our newest IQ8 Microinverters are the industry's first microgrid-forming, software-defined microinverters with split-phase power conversion capability to convert DC power to AC power efficiently. The brain of the semiconductor-based microinverter is our proprietary application-specific integrated circuit (ASIC) which enables the microinverter to operate in grid-tied or off-grid modes. This chip is built in advanced 55nm technology with high speed digital logic and has super-fast response times to changing loads and grid events, alleviating constraints on battery sizing for home energy systems.



Part of the Enphase Energy System, IQ8 Series Microinverters integrate with the Enphase IQ Battery, Enphase IQ Gateway, and the Enphase App monitoring and analysis software.



IQ8 Series Microinverters redefine reliability standards with more than one million cumulative hours of power-on testing, enabling an industry-leading limited warranty of up to 25 years.



Connect PV modules quickly and easily to IQ8 Series Microinverters using the included Q-DCC-2 adapter cable with plug-n-play MC4 connectors.



IQ8 Series Microinverters are UL Listed as PV Rapid Shut Down Equipment and conform with various regulations, when installed according to manufacturer's instructions.

## Easy to install

- Lightweight and compact with plug-n-play connectors
- Power Line Communication (PLC) between components
- Faster installation with simple two-wire cabling

## High productivity and reliability

- Produce power even when the grid is down
- More than one million cumulative hours of testing
- Class II double-insulated enclosure
- Optimized for the latest high-powered PV modules

## Microgrid-forming

- Complies with the latest advanced grid support
- Remote automatic updates for the latest grid requirements
- Configurable to support a wide range of grid profiles
- Meets CA Rule 21 (UL 1741-SA) requirements

# IQ8 Series Microinverters

| INPUT DATA (DC)                                      |    | IQ8-60-2-US                                                                                                                                                                                                                                                                                                                                                                                             | IQ8PLUS-72-2-US | IQ8M-72-2-US                | IQ8A-72-2-US | IQ8H-240-72-2-US | IQ8H-208-72-2-US |
|------------------------------------------------------|----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------------|--------------|------------------|------------------|
| Commonly used module pairings <sup>2</sup>           | W  | 235 – 350                                                                                                                                                                                                                                                                                                                                                                                               | 235 – 440       | 260 – 460                   | 295 – 500    | 320 – 540+       | 295 – 500+       |
| Module compatibility                                 |    | 60-cell/120 half-cell, 66-cell/132 half-cell and 72-cell/144 half-cell                                                                                                                                                                                                                                                                                                                                  |                 |                             |              |                  |                  |
| MPPT voltage range                                   | V  | 27 – 37                                                                                                                                                                                                                                                                                                                                                                                                 | 29 – 45         | 33 – 45                     | 36 – 45      | 38 – 45          | 38 – 45          |
| Operating range                                      | V  | 25 – 48                                                                                                                                                                                                                                                                                                                                                                                                 |                 |                             | 25 – 58      |                  |                  |
| Min/max start voltage                                | V  | 30 / 48                                                                                                                                                                                                                                                                                                                                                                                                 |                 |                             | 30 / 58      |                  |                  |
| Max input DC voltage                                 | V  | 50                                                                                                                                                                                                                                                                                                                                                                                                      |                 |                             | 60           |                  |                  |
| Max DC current <sup>3</sup> [module Isc]             | A  |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | 15                          |              |                  |                  |
| Overvoltage class DC port                            |    |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | II                          |              |                  |                  |
| DC port backfeed current                             | mA |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | 0                           |              |                  |                  |
| PV array configuration                               |    | 1x1 Ungrounded array; No additional DC side protection required; AC side protection requires max 20A per branch circuit                                                                                                                                                                                                                                                                                 |                 |                             |              |                  |                  |
| OUTPUT DATA (AC)                                     |    | IQ8-60-2-US                                                                                                                                                                                                                                                                                                                                                                                             | IQ8PLUS-72-2-US | IQ8M-72-2-US                | IQ8A-72-2-US | IQ8H-240-72-2-US | IQ8H-208-72-2-US |
| Peak output power                                    | VA | 245                                                                                                                                                                                                                                                                                                                                                                                                     | 300             | 330                         | 366          | 384              | 366              |
| Max continuous output power                          | VA | 240                                                                                                                                                                                                                                                                                                                                                                                                     | 290             | 325                         | 349          | 380              | 360              |
| Nominal (L-L) voltage/range <sup>4</sup>             | V  |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | 240 / 211 – 264             |              |                  | 208 / 183 – 250  |
| Max continuous output current                        | A  | 1.0                                                                                                                                                                                                                                                                                                                                                                                                     | 1.21            | 1.35                        | 1.45         | 1.58             | 1.73             |
| Nominal frequency                                    | Hz |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | 60                          |              |                  |                  |
| Extended frequency range                             | Hz |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | 50 – 68                     |              |                  |                  |
| Max units per 20 A (L-L) branch circuit <sup>5</sup> |    | 16                                                                                                                                                                                                                                                                                                                                                                                                      | 13              | 11                          | 11           | 10               | 9                |
| Total harmonic distortion                            |    |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | <5%                         |              |                  |                  |
| Overvoltage class AC port                            |    |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | III                         |              |                  |                  |
| AC port backfeed current                             | mA |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | 30                          |              |                  |                  |
| Power factor setting                                 |    |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | 1.0                         |              |                  |                  |
| Grid-tied power factor (adjustable)                  |    |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | 0.85 leading – 0.85 lagging |              |                  |                  |
| Peak efficiency                                      | %  | 97.5                                                                                                                                                                                                                                                                                                                                                                                                    | 97.6            | 97.6                        | 97.6         | 97.6             | 97.4             |
| CEC weighted efficiency                              | %  | 97                                                                                                                                                                                                                                                                                                                                                                                                      | 97              | 97                          | 97.5         | 97               | 97               |
| Night-time power consumption                         | mW |                                                                                                                                                                                                                                                                                                                                                                                                         |                 | 60                          |              |                  |                  |
| MECHANICAL DATA                                      |    |                                                                                                                                                                                                                                                                                                                                                                                                         |                 |                             |              |                  |                  |
| Ambient temperature range                            |    | -40°C to +60°C (-40°F to +140°F)                                                                                                                                                                                                                                                                                                                                                                        |                 |                             |              |                  |                  |
| Relative humidity range                              |    | 4% to 100% (condensing)                                                                                                                                                                                                                                                                                                                                                                                 |                 |                             |              |                  |                  |
| DC Connector type                                    |    | MC4                                                                                                                                                                                                                                                                                                                                                                                                     |                 |                             |              |                  |                  |
| Dimensions (HxWxD)                                   |    | 212 mm (8.3") x 175 mm (6.9") x 30.2 mm (1.2")                                                                                                                                                                                                                                                                                                                                                          |                 |                             |              |                  |                  |
| Weight                                               |    | 1.08 kg (2.38 lbs)                                                                                                                                                                                                                                                                                                                                                                                      |                 |                             |              |                  |                  |
| Cooling                                              |    | Natural convection – no fans                                                                                                                                                                                                                                                                                                                                                                            |                 |                             |              |                  |                  |
| Approved for wet locations                           |    | Yes                                                                                                                                                                                                                                                                                                                                                                                                     |                 |                             |              |                  |                  |
| Acoustic noise at 1 m                                |    | <60 dBA                                                                                                                                                                                                                                                                                                                                                                                                 |                 |                             |              |                  |                  |
| Pollution degree                                     |    | PD3                                                                                                                                                                                                                                                                                                                                                                                                     |                 |                             |              |                  |                  |
| Enclosure                                            |    | Class II double-insulated, corrosion resistant polymeric enclosure                                                                                                                                                                                                                                                                                                                                      |                 |                             |              |                  |                  |
| Environ. category / UV exposure rating               |    | NEMA Type 6 / outdoor                                                                                                                                                                                                                                                                                                                                                                                   |                 |                             |              |                  |                  |
| COMPLIANCE                                           |    |                                                                                                                                                                                                                                                                                                                                                                                                         |                 |                             |              |                  |                  |
| Certifications                                       |    | CA Rule 21 (UL 1741-SA), UL 62109-1, UL1741/IEEE1547, FCC Part 15 Class B, ICES-0003 Class B, CAN/CSA-C22.2 NO. 107.1-01<br><br>This product is UL Listed as PV Rapid Shut Down Equipment and conforms with NEC 2014, NEC 2017, and NEC 2020 section 690.12 and C22.1-2018 Rule 64-218 Rapid Shutdown of PV Systems, for AC and DC conductors, when installed according to manufacturer's instructions. |                 |                             |              |                  |                  |

(1) The IQ8H-208 variant will be operating in grid-tied mode only at 208V AC. (2) No enforced DC/AC ratio. See the compatibility calculator at <https://link.enphase.com/module-compatibility> (3) Maximum continuous input DC current is 10.6A (4) Nominal voltage range can be extended beyond nominal if required by the utility. (5) Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.



# Enphase IQ Combiner 4/4C

X-IQ-AM1-240-4  
X-IQ-AM1-240-4C



To learn more about Enphase offerings, visit [enphase.com](https://enphase.com)

The **Enphase IQ Combiner 4/4C** with Enphase IQ Gateway and integrated LTE-M1 cell modem (included only with IQ Combiner 4C) consolidates interconnection equipment into a single enclosure and streamlines IQ microinverters and storage installations by providing a consistent, pre-wired solution for residential applications. It offers up to four 2-pole input circuits and Eaton BR series busbar assembly.

## Smart

- Includes IQ Gateway for communication and control
- Includes Enphase Mobile Connect cellular modem (CELLMODEM-M1-06-SP-05), included only with IQ Combiner 4C
- Includes solar shield to match Enphase IQ Battery aesthetics and deflect heat
- Flexible networking supports Wi-Fi, Ethernet, or cellular
- Optional AC receptacle available for PLC bridge
- Provides production metering and consumption monitoring

## Simple

- Centered mounting brackets support single stud mounting
- Supports bottom, back and side conduit entry
- Up to four 2-pole branch circuits for 240 VAC plug-in breakers (not included)
- 80A total PV or storage branch circuits

## Reliable

- Durable NRTL-certified NEMA type 3R enclosure
- Five-year limited warranty
- Two years labor reimbursement program coverage included for both the IQ Combiner SKU's
- UL listed



## Enphase IQ Combiner 4/4C

| MODEL NUMBER                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IQ Combiner 4 (X-IQ-AM1-240-4)                                                                                    | IQ Combiner 4 with Enphase IQ Gateway printed circuit board for integrated revenue grade PV production metering (ANSI C12.20 +/- 0.5%) and consumption monitoring (+/- 2.5%). Includes a silver solar shield to match the IQ Battery system and IQ System Controller 2 and to deflect heat.                                                                                                                                                                                                                                                                                                    |
| IQ Combiner 4C (X-IQ-AM1-240-4C)                                                                                  | IQ Combiner 4C with Enphase IQ Gateway printed circuit board for integrated revenue grade PV production metering (ANSI C12.20 +/- 0.5%) and consumption monitoring (+/- 2.5%). Includes Enphase Mobile Connect cellular modem (CELLMODEM-M1-06-SP-05), a plug-and-play industrial-grade cell modem for systems up to 60 microinverters. (Available in the US, Canada, Mexico, Puerto Rico, and the US Virgin Islands, where there is adequate cellular service in the installation area.) Includes a silver solar shield to match the IQ Battery and IQ System Controller and to deflect heat. |
| ACCESSORIES AND REPLACEMENT PARTS (not included, order separately)                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Ensemble Communications Kit<br>COMMS-CELLMODEM-M1-06<br>CELLMODEM-M1-06-SP-05<br>CELLMODEM-M1-06-AT-05            | - Includes COMMS-KIT-01 and CELLMODEM-M1-06-SP-05 with 5-year Sprint data plan for Ensemble sites<br>- 4G based LTE-M1 cellular modem with 5-year Sprint data plan<br>- 4G based LTE-M1 cellular modem with 5-year AT&T data plan                                                                                                                                                                                                                                                                                                                                                              |
| Circuit Breakers<br>BRK-10A-2-240V<br>BRK-15A-2-240V<br>BRK-20A-2P-240V<br>BRK-15A-2P-240V-B<br>BRK-20A-2P-240V-B | Supports Eaton BR210, BR215, BR220, BR230, BR240, BR250, and BR260 circuit breakers.<br>Circuit breaker, 2 pole, 10A, Eaton BR210<br>Circuit breaker, 2 pole, 15A, Eaton BR215<br>Circuit breaker, 2 pole, 20A, Eaton BR220<br>Circuit breaker, 2 pole, 15A, Eaton BR215B with hold down kit support<br>Circuit breaker, 2 pole, 20A, Eaton BR220B with hold down kit support                                                                                                                                                                                                                  |
| EPLC-01                                                                                                           | Power line carrier (communication bridge pair), quantity - one pair                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| XA-SOLARSHIELD-ES                                                                                                 | Replacement solar shield for IQ Combiner 4/4C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| XA-PLUG-120-3                                                                                                     | Accessory receptacle for Power Line Carrier in IQ Combiner 4/4C (required for EPLC-01)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| XA-ENV-PCBA-3                                                                                                     | Replacement IQ Gateway printed circuit board (PCB) for Combiner 4/4C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| X-IQ-NA-HD-125A                                                                                                   | Hold down kit for Eaton circuit breaker with screws.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| ELECTRICAL SPECIFICATIONS                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Rating                                                                                                            | Continuous duty                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| System voltage                                                                                                    | 120/240 VAC, 60 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Eaton BR series busbar rating                                                                                     | 125 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Max. continuous current rating                                                                                    | 65 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Max. continuous current rating (input from PV/storage)                                                            | 64 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Max. fuse/circuit rating (output)                                                                                 | 90 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Branch circuits (solar and/or storage)                                                                            | Up to four 2-pole Eaton BR series Distributed Generation (DG) breakers only (not included)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Max. total branch circuit breaker rating (input)                                                                  | 80A of distributed generation / 95A with IQ Gateway breaker included                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Envoy breaker                                                                                                     | 10A or 15A rating GE/Siemens/Eaton included                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Production metering CT                                                                                            | 200 A solid core pre-installed and wired to IQ Gateway                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Consumption monitoring CT (CT-200-SPLIT)                                                                          | A pair of 200 A split core current transformers                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| MECHANICAL DATA                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Dimensions (WxHxD)                                                                                                | 37.5 x 49.5 x 16.8 cm (14.75" x 19.5" x 6.63"). Height is 21.06" (53.5 cm) with mounting brackets.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Weight                                                                                                            | 7.5 kg (16.5 lbs)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Ambient temperature range                                                                                         | -40° C to +46° C (-40° to 115° F)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Cooling                                                                                                           | Natural convection, plus heat shield                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Enclosure environmental rating                                                                                    | Outdoor, NRTL-certified, NEMA type 3R, polycarbonate construction                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Wire sizes                                                                                                        | • 20 A to 50 A breaker inputs: 14 to 4 AWG copper conductors<br>• 60 A breaker branch input: 4 to 1/0 AWG copper conductors<br>• Main lug combined output: 10 to 2/0 AWG copper conductors<br>• Neutral and ground: 14 to 1/0 copper conductors<br>Always follow local code requirements for conductor sizing.                                                                                                                                                                                                                                                                                 |
| Altitude                                                                                                          | To 2000 meters (6,560 feet)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| INTERNET CONNECTION OPTIONS                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Integrated Wi-Fi                                                                                                  | 802.11b/g/n                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Cellular                                                                                                          | CELLMODEM-M1-06-SP-05, CELLMODEM-M1-06-AT-05 (4G based LTE-M1 cellular modem). Note that an Enphase Mobile Connect cellular modem is required for all Ensemble installations.                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Ethernet                                                                                                          | Optional, 802.3, Cat5E (or Cat 6) UTP Ethernet cable. (not included)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| COMPLIANCE                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Compliance, IQ Combiner                                                                                           | UL 1741, CAN/CSA C22.2 No. 107.1, 47 CFR, Part 15, Class B, ICES 003<br>Production metering: ANSI C12.20 accuracy class 0.5 (PV production)<br>Consumption metering: accuracy class 2.5                                                                                                                                                                                                                                                                                                                                                                                                        |
| Compliance, IQ Gateway                                                                                            | UL 60601-1/CANCSA 22.2 No. 61010-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

To learn more about Enphase offerings, visit [enphase.com](https://enphase.com)

© 2022 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ Combiner 4/4C, and other names are trademarks of Enphase Energy, Inc. Data subject to change. 02-14-2022





STRONGHOLD™

| BUTYL

UNIRAC

BETTER SOLAR STARTS HERE

Unirac's **STRONGHOLD® Butyl** is efficient, dependable, and optimized for UNIRAC's **NXT UMOUNT®** system.

The pre-applied butyl pad removes the need for additional flashing. Just peel the liner, place the attachment, and fasten it to the roof. In addition, the butyl, used throughout the roofing and solar industries for its reliability, conforms to the screws and roof for a robust, dependable seal with no extra work! Couple this with the **NXT UMOUNT®** system, and you have a highly reliable, easy-to-install system with integrated wire management.



KITTED WITH

- ONE (1) STRONGHOLD® Butyl direct-to-deck attachment with pre-applied butyl patch (Extra patches for shimming available.)

• TWO (2) screws for rafter installation (Additional screws for direct-to-deck applications available.)

• ONE (1) NXT Rail Clamp

FOR QUESTIONS OR CUSTOMER SERVICE CONTACT: 505-242-6411 | SALES@UNIRAC.COM | WWW.UNIRAC.COM

| PART # TABLE |                              |
|--------------|------------------------------|
| P/N          | DESCRIPTION                  |
| SBUTYLM1     | STRONGHOLD ATT W/BUTYL, MILL |
| SBUTYLD1     | STRONGHOLD ATT W/BUTYL, DARK |

RAIL CLAMP ASSY

2X #12-14 SCREW, HWH, SS, SELF-DR W/ #12 EPDM WASHER

DTD BUTYL ATT ASSY

2 1/2"

3"

1 1/16" ADJUSTMENT

4 1/2"

1 3/4"

1/8" BUTYL

| PART # TABLE |                           |         |
|--------------|---------------------------|---------|
| P/N          | DESCRIPTION               | LENGTH  |
| 084RLM1      | NXT UMOUNT RAIL 84" MILL  | 84"     |
| 084RLD1      | NXT UMOUNT RAIL 84" DARK  | 84"     |
| 168RLM1      | NXT UMOUNT RAIL 168" MILL | 168"    |
| 168RLD1      | NXT UMOUNT RAIL 168" DARK | 168"    |
| 208RLM1      | NXT UMOUNT RAIL 208" MILL | 208"    |
| 208RLD1      | NXT UMOUNT RAIL 208" DARK | 208"    |
| 246RLM1      | NXT UMOUNT RAIL 246" MILL | 246"    |
| 246RLD1      | NXT UMOUNT RAIL 246" DARK | 246"    |
| 171RLM1      | NXT UMOUNT RAIL 171" MILL | 171.50" |
| 171RLD1      | NXT UMOUNT RAIL 171" DARK | 171.50" |

7/8"

1 1/8"

1 1/16"

1 3/4"

LENGTH

UNIRAC

1411 BROADWAY BLVD. NE  
ALBUQUERQUE, NM 87102 USA  
PHONE: 505.242.6411  
WWW.UNIRAC.COM

PRODUCT LINE:

NXT UMOUNT

DRAWING TYPE:

PARTS

DESCRIPTION:

SH BUTYL ATTACHMENT

REVISION DATE:

2/3/2023

DRAWING NOT TO SCALE  
ALL DIMENSIONS ARE  
NOMINAL

PRODUCT PROTECTED BY  
ONE OR MORE US PATENTS

LEGAL NOTICE

NU-A10

SHEET

UNIRAC

1411 BROADWAY BLVD. NE  
ALBUQUERQUE, NM 87102 USA  
PHONE: 505.242.6411  
WWW.UNIRAC.COM

PRODUCT LINE:

NXT UMOUNT

DRAWING TYPE:

PART DETAIL

DESCRIPTION:

RAIL

REVISION DATE:

11/17/2022

DRAWING NOT TO SCALE  
ALL DIMENSIONS ARE  
NOMINAL

PRODUCT PROTECTED BY  
ONE OR MORE US PATENTS

LEGAL NOTICE

NU-P01

SHEET