

## BID TABULATION

Columbia County Board of County Commissioners

Date: September 24, 2026

Project Bid No: T26-20


Addendums Issued: 0

Company Name

Bid Amount

- |                                    |                        |
|------------------------------------|------------------------|
| 1. <u>Norton Home Improvements</u> | \$ <u>1,068,802.06</u> |
| 2. <u>Curt's Construction</u>      | \$ <u>1,253,578.50</u> |
| 3. <u>Anderson Columbia Co.</u>    | \$ <u>804,750.05</u>   |
| 4. <u>C.A. Boone Construction</u>  | \$ <u>1,093,000.00</u> |
| 5. _____                           | \$ _____               |
| 6. _____                           | \$ _____               |
| 7. _____                           | \$ _____               |
| 8. _____                           | \$ _____               |

Witnessed by \_\_\_\_\_



**COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS**  
**PROJECT NUMBER T26-20**

**2025-2026 Annual Resurfacing – Picadilly Park (South)**

BID PROPOSAL: THE UNDERSIGNED hereby proposes to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices:

|               | ITEM                                | UNIT | QUANTITY | UNIT COST   | TOTAL                 |
|---------------|-------------------------------------|------|----------|-------------|-----------------------|
| 1             | Mobilization                        | LS   | 1        | \$41,371.56 | \$41,371.56           |
| 2             | Maintenance of Traffic              | LS   | 1        | \$55,000.00 | \$55,000.00           |
| 3             | Milling Existing Pavement (+/-1.5") | SY   | 7950     | \$1.88      | \$14,946.00           |
| 4             | Borrow                              | CY   | 500      | \$15.00     | \$7,500.00            |
| 5             | Asphaltic Conc. - Levelling         | TN   | 1390     | \$196.60    | \$273,274.00          |
| 6             | Asphaltic Conc. - SP 12.5           | TN   | 3400     | \$180.50    | \$613,700.00          |
| 7             | Seed and Mulch                      | LS   | 1        | \$350.00    | \$350.00              |
| 8             | Sod                                 | SY   | 9850     | \$3.25      | \$32,012.50           |
| 9             | Painted Pavement Markings           | LS   | 1        | \$27,648.00 | \$27,648.00           |
| 10            | Asphalt Speed Humps                 | EA   | 2        | \$1,500.00  | \$3,000.00            |
| <b>TOTAL:</b> |                                     |      |          |             | <b>\$1,068,802.06</b> |

Contractor Name (PRINT): Jack J. Norton

Contractor Signature: 

**PAY ITEM NOTES**

**MOT**

Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing/offsets, and any edge of pavement reclamation where required.

**Milling Existing Pavement**

Existing asphalt depths range from 1.0 to 2.0 inches. Milling shall be achieved with a milling machine or engineer approved equivalent.

**Borrow**

Includes cost to finish shoulder on levelling/resurfacing sections to place sod. Remainder shall be placed at direction of engineer

**Asphalt-Levelling**

Includes placement of asphalt concrete at +/- 82.5 lbs/sy for levelling/resurfacing sections as directed by the engineer.

**Asphalt 12.5**

Includes placement of SP 12.5 @ +/- 137.5 lb/sy (Levelling/Resurfacing section) and 165 lbs/SY (Mill/Resurfacing section) To maintain level access to driveways, an apron shall be required at all driveway locations unless other directed by engineer and will be paid for under this item. Approximately 200' of asphalt curb shall be placed with this quantity.

**Sod**

Includes placement, fertilizer, and irrigation required to promote growth for a 42" sod strip along all sections of levelling/resurfacing section and other areas directed by engineer. Shall be placed over finished shoulder, prior to final lift of asphalt

**Seed and Mulch**

Shall be placed at all disturbed areas not sodded, as directed by the Engineer.

**Painted Pavement Markings**

Shall include striping the roadway to match existing layout (double yellow if no existing) and shall include stop bars at all stop conditions, and centerline/edgeline striping (2 coats each)

- ALL ITEMS MAY BE INCREASED, DECREASED, OR OMITTED AS DIRECTED BY THE ENGINEER.
- ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO BOTH THE REQUIREMENTS OF THE LATEST FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND THE LATEST FDOT DESIGN STANDARDS.
- ALL INCIDENTAL WORK INCLUDED IN THESE ITEMS. ALL UNIT PRICE AND TOTAL SPACES MUST BE FILLED IN CORRECTLY AND CORRELATE WITH EACH ITEM

**COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS**  
**PROJECT NUMBER T26-20**  
**2025-2026 Annual Resurfacing – Picadilly Park (South)**

Company Name: Norton Home Improvement Co., Inc. (SEAL)  
dba: Bubba's Site Prep & Paving

Authorized  
Company  
Representative:

Jack J. Norton


Printed Name

  
Signature

Attested By:

Patricia T. Peeler

Printed Name

  
Signature

Total Bid Amount:

\$1,068,802.26

Date:

9/23/2024

# COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS

## PROJECT NUMBER T26-20

### 2025-2026 Annual Resurfacing – Picadilly Park (South)

BID PROPOSAL: THE UNDERSIGNED hereby proposes to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices

|               | ITEM                                | UNIT | QUANTITY | UNIT COST           | TOTAL      |
|---------------|-------------------------------------|------|----------|---------------------|------------|
| 1             | Mobilization                        | LS   | 1        | 58,000.00           | 58,000.00  |
| 2             | Maintenance of Traffic              | LS   | 1        | 65,000.00           | 65,000.00  |
| 3             | Milling Existing Pavement (+/-1.5") | SY   | 7950     | 3.50                | 27,825.00  |
| 4             | Borrow                              | CY   | 500      | 11.00               | 5,500.00   |
| 5             | Asphaltic Conc - Levelling          | TN   | 1390     | 230.00              | 319,700.00 |
| 6             | Asphaltic Conc - SP 12.5            | TN   | 3400     | 210.00              | 714,000.00 |
| 7             | Seed and Mulch                      | LS   | 1        | 5,000.00            | 5,000.00   |
| 8             | Sod                                 | SY   | 9850     | 2.95                | 29,057.50  |
| 9             | Painted Pavement Markings           | LS   | 1        | 26,496.00           | 26,496.00  |
| 10            | Asphalt Speed Humps                 | EA   | 2        | 1,500.00            | 3,000.00   |
| <b>TOTAL:</b> |                                     |      |          | <b>1,253,578.50</b> |            |

Contractor Name (PRINT): Curt's Construction, Inc.

Contractor Signature

Dana Haynes

#### PAY ITEM NOTES

##### MOT

Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing/offsets, and any edge of pavement reclamation where required.

##### Milling Existing Pavement

Existing asphalt depths range from 1.0 to 2.0 inches. Milling shall be achieved with a milling machine or engineer approved equivalent

##### Borrow

Includes cost to finish shoulder on levelling/resurfacing sections to place sod. Remainder shall be placed at direction of engineer

##### Asphalt-Levelling

Includes placement of asphalt concrete at +/- 82.5 lbs/sy for levelling/resurfacing sections as directed by the engineer.

##### Asphalt 12.5

Includes placement of SP 12.5 @ +/- 137.5 lb/sy (Levelling/Resurfacing section) and 165 lbs/SY (Mill/Resurfacing section) To maintain level access to driveways, an apron shall be required at all driveway locations unless other directed by engineer and will be paid for under this item. Approximately 200' of asphalt curb shall be placed with this quantity.

##### Sod

Includes placement, fertilizer, and irrigation required to promote growth for a 42" sod strip along all sections of levelling/resurfacing section and other areas directed by engineer. Shall be placed over finished shoulder, prior to final lift of asphalt

##### Seed and Mulch

Shall be placed at all disturbed areas not sodded, as directed by the Engineer.

##### Painted Pavement Markings

Shall include striping the roadway to match existing layout (double yellow if no existing) and shall include stop bars at all stop conditions, and centerline/edgeline striping (2 coats each)

- ALL ITEMS MAY BE INCREASED, DECREASED, OR OMITTED AS DIRECTED BY THE ENGINEER.
- ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO BOTH THE REQUIREMENTS OF THE LATEST FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND THE LATEST FDOT DESIGN STANDARDS.
- ALL INCIDENTAL WORK INCLUDED IN THESE ITEMS. ALL UNIT PRICE AND TOTAL SPACES MUST BE FILLED IN CORRECTLY AND CORRELATE WITH EACH ITEM

**COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS**  
**PROJECT NUMBER T26-20**  
**2025-2026 Annual Resurfacing – Picadilly Park (South)**

Company Name:

Curt's Construction, Inc.

(SEAL)

Authorized  
Company  
Representative:

Dana Haynes

Printed Name

  
Signature

Attested By:

Andrea Wimberly

Printed Name

  
Signature

Total Bid Amount:

1,253,578.50

Date:

September 24, 2026

# COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS

## PROJECT NUMBER T26-20

### 2025-2026 Annual Resurfacing – Picadilly Park (South)


BID PROPOSAL THE UNDERSIGNED hereby proposes to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices

|               | ITEM                                 | UNIT | QUANTITY | UNIT COST           | TOTAL        |
|---------------|--------------------------------------|------|----------|---------------------|--------------|
| 1             | Mobilization                         | LS   | 1        | \$13,706.33         | \$13,706.33  |
| 2             | Maintenance of Traffic               | LS   | 1        | \$14,873.89         | \$14,873.89  |
| 3             | Milling Existing Pavement (+/- 1 5") | SY   | 7950     | \$2.20              | \$17,490.00  |
| 4             | Borrow                               | CY   | 500      | \$18.13             | \$9,065.00   |
| 5             | Asphaltic Conc - Levelling           | TN   | 1390     | \$150.04            | \$208,555.60 |
| 6             | Asphaltic Conc - SP 12.5             | TN   | 3400     | \$131.24            | \$446,216.00 |
| 7             | Seed and Mulch                       | LS   | 1        | \$15,656.14         | \$15,656.14  |
| 8             | Sod                                  | SY   | 9850     | \$2.90              | \$28,565.00  |
| 9             | Painted Pavement Markings            | LS   | 1        | \$44,827.43         | \$44,827.43  |
| 10            | Asphalt Speed Humps                  | EA   | 2        | \$2,897.33          | \$5,794.66   |
| <b>TOTAL:</b> |                                      |      |          | <b>\$804,750.05</b> |              |

Anderson Columbia Co., Inc.

Contractor Name (PRINT) E. Tony Williams Jr., Vice President

Contractor Signature

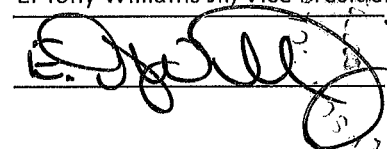

#### PAY ITEM NOTES

##### MOT

Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing/offsets, and any edge of pavement reclamation where required

##### Milling Existing Pavement

Existing asphalt depths range from 1.0 to 2.0 inches. Milling shall be achieved with a milling machine or engineer approved equivalent.

##### Borrow

Includes cost to finish shoulder on levelling/resurfacing sections to place sod. Remainder shall be placed at direction of engineer.

##### Asphalt-Levelling

Includes placement of asphalt concrete at +/- 82.5 lbs/sy for levelling/resurfacing sections as directed by the engineer.

##### Asphalt 12.5

Includes placement of SP 12.5 @ +/- 137.5 lb/sy (Levelling/Resurfacing section) and 165 lbs/SY (Mill/Resurfacing section). To maintain level access to driveways, an apron shall be required at all driveway locations unless other directed by engineer and will be paid for under this item. Approximately 200' of asphalt curb shall be placed with this quantity.

##### Sod

Includes placement, fertilizer, and irrigation required to promote growth for a 42" sod strip along all sections of levelling/resurfacing section and other areas directed by engineer. Shall be placed over finished shoulder, prior to final lift of asphalt.

##### Seed and Mulch

Shall be placed at all disturbed areas not sodded, as directed by the Engineer.

##### Painted Pavement Markings

Shall include striping the roadway to match existing layout (double yellow if no existing) and shall include stop bars at all stop conditions, and centerline/edgeline striping (2 coats each).

- ALL ITEMS MAY BE INCREASED, DECREASED, OR OMITTED AS DIRECTED BY THE ENGINEER.
- ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO BOTH THE REQUIREMENTS OF THE LATEST FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND THE LATEST FDOT DESIGN STANDARDS.
- ALL INCIDENTAL WORK INCLUDED IN THESE ITEMS. ALL UNIT PRICE AND TOTAL SPACES MUST BE FILLED IN CORRECTLY AND CORRELATE WITH EACH ITEM.

**COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS**  
**PROJECT NUMBER T26-20**  
**2025-2026 Annual Resurfacing – Picadilly Park (South)**


**Company Name:**

Anderson Columbia Co., Inc.

**Authorized  
Company  
Representative:**

E. Tony Williams Jr., Vice President

**Printed Name**

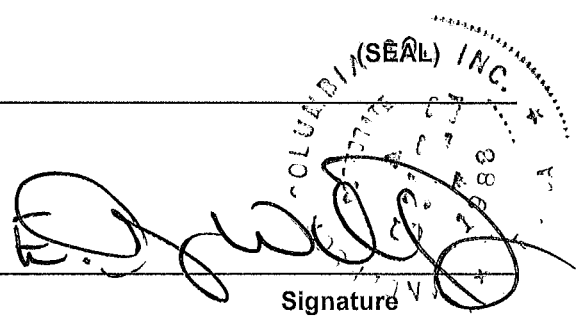  
**Signature**

**Attested By:**

Brian P. Schreiber, Secretary

**Printed Name**



**Signature**

**Total Bid Amount:**

**\$804,750.05**

**Date:**

9-24-26

# COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS

## PROJECT NUMBER T26-20

### 2025-2026 Annual Resurfacing – Picadilly Park (South)

BID PROPOSAL: THE UNDERSIGNED hereby proposes to furnish all materials, labor and supervision for the construction of the subject project including conformance with the construction requirements and specifications for the following unit prices

|               | ITEM                                | UNIT | QUANTITY | UNIT COST   | TOTAL                 |
|---------------|-------------------------------------|------|----------|-------------|-----------------------|
| 1             | Mobilization                        | LS   | 1        | \$40,927.00 | \$40,927 00           |
| 2             | Maintenance of Traffic              | LS   | 1        | \$32,593.00 | \$32,593 00           |
| 3             | Milling Existing Pavement (+/-1.5") | SY   | 7950     | \$1.50      | \$11,925 00           |
| 4             | Borrow                              | CY   | 500      | \$9.50      | \$4,750.00            |
| 5             | Asphaltic Conc. - Levelling         | TN   | 1390     | \$195.00    | \$271,050.00          |
| 6             | Asphaltic Conc. - SP 12 5           | TN   | 3400     | \$195.00    | \$663,000 00          |
| 7             | Seed and Mulch                      | LS   | 1        | \$3,500.00  | \$3,500 00            |
| 8             | Sod                                 | SY   | 9850     | \$2.50      | \$24,625 00           |
| 9             | Painted Pavement Markings           | LS   | 1        | \$37,630 00 | \$37,630 00           |
| 10            | Asphalt Speed Humps                 | EA   | 2        | \$1,500 00  | \$3,000 00            |
| <b>TOTAL:</b> |                                     |      |          |             | <b>\$1,093,000.00</b> |

Contractor Name (PRINT): James F. Boone, President

Contractor Signature: \_\_\_\_\_

C.A. Boone Construction, Inc

#### PAY ITEM NOTES

##### MOT

Shall include all elements required per FDOT standards and include temporary centerline/stop bar delineation at all non working times, stationing/offsets, and any edge of pavement reclamation where required.

##### Milling Existing Pavement

Existing asphalt depths range from 1.0 to 2.0 inches. Milling shall be achieved with a milling machine or engineer approved equivalent.

##### Borrow

Includes cost to finish shoulder on levelling/resurfacing sections to place sod. Remainder shall be placed at direction of engineer.

##### Asphalt-Levelling

Includes placement of asphalt concrete at +/- 82.5 lbs/sy for levelling/resurfacing sections as directed by the engineer.

##### Asphalt 12.5

Includes placement of SP 12 5 @ +/- 137.5 lb/sy (Levelling/Resurfacing section) and 165 lbs/SY (Mill/Resurfacing section). To maintain level access to driveways, an apron shall be required at all driveway locations unless other directed by engineer and will be paid for under this item. Approximately 200' of asphalt curb shall be placed with this quantity.

##### Sod

Includes placement, fertilizer, and irrigation required to promote growth for a 42" sod strip along all sections of levelling/resurfacing section and other areas directed by engineer. Shall be placed over finished shoulder, prior to final lift of asphalt.

##### Seed and Mulch

Shall be placed at all disturbed areas not sodded, as directed by the Engineer.

##### Painted Pavement Markings

Shall include striping the roadway to match existing layout (double yellow if no existing) and shall include stop bars at all stop conditions, and centerline/edgeline striping (2 coats each).

- ALL ITEMS MAY BE INCREASED, DECREASED, OR OMITTED AS DIRECTED BY THE ENGINEER.
- ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO BOTH THE REQUIREMENTS OF THE LATEST FDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND THE LATEST FDOT DESIGN STANDARDS.
- ALL INCIDENTAL WORK INCLUDED IN THESE ITEMS. ALL UNIT PRICE AND TOTAL SPACES MUST BE FILLED IN CORRECTLY AND CORRELATE WITH EACH ITEM

**COLUMBIA COUNTY BOARD OF COUNTY COMMISSIONERS**

**PROJECT NUMBER T26-20**

**2025-2026 Annual Resurfacing – Picadilly Park (South)**

**Company Name:** C.A. Boone Construction, Inc

**Authorized  
Company  
Representative:** James Boone, President

Printed Name

Signature

**Attested By:** Sherry Font

Printed Name

Signature

**Total Bid Amount:** One Million Ninety-Three Thousand Dollars

**Date:** September 24, 2026

