

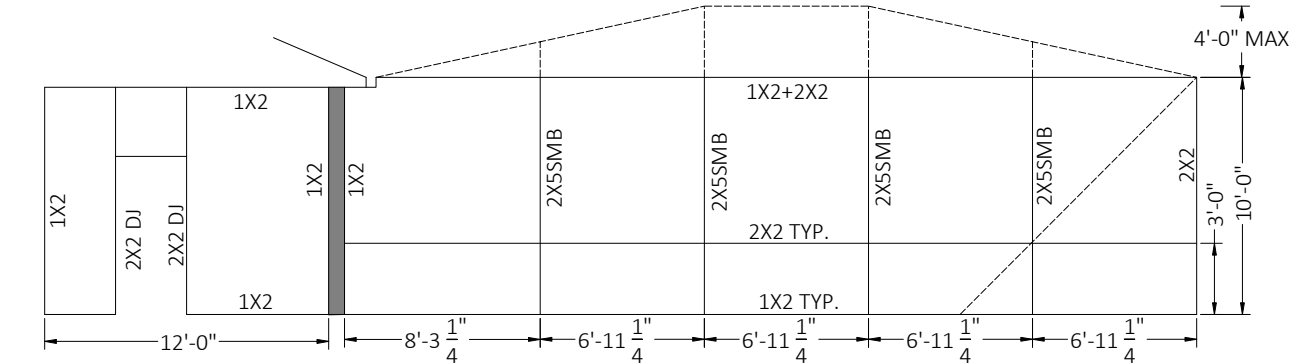
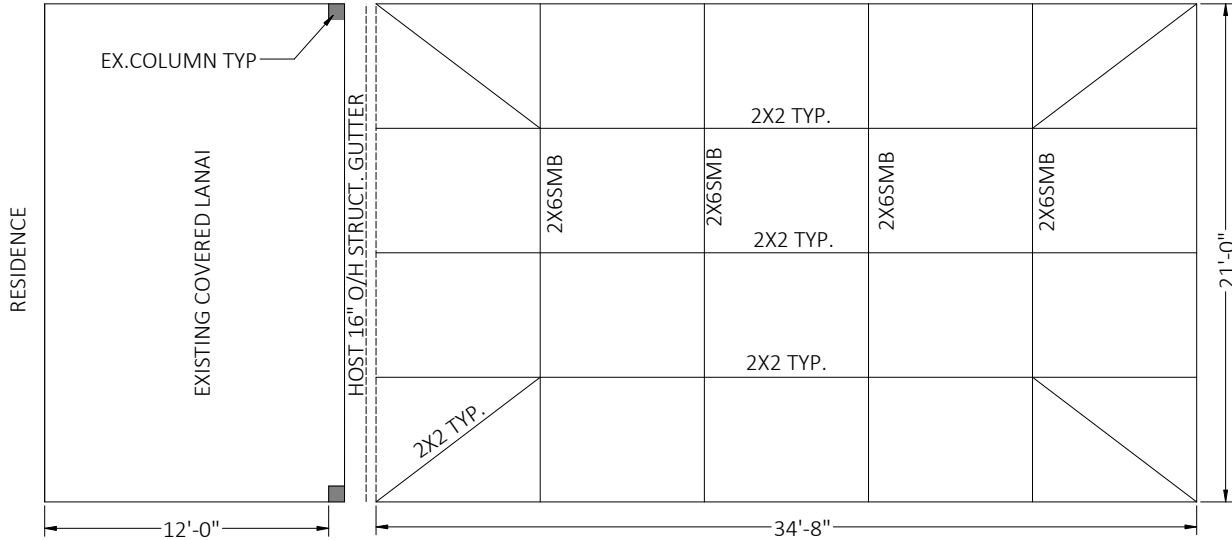


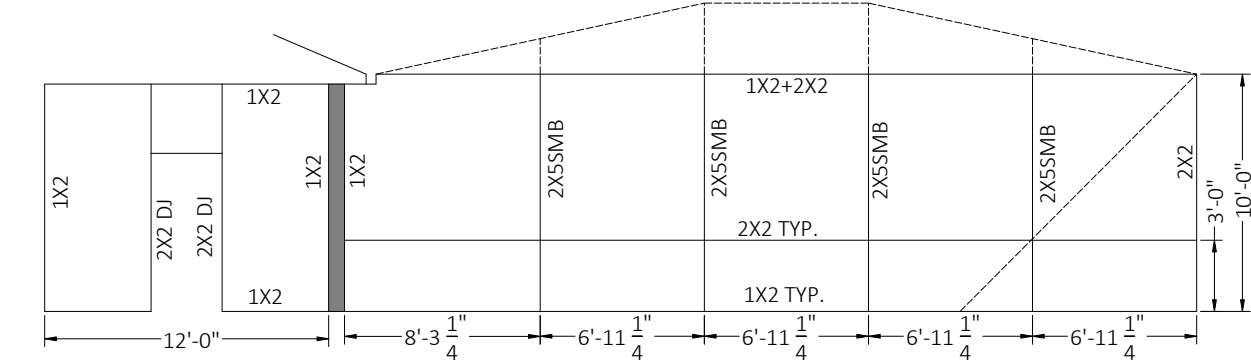

ALUMINUM SPECIFICATIONS

1. ALUMINUM EXTRUSIONS SHALL BE 6005 T5 ALLOY UNLESS OTHERWISE NOTED.
2. ALL SELF MATING BEAM SECTIONS ARE TO BE STITCHED WITH #12 SCREWS 6" FROM ENDS & 24" CENTER TO CENTER. #10 SCREW 6" FROM ENDS & 12" CENTER TO CENETER.
3. ROOF BRACING SHALL BE A MINIMUM 2"X2"X.050".
4. THE MINIMUM NORMAL THICKNESS OF PROTECTOR PANELS (KICKPLATES) SHALL BE AN INDUSTRY STANDARD OF 0.024 INCHES.
5. VINYL AND ACRYLIC PANELS SHALL BE REMOVED WHEN WIND SPEEDS EXCEED 75 MPH PER FBC.
6. SCREEN MATERIAL SHALL BE 18/14 SCREEN UNLESS APPROVED BY FLORIDA ENGINEERING LLC.
7. 1"X2" & 1"X3" NON STRUCTURAL MEMBERS MAY BE USED INTERCHANGEABLY.
8. DOOR LOCATION MAY BE DETERMINED/ RELOCATED BY CONTRACTOR IN THE FIELD.

This item has been electronically signed and sealed by Craig E. Gunderson, P.E. on date below using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

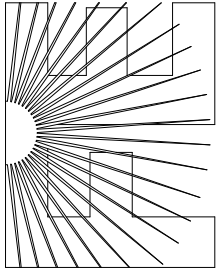

FLORIDA ENGINEERING LLC
4161 TAMiami TRAIL, UNIT 101
PORT CHARLOTTE, FLORIDA 33952
(941) 391-5980
www.flengineeringllc.com

PROJECT NO. 2215979

CA CERT. #30782


CONTRACTOR: MY FAVORITE POOL BUILDER		PROJECT ADDRESS: MATUKAITIS 486 SW MEADOW WOOD GLN, LAKE CITY FL 32024	
DESIGN DATE: 06/09/2022		REVISION 1: DATE	
REVISION 2: DATE		SHEET: 02	
DRAWN BY: TCP		SCALE: NTS	

1"x2" FASTEN TO COL. (INTERNAL)
w/(2) #10x1-1/2" SMS, FASTEN TO
EAVE RAILS ABOVE w/#10 1-1/2" SMS
24" O.C. AND 6" WITHIN COL.


TABLE "D"

BEAM	QTY/ SIZE EACH SIDE
2 x 3	(4)/ #12
2 x 4	(5)/ #12
2 x 5	(5)/ #12
2 x 6	(6)/ #12
2 x 7	(7)/ #12
2 x 8	(8)/ #14
2 x 9	(9)/ #14
2 x 10	(9)/ #14

MAINTAIN MIN. OF 5/8" SEPERATION
FROM EDGE OF BEAM SMS O.C.

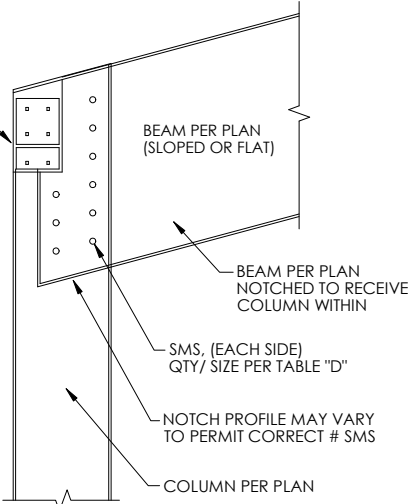

DETAIL E - UPRIGHT TO BEAM
CONNECTION SCALE: NTS

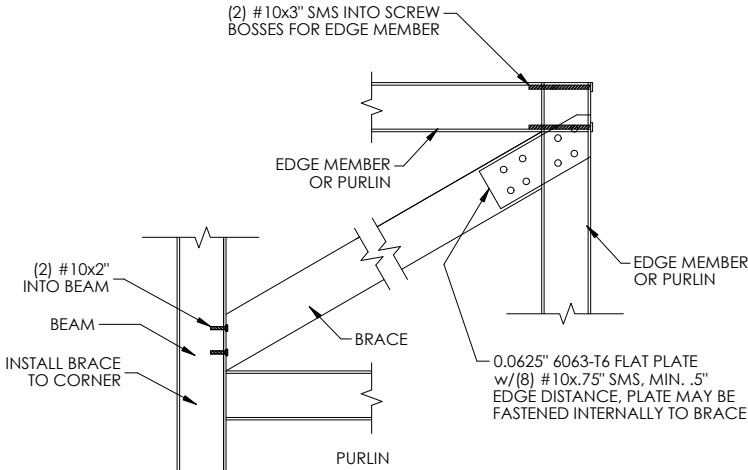

DETAIL "D" - ROOF BRACING CONNECTION
SCALE: NTS

ALUMINUM MEMBERS DIMENSIONS

HOLLOW SECTIONS

2 x 2: 2" x 2" x 0.050"
2 x 3: 2" x 3" x 0.050"
2 x 4: 2" x 4" x 0.050"
2 x 5: 2" x 5" x 0.050"

OPEN BACK SECTIONS

1 x 2: 1" x 2" x 0.044"
1 x 3: 1" x 3" x 0.045"

SNAP SECTIONS

2 x 2 SNAP: 2" x 2" x 0.045"
2 x 3 SNAP: 2" x 3" x 0.050"
2 x 4 SNAP: 2" x 4" x 0.045"

SELF MATING (SMB)


2 x 4 SMB: 2" x 4" x 0.046" x 0.100"
2 x 5 SMB: 2" x 5" x 0.050" x 0.116"
2 x 6 SMB: 2" x 6" x 0.050" x 0.120"
2 x 7 SMB: 2" x 7" x 0.055" x 0.120"
2 x 8 SMB: 2" x 8" x 0.072" x 0.224"
2 x 9 SMB: 2" x 9" x 0.072" x 0.224"
2 x 9(H) SMB: 2" x 9" x 0.082" x 0.306"
2 x 10 SMB: 2" x 10" x 0.092" x 0.374"

DETAIL A


This item has been electronically
signed and sealed by Craig E.
Gunderson, P.E. on date below
using a Digital Signature. Printed
copies of this document are not
considered signed and sealed and
the signature must be verified on any
electronic copies.

MINIMUM NUMBER OF TAPCONS INTO CONCRETE &
12 X 3/4" S.M.S. INTO UPRIGHT / EACH SIDE OF BEAM
THROUGH SECONDARY 2" X 2" X 0.125" ANGLES
(SEE BELOW)


2X4 S.M.B. (1) 1/4" X 2-1/4" S.S. TAPCON & (2) # 12 X 3/4" S.M.S.
2X5 S.M.B. (1) 1/4" X 2-1/4" S.S. TAPCON & (2) # 12 X 3/4" S.M.S.
2X6 S.M.B. (2) 1/4" X 2-1/4" S.S. TAPCON & (3) # 12 X 3/4" S.M.S.
2X7 S.M.B. (2) 1/4" X 2-1/4" S.S. TAPCON & (4) # 12 X 3/4" S.M.S.
2X8 S.M.B. (3) 1/4" X 2-1/4" S.S. TAPCON & (5) # 12 X 3/4" S.M.S.
2X9 S.M.B. (4) 1/4" X 2-1/4" S.S. TAPCON & (6) # 12 X 3/4" S.M.S.
2X10 S.M.B. (5) 1/4" X 2-1/4" S.S. TAPCON & (7) # 12 X 3/4" S.M.S.

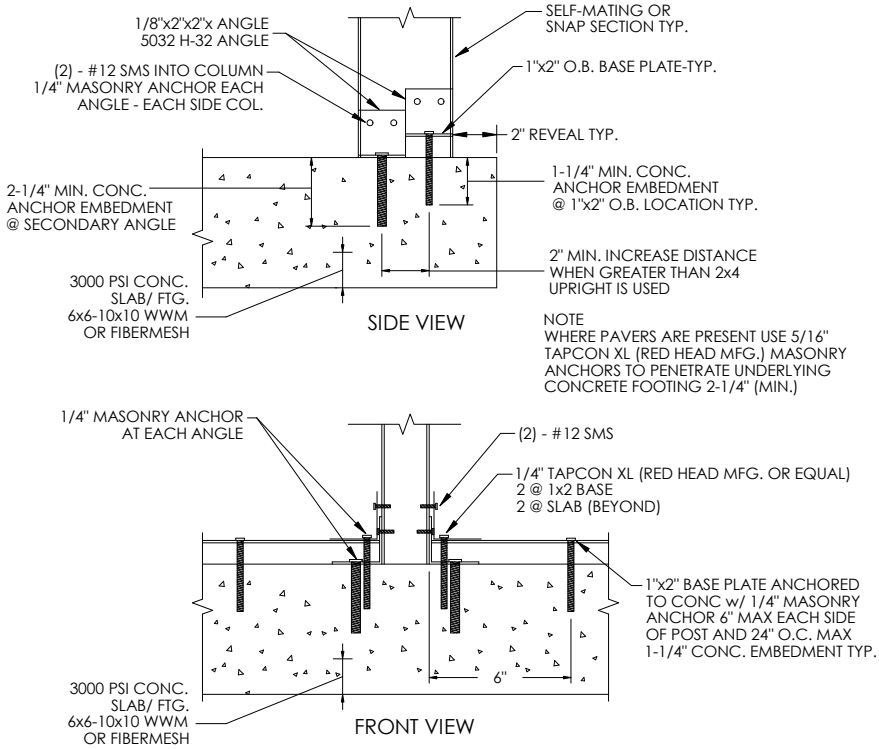


DETAIL "B" - 2"x4" OR LARGER SELF MATING
UPRIGHT TO DECK DETAILS SCALE: NTS

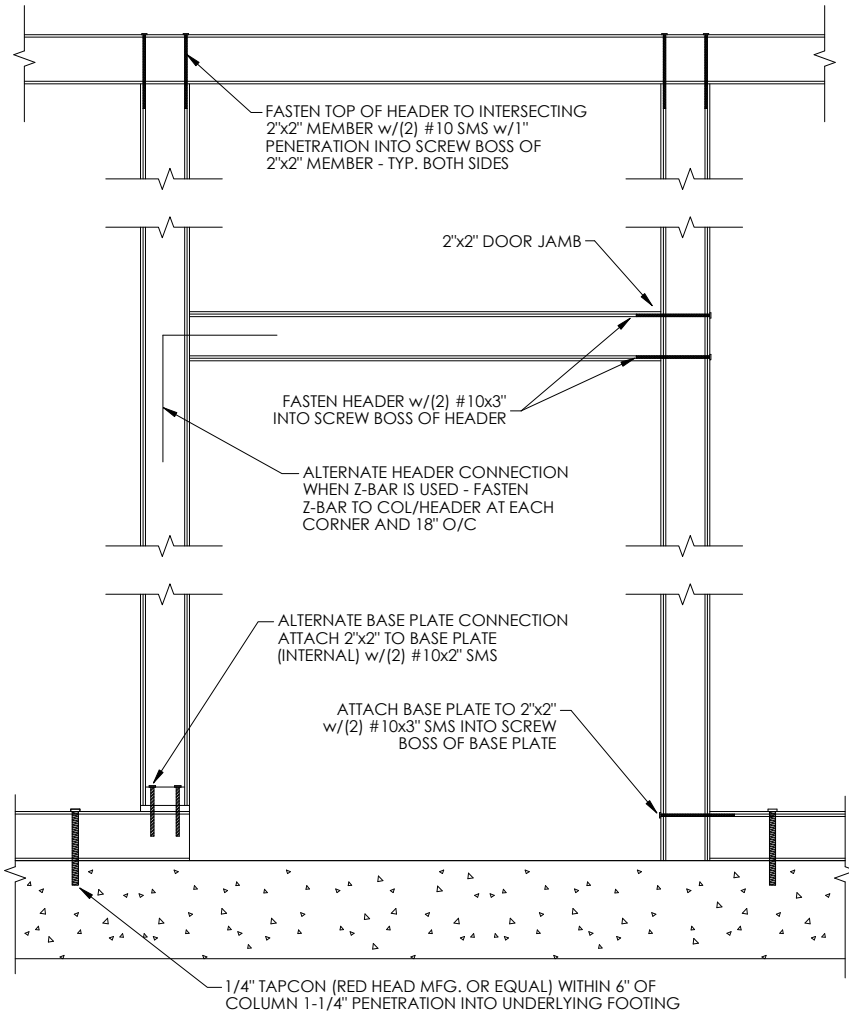

DETAIL "F" - DOOR JAMB & HEADER
CONNECTION SCALE: NTS

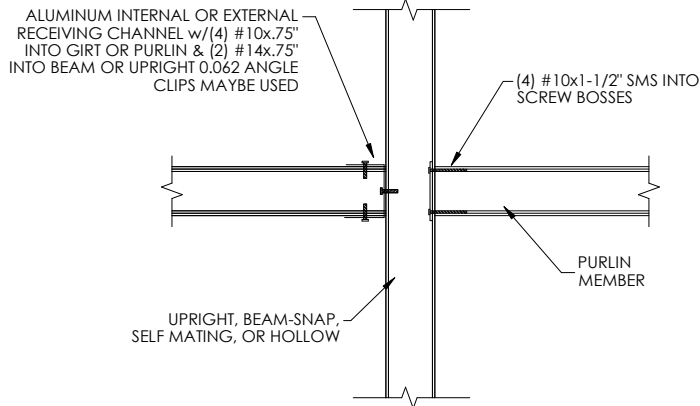


DETAIL "C" - GIRT OR PURLIN TO BEAM
OR POST DETAIL SCALE: NTS

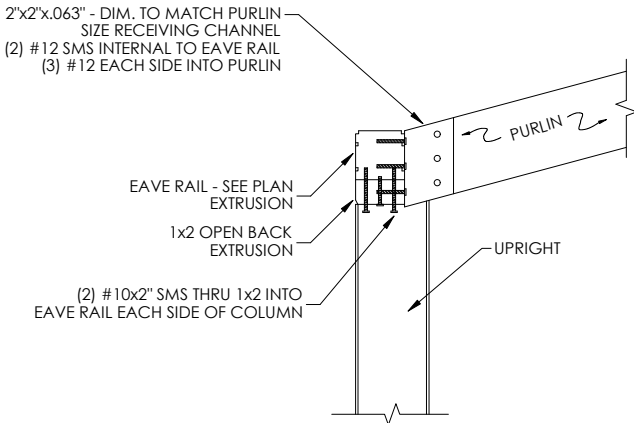

DETAIL "G" - SLOPED PURLIN
CONNECTION SCALE: NTS

FLORIDA ENGINEERING LLC
4161 TAMiami TRAIL, UNIT 101
PORT CHARLOTTE, FLORIDA 33952
(941) 391-5980
www.flengineeringllc.com

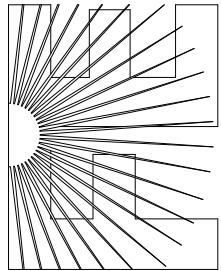

PROJECT NO. 2215979

CA CERT. #30782

CONTRACTOR:
MY FAVORITE POOL BUILDER

PROJECT ADDRESS:
MATUKAITIS
486 SW MEADOW WOOD GLN,
LAKE CITY FL 32024

DESIGN DATE: 06/09/2022

REVISION 1: DATE

REVISION 2: DATE


DRAWN BY: TCP

SCALE: NTS


SHEET:

03

GIRT FASTENED INTERNALLY AT EACH END w/ #10x1.5" EACH SCREW GROOVE. FASTEN TO BEAM w/ 2"x2"x1/8" ANGLE (2) #12 SMS INTO BEAM & (2) #10x1.5 THRU ANGLE INTO GUTTER WHERE NO GIRT IS PRESENT, ATTACH ANGLE DIRECTLY TO GUTTER

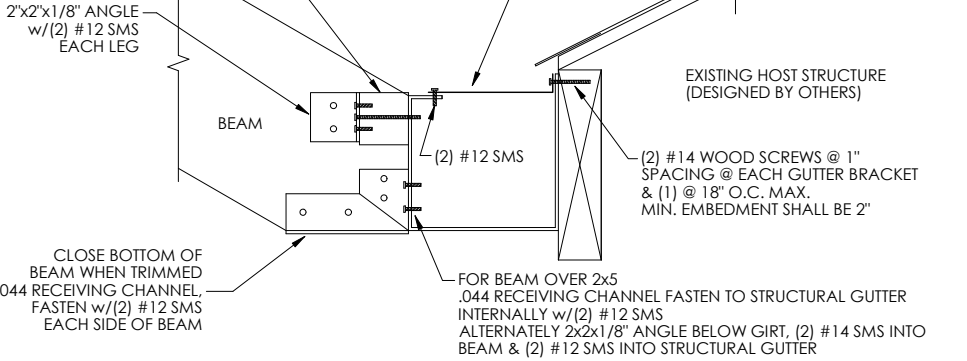


SIDE VIEW

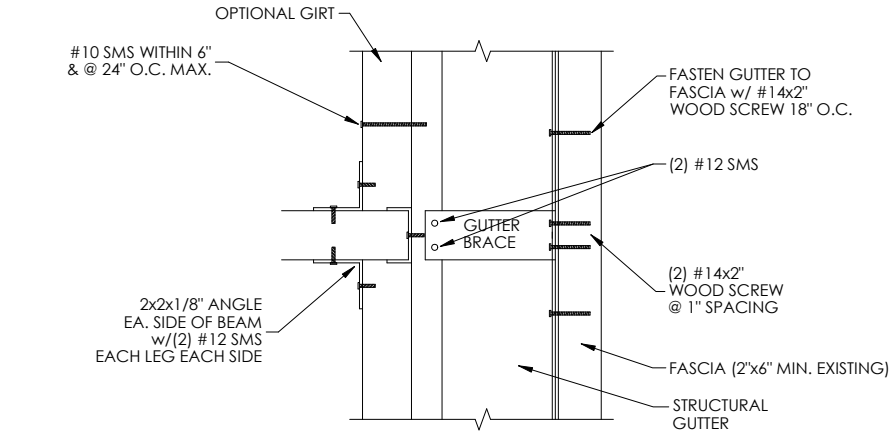

TOP VIEW

DETAIL "H" BEAM TO GUTTER CONNECTION SCALE: NTS

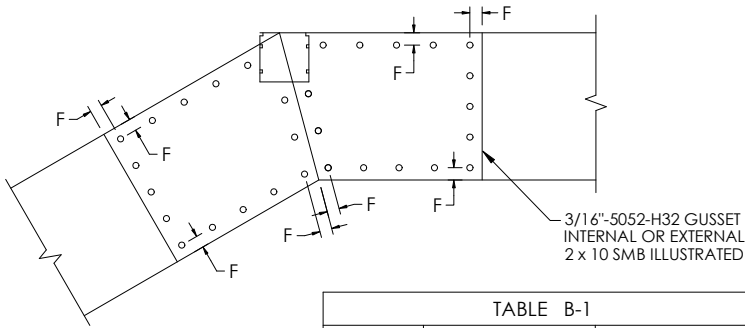


NOTE F
INSTALL FASTENERS ALONG PERIMETER OF GUSSET -BEAM JOINT 3/8" MIN, FROM EDGE. FASTENERS MAY BE STAGGERED TO INSURE PROPER QUANTITY PER TABLE B-1


FASTENER PATTERN MAY APPEAR DIFFERENT FROM ILLUSTRATION. MAINTAIN 1/2" SEPARATION BETWEEN FASTENERS. MAINTAIN 3/8" MIN. FASTENER SEPARATION FROM BEAM JOINT OR EDGE OF BEAM LAP FASTENERS MAY BE EVENLY SPACED AROUND EDGE OF GUSSET WITHIN 3/8" OF BEAM JOINT. FASTENERS MAY BE STAGGERED TO INSURE PROPER QUANTITY PER TABLE B-1

TABLE B-1		
BEAM SIZE	COL. TO BEAM QTY SMS/ SIDE OF COL.	BEAM TO BEAM QTY SMS/ EA. FACE/SIDE
2 x 4	(5) #12	(9) #12
2 x 5	(5) #12	(9) #12
2 x 6	(7) #12	(9) #12
2 x 7	(10) #12	(10) #12
2 x 8	(12) #12	(14) #12
2 x 9	(14) #14	(14) #14
2 x 10	(16) #14	(15) #14


DETAIL "K" GUSSET CONNECTION SCALE: NTS

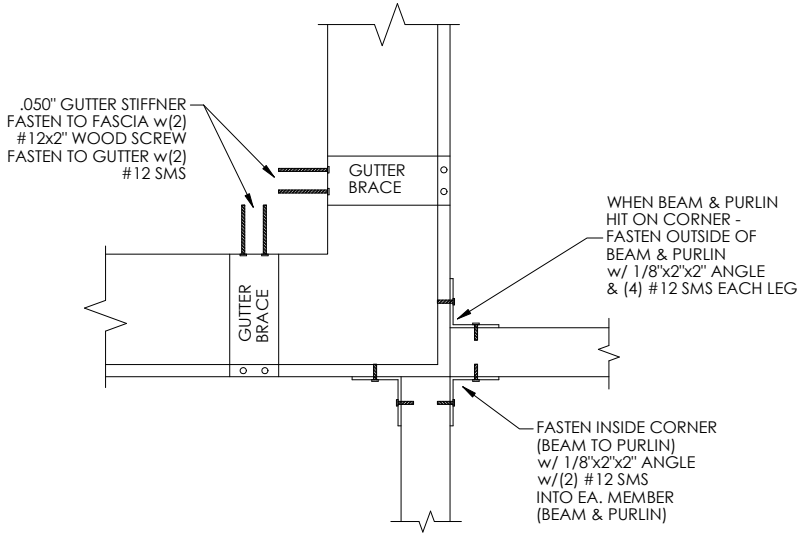

DETAIL "M" BEAM & PURLIN TO GUTTER CONNECTION SCALE: NTS

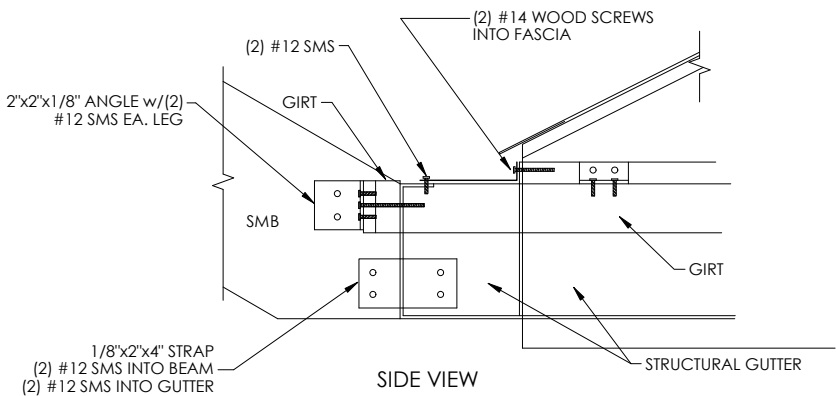


SIDE VIEW



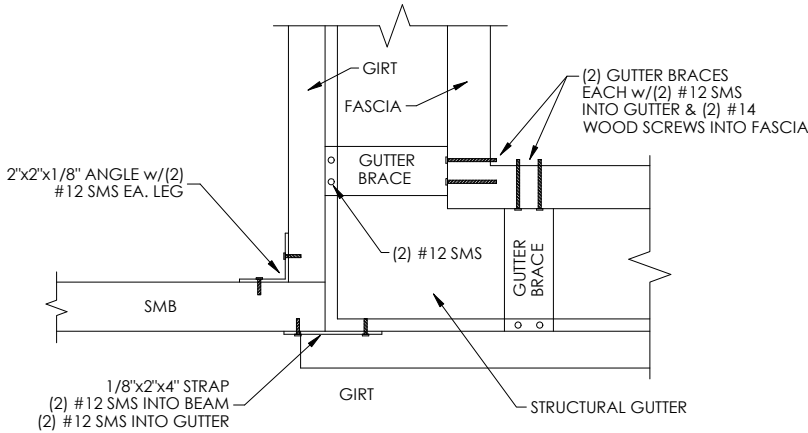


TOP VIEW

DETAIL "L" CORNER CONNECTION SCALE: NTS

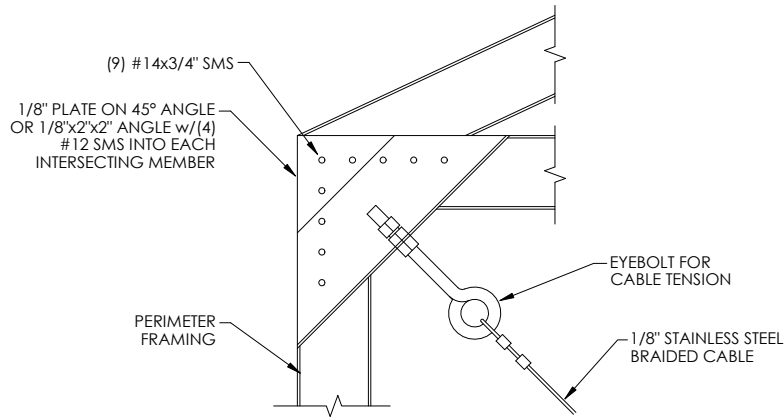


DETAIL "I-2" CABLE CONNECTION AT CORNER SCALE: NTS

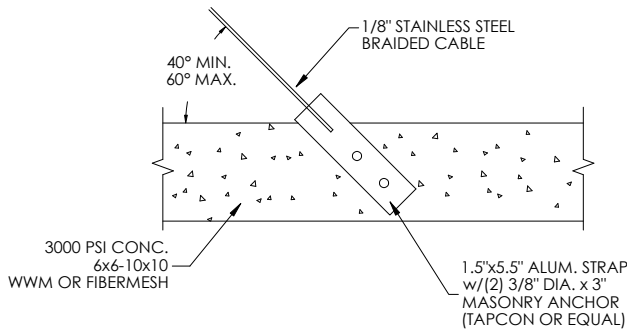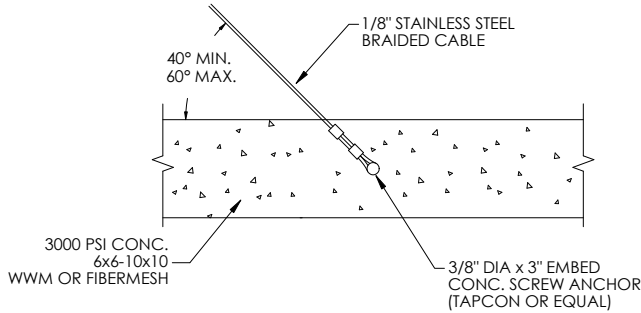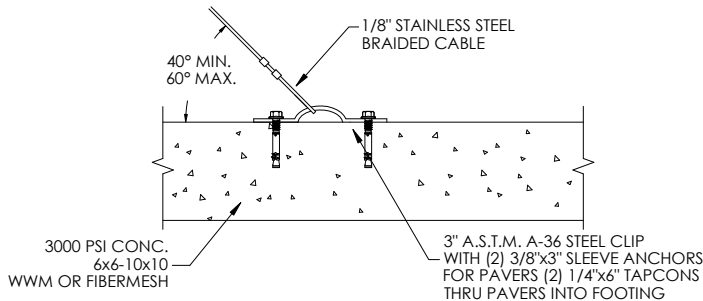

DETAIL "I-1" CABLE CONNECTION AT FOUNDATION SCALE: NTS

This item has been electronically signed and sealed by Craig E. Gunderson, P.E. on date below using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

FLORIDA ENGINEERING LLC
4161 TAMiami TRAIL, UNIT 101
PORT CHARLOTTE, FLORIDA 33952
(941) 391-5980
www.flengineeringllc.com

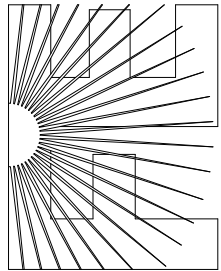

PROJECT NO. 2215979

CA CERT. #30782

CONTRACTOR:
MY FAVORITE POOL BUILDER

PROJECT ADDRESS:
MATUKAITIS
486 SW MEADOW WOOD GLN,
LAKE CITY FL 32024

DESIGN DATE: 06/09/2022

REVISION 1: DATE

REVISION 2: DATE

DRAWN BY: TCP

SCALE: NTS

SHEET:

04