### Cool and Cobb Engineering Company

Date: <u>7/29/2022</u>

Job: <u>Rosa Febre</u>

Location: <u>1189 S Marion Ave</u>
Lake City, FL 32025

#### CRAWL SPACE JACK DESIGN ANALYSIS

The load requirements for the Crawl Space Jacks designed to assist in supporting the identified areas of the subject residence were determined. The selected Crawl Space Jack locations and the specific Crawl Space Jacks are identified on the Jack Identification and Location Plan attached. The calculated total loads on the Crawl Space Jacks in the specific location, including both dead and live loads are documented in the attached table which is designated as Attachment "A". This Crawl Space Jack design is approved and certified as meeting all the requirements of the Florida Building Code 2020 7th Edition, and good engineering practice. This is not to be the primary support structure, but a supplement support to assist in support of the weight of the structure, which will reduce the total pressure on the existing soils and reduce deflection in beams. After completion of installation, Cool and Cobb Engineering Company shall be supplied with a log of the location of each Crawl Space Jack installed so they can evaluate the installation and prepare the "As Built" drawings.

#### **General Notes:**

- 1. A log of each Crawl Space Jack to be kept by Contractor.
- 2. Assumed allowable soil loading of 2,000 psf

#### 7/29/2022

Carl E Cool, P.E. State of Florida Professional Engineer No. 16921



This Item has been

electronically sealed by Carl Cool using a digital signature and date. Printed copies of this document are not considered

signed and sealed and the

any electronic copies.

signature must be verified on


Digitally signed by Carl E Cool Date: 2022.07.2 09:24:39 -04'00'

203 W. Main St. Avon Park, FL 33825 Office: (863) 657-2323 Fax: (863) 657-2324

Contractor: Solid Foundations

# **Solid Foundations**

1910 SW Main Blvd Lake City, FL 32025 855-227-0300





SF Representative: Jimbo Willis

Cell: 386-288-3240


Email: <u>Jimmie@solidfoundations.com</u>

**CONTRACT DATE:** 5/20/2022 EMAIL: rsf2131@gmail.com subмitтер то: Rosa Febre Phone: 904-540-8394

ADDRESS: 1189 S. Marion Ave.

Lake City, Fl. 32025

One - Story home on an elevated pier system with approximately 16 to 22" clearance

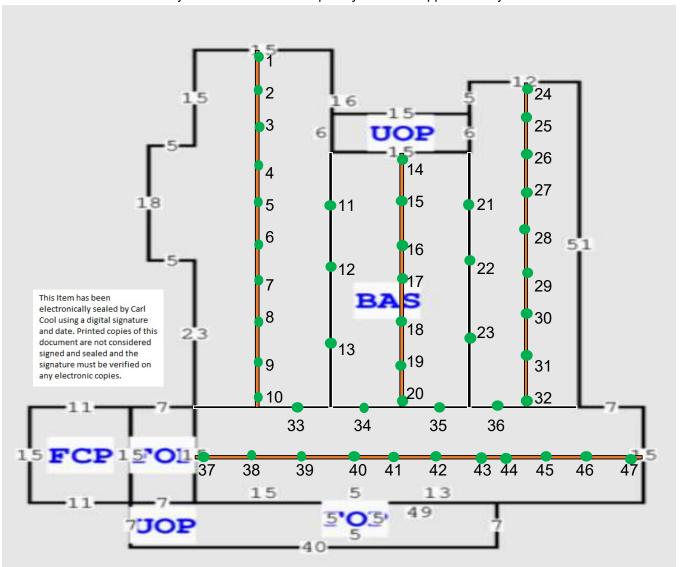

Push Pier Model 300: Interior Pier: Polyurethane 700: Push Pier Model 250: Low Profile Bracket: Polyurethane 430: Exsisting Beams I Helical Pier: Porch Bracket: -Crawl Space Pier: 4x6 Wood Beam: Floor Joist:

# Cool and Cobb Engineering Company

Date:	7/29/2022	
ob:	Rosa Febre	
ocation:	1189 S Marion Ave	
	Lake City, FL 32025	
	Attachment "A"	,
	Total Load on Pile (I	Live Load + Dead Load)
PILE NO.		TOTAL CALCULATE LOAD
1		1,340 lbs
2		2,680 lbs
3		2,680 lbs
4		2,680 lbs
5		2,680 lbs
6		2,680 lbs
7		2,680 lbs
8		2,680 lbs
9		2,680 lbs
10		1,340 lbs
11		*3,550 lbs
12		*3,550 lbs
13		*3,550 lbs
14		1,440 lbs
15		2,890 lbs
16		2,890 lbs
17		2,890 lbs
18		2,890 lbs
19		2,890 lbs
20		1,440 lbs
21		*3,550 lbs
22	This Item has been	*3,550 lbs
23	electronically sealed by Carl	*3,550 lbs
24		1,050 lbs
25	Cool using a digital signature	2,100 lbs
26	and date. Printed copies of thi	2,100 lbs
27	document are not considered	2,100 lbs
28	signed and sealed and the	2,100 lbs
29	signature must be verified on	2,100 lbs
30	any electronic copies.	2,100 lbs
	*LOADS LIMITED TO 3,550 LBS	

Maximum Total Load on Pile: 3,550 lbs

Cool and Cobb Engineering Co. 203 W. Main St. Avon Park, FL 33825

7/29/2022 Carl E. Cool, P.E. PE# 16921

### Cool and Cobb Engineering Company

Date:	7/29/2022	
Job:	Rosa Febre	
Location:	1189 S Marion Ave	
	Lake City, FL 32025	
		Attachment "A"
	Total Load on Pile	(Live Load + Dead Load)
PILE NO.		TOTAL CALCULATE LOAD
31		2,100 lbs
32		1,050 lbs
33		3,520 lbs
34		3,520 lbs
35		3,520 lbs
36		3,520 lbs
37		1,030 lbs
38		2,060 lbs
39		2,060 lbs
40		2,060 lbs
41		2,060 lbs
42		2,060 lbs
43		2,060 lbs
44		2,060 lbs
45		2,060 lbs
46		2,060 lbs
47		1,030 lbs
	This Item has	been
		sealed by Carl
		igital signature
	and date. Printed copie document are not cons	
	signed and se	
		t be verified on
	any electronic	
	N	Iaximum Total Load on Pile: 3,520 lbs
	10.	

Cool and Cobb Engineering Co. 203 W. Main St. Avon Park, FL 33825

7/29/2022 Carl E. Cool, P.E. PE# 16921

