


Remove door
cutting

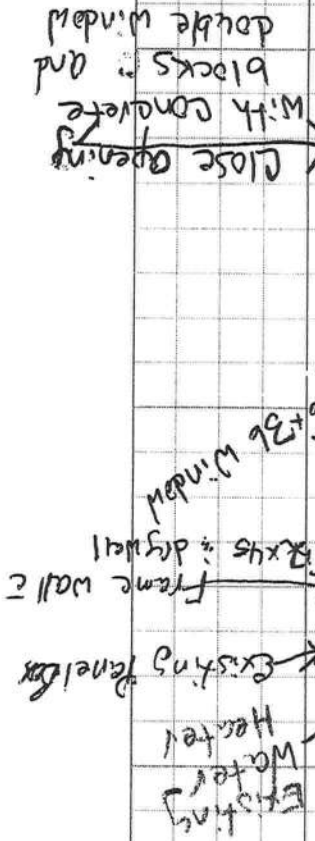

The S, E, and N walls will be insulated 2
system, pipes and drywall installed. Each of these walls
with will have 2 outlets. The East wall will have
1 outlet. The existing ceiling fan/light will be moved
to the center of the room. The existing A/C heat
vent will remain. A light fixture will be installed
in the storage room.

- Convert FCP into a 14 x 15 bedroom.

→ Replace of Existing windows
with double pane windows.