

DATE 11/03/2006

Columbia County Building Permit

PERMIT

This Permit Expires One Year From the Date of Issue

000025195

APPLICANT ZANNIE LITTLE, AGENT PHONE 386.758.1330
ADDRESS 846 NW JAKE GLEN LAKE CITY FL 32055
OWNER DELORIS LITTLE PHONE 386.755.1435
ADDRESS 586 NW JAKE GLEN LAKE CITY FL 32055
CONTRACTOR WALLACE E. PICKLES PHONE 386.758.9900
LOCATION OF PROPERTY 41-N T0 C-131,TR TO 4 1/2 MILES TO JAKE GLEN,TL AND IT'S
APPROX.3/4 OF A MILE TO PROPERTY ON L.

TYPE DEVELOPMENT M/H & UTILITY ESTIMATED COST OF CONSTRUCTION 0.00
HEATED FLOOR AREA TOTAL AREA HEIGHT STORIES
FOUNDATION WALLS ROOF PITCH FLOOR
LAND USE & ZONING A-3 MAX. HEIGHT
Minimum Set Back Requirments: STREET-FRONT 30.00 REAR 25.00 SIDE 25.00
NO. EX.D.U. 1 FLOOD ZONE X DEVELOPMENT PERMIT NO.

PARCEL ID 24-2S-16-01740-000 SUBDIVISION
LOT BLOCK PHASE UNIT TOTAL ACRES 12.00

DIH000060
Culvert Permit No. Culvert Waiver Contractor's License Number Applicant/Owner/Contractor
EXISTING 06-0974-E BLK JTH N
Driveway Connection Septic Tank Number LU & Zoning checked by Approved for Issuance New Resident

COMMENTS: REPLACING BURN'T UNIT. NO CHARGE. ASSESSMENTS CHARGED FOR 1 UNIT.
1 FOOT ABOVE ROAD.

Check # or Cash NO CHARGE

FOR BUILDING & ZONING DEPARTMENT ONLY

(footer/Slab)

Temporary Power Foundation Monolithic
date/app. by date/app. by date/app. by
Under slab rough-in plumbing Slab Sheathing/Nailing
date/app. by date/app. by date/app. by
Framing Rough-in plumbing above slab and below wood floor
date/app. by date/app. by
Electrical rough-in Heat & Air Duct Peri. beam (Lintel)
date/app. by date/app. by date/app. by
Permanent power C.O. Final Culvert
date/app. by date/app. by date/app. by
M/H tie downs, blocking, electricity and plumbing Pool
date/app. by date/app. by
Reconnection Pump pole Utility Pole
date/app. by date/app. by date/app. by
M/H Pole Travel Trailer Re-roof
date/app. by date/app. by date/app. by

BUILDING PERMIT FEE \$ 0.00 CERTIFICATION FEE \$ 0.00 SURCHARGE FEE \$ 0.00
MISC. FEES \$ 0.00 ZONING CERT. FEE \$ FIRE FEE \$ 0.00 WASTE FEE \$
FLOOD DEVELOPMENT FEE \$ FLOOD ZONE FEE \$ CULVERT FEE \$ TOTAL FEE 0.00
INSPECTORS OFFICE CLERKS OFFICE

NOTICE: IN ADDITION TO THE REQUIREMENTS OF THIS PERMIT, THERE MAY BE ADDITIONAL RESTRICTIONS APPLICABLE TO THIS PROPERTY THAT MAY BE FOUND IN THE PUBLIC RECORDS OF THIS COUNTY. AND THERE MAY BE ADDITIONAL PERMITS REQUIRED FROM OTHER GOVERNMENTAL ENTITIES SUCH AS WATER MANAGEMENT DISTRICTS, STATE AGENCIES, OR FEDERAL AGENCIES.

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

This Permit Must Be Prominently Posted on Premises During Construction

PLEASE NOTIFY THE COLUMBIA COUNTY BUILDING DEPARTMENT AT LEAST 24 HOURS IN ADVANCE OF EACH INSPECTION, IN ORDER THAT IT MAY BE MADE WITHOUT DELAY OR INCONVIENCE, PHONE 758-1008. THIS PERMIT IS NOT VALID UNLESS THE WORK AUTHORIZED BY IT IS COMMENCED WITHIN 6 MONTHS AFTER ISSUANCE.

The Issuance of this Permit Does Not Waive Compliance by Permittee with Deed Restrictions.

PERMIT APPLICATION / MANUFACTURED HOME INSTALLATION APPLICATION

For Office Use Only (Revised 9-22-06) Zoning Official BLK 03.11.06 Building Official OK JTH 11-2-06

AP# 0611-09 Date Received 11/2/06 By JW Permit # 25195

Flood Zone X Development Permit N/A Zoning A-3 Land Use Plan Map Category A-3

Comments ASSESSMENT CHANGED
- NEW UNIT BUILT - NO CHANGES

FEMA Map# _____ Elevation _____ Finished Floor _____ River _____ In Floodway _____

☒ Site Plan with Setbacks Shown ☒ EH Signed Site Plan ☒ EH Release ☒ Well letter ☒ Existing well

☒ Copy of Recorded Deed or Affidavit from land owner ☒ Letter of Authorization from installer

☒ State Road Access ☒ Parent Parcel # _____ ☒ STUP-MH _____

Property ID # 24-25-16-01740-000 Subdivision _____

- New Mobile Home ☒ Used Mobile Home _____ Year 2007
- Applicant ZANNIE LITTLE Phone # 386-758-1330
- Address 1846 NW JAKE GIN, L.C. #1 32055
- Name of Property Owner DELORAS LITTLE Phone# 755 1485
- 911 Address 586 NW JAKE GIN, L.C. #1 32055
- Circle the correct power company - FL Power & Light - Clay Electric
(Circle One) - Suwannee Valley Electric - Progress Energy
- Name of Owner of Mobile Home DELORAS LITTLE Phone # 386-758-1330
Address 586 NW JAKE GIN, JAKE CITY #1 32055
- Relationship to Property Owner Daughter-in-law
- Current Number of Dwellings on Property 1 (BROKE OUT) HAS BEEN REMOVED
- Lot Size _____ Total Acreage 18.00
- Do you : Have Existing Drive or Private Drive or need Culvert Permit or Culvert Waiver (Circle one)
(Currently using) (Blue Road Sign) (Putting in a Culvert) (Not existing but do not need a Culvert)
- Is this Mobile Home Replacing an Existing Mobile Home YES
- Driving Directions to the Property 41-N TO E-131, TPC FALLING CREEK RD - TO
1 1/2 miles to NW JAKE GIN, TL. IT'S APPROX. 3/4 mile to
PROPERTY ON L.

- Name of Licensed Dealer/Installer WALACE E. HICKLES Phone # 758.9900
- Installers Address 136 SW HEPBURN J. DAVIS LANE, L.C. #1 32055
- License Number OTH 000060 Installation Decal # 22304
- forthcoming

@ CAM112M01	S	CamaUSA Appraisal System	Columbia County
11/02/2006 12:12		Legal Description Maintenance	9150 Land 002
Year T Property		Sel	1980 AG 001
2007 R 24-2S-16-01740-000			31709 Bldg 001 *
		586 JAKE GLEN NW	2913 Xfea 005
HX		LITTLE DELORIS	45752 TOTAL B

1	SW1/4 OF NE1/4 & N1/2 OF N1/2	OF SW1/4 & N1/2 OF NW1/4 OF	2
3	SE1/4, EX R/W OF D PARNELL RD.	EX 23.06 AC DESC ORB 800-1463	4
5	& EX 22 AC DESC ORB 800-1343 &	EX 22 AC DESC ORB 800-1346	6
7	ORB 758-2235, 792-265 THRU	792-270, 792-2338, DC 952-1502	8
9	EX 17.80 AC DESC ORB 1087-2509		10
11			12
13			14
15			16
17			18
19			20
21			22
23			24
25			26
27			28

Mnt 7/27/2006 LARRY

F1=Task F3=Exit F4=Prompt F10=GoTo PgUp/PgDn F24=More

PERMIT NUMBER

POCKET PENETROMETER TEST

The pocket penetrometer tests are rounded down to psi or check here to declare 1000 lb. soil without testing.

x 2000 x 2000 x 2000

POCKET PENETROMETER TESTING METHOD

1. Test the perimeter of the home at 6 locations.
2. Take the reading at the depth of the footer.
3. Using 500 lb. increments, take the lowest reading and round down to that increment.

x 2000 x 2000 x 2000

TORQUE PROBE TEST

The results of the torque probe test is 300 inch pounds or check here if you are declaring 5" anchors without testing A test showing 275 inch pounds or less will require 4 foot anchors.

Note: A state approved lateral arm system is being used and 4 ft. anchors are allowed at tie sidewall locations. I understand 6 ft. anchors are required at all centerline tie points where the torque test reading is 275 or less and where the mobile home manufacturer may require anchors with 400 lb. holding capacity.

Installer's Initials

ALL TESTS MUST BE PERFORMED BY A LICENSED INSTALLER

Installer Name

Wallace E. Pickles

Date Tested

11-2-06

Electrical

Connect electrical conductions between multi-wide units, but not to the main power source. This includes the bonding wire between multi-wide units. Pg. 54-09-0010

Plumbing

Connect all sewer drains to an existing sewer lap or septic tank. Pg. 54-11-0001

Connect all potable water supply piping to an existing water meter, water tap, or other independent water supply systems. Pg. 54-11-0001

Site Preparation

Debris and organic material removed Pad Other
Water drainage: Natural X Swale

Fastening multi-wide units

Floor: Type Fastener: staple Length: 7/16" Spacing: 16 ga.
Walls: Type Fastener: staple Length: 3/4" Spacing: 12" o/c
Roof: Type Fastener: staple Length: 7/16" Spacing: 12" o/c
For used homes a min. 30 gauge, 6" wide, galvanized metal strip will be centered over the peak of the roof and fastened with galv. roofing nails at 2' on center on both sides of the centerline.

Gasket (weatherproofing requirement)

I understand a properly installed gasket is a requirement of all new and used homes and that condensation, mold, mildew and buckled marriage walls are a result of a poorly installed or no gasket being installed. I understand a strip of tape will not serve as a gasket.

Installer's initials

N.P.

Type gasket

foilcrete

Pg.

54-05-001

Installed:

Between Floors Yes X
Between Walls Yes X
Bottom of ridgebeam Yes

Weatherproofing

The bottomboard will be repaired and/or taped. Yes X Pg. 54-15-001
Siding on units is installed to manufacturer's specifications. Yes X
Fireplace chimney installed so as not to allow intrusion of rain water. Yes X

Miscellaneous

Skirting to be installed. Yes X No

Dryer vent installed outside of skirting. Yes X N/A

Range downflow vent installed outside of skirting. Yes X N/A

Drain lines supported at 4 foot intervals. Yes X

Electrical crossovers protected. Yes X

Other:

Installer verifies all information given with this permit worksheet is accurate and true based on the

manufacturer's installation instructions and or Rule 15C-1 & 2

Installer Signature

Wallace E. Pickles

Date

PERMIT NUMBER

Installer Wallace F. Pickles License # DIH 000060

Address of home being installed



Manufacturer Jacobsen Length x width 16 x 66' 8"

NOTE: if home is a single wide fill out one half of the blocking plan
if home is a triple or quad wide sketch in remainder of home

I understand Lateral Arm Systems cannot be used on any home (new or used) where the sidewall ties exceed 5 ft 4 in.

Installer's initials W.F.

Typical pier spacing

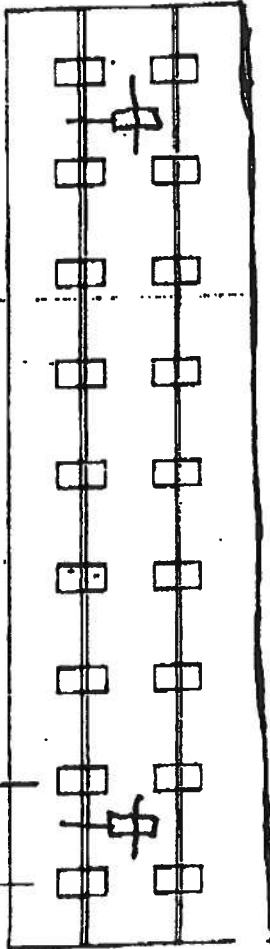

New Home ☒ Used Home ☐
Home installed to the Manufacturer's Installation Manual

Home is installed in accordance with Rule 15-C

Single wide ☒ Wind Zone II ☒ Wind Zone III ☐

Double wide ☐ Installation Decal # 22304

Triple/Quad ☐ Serial #

PIER SPACING TABLE FOR USED HOMES

Load bearing capacity (sq in)	16' x 16" (256)	18 1/2" x 18 1/2" (342)	20' x 20" (400)	22' x 22" (484)	24' x 24" (576)	26' x 26" (676)
1000 psi	3'	4'	5'	6'	7'	8'
1500 psi	4' 8"	6'	7'	8'	9'	10'
2000 psi	6'	8'	9'	10'	11'	12'
2500 psi	7' 6"	9'	10'	11'	12'	13'
3000 psi	8'	10'	11'	12'	13'	14'
3500 psi	8'	10'	11'	12'	13'	14'

Interpolated from Rule 15C-1 pier spacing table.

PIER PAD SIZES

Pad Size	Sq. in.
18 x 18	258
18 x 18	288
18 1/2 x 18 1/2	342
18 x 22 1/2	360
17 x 22	374
13 1/4 x 28 1/4	348
20 x 20	400
17 3/16 x 25 3/16	441
17 1/2 x 25 1/2	448
24 x 24	576
26 x 26	676

I-beam pier pad size 17x22

Perimeter pier pad size 17x22

Other pier pad sizes (required by the mfg.)

Draw the approximate locations of marriage wall openings 4 foot or greater. Use this symbol to show the piers.



List all marriage wall openings greater than 4 foot and their pier pad sizes below.

Opening

Pier pad size

4 ft ☒ 5 ft

FRAME TIES

within 2' of end of home, spaced at 5' 4" oc ☒

TIEDOWN COMPONENTS

OTHER TIES Number

Longitudinal Stabilizing Device (LSD) Manufacturer Olive's Tech
Longitudinal Stabilizing Device w/ Lateral Arms Manufacturer Olive's Tech

Side wall Longitudinal Marriage wall Shear wall

Friends
Buy a Home™



Corbett's Mobile Homes Sales & Service

Deputy J. Davis Lane-Lake City, Florida 32024

(386)758-9900

Fax- (386)755-4287

To: Janice

Company: _____

Fax: _____

Phone#: _____

From: Wallace E. Little

Date Time: _____

Total Pgs. (Inc. Cover) _____


Re: _____

I do not receive total # of Pages indicated above or of there are transmittal problems, please call (386)758-
Thank you for your Business.


Comments: I Wallace E. Little
President of Corbett's Mobile Homes

Gives Mrs. Little Authorization To
Act as a Agent in pulling Permit
for her Mother. One a Single
Wide Home to be located around
Fallen Creek Rd.


Wallace E. Little
214 000060

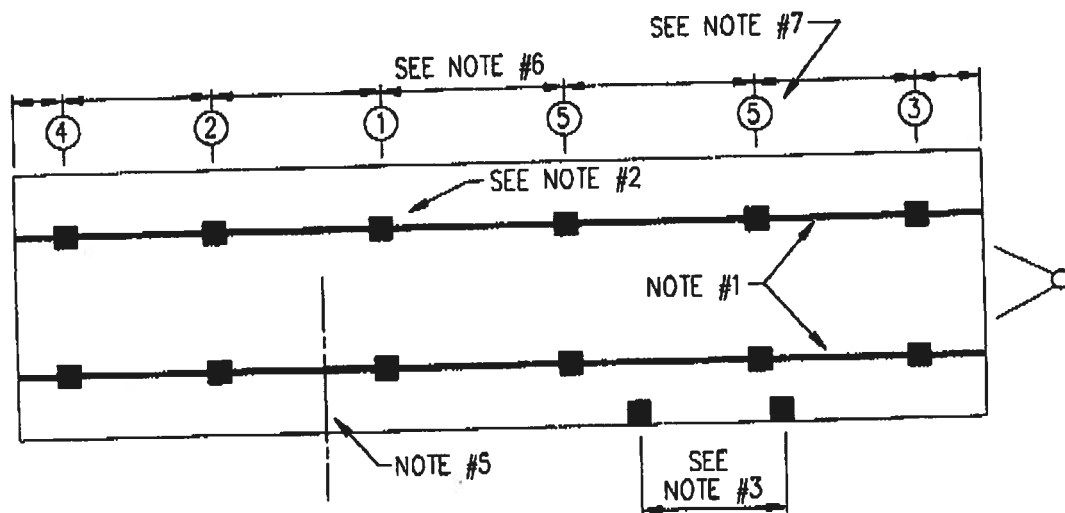

TYPICAL SINGLE WIDE BLOCKING
(SEE SU-01-0004 FOR NOTES)

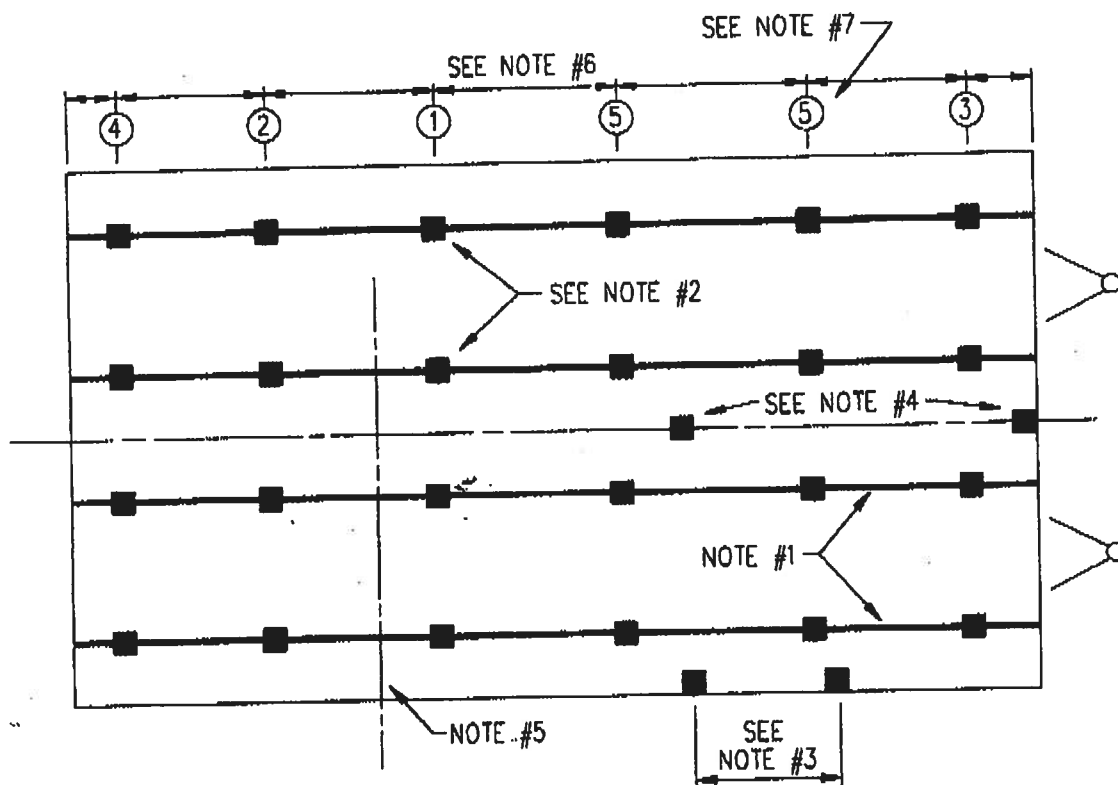

TYPICAL DOUBLE WIDE BLOCKING
(SEE SU-01-0004 FOR NOTES)



JACOBSEN HOMES

P.O. BOX 368
SAFETY HARBOR, FLORIDA 34695
PHONE (727) 728-1138

NOTICE:

THESE SPECIFICATIONS AND DRAWINGS ARE ORIGINAL, PROPRIETARY, AND CONFIDENTIAL MATERIALS OF JACOBSEN MANUFACTURING INC. SUCH MATERIALS ARE PROVIDED TO THE RECIPIENT FOR SPECIFIC PURPOSES AND MUST BE KEPT CONFIDENTIAL AND SECRET FROM OTHERS.

DRAWN BY:

S.A.

DATE:

6-6-94


REV. LETTER:

DRAWING TITLE:

DOUBLE WIDE BLOCKING

DRAWING NUMBER:

SU-01-0003

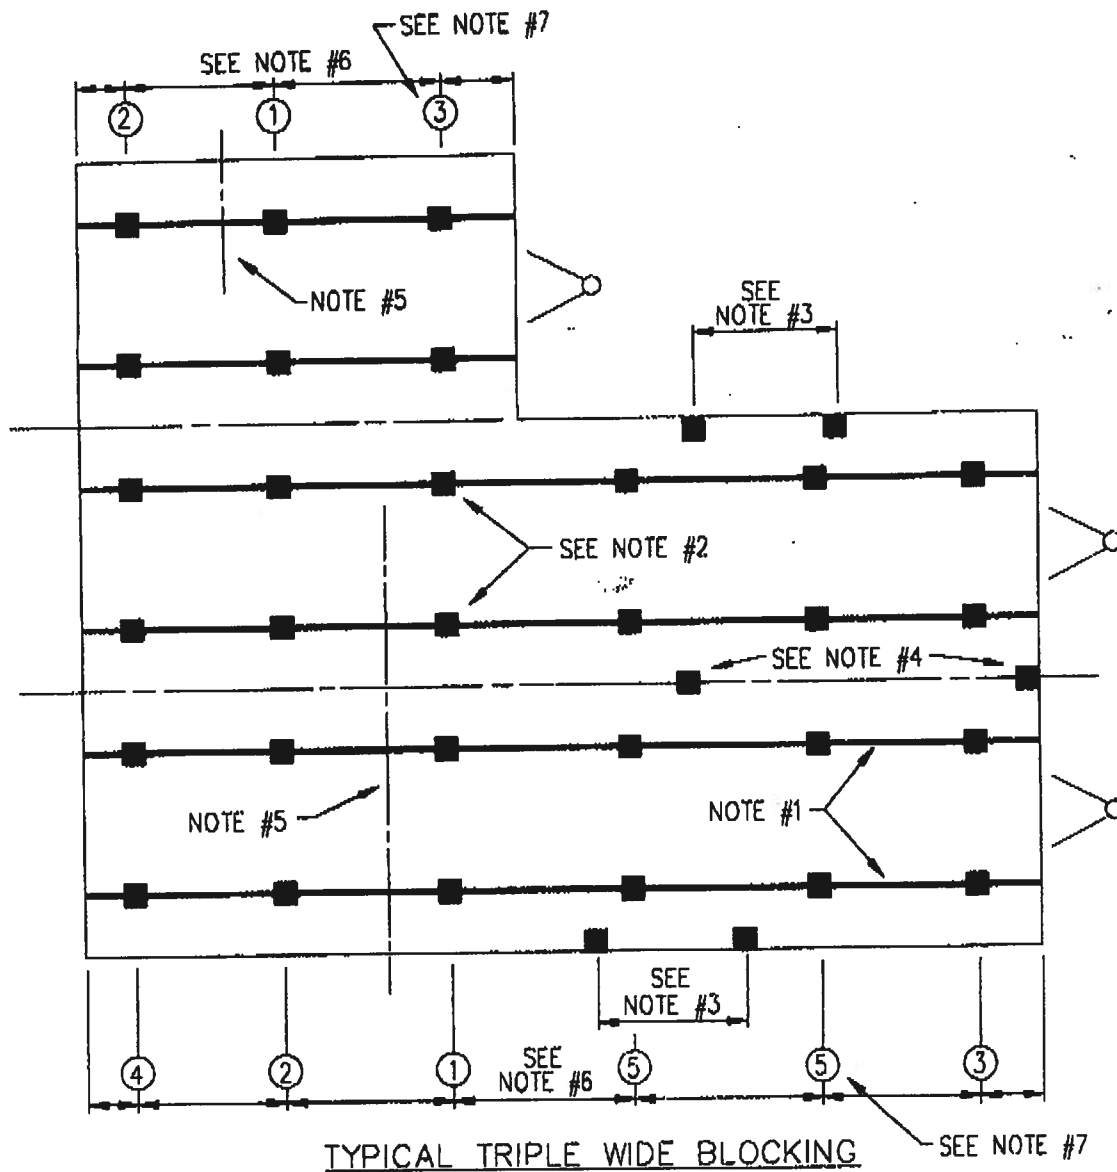

NOTES

- #1-MAIN FRAME I-BEAMS
- #2-LOCATE PIERS UNDER FRAME I-BEAMS
- #3-LOCATE PIERS UNDER CLOSEST FLOOR JOIST EACH SIDE OF OPENINGS 48" AND LARGER.
(I.E.-RECESSED ENTRIES AND SL. GL. DRS.) SEE TABLE FOR PIER FOOTER SIZING PAGE 10.
- #4-LOCATE PIERS UNDER MARRIAGE WALL PERIMETER JOISTS WITHIN 6" OF EACH SIDE OF OPENINGS.
48" & LARGER AND RIDGE BEAM COLUMNS. SEE TABLE FOR PIER FOOTER SIZING SU-01-0030 AND SEE
DETAIL 'B', SU-01-0010.
- #5-AXLE ASSEMBLY CENTER LINE
- #6-SEE TABLE I FOR PIER FOOTER SIZING AND PIER SPACING INFORMATION SU-01-0040, AND DETAIL 'A' SU-01-0010.
- #7-BLOCKING SEQUENCE NUMBERS, SEE SU-01-0002 FOR PROPER BLOCKING PROCEDURES.



JACOBSEN HOMES

P.O. BOX 368
SAFETY HARBOR, FLORIDA 34895
PHONE (727) 726-1138

NOTICE:
THESE SPECIFICATIONS AND DRAWINGS ARE
ORIGINAL, PROPRIETARY, AND CONFIDENTIAL
MATERIALS OF JACOBSEN MANUFACTURING
INC. SUCH MATERIALS ARE PROVIDED TO THE
RECIPIENT FOR SPECIFIC PURPOSES AND MUST BE
KEPT CONFIDENTIAL AND SECRET FROM OTHERS.

DRAWN BY:	S.A.	DATE:	6-6-94	REV. LETTER:
DRAWING TITLE:	TRIPLE WIDE BLOCKING			
DRAWING NUMBER:	SU-01-0004			

ADDENDUM

TIE-DOWN SYSTEM

TYPICAL SIDE ELEVATION
SHOWING TIE-DOWN SPACINGS

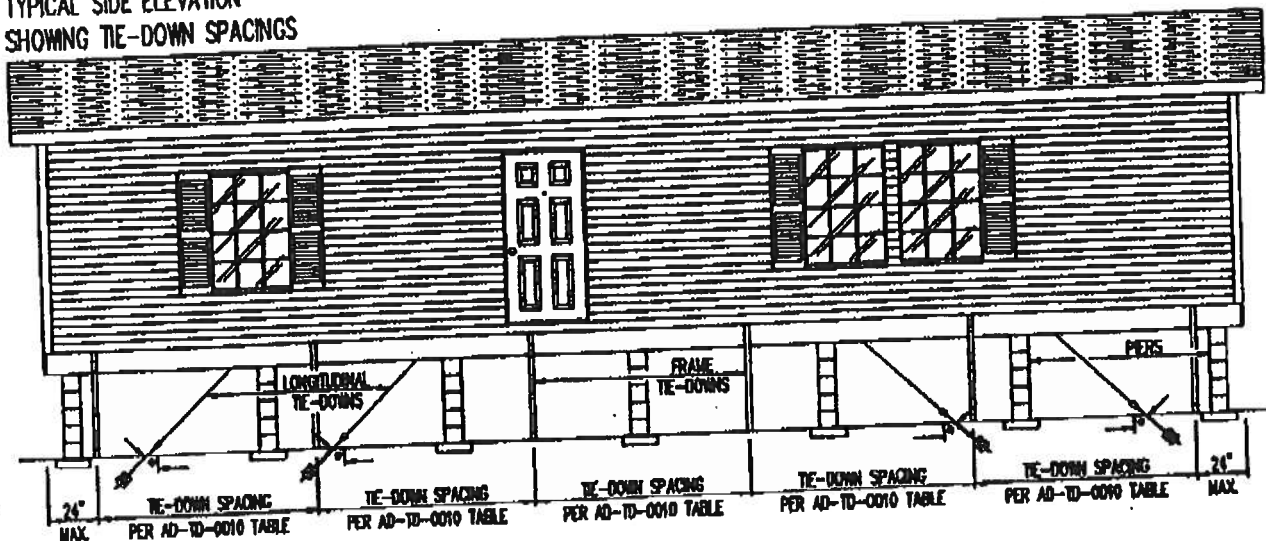


FIGURE 10.0

SEE FIGURE 2.0 FOR ALTERNATE TIE-DOWN METHOD

TYPICAL CROSS SECTION
SHOWING TIEDOWNS

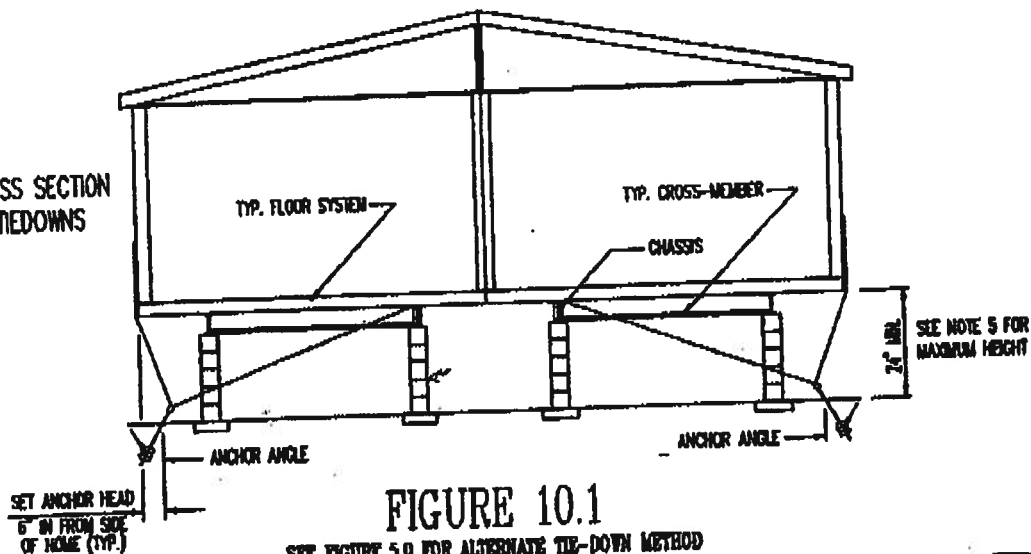


FIGURE 10.1

SEE FIGURE 5.0 FOR ALTERNATE TIE-DOWN METHOD


WINDZONE III
(110 MPH)
20 PSF ROOF
10 PSF D.L.

NOTES:

1. SEE AD-TD-0070 FOR SPACING TABLES.
2. SEE AD-TD-0070 FOR QUANTITY OF LONGITUDINAL TIE-DOWN STRAPS REQUIRED.
3. SEE OTHER DETAILS FOR BLOCKING (PIER) QUANTITY AND OTHER REQUIREMENTS.
4. SEE FULL ADDENDUM FOR ADDITIONAL REQUIREMENTS.
5. ZONE 2/EXPOSURE 'C': 56" MAXIMUM HEIGHT
ZONE 2/EXPOSURE 'D': 40" MAXIMUM HEIGHT
ZONE 3/EXPOSURE 'C': 56" MAXIMUM HEIGHT
ZONE 3/EXPOSURE 'D': 40" MAXIMUM HEIGHT

REF. CALCS

CWA-91.01-91.16

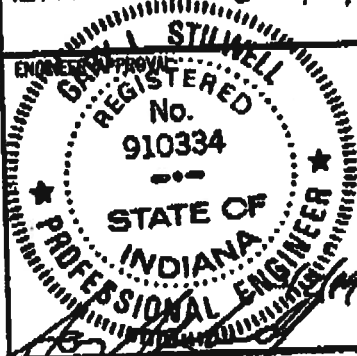

DAPIA APPROVAL:

APPROVED BY
NIA INC.
FEDERAL MANUFACTURED HOME
CONSTRUCTION AND SAFETY STANDARDS

JAN 18 2006

NOTICE:

THESE SPECIFICATIONS AND DRAWINGS ARE ORIGINAL, PROPRIETARY, AND CONFIDENTIAL MATERIALS OF JACOBSEN MANUFACTURING INC. SUCH MATERIALS ARE PROVIDED TO THE RECIPIENT FOR SPECIFIC PURPOSES AND MUST BE KEPT CONFIDENTIAL AND SECRET FROM OTHERS.

DRAWN BY:

M.T.

DATE:

3-1-99

REV. LETTER:

DRAWING TITLE:

FIGURES 10.0 AND 10.1

DRAWING NUMBER:

AD-TD-0071



JACOBSEN HOMES

P.O. BOX 368
SAFETY HARBOR, FLORIDA 34695
PHONE (727) 726-1138

ADDENDUM TIE-DOWN SYSTEM

TYPICAL SIDE ELEVATION
SHOWING TIE-DOWN SPACINGS

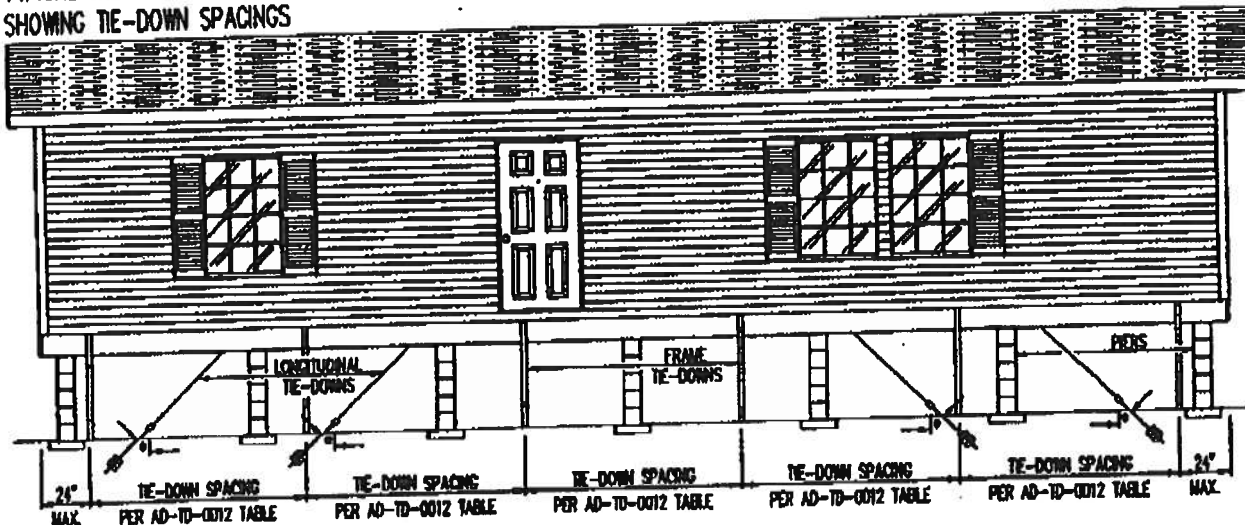


FIGURE 10.2

SEE FIGURE 2.0 FOR ALTERNATE TIE-DOWN METHOD

TYPICAL CROSS SECTION
SHOWING TIEDOWNS

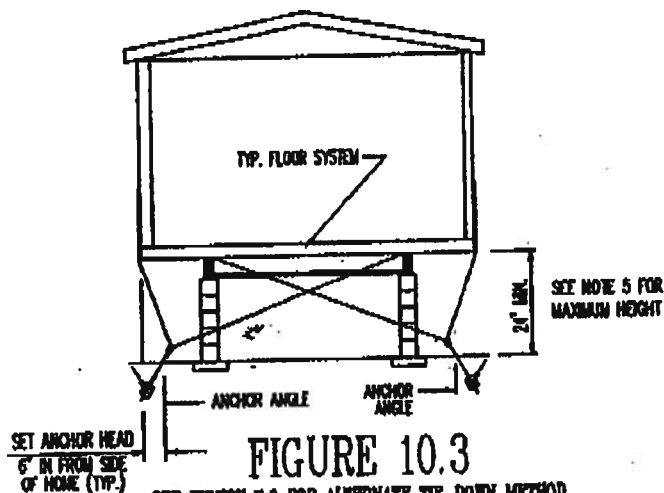


FIGURE 10.3

SEE FIGURE 7.0 FOR ALTERNATE TIE-DOWN METHOD

WINDZONE III
(110 MPH)
20 PSF ROOF
10 PSF D.L.

NOTES:

1. SEE AD-TD-0072 FOR SPACING TABLES AND NOTES.
2. SEE AD-TD-0072 FOR QUANTITY OF LONGITUDINAL TIE-DOWN STRAPS REQUIRED.
3. SEE OTHER DETAILS FOR BLOCKING (PIER) QUANTITY AND OTHER REQUIREMENTS.
4. SEE FULL ADDENDUM FOR ADDITIONAL REQUIREMENTS.
5. ZONE 2/EXPOSURE 'C': 56' MAXIMUM HEIGHT
ZONE 2/EXPOSURE 'D': 56' MAXIMUM HEIGHT
ZONE 3/EXPOSURE 'C': 56' MAXIMUM HEIGHT
ZONE 3/EXPOSURE 'D': 56' MAXIMUM HEIGHT

REF. CALCS.

CVA-92.01-92.16



DAPIA APPROVAL

APPROVED BY

NIA INC.
FELIX L. JACOBSEN, P.E.
CHIEF ENGINEER AND SAFETY ENGINEER

JAN 16 2004

NOTICE:

THESE SPECIFICATIONS AND DRAWINGS ARE ORIGINAL, PROPRIETARY, AND CONFIDENTIAL MATERIALS OF JACOBSEN MANUFACTURING INC. SUCH MATERIALS ARE PROVIDED TO THE RECIPIENT FOR SPECIFIC PURPOSES AND MUST BE KEPT CONFIDENTIAL, AND SECRET FROM OTHERS.

DRAWN BY:

M.T.

DATE:

3-1-99

REV. LETTER:

DRAWING TITLE:

FIGURES 10.2 AND 10.3

DRAWING NUMBER:

AD-TD-0073



JACOBSEN HOMES

P.O. BOX 368
SAFETY HARBOR, FLORIDA 34695
PHONE (727) 726-1138

ADDENDUM**OFFSET UNIT TIE-DOWN SPACING TABLES
ZONE II & III/EXP. C & D****SEE FIGURES
11.0, 11.1 & 11.2****EXPOSURE 'C'****LONGITUDINAL TIE-DOWN SPACING TABLE**

MIN. FLOOR WIDTH	WIND ZONE II		WIND ZONE III	
	MIN. QTY. EA. END OF EA. SECTION	ANCHOR ANGLE MIN. Ø	MIN. QTY. EA. END OF EA. SECTION	ANCHOR ANGLE MIN. Ø
12'-0"	3	47°	3	61°
13'-4"	2	54°	3	41°
15'-4"	2	54°	3	41°

VERTICAL TIE-DOWN / FRAME TIE-DOWN SPACING TABLE

MAX. EAVE OVERHANG	WIND ZONE II			WIND ZONE III		
	SPACING	DEL. HEAD LOAD	ANCHOR ANGLE	SPACING	DEL. HEAD LOAD	ANCHOR ANGLE
12"	5'-0"	3150#	40°	4'-0"	3150#	39°
12"	5'-0"	3150#	41°	4'-0"	3000#	40°
12"	5'-0"	3150#	43°	4'-0"	3000#	42°

EXPOSURE 'D'**LONGITUDINAL TIE-DOWN SPACING TABLE**

MIN. FLOOR WIDTH	WIND ZONE II		WIND ZONE III	
	MIN. QTY. EA. END OF EA. SECTION	ANCHOR ANGLE MIN. Ø	MIN. QTY. EA. END OF EA. SECTION	ANCHOR ANGLE MIN. Ø
12'-0"	4	45°	4	60°
13'-4"	3	45°	3	60°
15'-4"	3	45°	3	60°

VERTICAL TIE-DOWN / FRAME TIE-DOWN SPACING TABLE

MAX. EAVE OVERHANG	WIND ZONE II			WIND ZONE III		
	SPACING	DEL. HEAD LOAD	ANCHOR ANGLE	SPACING	DEL. HEAD LOAD	ANCHOR ANGLE
12"	4'-0"	3150#	40°	3'-0"	3000#	38°
12"	4'-0"	3065#	41°	3'-0"	3000#	39°
12"	4'-0"	3065#	43°	3'-0"	3000#	41°


R.C.B. - CALCS. C-90-16.01-16.12

UNIT WITH THE MARRIAGE LINE WALL EXTENDING BEYOND THE ENDWALL OF SECTION MUST BE TIED DOWN AT THE MARRIAGE LINE IN ACCORDANCE WITH THE ABOVE. THE SIDEWALL SIDE AND THE ADJACENT SECTION(S) ARE TO BE TIED DOWN IN ACCORDANCE WITH THE NORMAL SPACING TABLES (SEE AD-TD-0010 FOR 13'-4" WIDES, AND AD-TD-0070 FOR 15'-4" WIDES).

SEE AD-TD-0001 FOR ADDITIONAL REQUIREMENTS.

SEE AD-TD-0081 FOR MAXIMUM PIER HEIGHT REQUIRED FOR THE LOADS TABULATED

ENGINEER APPROVAL



REF. CALCS. (C-90-17.01-17.08)

APPROVED BY

NIA INC. JUN 11 2006

FEDERAL MANUFACTURED HOME CONSTRUCTION AND SAFETY STANDARDS

DATE: 6-8-04

REV. LETTER:

A

JACOBSEN HOMES

P.O. BOX 368
SAFETY HARBOR, FLORIDA 34896
PHONE (727) 728-1138

NOTICE:
THESE SPECIFICATIONS AND DRAWINGS ARE ORIGINAL, PROPRIETARY, AND CONFIDENTIAL MATERIALS OF JACOBSEN MANUFACTURING INC. SUCH MATERIALS ARE PROVIDED TO THE RECIPIENT FOR SPECIFIC PURPOSES AND MUST BE KEPT CONFIDENTIAL AND SECRET FROM OTHERS.

DRAWING TITLE:

OFFSET SPACING TABLES

DRAWING NUMBER:

AD-TD-0080



STATE OF FLORIDA
DEPARTMENT OF HEALTH

APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT


Permit Application Number

06-0924


PART II - SITE PLAN

Scale: Each block represents 5 feet and 1 inch = 50 feet.

SW 1/4 of NE 1/4 + N 1/2 of SW 1/4 + N 1/2 of NW 1/4 of SE 1/4



210'
1212
-20x20-

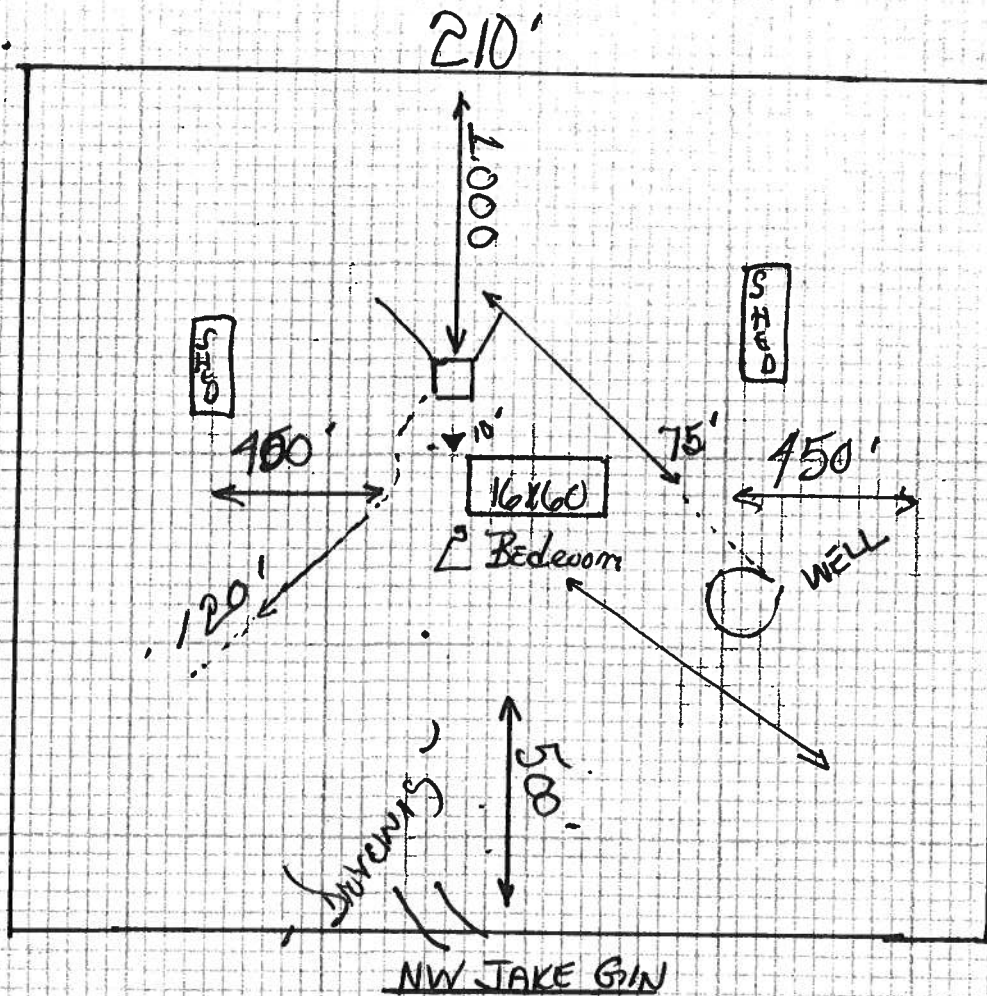

Notes:

Site Plan submitted by:

Jamie Little

Signature

Agent

Title

Plan Approved

Not Approved

Date


By

Mark S. Lander

11/3/06

County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT

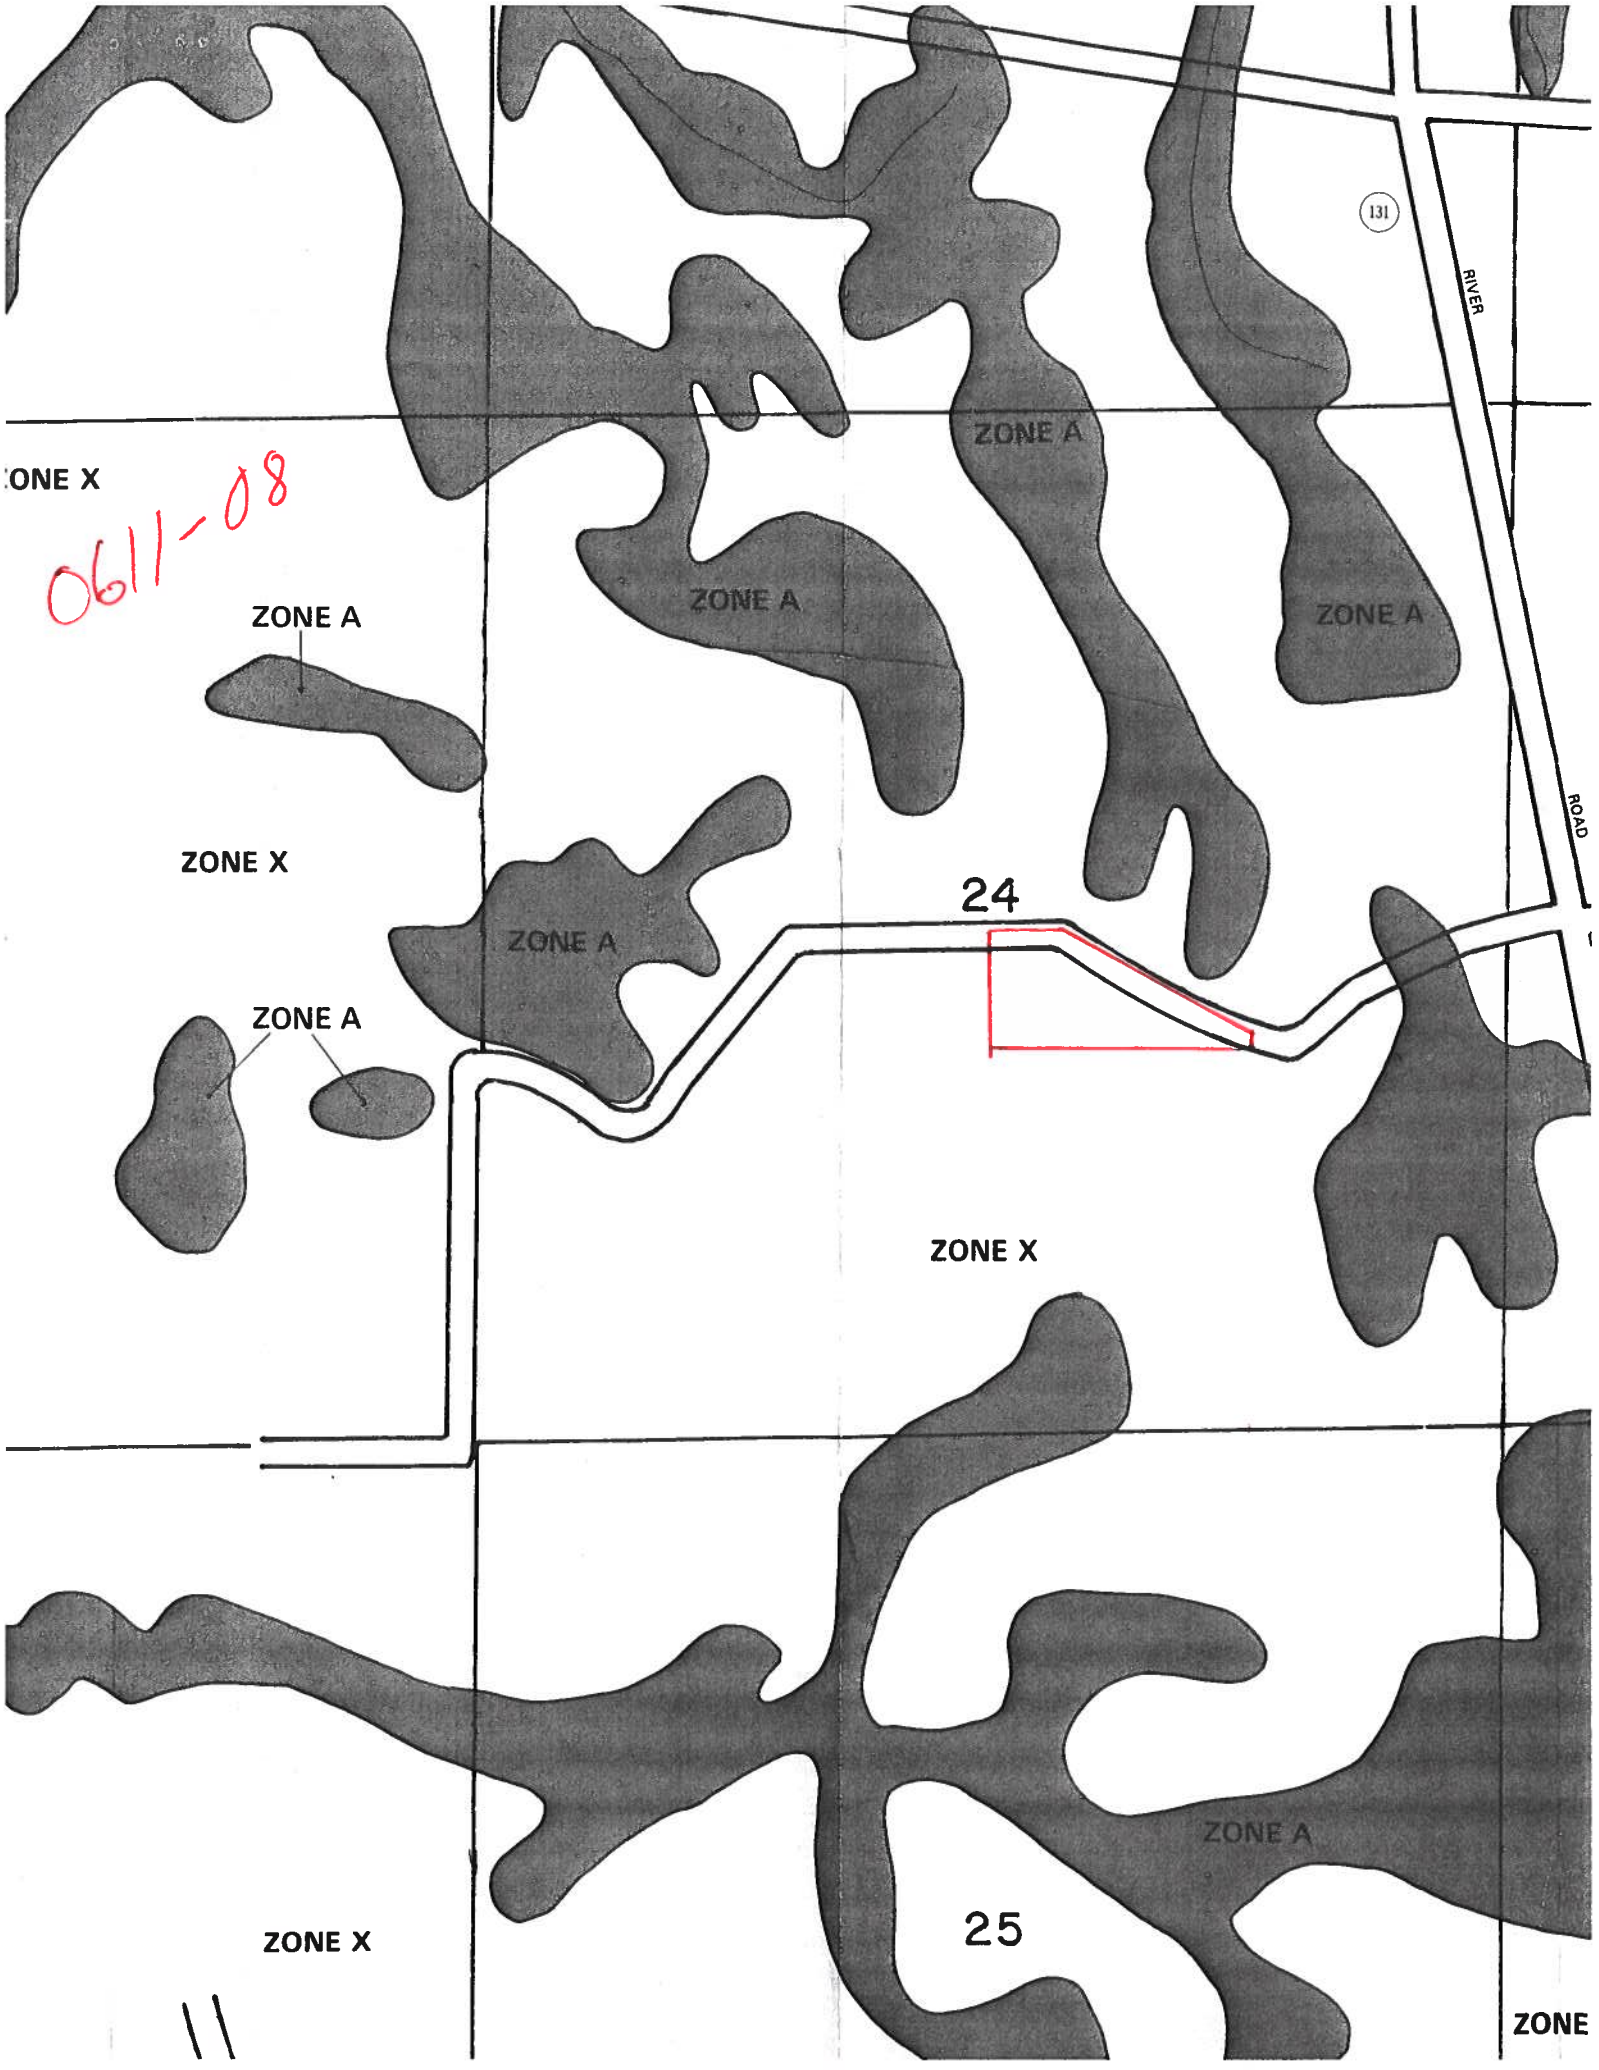

ZONE X

0611-08

ZONE A

ZONE X

ZONE A

ZONE A

ZONE A

ZONE A

ZONE A

24

ZONE X

ZONE A

25

ZONE X

11


131

RIVER

ROAD

ZONE

- SITE PLAN -

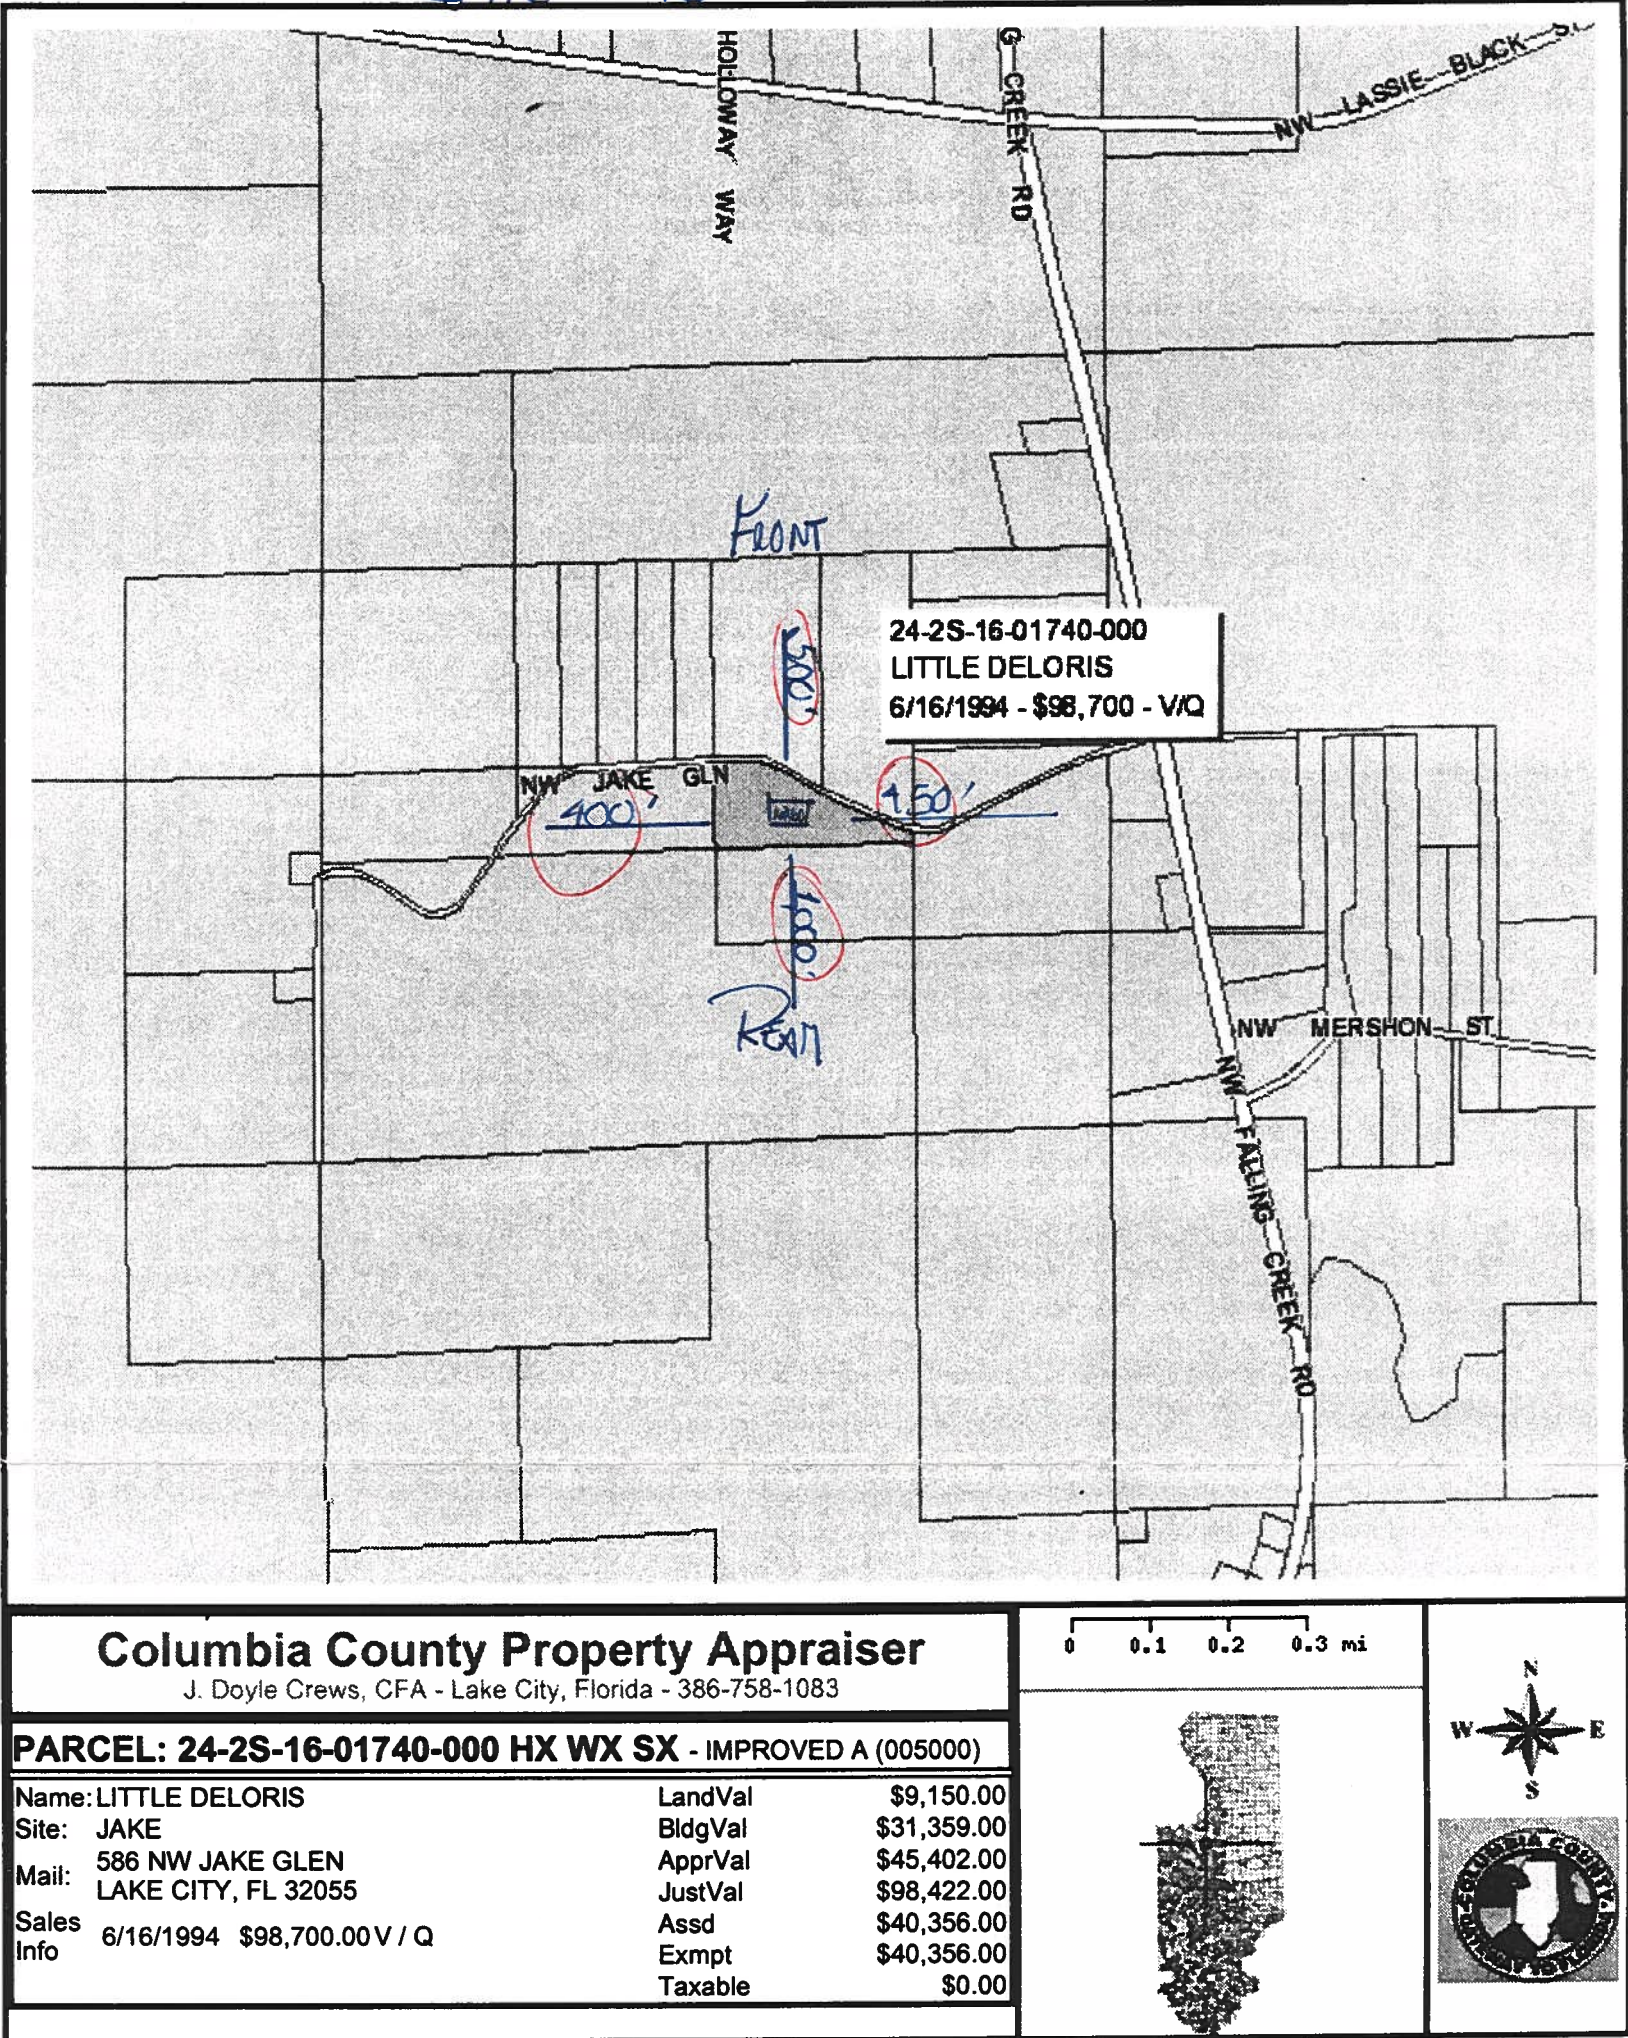

This information, GIS Map Updated: 10/4/2006, was derived from data which was compiled by the Columbia County Property Appraiser Office solely for the governmental purpose of property assessment. This information should not be relied upon by anyone as a determination of the ownership of property or market value. No warranties, expressed or implied, are provided for the accuracy of the data herein, it's use, or it's interpretation. Although it is periodically updated, this information may not reflect the data currently on file in the Property Appraiser's office. The assessed values are NOT certified values and therefore are subject to change before being finalized for ad valorem assessment purposes.