


### GABLE END GYPSUM DIAPHRAGM HOLDOWN CONNECTOR


SCALE: NONE

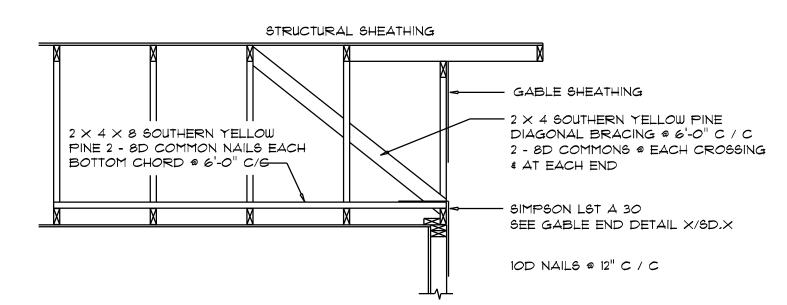


### END WALL BRACING FOR CEILING DIAPHRAGM

(ALTERNATIVE TO BALLOON FRAMING)

NOTE: ALL WOOD TO BE NUMBER 2 GRADE SOUTHERN YELLOW PINE

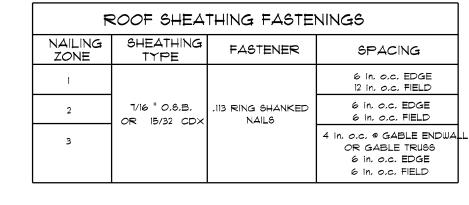

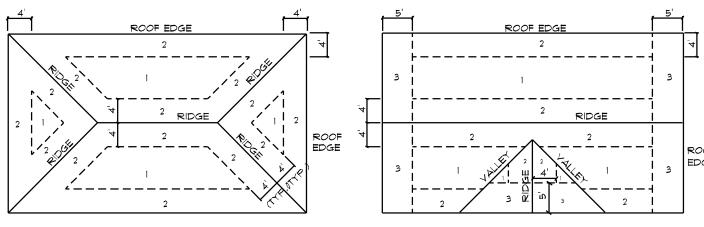


ROOF SHEATHING NAILING ZONES (HIP ROOF)


ROOF SHEATHING NAILING ZONES (GABLE ROOF)

# Roof Nail Pattern DET.


SCALE: NONE



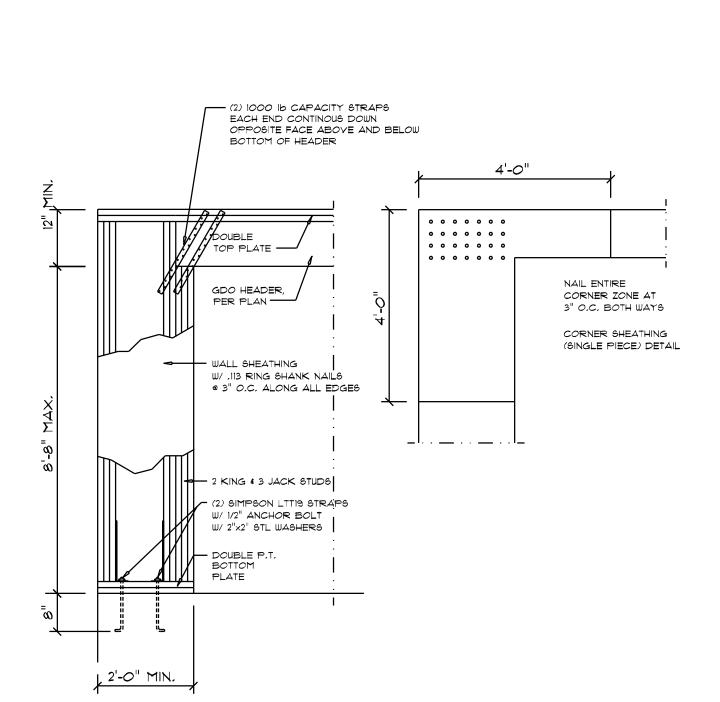


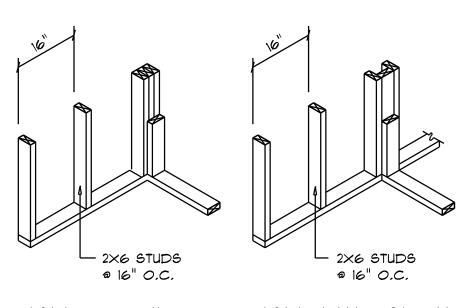


WALL CORNER WALL INTERSECTION

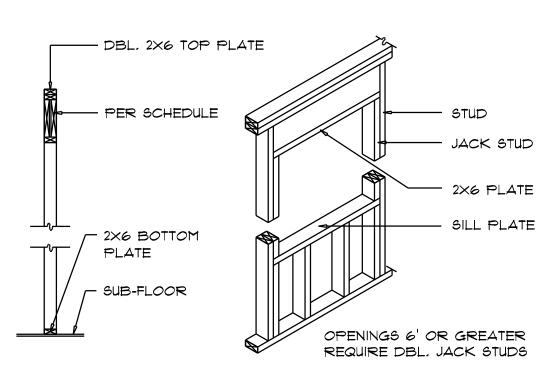


TYPICAL WINDOW HEADER

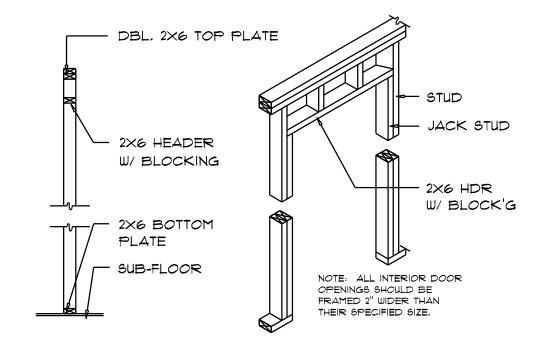

NON-BEARING WALL HEADER

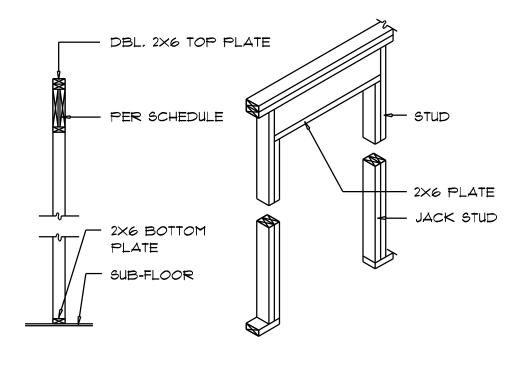


BEARING WALL HEADER




Wall Framing/Header DETAILS



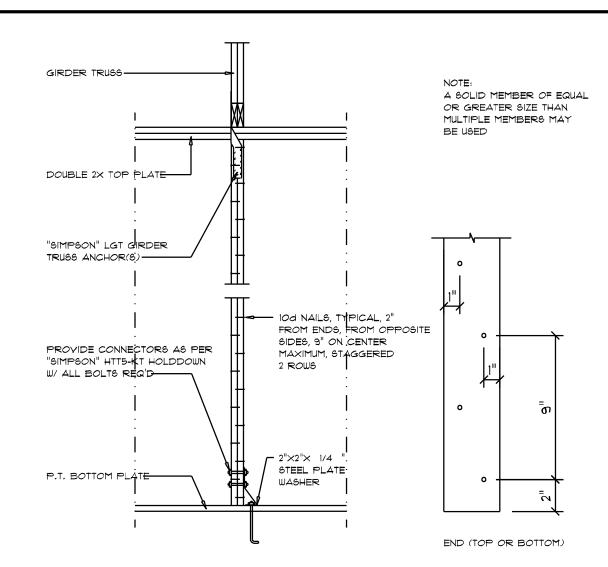

### Girder Truss Column DET.

SCALE: 1/2" = 1'-0"

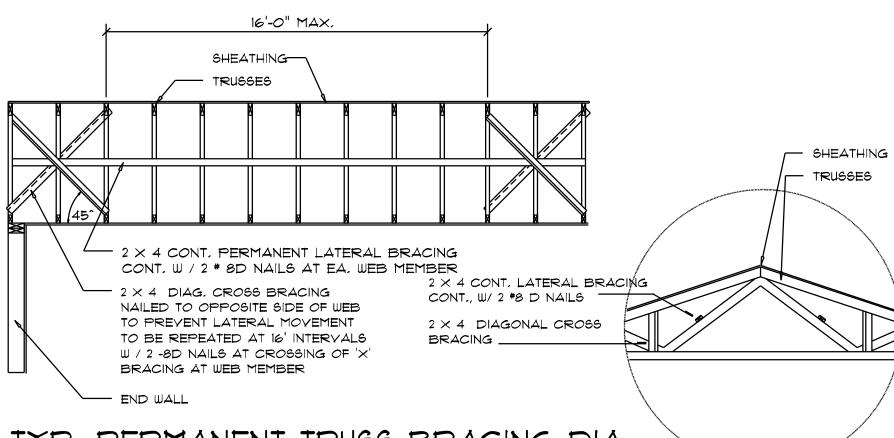


TYP, PERMANENT TRUSS BRACING DIA.

NOTE: ALL WOOD TO BE NUMBER 2 GRADE SOUTHERN YELLOW PINE

## Truss Bracing DETAILS

SCALE: AS NOTED

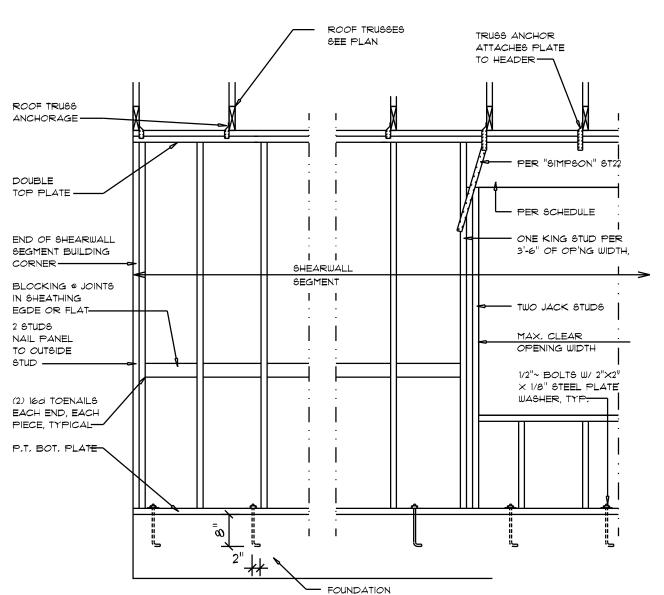

#### SHEARWALL NOTES:

D

- 2. THE WALL SHALL BE ENTIRELY SHEATHED WITH 7/16" WINDSTORM BD INCLUDING AREAS ABOVE AND BELOW
- 3. ALL SHEATHING SHALL BE ATTACHED TO FRAMING ALONG ALL FOUR EDGES WITH JOINTS FOR ADJACENT PANELS OCCURING OVER COMMON FRAMING MEMBERS

1. ALL SHEARWALLS SHALL BE TYPE 2 SHEARWALLS

4. NAIL SPACING SHALL BE 6" O.C. EDGES AND 12" O.C. IN THE FIELD.

OR ALONG BLOCKING.

FOR 8'-0" WALLS (2'-3").


5. TYPE 2 SHEARWALLS ARE DESIGNED FOR THE OPENING IT CONTAINS, MAXIMUM HEIGHT OF OPENING SHALL BE 5/6 TIMES THE WALL HEIGHT, THE MINIMUM DISTANCE BETWEEN OPENINGS SHALL BE THE WALL HEIGHT/3.5

OPENING WIDTH	SILL PLATES	16d TOE NAILS EACH END
UP TO 6'-0" > 6' TO 9'-0" > 9' TO 12'-0"	(1) 2x4 OR (1) 2x6 (3) 2x4 OR (1) 2x6 (5) 2x4 OR (2) 2x6	



SCALE: NONE







A H

VERL

A

SHEET NUMBER OF 4 SHEETS

