

RESIDENTIAL ENERGY CONSERVATION CODE DOCUMENTATION CHECKLIST

Florida Department of Business and Professional Regulation Simulated Performance Alternative (Performance) Method

Applications for compliance with the 2023 Florida Building Code, Energy Conservation via the Residential Simulated Performance Alternative shall include:

- This checklist*
- Form R405-2023 report*
- Input summary checklist that can be used for field verification (usually four pages/may be greater)*
- Energy Performance Level (EPL) Display Card (one page)*
- HVAC system sizing and selection based on ACCA Manual S or per exceptions provided in Section R403.7*
- Mandatory Requirements (five pages)*

Required prior to CO:

- Air Barrier and Insulation Inspection Component Criteria checklist (Table R402.4.1.1 - one page)*
- A completed 2023 Envelope Leakage Test Report (usually one page); exception in R402.4 allows dwelling units of R-2 Occupancies and multiple attached single family dwellings to comply with Section C402.5*
- If Form R405 duct leakage type indicates anything other than "default leakage", then a completed 2023 Duct Leakage Test Report - Performance Method (usually one page)*

FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION

Florida Department of Business and Professional Regulation - Residential Performance Method

Project Name: Spates - XXX TBD Street: XXX TBD City, State, Zip: Lake City, FL, Owner: Design Location: FL, Gainesville	Builder Name: Permit Office: Lake City Permit Number: Jurisdiction: 211200 County: Columbia(Florida Climate Zone 2)
-------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------

<table style="width:100%; border-collapse: collapse;"> <tr> <td style="width:30%;">1. New construction or existing</td> <td style="width:30%;">New (From Plans)</td> <td style="width:40%;"></td> </tr> <tr> <td>2. Single family or multiple family</td> <td>Detached</td> <td></td> </tr> <tr> <td>3. Number of units, if multiple family</td> <td>1</td> <td></td> </tr> <tr> <td>4. Number of Bedrooms</td> <td>3</td> <td></td> </tr> <tr> <td>5. Is this a worst case?</td> <td>Yes</td> <td></td> </tr> <tr> <td>6. Conditioned floor area above grade (ft²)</td> <td>2412</td> <td></td> </tr> <tr> <td> Conditioned floor area below grade (ft²)</td> <td>0</td> <td></td> </tr> <tr> <td>7. Windows(442.0 sqft.)</td> <td>Description</td> <td>Area</td> </tr> <tr> <td> a. U-Factor:</td> <td>Sgl, U=1.07</td> <td>247.00 ft²</td> </tr> <tr> <td> SHGC:</td> <td>SHGC=0.24</td> <td></td> </tr> <tr> <td> b. U-Factor:</td> <td>Sgl, U=1.11</td> <td>181.00 ft²</td> </tr> <tr> <td> SHGC:</td> <td>SHGC=0.27</td> <td></td> </tr> <tr> <td> c. U-Factor:</td> <td>Sgl, U=1.00</td> <td>14.00 ft²</td> </tr> <tr> <td> SHGC:</td> <td>SHGC=0.32</td> <td></td> </tr> <tr> <td>Area Weighted Average Overhang Depth:</td> <td>8.122 ft</td> <td></td> </tr> <tr> <td>Area Weighted Average SHGC:</td> <td>0.255</td> <td></td> </tr> <tr> <td>8. Skylights</td> <td>Description</td> <td>Area</td> </tr> <tr> <td> U-Factor:(AVG)</td> <td>N/A</td> <td>N/A ft²</td> </tr> <tr> <td> SHGC(AVG):</td> <td>N/A</td> <td></td> </tr> <tr> <td>9. Floor Types</td> <td>Insulation</td> <td>Area</td> </tr> <tr> <td> a. Slab-On-Grade Edge Insulation</td> <td>R= 0.0</td> <td>2412.00 ft²</td> </tr> <tr> <td> b. N/A</td> <td>R=</td> <td>ft²</td> </tr> <tr> <td> c. N/A</td> <td>R=</td> <td>ft²</td> </tr> </table>	1. New construction or existing	New (From Plans)		2. Single family or multiple family	Detached		3. Number of units, if multiple family	1		4. Number of Bedrooms	3		5. Is this a worst case?	Yes		6. Conditioned floor area above grade (ft ²)	2412		Conditioned floor area below grade (ft ²)	0		7. Windows(442.0 sqft.)	Description	Area	a. U-Factor:	Sgl, U=1.07	247.00 ft ²	SHGC:	SHGC=0.24		b. U-Factor:	Sgl, U=1.11	181.00 ft ²	SHGC:	SHGC=0.27		c. U-Factor:	Sgl, U=1.00	14.00 ft ²	SHGC:	SHGC=0.32		Area Weighted Average Overhang Depth:	8.122 ft		Area Weighted Average SHGC:	0.255		8. Skylights	Description	Area	U-Factor:(AVG)	N/A	N/A ft ²	SHGC(AVG):	N/A		9. Floor Types	Insulation	Area	a. Slab-On-Grade Edge Insulation	R= 0.0	2412.00 ft ²	b. N/A	R=	ft ²	c. N/A	R=	ft ²	<table style="width:100%; border-collapse: collapse;"> <tr> <td style="width:30%;">10. Wall Types(2520.0 sqft.)</td> <td style="width:30%;">Insulation</td> <td style="width:40%;">Area</td> </tr> <tr> <td> a. Concrete Block - Int Insul, Exterior</td> <td>R=4.1</td> <td>2270.00 ft²</td> </tr> <tr> <td> b. Frame - Wood, Adjacent</td> <td>R=13.0</td> <td>250.00 ft²</td> </tr> <tr> <td> c. N/A</td> <td></td> <td></td> </tr> <tr> <td> d. N/A</td> <td></td> <td></td> </tr> <tr> <td>11. Ceiling Types(2412.0 sqft.)</td> <td>Insulation</td> <td>Area</td> </tr> <tr> <td> a. Flat ceiling under att (Vented)</td> <td>R=30.0</td> <td>2412.00 ft²</td> </tr> <tr> <td> b. N/A</td> <td></td> <td></td> </tr> <tr> <td> c. N/A</td> <td></td> <td></td> </tr> <tr> <td>12. Roof(Comp. Shingles, Vented)</td> <td>Deck R=0.0</td> <td>2697 ft²</td> </tr> <tr> <td>13. Ducts, location & insulation level</td> <td>R</td> <td>ft²</td> </tr> <tr> <td> a. Sup: Attic, Ret: Hall, AH: Laundry</td> <td>6</td> <td>214</td> </tr> <tr> <td> b.</td> <td></td> <td></td> </tr> <tr> <td> c.</td> <td></td> <td></td> </tr> <tr> <td>14. Cooling Systems</td> <td>kBtu/hr</td> <td>Efficiency</td> </tr> <tr> <td> a. Central Unit</td> <td>51.0</td> <td>SEER2:14.30</td> </tr> <tr> <td>15. Heating Systems</td> <td>kBtu/hr</td> <td>Efficiency</td> </tr> <tr> <td> a. Electric Heat Pump</td> <td>55.5</td> <td>HSPF2:8.10</td> </tr> <tr> <td>16. Hot Water Systems</td> <td></td> <td></td> </tr> <tr> <td> a. ElectricTankless</td> <td></td> <td>Cap: 1 gallons</td> </tr> <tr> <td></td> <td></td> <td>EF: 0.990</td> </tr> <tr> <td> b. Conservation features</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>None</td> </tr> <tr> <td>17. Credits</td> <td></td> <td>WHF, Pstat</td> </tr> </table>	10. Wall Types(2520.0 sqft.)	Insulation	Area	a. Concrete Block - Int Insul, Exterior	R=4.1	2270.00 ft ²	b. Frame - Wood, Adjacent	R=13.0	250.00 ft ²	c. N/A			d. N/A			11. Ceiling Types(2412.0 sqft.)	Insulation	Area	a. Flat ceiling under att (Vented)	R=30.0	2412.00 ft ²	b. N/A			c. N/A			12. Roof(Comp. Shingles, Vented)	Deck R=0.0	2697 ft ²	13. Ducts, location & insulation level	R	ft ²	a. Sup: Attic, Ret: Hall, AH: Laundry	6	214	b.			c.			14. Cooling Systems	kBtu/hr	Efficiency	a. Central Unit	51.0	SEER2:14.30	15. Heating Systems	kBtu/hr	Efficiency	a. Electric Heat Pump	55.5	HSPF2:8.10	16. Hot Water Systems			a. ElectricTankless		Cap: 1 gallons			EF: 0.990	b. Conservation features					None	17. Credits		WHF, Pstat
1. New construction or existing	New (From Plans)																																																																																																																																													
2. Single family or multiple family	Detached																																																																																																																																													
3. Number of units, if multiple family	1																																																																																																																																													
4. Number of Bedrooms	3																																																																																																																																													
5. Is this a worst case?	Yes																																																																																																																																													
6. Conditioned floor area above grade (ft ²)	2412																																																																																																																																													
Conditioned floor area below grade (ft ²)	0																																																																																																																																													
7. Windows(442.0 sqft.)	Description	Area																																																																																																																																												
a. U-Factor:	Sgl, U=1.07	247.00 ft ²																																																																																																																																												
SHGC:	SHGC=0.24																																																																																																																																													
b. U-Factor:	Sgl, U=1.11	181.00 ft ²																																																																																																																																												
SHGC:	SHGC=0.27																																																																																																																																													
c. U-Factor:	Sgl, U=1.00	14.00 ft ²																																																																																																																																												
SHGC:	SHGC=0.32																																																																																																																																													
Area Weighted Average Overhang Depth:	8.122 ft																																																																																																																																													
Area Weighted Average SHGC:	0.255																																																																																																																																													
8. Skylights	Description	Area																																																																																																																																												
U-Factor:(AVG)	N/A	N/A ft ²																																																																																																																																												
SHGC(AVG):	N/A																																																																																																																																													
9. Floor Types	Insulation	Area																																																																																																																																												
a. Slab-On-Grade Edge Insulation	R= 0.0	2412.00 ft ²																																																																																																																																												
b. N/A	R=	ft ²																																																																																																																																												
c. N/A	R=	ft ²																																																																																																																																												
10. Wall Types(2520.0 sqft.)	Insulation	Area																																																																																																																																												
a. Concrete Block - Int Insul, Exterior	R=4.1	2270.00 ft ²																																																																																																																																												
b. Frame - Wood, Adjacent	R=13.0	250.00 ft ²																																																																																																																																												
c. N/A																																																																																																																																														
d. N/A																																																																																																																																														
11. Ceiling Types(2412.0 sqft.)	Insulation	Area																																																																																																																																												
a. Flat ceiling under att (Vented)	R=30.0	2412.00 ft ²																																																																																																																																												
b. N/A																																																																																																																																														
c. N/A																																																																																																																																														
12. Roof(Comp. Shingles, Vented)	Deck R=0.0	2697 ft ²																																																																																																																																												
13. Ducts, location & insulation level	R	ft ²																																																																																																																																												
a. Sup: Attic, Ret: Hall, AH: Laundry	6	214																																																																																																																																												
b.																																																																																																																																														
c.																																																																																																																																														
14. Cooling Systems	kBtu/hr	Efficiency																																																																																																																																												
a. Central Unit	51.0	SEER2:14.30																																																																																																																																												
15. Heating Systems	kBtu/hr	Efficiency																																																																																																																																												
a. Electric Heat Pump	55.5	HSPF2:8.10																																																																																																																																												
16. Hot Water Systems																																																																																																																																														
a. ElectricTankless		Cap: 1 gallons																																																																																																																																												
		EF: 0.990																																																																																																																																												
b. Conservation features																																																																																																																																														
		None																																																																																																																																												
17. Credits		WHF, Pstat																																																																																																																																												

Glass/Floor Area: 0.183 Total Proposed Modified Loads: 65.29
 Total Baseline Loads: 69.43

PASS

NOTE: Proposed residence must have annual total normalized Modified Loads that are less than or equal to 95 percent of the annual total loads of the standard reference design in order to comply.

<p>I hereby certify that the plans and specifications covered by this calculation are in compliance with the Florida Energy Code.</p> <p>PREPARED BY: <u>Eric Struble</u> E-Calcs Plus, Inc.</p> <p>DATE: <u>January 26, 2026</u></p> <p>I hereby certify that this building, as designed, is in compliance with the Florida Energy Code.</p> <p>OWNER/AGENT: _____</p> <p>DATE: _____</p>	<p>Review of the plans and specifications covered by this calculation indicates compliance with the Florida Energy Code. Before construction is completed this building will be inspected for compliance with Section 553.908 Florida Statutes.</p> <div style="text-align: center;">  </div> <p>BUILDING OFFICIAL: _____</p> <p>DATE: _____</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

- Compliance requires certification by the air handler unit manufacturer that the air handler enclosure qualifies as certified factory-sealed in accordance with R403.3.2.1.
- Compliance with a proposed duct leakage Qn requires a PERFORMANCE Duct Leakage Test Report confirming duct leakage to outdoors, tested in accordance with ANSI/RESNET/ICC 380, is not greater than 0.030 Qn for whole house.
- Compliance requires an Air Barrier and Insulation Inspection Checklist in accordance with R402.4.1.1 and this project requires a PERFORMANCE envelope leakage test report with envelope leakage no greater than 6.00 ACH50 (R402.4.1.2).

INPUT SUMMARY CHECKLIST REPORT

PROJECT			
Title:	Spates - XXX TBD	Address type:	Street Address
Building Type:	User	Bedrooms:	3
Owner:		Conditioned Area:	2412
Builder Home ID:		Total Stories:	1
Builder Name:		Worst Case:	Yes
Permit Office:	Lake City	Rotate Angle:	0
Jurisdiction:	211200	Cross Ventilation:	No
Family Type:	Detached	Whole House Fan:	Yes
New/Existing:	New (From Plans)	Terrain:	Suburban
Year Construct:		Shielding:	Suburban
Comment:			

CLIMATE										
<input checked="" type="checkbox"/> Design Location	Tmy Site	Design Temp	97.5%	2.5%	Int Design Temp	Winter	Summer	Heating Degree Days	Design Moisture	Daily temp Range
___ FL, Gainesville	FL_GAINESVILLE_REGIONA	32	92	70	75	1305.5	51	Medium		

BLOCKS			
<input checked="" type="checkbox"/> Number	Name	Area	Volume
___ 1	Entire House	2412	24120 cu ft

SPACES									
<input checked="" type="checkbox"/> Number	Name	Area	Volume	Kitchen	Occupants	Bedrooms	Finished	Cooled	Heated
___ 1	Laundry	166	1660	No	0		Yes	Yes	Yes
___ 2	BR2	166	1660	No	1	1	Yes	Yes	Yes
___ 3	BR3	196	1960	No	1	1	Yes	Yes	Yes
___ 4	BA2	84	840	No	0		Yes	Yes	Yes
___ 5	MBR	311	3110	No	2	1	Yes	Yes	Yes
___ 6	HER WIC	70	700	No	0		Yes	Yes	Yes
___ 7	HIS WIC	35	350	No	0		Yes	Yes	Yes
___ 8	MBA	154	1540	No	0		Yes	Yes	Yes
___ 9	Office	126	1260	No	0		Yes	Yes	Yes
___ 10	Pantry	45	450	No	0		Yes	Yes	Yes
___ 11	BA3	45	450	No	0		Yes	Yes	Yes
___ 12	Hall	149	1490	No	0		Yes	Yes	Yes
___ 13	KitLivDin	865	8650	Yes	0		Yes	Yes	Yes

FLOORS (Total Exposed Area = 2412 sq.ft.)										
<input checked="" type="checkbox"/> #	Floor Type	Space	Exposed Perim(ft)	Area	R-Value Perim.	U-Factor Joist	Slab Insul. Vert/Horiz	Tile	Wood	Carpet
___ 1	Slab-On-Grade Edge Ins	Laundry	35	166 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00
___ 2	Slab-On-Grade Edge Ins	BR2	13	166 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00
___ 3	Slab-On-Grade Edge Ins	BR3	31	196 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00
___ 4	Slab-On-Grade Edge Ins	BA2	10	84 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00
___ 5	Slab-On-Grade Edge Ins	MBR	37	311 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00
___ 6	Slab-On-Grade Edge Ins	HER WIC	10	70 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00
___ 7	Slab-On-Grade Edge Ins	HIS WIC	1	35 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00
___ 8	Slab-On-Grade Edge Ins	MBA	28	154 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00
___ 9	Slab-On-Grade Edge Ins	Office	12	126 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00
___ 10	Slab-On-Grade Edge Ins	Pantry	5	45 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00
___ 11	Slab-On-Grade Edge Ins	BA3	7	45 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00
___ 12	Slab-On-Grade Edge Ins	Hall	12	149 sqft	0.0	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00

INPUT SUMMARY CHECKLIST REPORT

FLOORS(Continued)

✓ #	Floor Type	Space	Exposed Perim(ft)	Area	R-Value Perim.	U-Factor Joist	Slab Insul. Vert/Horiz	Tile	Wood	Carpet	
___ 13	Slab-On-Grade Edge Ins	KitLivDin	52	865 sqft	0.0	---	0.710	2 (ft)/0 (ft)	1.00	0.00	0.00

ROOF

✓ #	Type	Materials	Roof Area	Gable Area	Framing. Fract.	Roof Color	Rad Barr	Solar Absor.	SA Tested	Emitt Tested	Emitt Tested	Deck Insul.	Pitch (deg)
___ 1	Hip	Composition shingles	2697 ft²	0 ft²	0.11	Medium	N	0.85	No	0.9	No	0	26.57

ATTIC

✓ #	Type	Ventilation	Vent Ratio (1 in)	Area	RBS	IRCC
___ 1	Full attic	Vented	150	2412 ft²	N	N

CEILING

(Total Exposed Area = 2412 sq.ft.)

✓ #	Ceiling Type	Space	R-Value	Ins. Type	Area	U-Factor	Framing Frac.	Truss Type
___ 1	Flat ceiling under attic(Vented)	Laundry	30.0	Blown	166.0ft²	0.053	0.10	Wood
___ 2	Flat ceiling under attic(Vented)	BR2	30.0	Blown	166.0ft²	0.053	0.10	Wood
___ 3	Flat ceiling under attic(Vented)	BR3	30.0	Blown	196.0ft²	0.053	0.10	Wood
___ 4	Flat ceiling under attic(Vented)	BA2	30.0	Blown	84.0ft²	0.053	0.10	Wood
___ 5	Flat ceiling under attic(Vented)	MBR	30.0	Blown	311.0ft²	0.053	0.10	Wood
___ 6	Flat ceiling under attic(Vented)	HER WIC	30.0	Blown	70.0ft²	0.053	0.10	Wood
___ 7	Flat ceiling under attic(Vented)	HIS WIC	30.0	Blown	35.0ft²	0.053	0.10	Wood
___ 8	Flat ceiling under attic(Vented)	MBA	30.0	Blown	154.0ft²	0.053	0.10	Wood
___ 9	Flat ceiling under attic(Vented)	Office	30.0	Blown	126.0ft²	0.053	0.10	Wood
___ 10	Flat ceiling under attic(Vented)	Pantry	30.0	Blown	45.0ft²	0.053	0.10	Wood
___ 11	Flat ceiling under attic(Vented)	BA3	30.0	Blown	45.0ft²	0.053	0.10	Wood
___ 12	Flat ceiling under attic(Vented)	Hall	30.0	Blown	149.0ft²	0.053	0.10	Wood
___ 13	Flat ceiling under attic(Vented)	KitLivDin	30.0	Blown	865.0ft²	0.053	0.10	Wood

WALLS

(Total Exposed Area = 2520 sq.ft.)

✓ #	Ornt	Adjacent To	Wall Type	Space	Cavity R-Value	Width Ft	In	Height Ft	In	Area sq.ft.	U-Factor	Sheath R-Value	Frm. Frac.	Solar Absor.	Below Grade
___ 1	E	Exterior	Conc. Blk - Int Ins	Laundry	4.1	8.0	0	10.0	0	80.0	0.149	0	0	0.45	0.0 %
___ 2	S	Exterior	Conc. Blk - Int Ins	Laundry	4.1	9.0	0	10.0	0	90.0	0.149	0	0	0.45	0.0 %
___ 3	W	Garage	Frame - Wood	Laundry	13.0	18.0	0	10.0	0	180.0	0.094	0	0.23	0.01	0.0 %
___ 4	S	Exterior	Conc. Blk - Int Ins	BR2	4.1	13.0	0	10.0	0	130.0	0.149	0	0	0.45	0.0 %
___ 5	N	Exterior	Conc. Blk - Int Ins	BR3	4.1	3.0	0	10.0	0	30.0	0.149	0	0	0.45	0.0 %
___ 6	E	Exterior	Conc. Blk - Int Ins	BR3	4.1	14.0	0	10.0	0	140.0	0.149	0	0	0.45	0.0 %
___ 7	S	Exterior	Conc. Blk - Int Ins	BR3	4.1	14.0	0	10.0	0	140.0	0.149	0	0	0.45	0.0 %
___ 8	E	Exterior	Conc. Blk - Int Ins	BA2	4.1	3.0	0	10.0	0	30.0	0.149	0	0	0.45	0.0 %
___ 9	S	Exterior	Conc. Blk - Int Ins	BA2	4.1	7.0	0	10.0	0	70.0	0.149	0	0	0.45	0.0 %
___ 10	N	Exterior	Conc. Blk - Int Ins	MBR	4.1	16.0	0	10.0	0	160.0	0.149	0	0	0.45	0.0 %
___ 11	S	Exterior	Conc. Blk - Int Ins	MBR	4.1	5.0	0	10.0	0	50.0	0.149	0	0	0.45	0.0 %
___ 12	W	Exterior	Conc. Blk - Int Ins	MBR	4.1	16.0	0	10.0	0	160.0	0.149	0	0	0.45	0.0 %
___ 13	N	Exterior	Conc. Blk - Int Ins	HER WIC	4.1	10.0	0	10.0	0	100.0	0.149	0	0	0.45	0.0 %
___ 14	N	Exterior	Conc. Blk - Int Ins	MBA	4.1	11.0	0	10.0	0	110.0	0.149	0	0	0.45	0.0 %
___ 15	E	Exterior	Conc. Blk - Int Ins	MBA	4.1	14.0	0	10.0	0	140.0	0.149	0	0	0.45	0.0 %
___ 16	S	Exterior	Conc. Blk - Int Ins	MBA	4.1	3.0	0	10.0	0	30.0	0.149	0	0	0.45	0.0 %
___ 17	E	Exterior	Conc. Blk - Int Ins	Office	4.1	12.0	0	10.0	0	120.0	0.149	0	0	0.45	0.0 %
___ 18	E	Exterior	Conc. Blk - Int Ins	Pantry	4.1	5.0	0	10.0	0	50.0	0.149	0	0	0.45	0.0 %

INPUT SUMMARY CHECKLIST REPORT

WALLS(Continued)

___ 19 W	Exterior	Conc. Blk - Int Ins	BA3	4.1	7.0	0	10.0	0	70.0	0.149	0	0	0.45	0.0 %
___ 20 N	Exterior	Conc. Blk - Int Ins	Hall	4.1	5.0	0	10.0	0	50.0	0.149	0	0	0.45	0.0 %
___ 21 W	Garage	Frame - Wood	Hall	13.0	7.0	0	10.0	0	70.0	0.094	0	0.23	0.01	0.0 %
___ 22 N	Exterior	Conc. Blk - Int Ins	KitLivDin	4.1	6.0	0	10.0	0	60.0	0.149	0	0	0.45	0.0 %
___ 23 E	Exterior	Conc. Blk - Int Ins	KitLivDin	4.1	19.0	0	10.0	0	190.0	0.149	0	0	0.45	0.0 %
___ 24 W	Exterior	Conc. Blk - Int Ins	KitLivDin	4.1	27.0	0	10.0	0	270.0	0.149	0	0	0.45	0.0 %

DOORS

(Total Exposed Area = 0 sq.ft.)

✓ #	Ornt	Adjacent To	Door Type	Space	Storms	U-Value	Width Ft	In	Height Ft	In	Area
-----	------	-------------	-----------	-------	--------	---------	-------------	----	--------------	----	------

WINDOWS

(Total Exposed Area = 442 sq.ft.)

✓ #	Ornt	Wall ID	Frame	Panes	NFRC U-Factor	SHGC	Imp	Storm	Total Area (ft²)	Same Units	Width (ft)	Height (ft)	--Overhang-- Depth (ft)	Sep. (ft)	Interior Shade	Screen
___ 1	S	2	Vinyl	Low-E Single	Y 1.07	0.24	N	N	9.0	1	3.00	3.00	2.0	0.5	None	None
___ 2	S	4	Vinyl	Low-E Single	Y 1.07	0.24	N	N	15.0	1	3.00	5.00	2.0	0.5	None	None
___ 3	E	6	Vinyl	Low-E Single	Y 1.07	0.24	N	N	36.0	2	3.00	6.00	2.0	0.5	None	None
___ 4	S	9	Vinyl	Low-E Single	Y 1.07	0.24	N	N	9.0	1	3.00	3.00	2.0	0.5	None	None
___ 5	N	10	Vinyl	Low-E Single	Y 1.07	0.24	N	N	30.0	2	3.00	5.00	2.0	0.5	None	None
___ 6	S	11	Vinyl	Low-E Single	Y 1.07	0.24	N	N	10.0	1	2.00	5.00	18.0	0.5	None	None
___ 7	W	12	Vinyl	Low-E Single	Y 1.11	0.27	N	N	40.8	1	6.00	6.83	9.5	0.5	None	None
___ 8	N	13	Vinyl	Low-E Single	Y 1.00	0.32	N	N	8.4	1	6.00	1.42	2.0	0.5	None	None
___ 9	N	14	Vinyl	Low-E Single	Y 1.00	0.32	N	N	5.6	1	4.00	1.42	2.0	0.5	None	None
___ 10	E	15	Vinyl	Low-E Single	Y 1.07	0.24	N	N	36.0	2	3.00	6.00	2.0	0.5	None	None
___ 11	E	17	Vinyl	Low-E Single	Y 1.07	0.24	N	N	36.0	2	3.00	6.00	7.5	0.5	None	None
___ 12	W	19	Vinyl	Low-E Single	Y 1.07	0.24	N	N	6.0	1	2.00	3.00	8.5	0.5	None	None
___ 13	N	20	Vinyl	Low-E Single	Y 1.11	0.27	N	N	20.4	1	3.00	6.83	2.0	0.5	None	None
___ 14	N	22	Vinyl	Low-E Single	Y 1.07	0.24	N	N	12.0	1	3.00	4.00	35.0	0.5	None	None
___ 15	E	23	Vinyl	Low-E Single	Y 1.07	0.24	N	N	36.0	2	3.00	6.00	7.5	0.5	None	None
___ 16	E	23	Vinyl	Low-E Single	Y 1.11	0.27	N	N	23.8	1	3.50	6.83	7.5	0.5	None	None
___ 17	W	24	Vinyl	Low-E Single	Y 1.07	0.24	N	N	12.0	1	3.00	4.00	8.5	0.5	None	None
___ 18	W	24	Vinyl	Low-E Single	Y 1.11	0.27	N	N	96.0	1	12.00	8.00	14.5	0.5	None	None

INFILTRATION

✓ #	Scope	Method	SLA	CFM50	ELA	EqLA	ACH	ACH50	Space(s)	Infiltration Test Volume
___ 1	Wholehouse	Proposed ACH(50)	0.00038	2412	132.33	248.43	0.1285	6.0	All	24120 cu ft

GARAGE

✓ #	Floor Area	Length	Width	Roof Area	Exposed Perimeter	Area Under Uncond.	Avg. Wall Height	Exposed Wall Insulation
___ 1	714 ft²	20.0 ft²	35.7 ft²	714 ft²	64 ft	714 ft	8 ft	1

INPUT SUMMARY CHECKLIST REPORT

MASS												
✓ #	Mass Type	Area	Thickness	Furniture Fraction	Space							
___ 1	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	Laundry							
___ 2	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	BR2							
___ 3	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	BR3							
___ 4	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	BA2							
___ 5	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	MBR							
___ 6	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	HER WIC							
___ 7	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	HIS WIC							
___ 8	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	MBA							
___ 9	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	Office							
___ 10	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	Pantry							
___ 11	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	BA3							
___ 12	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	Hall							
___ 13	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	KitLivDin							

HEATING SYSTEM											
✓ #	System Type	Subtype/Speed	AHRI #	Efficiency	Capacity kBtu/hr	----Geothermal HeatPump----			Ducts	Block	
						Entry	Power	Volt	Current		
___ 1	Electric Heat Pump	Split/Single		HSPF2: 8.10	55.5	0.00	0.00	0.00	sys#1	1	

COOLING SYSTEM									
✓ #	System Type	Subtype/Speed	AHRI #	Efficiency	Capacity kBtu/hr	Air Flow cfm	SHR	Duct	Block
___ 1	Central Unit	Split/Single		SEER2:14.3	51.0	1530	0.75	sys#1	1

HOT WATER SYSTEM											
✓ #	System Type	Subtype	Location	EF(UEF)	Cap	Use	SetPnt	Fixt. Flow	Trap	Pipe Ins.	Pipe length
___ 1	Electric	Tankless	Laundry	0.99 (0.99)	1.0 gal	60 gal	120 deg	Standard	Yes	None	75
		Recirculation System	Recirc Control Type	Loop length	Branch length	Pump power	DWHR	Facilities Connected	Equal Flow	DWHR Eff	Other Credits
___ 1		No		NA	NA	NA	No	NA	NA	NA	None

DUCTS												
✓ Duct #	-----Supply----- Location	R-Value	Area	-----Return----- Location	R-Value	Area	Leakage Type	AHU Location	CFM 25 TOT OUT	QN OUT	AHU SEALED	HVAC # Heat Cool
___ 1	Attic	6.0	214 ft²	Hall	6.0	54 ft²	Prop. Leak Free	Laundry	--- ---	0.030	Yes	0.50 1 1

TEMPERATURES												
Programable Thermostat: Y						Ceiling Fans: N						
Cooling	<input type="checkbox"/> Jan	<input type="checkbox"/> Feb	<input type="checkbox"/> Mar	<input type="checkbox"/> Apr	<input type="checkbox"/> May	<input checked="" type="checkbox"/> Jun	<input checked="" type="checkbox"/> Jul	<input checked="" type="checkbox"/> Aug	<input checked="" type="checkbox"/> Sep	<input type="checkbox"/> Oct	<input type="checkbox"/> Nov	<input type="checkbox"/> Dec
Heating	<input checked="" type="checkbox"/> Jan	<input checked="" type="checkbox"/> Feb	<input checked="" type="checkbox"/> Mar	<input type="checkbox"/> Apr	<input type="checkbox"/> May	<input type="checkbox"/> Jun	<input type="checkbox"/> Jul	<input type="checkbox"/> Aug	<input type="checkbox"/> Sep	<input type="checkbox"/> Oct	<input checked="" type="checkbox"/> Nov	<input checked="" type="checkbox"/> Dec
Venting	<input type="checkbox"/> Jan	<input type="checkbox"/> Feb	<input checked="" type="checkbox"/> Mar	<input checked="" type="checkbox"/> Apr	<input type="checkbox"/> May	<input type="checkbox"/> Jun	<input type="checkbox"/> Jul	<input type="checkbox"/> Aug	<input type="checkbox"/> Sep	<input checked="" type="checkbox"/> Oct	<input checked="" type="checkbox"/> Nov	<input type="checkbox"/> Dec

INPUT SUMMARY CHECKLIST REPORT

TEMPERATURES(Continued)

<input checked="" type="checkbox"/> Thermostat Schedule: HERS 2006 Reference Schedule Type	Hours												
	1	2	3	4	5	6	7	8	9	10	11	12	
___ Cooling (WD)	AM PM	78 80	78 80	78 78	78 78	78 78	78 78	78 78	78 78	80 78	80 78	80 78	80 78
___ Cooling (WEH)	AM PM	78 78											
___ Heating (WD)	AM PM	66 68	66 68	66 68	66 68	66 68	68 68	68 68	68 68	68 68	68 68	68 66	68 66
___ Heating (WEH)	AM PM	66 68	66 68	66 68	66 68	66 68	68 68	68 68	68 68	68 68	68 68	68 66	68 66

Florida Building Code, Energy Conservation, 8th Edition (2023)

Mandatory Requirements for Residential Performance, Prescriptive and ERI Methods

ADDRESS: XXX TBD
Lake City, FL

Permit Number:

MANDATORY REQUIREMENTS - See individual code sections for full details.

SECTION R401 GENERAL

- R401.3 Energy Performance Level (EPL) display card - (Mandatory).** The building official shall require that an energy performance level (EPL) display card be completed and certified by the builder to be accurate and correct before final approval of the building for occupancy. Florida law (Section 553.9085, Florida Statutes) requires the EPL display card to be included as an addendum to each sales contract for both presold and nonpresold residential buildings. The EPL display card contains information indicating the energy performance level and efficiencies of components installed in a dwelling unit. The building official shall verify that the EPL display card completed and signed by the builder accurately reflects the plans and specifications submitted to demonstrate code compliance for the building. A copy of the EPL display card can be found in Appendix RD.

SECTION R402 BUILDING THERMAL ENVELOPE

- R402.2.10.1 Slab-on-grade floor insulation installation (Mandatory).** Where installed, the insulation shall extend downward from the top of the slab on the outside or inside of the foundation wall. Insulation located below grade shall be extended the distance provided in Table R402.1.2, or the distance of the proposed design as applicable, by any combination of vertical insulation, insulation extending under the slab or insulation extending out from the building. Insulation extending away from the building shall be protected by pavement or by not less than 10 inches (254 mm) of soil. The top edge of the insulation installed between the exterior wall and the edge of the interior slab shall be permitted to be cut at a 45-degree (0.79 rad) angle away from the exterior wall.
- R402.2.11.1 Crawl space walls insulation installation (Mandatory).** Where crawl space wall insulation is installed, it shall be permanently fastened to the wall and extend downward from the floor to the finished grade level and then vertically and/or horizontally for at least an additional 24 inches (610 mm). Exposed earth in unvented crawl space foundations shall be covered with a continuous Class I vapor retarder in accordance with the Florida Building Code, Building, or Florida Building Code, Residential, as applicable. All joints of the vapor retarder shall overlap by 6 inches (153 mm) and be sealed or taped. The edges of the vapor retarder shall extend not less than 6 inches (153 mm) up the stem wall and shall be attached to the stem wall.
- R402.4 Air leakage (Mandatory).** The building thermal envelope shall be constructed to limit air leakage in accordance with the requirements of Sections R402.4.1 through R402.4.5.
 - Exception:** Dwelling units of R-2 Occupancies and multiple attached single family dwellings shall be permitted to comply with Section C402.5.
- R402.4.1 Building thermal envelope.** The building thermal envelope shall comply with Sections R402.4.1.1 and R402.4.1.2. The sealing methods between dissimilar materials shall allow for differential expansion and contraction.
- R402.4.1.1 Installation.** The components of the building thermal envelope as listed in Table R402.4.1.1 shall be installed in accordance with the manufacturer's instructions and the criteria listed in Table R402.4.1.1, as applicable to the method of construction. Where required by the code official, an approved third party shall inspect all components and verify compliance.
- R402.4.1.2 Testing.** The building or dwelling unit shall be tested and verified as having an air leakage rate not exceeding seven air changes per hour in Climate Zones 1 and 2, and three air changes per hour in Climate Zones 3 through 8. Dwelling units with an air leakage rate less than three air changes per hour shall be provided with whole-house mechanical ventilation in accordance with Section R403.6.1 of this code and Section M1507.3 of the Florida Building Code, Residential. Testing shall be conducted in accordance with ANSI/RESNET/ICC 380 and reported at a pressure of 0.2 inch w.g. (50 pascals). Testing shall be conducted by either individuals as defined in Section 553.993(5) or (7), Florida Statutes, or individuals licensed as set forth in Section 489.105(3)(f), (g) or (i) or an approved third party. A written report of the results of the test shall be signed by the party conducting the test and provided to the code official. Testing shall be performed at any time after creation of all penetrations of the building thermal envelope.

Exception: Testing is not required for additions, alterations, renovations, or repairs, of the building thermal envelope of existing buildings in which the new construction is less than 85 percent of the building thermal envelope.

During testing:

1. Exterior windows and doors, fireplace and stove doors shall be closed, but not sealed, beyond the intended weatherstripping or other infiltration control measures.
2. Dampers including exhaust, intake, makeup air, backdraft and flue dampers shall be closed, but not sealed beyond intended infiltration control measures.
3. Interior doors, if installed at the time of the test, shall be open.
4. Exterior doors for continuous ventilation systems and heat recovery ventilators shall be closed and sealed.
5. Heating and cooling systems, if installed at the time of the test, shall be turned off.
6. Supply and return registers, if installed at the time of the test, shall be fully open.
7. If an attic is both air sealed and insulated at the roof deck, interior access doors and hatches between the conditioned space volume and the attic shall be opened during the test and the volume of the attic shall be added to the conditioned space volume for purposes of reporting an infiltration volume and calculating the air leakage of the home.

Florida Building Code, Energy Conservation, Mandatory Requirements (2023 Continued)

- R402.4.2 Fireplaces.** New wood-burning fireplaces shall have tight-fitting flue dampers or doors, and outdoor combustion air. Where using tight-fitting doors on factory-built fireplaces listed and labeled in accordance with UL 127, the doors shall be tested and listed for the fireplace. Where using tight-fitting doors on masonry fireplaces, the doors shall be listed and labeled in accordance with UL 907.
- R402.4.3 Fenestration air leakage.** Windows, skylights and sliding glass doors shall have an air infiltration rate of no more than 0.3 cfm per square foot (1.5 L/s/m²), and swinging doors no more than 0.5 cfm per square foot (2.6 L/s/m²), when tested according to NFRC 400 or AAMA/WDMA/CSA 101/I.S.2/A440 by an accredited, independent laboratory and listed and labeled by the manufacturer.

Exception: Site-built windows, skylights and doors.
- R402.4.4 Rooms containing fuel - burning appliances.** In Climate Zones 3 through 8, where open combustion air ducts provide combustion air to open combustion fuel burning appliances, the appliances and combustion air opening shall be located outside the building thermal envelope or enclosed in a room, isolated from inside the thermal envelope. Such rooms shall be sealed and insulated in accordance with the envelope requirements of Table R402.1.2, where the walls, floors and ceilings shall meet not less than the basement wall R-value requirement. The door into the room shall be fully gasketed and any water lines and ducts in the room insulated in accordance with Section R403. The combustion air duct shall be insulated where it passes through conditioned space to a minimum of R-8.

Exceptions:

 1. Direct vent appliances with both intake and exhaust pipes installed continuous to the outside.
 2. Fireplaces and stoves complying with Section R402.4.2 and Section R1006 of the Florida Building Code, Residential.
- R402.4.5 Recessed lighting.** Recessed luminaires installed in the building thermal envelope shall be sealed to limit air leakage between conditioned and unconditioned spaces. All recessed luminaires shall be IC-rated and labeled as having an air leakage rate not more than 2.0 cfm (0.944 L/s) when tested in accordance with ASTM E283 at a 1.57 psf (75 Pa) pressure differential. All recessed luminaires shall be sealed with a gasket or caulk between the housing and the interior wall or ceiling covering.
- R402.4.6 Air-sealed electrical and communication boxes.** Air-sealed electrical and communication boxes that penetrate the air barrier of the building thermal envelope shall be caulked, taped, gasketed, or otherwise sealed to the air barrier element being penetrated. Air-sealed boxes shall be buried in or surrounded by insulation. Air-sealed boxes shall be marked in accordance with NEMA OS 4. Air-sealed boxes shall be installed in accordance with the manufacturer's instructions.

SECTION R403 SYSTEMS

R403.1 Controls

- R403.1.1 Thermostat provision (Mandatory).** At least one thermostat shall be provided for each separate heating and cooling system
- R403.1.3 Heat pump supplementary heat (Mandatory).** Heat pumps with supplementary electric-resistance heaters shall have controls that limit supplemental heat operation to only those times when one of the following applies:
 1. The vapor compression cycle cannot provide the necessary heating energy to satisfy the thermostat setting.
 2. The heat pump is operating in defrost mode.
 3. The vapor compression cycle malfunctions.
 4. The thermostat malfunctions
- R403.3.2 Sealing (Mandatory).** All ducts, air handlers, filter boxes and building cavities that form the primary air containment passageways for air distribution systems shall be considered ducts or plenum chambers, shall be constructed and sealed in accordance with Section C403.2.9.2 of the Commercial Provisions of this code and shall be shown to meet duct tightness criteria below.

Duct tightness shall be verified by testing in accordance with ANSI/RESNET/ICC 380 by either individuals as defined in Section 553.993(5) or (7), Florida Statutes, or individuals licensed as set forth in Section 489.105(3)(f), (g) or (i), Florida Statutes, to be "substantially leak free" in accordance with Section R403.3.3.
- R403.3.2.1 Sealed air handler.** Air handlers shall have a manufacturer's designation for an air leakage of no more than 2 percent of the design airflow rate when tested in accordance with ASHRAE 193.
- R403.3.3 Duct testing (Mandatory).** Ducts shall be pressure tested to determine air leakage by one of the following methods:
 1. Rough-in test: Total leakage shall be measured with a pressure differential of 0.1 inch w.g. (25 Pa) across the system, including the manufacturer's air handler enclosure if installed at the time of the test. All registers shall be taped or otherwise sealed during the test.
 2. Postconstruction test: Total leakage shall be measured with a pressure differential of 0.1 inch w.g. (25 Pa) across the entire system, including the manufacturer's air handler enclosure. Registers shall be taped or otherwise sealed during the test.

Exceptions;

 1. A duct air leakage test shall not be required where the ducts and air handlers are located entirely within the building thermal envelope.
 2. Duct testing is not mandatory for buildings complying by Section 405 of this code. Duct leakage testing is required for Section R405 compliance where credit is taken for leakage, and a duct air leakage Q_n to the outside of less than 0.080 (where Q_n = duct leakage to the outside in cfm per 100 square feet of conditioned floor area tested at 25 Pascals) is indicated in the compliance report for the proposed design.

A written report of the results of the test shall be signed by the party conducting the test and provided to the code official

Florida Building Code, Energy Conservation, Mandatory Requirements (2023 Continued)

- R403.3.5 Building cavities (Mandatory).** Building framing cavities shall not be used as ducts or plenums
- R403.4 Mechanical system piping insulation (Mandatory).** Mechanical system piping capable of carrying fluids above 105°F (41°C) or below 55°F (13°C) shall be insulated to a minimum of R-3.
- R403.4.1 Protection of piping insulation.** Piping insulation exposed to weather shall be protected from damage, including that caused by sunlight, moisture, equipment maintenance and wind, and shall provide shielding from solar radiation that can cause degradation of the material. Adhesive tape shall not be permitted.
- R403.5.1 Heated water circulation and temperature maintenance systems (Mandatory).** If heated water circulation systems are installed, they shall be in accordance with Section R403.5.1.1. Heat trace temperature maintenance systems shall be in accordance with Section R403.5.1.2. Automatic controls, temperature sensors and pumps shall be accessible. Manual controls shall be readily accessible.
- R403.5.1.1 Circulation systems.** Heated water circulation systems shall be provided with a circulation pump. The system return pipe shall be a dedicated return pipe or a cold water supply pipe. Gravity and thermosiphon circulation systems shall be prohibited. Controls for circulating hot water system pumps shall start the pump based on the identification of a demand for hot water within the occupancy. The controls shall automatically turn off the pump when the water in the circulation loop is at the desired temperature and when there is no demand for hot water.
- R403.5.1.2 Heat trace systems.** Electric heat trace systems shall comply with IEEE 515.1 or UL 515. Controls for such systems shall automatically adjust the energy input to the heat tracing to maintain the desired water temperature in the piping in accordance with the times when heated water is used in the occupancy.
- R403.5.2 Demand recirculation water systems (Mandatory).** Where installed, demand recirculation water systems shall have controls that comply with both of the following:
 1. The control shall start the pump upon receiving a signal from the action of a user of a fixture or appliance, sensing the presence of a user of a fixture or sensing the flow of hot or tempered water to a fixture fitting or appliance.
 2. The control shall limit the temperature of the water entering the cold water piping to 104°F (40°C).
- R403.5.5 Heat traps (Mandatory).** Storage water heaters not equipped with integral heat traps and having vertical pipe risers shall have heat traps installed on both the inlets and outlets. External heat traps shall consist of either a commercially available heat trap or a downward and upward bend of at least 3 ½ inches (89 mm) in the hot water distribution line and cold water line located as close as possible to the storage tank.
- R403.5.6 Water heater efficiencies (Mandatory).**
 - R403.5.6.1.1 Automatic controls.** Service water-heating systems shall be equipped with automatic temperature controls capable of adjustment from the lowest to the highest acceptable temperature settings for the intended use. The minimum temperature setting range shall be from 100°F to 140°F (38°C to 60°C).
 - R403.5.6.1.2 Shut down.** A separate switch or a clearly marked circuit breaker shall be provided to permit the power supplied to electric service systems to be turned off. A separate valve shall be provided to permit the energy supplied to the main burner(s) of combustion types of service water-heating systems to be turned off.
 - R403.5.6.2 Water-heating equipment.** Water-heating equipment installed in residential units shall meet the minimum efficiencies of Table C404.2 in Chapter 4 of the Florida Building Code, Energy Conservation, Commercial Provisions, for the type of equipment installed. Equipment used to provide heating functions as part of a combination system shall satisfy all stated requirements for the appropriate water-heating category. Solar water heaters shall meet the criteria of Section R403.5.6.2.1.
 - R403.5.6.2.1 Solar water-heating systems.** Solar systems for domestic hot water production are rated by the annual solar energy factor of the system. The solar energy factor of a system shall be determined from the Florida Solar Energy Center Directory of Certified Solar Systems. Solar collectors shall be tested in accordance with ISO Standard 9806, Test Methods for Solar Collectors, and SRCC Standard TM-1, Solar Domestic Hot Water System and Component Test Protocol. Collectors in installed solar water-heating systems should meet the following criteria:
 1. Be installed with a tilt angle between 10 degrees and 40 degrees of the horizontal; and
 2. Be installed at an orientation within 45 degrees of true south.
- R403.6 Mechanical ventilation (Mandatory).** The building shall be provided with ventilation that meets the requirements of the Florida Building Code, Residential, or Florida Building Code, Mechanical, as applicable, or with other approved means of ventilation including: Natural, Infiltration or Mechanical means. Outdoor air intakes and exhausts shall have automatic or gravity dampers that close when the ventilation system is not operating.

R403.6.1 Whole-house mechanical ventilation system fan efficacy. When installed to function as a whole-house mechanical ventilation system, fans shall meet the efficacy requirements of Table R403.6.1.

Exception: Where an air handler that is integral to tested and listed HVAC equipment is used to provide whole-house mechanical ventilation, the air handler shall be powered by an electronically commutated motor.

**TABLE R403.6.1
WHOLE-HOUSE MECHANICAL VENTILATION SYSTEM FAN EFFICACY**

FAN LOCATION	AIRFLOW RATE MINIMUM (CFM)	MINIMUM EFFICACY ^a (CFM/WATT)	AIRFLOW RATE MAXIMUM (CFM)
HRV or ERV	Any	1.2 cfm/watt	Any
Range hoods	Any	2.8 cfm/watt	Any
In-line fan	Any	3.8 cfm/watt	Any
Bathroom, utility room	10	2.8 cfm/watt	<90
Bathroom, utility room	90	3.5 cfm/watt	Any

For SI: 1 cfm = 28.3 L/min.

a. When tested in accordance with HVI Standard 916

R403.6.2 Ventilation Air. Residential buildings designed to be operated at a positive indoor pressure or for mechanical ventilation shall meet the following criteria:

1. The design air change per hour minimums for residential buildings in ASHRAE 62.2, Ventilation for Acceptable Indoor Air Quality, shall be the maximum rates allowed for residential applications.
2. No ventilation or air-conditioning system make-up air shall be provided to conditioned space from attics, crawlspaces, attached enclosed garages or outdoor spaces adjacent to swimming pools or spas.
3. If ventilation air is drawn from enclosed space(s), then the walls of the space(s) from which air is drawn shall be insulated to a minimum of R-11 and the ceiling shall be insulated to a minimum of R-19, space permitting, or R-10 otherwise.

R403.7 Heating and cooling equipment.

R403.7.1 Equipment sizing (Mandatory). Heating and cooling equipment shall be sized in accordance with ACCA Manual S based on the equipment loads calculated in accordance with ACCA Manual J or other approved heating and cooling calculation methodologies, based on building loads for the directional orientation of the building. The manufacturer and model number of the outdoor and indoor units (if split system) shall be submitted along with the sensible and total cooling capacities at the design conditions described in Section R302.1. This Code does not allow designer safety factors, provisions for future expansion or other factors that affect equipment sizing. System sizing calculations shall not include loads created by local intermittent mechanical ventilation such as standard kitchen and bathroom exhaust systems. New or replacement heating and cooling equipment shall have an efficiency rating equal to or greater than the minimum required by federal law for the geographic location where the equipment is installed.

Florida Building Code, Energy Conservation, Mandatory Requirements (2023 Continued)

- R403.7.1.1 Cooling equipment capacity.** Cooling only equipment shall be selected so that its total capacity is not less than the calculated total load but not more than 1.15 times greater than the total load calculated according to the procedure selected in Section R403.7, or the closest available size provided by the manufacturer's product lines. The corresponding latent capacity of the equipment shall not be less than the calculated latent load.
- The published value for AHRI total capacity is a nominal, rating-test value and shall not be used for equipment sizing. Manufacturer's expanded performance data shall be used to select cooling-only equipment. This selection shall be based on the outdoor design dry-bulb temperature for the load calculation (or entering water temperature for water-source equipment), the blower CFM provided by the expanded performance data, the design value for entering wet-bulb temperature and the design value for entering dry-bulb temperature.

Design values for entering wet-bulb and dry-bulb temperatures shall be for the indoor dry bulb and relative humidity used for the load calculation and shall be adjusted for return side gains if the return duct(s) is installed in an unconditioned space.

Exceptions:

1. Attached single- and multiple-family residential equipment sizing may be selected so that its cooling capacity is less than the calculated total sensible load but not less than 80 percent of that load.
2. When signed and sealed by a Florida-registered engineer, in attached single- and multiple-family units, the capacity of equipment may be sized in accordance with good design practice.

R403.7.1.2 Heating equipment capacity.

- R403.7.1.2.1 Heat pumps.** Heat pump sizing shall be based on the cooling requirements as calculated according to Section R403.7.1.1, and the heat pump total cooling capacity shall not be more than 1.15 times greater than the design cooling load even if the design heating load is 1.15 times greater than the design cooling load.
- R403.7.1.2.2 Electric resistance furnaces.** Electric resistance furnaces shall be sized within 4 kW of the design requirements calculated according to the procedure selected in Section R403.7.1.
- R403.7.1.2.3 Fossil fuel heating equipment.** The capacity of fossil fuel heating equipment with natural draft atmospheric burners shall not be less than the design load calculated in accordance with Section R403.7.1.
- R403.7.1.3 Extra capacity required for special occasions.** Residences requiring excess cooling or heating equipment capacity on an intermittent basis, such as anticipated additional loads caused by major entertainment events, shall have equipment sized or controlled to prevent continuous space cooling or heating within that space by one or more of the following options:
1. A separate cooling or heating system is utilized to provide cooling or heating to the major entertainment areas.
 2. A variable capacity system sized for optimum performance during base load periods is utilized.
- R403.8 Systems serving multiple dwelling units (Mandatory).** Systems serving multiple dwelling units shall comply with Sections C403 and C404 of the Florida Building Code, Energy Conservation—Commercial Provisions in lieu of Section R403.
- R403.9 Snow melt and ice system controls (Mandatory).** Snow- and ice-melting systems, supplied through energy service to the building, shall include automatic controls capable of shutting off the system when the pavement temperature is above 50°F (10°C), and no precipitation is falling and an automatic or manual control that will allow shutoff when the outdoor temperature is above 40°F (4.8°C).
- 403.10 Pools and permanent spa energy consumption (Mandatory).** The energy consumption of pools and permanent spas shall be in accordance with Sections R403.10.1 through R403.10.5.
- R403.10.1 Heaters.** The electric power to heaters shall be controlled by a readily accessible on-off switch that is an integral part of the heater mounted on the exterior of the heater, or external to and within 3 feet (914 mm) of the heater. Operation of such switch shall not change the setting of the heater thermostat. Such switches shall be in addition to a circuit breaker for the power to the heater.
- Gas-fired heaters shall not be equipped with continuously burning ignition pilots.
- R403.10.2 Time switches.** Time switches or other control methods that can automatically turn off and on according to a preset schedule shall be installed for heaters and pump motors. Heaters and pump motors that have built-in time switches shall be in compliance with this section.

Exceptions:

1. Where public health standards require 24-hour pump operation.
2. Pumps that operate solar- and waste-heat-recovery pool heating systems
3. Where pumps are powered exclusively from on-site renewable generation.

Florida Building Code, Energy Conservation, Mandatory Requirements (2023 Continued)

- R403.10.3 Covers.** Outdoor heated swimming pools and outdoor permanent spas shall be equipped with a vapor-retardant cover on or at the water surface or a liquid cover or other means proven to reduce heat loss.

Exception: Where more than 70 percent of the energy for heating, computed over an operation season, is from site-recovered energy, such as from a heat pump or solar energy source, covers or other vapor-retardant means shall not be required.
- R403.10.4 Gas- and oil-fired pool and spa heaters.** All gas- and oil-fired pool and spa heaters shall have a minimum thermal efficiency of 82 percent for heaters manufactured on or after April 16, 2013, when tested in accordance with ANSI Z 21.56. Pool heaters fired by natural or LP gas shall not have continuously burning pilot lights.
- R403.10.5 Heat pump pool heaters.** Heat pump pool heaters shall have a minimum COP of 4.0 when tested in accordance with AHRI 1160, Table 2, Standard Rating Conditions-Low Air Temperature. A test report from an independent laboratory is required to verify procedure compliance. Geothermal swimming pool heat pumps are not required to meet this standard.
- R403.11 Portable spas (Mandatory).** The energy consumption of electric-powered portable spas shall be controlled by the requirements of APSP-14
- R403.13 Dehumidifiers (Mandatory).** If installed, a dehumidifier shall conform to the following requirements:
 1. The minimum rated efficiency of the dehumidifier shall be greater than 1.7 liters/ kWh if the total dehumidifier capacity for the house is less than 75 pints/day and greater than 2.38 liters/kWh if the total dehumidifier capacity for the house is greater than or equal to 75 pints/day.
 2. The dehumidifier shall be controlled by a sensor that is installed in a location where it is exposed to mixed house air.
 3. Any dehumidifier unit located in unconditioned space that treats air from conditioned space shall be insulated to a minimum of R-2.
 4. Condensate disposal shall be in accordance with Section M1411.3.1 of the Florida Building Code, Residential.
- R403.13.1 Ducted dehumidifiers.** Ducted dehumidifiers shall, in addition to conforming to the requirements of Section R403.13, conform to the following requirements:
 1. If a ducted dehumidifier is configured with return and supply ducts both connected into the supply side of the cooling system, a backdraft damper shall be installed in the supply air duct between the dehumidifier inlet and outlet duct.
 2. If a ducted dehumidifier is configured with only its supply duct connected into the supply side of the central heating and cooling system, a backdraft damper shall be installed in the dehumidifier supply duct between the dehumidifier and central supply duct.
 3. A ducted dehumidifier shall not be ducted to or from a central ducted cooling system on the return duct side upstream from the central cooling evaporator coil.
 4. Ductwork associated with a dehumidifier located in unconditioned space shall be insulated to a minimum of R-6.

SECTION R404 ELECTRICAL POWER AND LIGHTING SYSTEMS

- R404.1 Lighting equipment (Mandatory).** All permanently installed luminaires, excluding those in kitchen appliances, shall have an efficacy of at least 45 lumens-per-watt or shall utilize lamps with an efficacy of not less than 65 lumens-per-watt.

R404.1.1 Lighting equipment (Mandatory). Fuel gas lighting systems shall not have continuously burning pilot lights.

SECTION R405
SIMULATED PERFORMANCE ALTERNATIVE
(PERFORMANCE)

- R405.2 Mandatory requirements.** Compliance with this section requires that the mandatory provisions identified in Section R401.2 be met. All supply and return ducts not completely inside the building thermal envelope shall be insulated to a minimum of R-6, except site-wrapped supply ducts not completely inside the building thermal envelope shall be insulated to a minimum of R-8.
- R405.2.1 Ceiling insulation.** Ceilings shall have an insulation level of at least R-19, space permitting. For the purposes of this code, types of ceiling construction that are considered to have inadequate space to install R-19 include single assembly ceilings of the exposed deck and beam type and concrete deck roofs. Such ceiling assemblies shall be insulated to at least a level of R-10.
- R405.2.2 Building air leakage testing.** Building or dwelling air leakage testing shall be in accordance with Sections R402.4 through R402.4.1.2. If an air leakage rate below seven air changes per hour at a pressure of 0.2 inch w.g. (50 pascals) is specified for the proposed design, testing shall verify the air leakage rate does not exceed the air leakage rate of the proposed design instead of seven air changes per hour.
- R405.2.3 Duct air leakage testing.** In cases where duct air leakage lower than the default Q_n to outside of 0.080 (where Q_n = duct leakage to the outside in cfm per 100 square feet of conditioned floor area tested at 25 Pascals) is specified for the proposed design, testing in accordance with Section R403.3.2 shall verify a duct air leakage rate not exceeding the leakage rate of the proposed design. Otherwise, in accordance with Section R403.3.3, duct testing is not mandatory for buildings complying by Section R405.

SECTION R406
ENERGY RATING INDEX
COMPLIANCE ALTERNATIVE

- R406.2 Mandatory requirements.** Compliance with this section requires that the provisions identified in Sections R401 through R404 labeled as “mandatory” and Section R403.5.3 of the 2015 International Energy Conservation Code be met. For buildings that do not utilize on-site renewable power production for compliance with this section, the building thermal envelope shall be greater than or equal to levels of efficiency and Solar Heat Gain Coefficient in Table 402.1.1 or 402.1.3 of the 2009 International Energy Conservation Code. For buildings that utilize on-site renewable power production for compliance with this section, the building thermal envelope shall be greater than or equal to levels of efficiency and Solar Heat Gain Coefficient in Table R402.1.2 or Table R402.1.4 of the 2015 International Energy Conservation Code.
 - Exception:** Supply and return ducts not completely inside the building thermal envelope shall be insulated to a minimum of R-6.
- R406.2.1 Site-wrapped supply ducts.** Site-wrapped supply ducts not completely inside the building thermal envelope shall be insulated to a minimum of R-8.

2023 - AIR BARRIER AND INSULATION INSPECTION COMPONENT CRITERIA-TABLE 402.4.1.1^a

Project Name: Spates - XXX TBD		Builder Name:	
Street: XXX TBD		Permit Office: Lake City	
City, State, Zip: Lake City, FL,		Permit Number:	
Owner:		Jurisdiction: 211200	
Design Location: FL, Gainesville		County: Columbia(Florida Climate Zone 2)	
COMPONENT	AIR BARRIER CRITERIA	INSULATION INSTALLATION CRITERIA	CHECK
General requirements	A continuous air barrier shall be installed in the building envelope. The exterior thermal envelope contains a continuous air barrier. Breaks or joints in the air barrier shall be sealed.	Air-permeable insulation shall not be used as a sealing material.	C
Ceiling/attic	The air barrier in any dropped ceiling/soffit shall be aligned with the insulation and any gaps in the air barrier shall be sealed. Access openings, drop down stairs or knee wall doors to unconditioned attic spaces shall be sealed.	The insulation in any dropped ceiling/soffit shall be aligned with the air barrier.	
Walls	The junction of the foundation and sill plate shall be sealed. The junction of the top plate and the top of exterior walls shall be sealed. Knee walls shall be sealed.	Cavities within corners and headers of frame walls shall be insulated by completely filling the cavity with a material having a thermal resistance of R-3 per inch minimum Exterior thermal envelope insulation for framed walls shall be installed in substantial contact and continuous alignment with the air barrier.	
Windows, skylights and doors	The space between window/door jambs and framing, and skylights and framing shall be sealed.		
Rim joists	Rim joists shall include the air barrier.	Rim joists shall be insulated.	
Floors (including above-garage and cantilevered floors)	The air barrier shall be installed at any exposed edge of insulation.	Floor framing cavity insulation shall be installed to maintain permanent contact with the underside of subfloor decking, or floor framing cavity insulation shall be permitted to be in contact with the top side of sheathing, or continuous insulation installed on the underside of floor framing and extends from the bottom to the top of all perimeter floor framing members.	
Crawl space walls	Exposed earth in unvented crawl spaces shall be covered with a Class I vapor retarder with overlapping joints taped.	Where provided instead of floor insulation, insulation shall be permanently attached to the crawlspace walls.	
Shafts, penetrations	Duct shafts, utility penetrations, and flue shafts opening to exterior or unconditioned space shall be sealed.		
Narrow cavities		Batts in narrow cavities shall be cut to fit, or narrow cavities shall be filled by insulation that on installation readily conforms to the available cavity spaces.	
Garage separation	Air sealing shall be provided between the garage and conditioned spaces.		
Recessed lighting	Recessed light fixtures installed in the building thermal envelope shall be sealed to the finished surface.	Recessed light fixtures installed in the building thermal envelope shall be air tight and IC rated.	
Plumbing and wiring		Batt insulation shall be cut neatly to fit around wiring and plumbing in exterior walls, or insulation that on installation readily conforms to available space shall extend behind piping and wiring.	
Shower/tub on exterior wall	The air barrier installed at exterior walls adjacent to showers and tubs shall separate them from the showers and tubs.	Exterior walls adjacent to showers and tubs shall be insulated.	
Electrical, communication, and other equipment boxes, housings, and enclosures	Boxes, housings, and enclosures that penetrate the air barrier shall be caulked, taped, gasketed, or otherwise sealed to the air barrier element being penetrated. All concealed openings into the box, housing, or enclosure shall be sealed. The continuity of the air barrier shall be maintained around boxes, housings, and enclosures that penetrate the air barrier. Alternatively, air-sealed boxes shall be installed in accordance with R402.4.6	Boxes, housings, and enclosures shall be buried in or surrounded by tightly fitted insulation.	
HVAC register boots	HVAC supply and return register boots that penetrate building thermal envelope shall be sealed to the sub-floor, wall covering or ceiling penetrated by the boot.		
Concealed sprinklers	When required to be sealed, concealed fire sprinklers shall only be sealed in a manner that is recommended by the manufacturer. Caulking or other adhesive sealants shall not be used to fill voids between fire sprinkler cover plates and walls or ceilings.		

a. In addition, inspection of log walls shall be in accordance with the provisions of ICC-400.

Envelope Leakage Test Report (Blower Door Test)

Residential Prescriptive, Performance or ERI Method Compliance

2023 Florida Building Code, Energy Conservation, 8th Edition

Jurisdiction: 211200	Permit #:
----------------------	-----------

Job Information

Builder:	Community:	Lot: NA
Address: XXX TBD		
City: Lake City	State: FL	Zip:

Air Leakage Test Results *Passing results must meet either the Performance, Prescriptive, or ERI Method*

PRESCRIPTIVE METHOD-The building or dwelling unit shall be tested and verified as having an air leakage rate of not exceeding 7 air changes per hour at a pressure of 0.2 inch w.g. (50 Pascals) in Climate Zones 1 and 2.

PERFORMANCE or ERI METHOD-The building or dwelling unit shall be tested and verified as having an air leakage rate of not exceeding the selected ACH(50) value, as shown on Form R405-2023 (Performance) or R406-2023 (ERI), section labeled as infiltration, sub-section ACH50.
ACH(50) specified on Form R405-2023-Energy Calc (Performance) or R406-2023 (ERI): 6.000

$\frac{\text{CFM}(50) \times 60}{\text{Building Volume}} = \text{ACH}(50)$ <div style="text-align: center; margin-top: 10px;"> <input type="checkbox"/> PASS </div> <p><input type="checkbox"/> When ACH(50) is less than 3, Mechanical Ventilation installation must be verified by building department.</p>	<p><u>Method for calculating building volume:</u></p> <p><input type="radio"/> Retrieved from architectural plans</p> <p><input checked="" type="radio"/> Code software calculated</p> <p><input type="radio"/> Field measured and calculated</p>
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

R402.4.1.2 Testing. The building or dwelling unit shall be tested and verified as having an air leakage rate not exceeding seven air changes per hour in Climate Zones 1 and 2, and three air changes per hour in Climate Zones 3 through 8. Dwelling units with an air leakage rate less than three air changes per hour shall be provided with whole-house mechanical ventilation in accordance with Section R403.6.1 of this code and Section M1507.3 if the *Florida Building Code, Residential*. Testing shall be conducted in accordance with ANSI/RESNET/ICC 380 and reported at a pressure of 0.2 inch w.g. (50 Pascals). Testing shall be conducted by either individuals as defined in Section 553.993(5) or (7), *Florida Statutes*, or individuals licensed as set forth in Section 489.105(3)(f), (g), or (i) or an approved third party. A written report of the results of the test shall be signed by the party conducting the test and provided to the *code official*. Testing shall be performed at any time after creation of all penetrations of the *building thermal envelope*.

During testing:

1. Exterior windows and doors, fireplace and stove doors shall be closed, but not sealed, beyond the intended weatherstripping or other infiltration control measures.
2. Dampers including exhaust, intake, makeup air, back draft and flue dampers shall be closed, but not sealed beyond intended infiltration control measures.
3. Interior doors, if installed at the time of the test, shall be open.
4. Exterior doors for continuous ventilation systems and heat recovery ventilators shall be closed and sealed.
5. Heating and cooling systems, if installed at the time of the test, shall be turned off.
6. Supply and return registers, if installed at the time of the test, shall be fully open.
7. If an attic is both sealed and insulated at the roof deck, interior access doors and hatches between the conditioned space volume and the attic shall be opened during the test and the volume of the attic shall be added to the conditioned space volume for purposes of reporting the infiltration volume and calculating the air leakage of the home.

Testing Company

Company Name: _____ Phone: _____

I hereby verify that the above Air Leakage results are in accordance with the 2023 8th Edition Florida Building Code Energy Conservation requirements according to the compliance method selected above.

Signature of Tester: _____ Date of Test: _____

Printed Name of Tester: _____

License/Certification #: _____ Issuing Authority: _____

Duct Leakage Test Report

Residential Prescriptive, Performance or ERI Method Compliance 2023 Florida Building Code, Energy Conservation, 8th Edition

Jurisdiction: 211200	Permit #:
----------------------	-----------

Job Information

Builder:	Community:	Lot: NA
Address: XXX TBD		
City: Lake City	State: FL	Zip:

Duct Leakage Test Results

System 1	_____ cfm25
System 2	_____ cfm25
System 3	_____ cfm25
Sum of others	_____ cfm25
Total of all	_____ cfm25

Prescriptive Method cfm25 (Total)

To qualify as "substantially leak free" Qn Total must be less than or equal to 0.04 if air handler unit is installed. If air handler unit is not installed, Qn Total must be less than or equal to 0.03. This testing method meets the requirements in accordance with Section R403.3.3.

Is the air handler unit installed during testing? YES (⁰⁴/_{Qn}) NO (⁰³/_{Qn})

Performance/ERI Method cfm25 (Out or Total)

To qualify using this method, Qn must not be greater than the proposed duct leakage Qn specified on Form R405-2023 or R406-2023.

<i>Leakage Type selected on Form</i>	<i>Qn specified on Form R405-2023</i>
<i>R405-2023 (EnergyCalc) or R406-2023</i>	<i>(EnergyCalc) or R406-2023</i>

Proposed Leak Free	0.030
--------------------	-------

_____ ÷ 2412 = _____ Qn

Total of all systems Total Conditioned Square Footage

PASS **FAIL**

Duct tightness shall be verified by testing in accordance with ANSI/RESNET/ICC380 by either individuals as defined in Section 553.993(5) or (7), Florida Statutes, or individuals licensed as set forth in Section 489.105(3)(f), (g) or (i), Florida Statutes.

Testing Company

Company Name: _____ Phone: _____

I hereby verify that the above duct leakage testing results are in accordance with the Florida Building Code requirements with the selected compliance path as stated above, either the Prescriptive Method or Performance Method.

Signature of Tester: _____ Date of Test: _____

Printed Name of Tester: _____

License/Certification #: _____ Issuing Authority: _____



Manual S Compliance Report

Entire House

E-Calcs Plus, Inc

Job: Spates - XXX TBD
 Date:
 By: E-Calcs Plus, Inc

Serving all of Florida Phone: 833.322.5271 Email: eric@ecalcsplus.com Web: www.ecalcsplus.com License: HERS Rater ID# 0757810

Project Information

For: Spates - XXX TBD
 XXX TBD, Lake City, FL

Cooling Equipment

Design Conditions

Outdoor design DB:	91.9°F	Sensible gain:	40489 Btuh	Entering coil DB:	76.5°F
Outdoor design WB:	76.2°F	Latent gain:	5383 Btuh	Entering coil WB:	63.4°F
Indoor design DB:	75.0°F	Total gain:	45871 Btuh		
Indoor RH:	50%	Estimated airflow:	1700 cfm		

Manufacturer's Performance Data at Actual Design Conditions

Equipment type:	Split ASHP				
Manufacturer:	Goodman Mfg.	Model:	GLZS4BA6010A*+AE*L++CM60A4D+TDR		
Actual airflow:	1700 cfm				
Sensible capacity:	44538 Btuh	110% of load			
Latent capacity:	6460 Btuh	120% of load			
Total capacity:	50998 Btuh	111% of load	SHR:	87%	

Heating Equipment

Design Conditions

Outdoor design DB:	33.0°F	Heat loss:	52058 Btuh	Entering coil DB:	70.0°F
Indoor design DB:	70.0°F				

Manufacturer's Performance Data at Actual Design Conditions

Equipment type:	Split ASHP				
Manufacturer:	Goodman Mfg.	Model:	GLZS4BA6010A*+AE*L++CM60A4D+TDR		
Actual airflow:	0 cfm				
Output capacity:	55500 Btuh	107% of load		Capacity balance:	32 °F
Supplemental heat required:	0 Btuh			Economic balance:	-70 °F

Backup equipment type:	Elec strip				
Manufacturer:	Goodman Mfg.	Model:	AFUE 100		
Actual airflow:	0 cfm				
Output capacity:	15.0 kW	98% of load	Temp. rise:	28 °F	

Meets all requirements of ACCA Manual S.





Project Summary
Entire House
E-Calcs Plus, Inc

Job: Spates - XXX TBD
 Date:
 By: E-Calcs Plus, Inc

Serving all of Florida Phone: 833.322.5271 Email: eric@ecalcsplus.com Web: www.ecalcsplus.com License: HERS Rater ID# 0757810

Project Information

For: Spates - XXX TBD
 XXX TBD, Lake City, FL

Notes:

Design Information

Weather: Gainesville Rgnl, FL, US

Winter Design Conditions

Outside db 33 °F
 Inside db 70 °F
 Design TD 37 °F

Ventilation Method ASHRAE 62.2-2010

Summer Design Conditions

Outside db 92 °F
 Inside db 75 °F
 Design TD 17 °F
 Daily range M
 Relative humidity 50 %
 Moisture difference 47 gr/lb

Heating Summary

Structure 46110 Btuh
 Ducts (R-6.0) 5948 Btuh
 Central vent (0 cfm) 0 Btuh
 Humidification 0 Btuh
 Piping 0 Btuh
 Equipment load 52058 Btuh

Infiltration

Method Simplified
 Construction quality Semi-tight
 Fireplaces 0

	Heating	Cooling
Area (ft ²)	2429	2429
Volume (ft ³)	24290	24290
Air changes/hour	0.22	0.11
Equiv. AVF (cfm)	89	45

Heating Equipment Summary

Make Goodman Mfg.
 Trade GOODMAN
 Model GLZS4BA6010A*
 AHRI ref 215445720
 Efficiency 8.1 HSPF2
 Heating input
 Heating output 55500 Btuh @ 47°F
 Temperature rise 0 °F
 Actual air flow 0 cfm
 Air flow factor 0 cfm/Btuh
 Static pressure 0.50 in H2O
 Space thermostat
 Capacity balance point = 32 °F
 Backup: Goodman Mfg. AFUE 100
 Input = 15 kW, Output = 51182 Btuh, 100 AFUE

Sensible Cooling Equipment Load Sizing

Structure 30443 Btuh
 Ducts (R-6.0) 10045 Btuh
 Central vent (0 cfm) 0 Btuh
 Blower 0 Btuh
 Use manufacturer's data y
 Rate/swing multiplier 1.00
 Equipment sensible load 40489 Btuh

Latent Cooling Equipment Load Sizing

Structure 2212 Btuh
 Ducts 3170 Btuh
 Central vent (0 cfm) 0 Btuh
 Equipment latent load 5383 Btuh
Equipment Total Load (Sen+Lat) 45871 Btuh
 Req. total capacity at 0.75 SHR 4.5 ton

Cooling Equipment Summary

Make Goodman Mfg.
 Trade GOODMAN
 Cond GLZS4BA6010A*
 Coil AE*L++CM60A4D+TDR
 AHRI ref 215445720
 Efficiency 12.0 EER2, 14.3 SEER2
 Sensible cooling 38250 Btuh
 Latent cooling 12750 Btuh
 Total cooling 51000 Btuh
 Actual air flow 1700 cfm
 Air flow factor 0.042 cfm/Btuh
 Static pressure 0.50 in H2O
 Load sensible heat ratio 0.88

Calculations approved by ACCA to meet all requirements of Manual J 8th Ed.





Load Short Form

Entire House

E-Calcs Plus, Inc

Job: Spates - XXX TBD
 Date:
 By: E-Calcs Plus, Inc

Serving all of Florida Phone: 833.322.5271 Email: eric@ecalcsplus.com Web: www.ecalcsplus.com License: HERS Rater ID# 0757810

Project Information

For: Spates - XXX TBD
 XXX TBD, Lake City, FL

Design Information

	Htg	Clg		Infiltration	
Outside db (°F)	33	92	Method		Simplified
Inside db (°F)	70	75	Construction quality		Semi-tight
Design TD (°F)	37	17	Fireplaces		0
Daily range	-	M			
Inside humidity (%)	50	50			
Moisture difference (gr/lb)	33	47			

HEATING EQUIPMENT

Make Goodman Mfg.
 Trade GOODMAN
 Model GLZS4BA6010A*
 AHRI ref 215445720

Efficiency 8.1 HSPF2
 Heating input
 Heating output 55500 Btuh @ 47°F
 Temperature rise 0 °F
 Actual air flow 0 cfm
 Air flow factor 0 cfm/Btuh
 Static pressure 0.50 in H2O
 Space thermostat
 Capacity balance point = 32 °F

Backup: Goodman Mfg. AFUE 100
 Input = 15 kW, Output = 51182 Btuh, 100 AFUE

COOLING EQUIPMENT

Make Goodman Mfg.
 Trade GOODMAN
 Model GLZS4BA6010A*
 Coil AE*L++CM60A4D+TDR
 AHRI ref 215445720

Efficiency 12.0 EER2, 14.3 SEER2
 Sensible cooling 38250 Btuh
 Latent cooling 12750 Btuh
 Total cooling 51000 Btuh
 Actual air flow 1700 cfm
 Air flow factor 0.042 cfm/Btuh
 Static pressure 0.50 in H2O
 Load sensible heat ratio 0.88

ROOM NAME	Area (ft²)	Htg load (Btuh)	Clg load (Btuh)	Htg AVF (cfm)	Clg AVF (cfm)
Laundry	164	4349	2386	0	100
BR2	166	2483	2073	0	87
BR3	196	5659	4166	0	175
BA2	84	1751	900	0	38
MBR	311	8410	6933	0	291
HER WIC	70	1684	867	0	36
HIS WIC	35	47	81	0	3
MBA	154	5419	3413	0	143
Office	126	3123	2661	0	112
Pantry	45	703	308	0	13
BA3	45	1195	798	0	34
Hall	151	2738	1444	0	61
KitLivDin	882	14496	14458	0	607

Calculations approved by ACCA to meet all requirements of Manual J 8th Ed.



Entire House	p	2429	52058	40489	0	1700
Other equip loads			0	0		
Equip. @ 1.00 RSM				40489		
Latent cooling				5383		
TOTALS		2429	52058	45871	0	1700

Calculations approved by ACCA to meet all requirements of Manual J 8th Ed.



Project Information

 For: Spates - XXX TBD
 XXX TBD, Lake City, FL

Design Conditions

Location:

 Gainesville Rgnl, FL, US
 Elevation: 164 ft
 Latitude: 30°N

Outdoor:

 Dry bulb (°F)
 Daily range (°F)
 Wet bulb (°F)
 Wind speed (mph)

Heating

 33
 -
 -
 15.0

Cooling

 92
 18 (M)
 76
 7.5

Indoor:

 Indoor temperature (°F)
 Design TD (°F)
 Relative humidity (%)
 Moisture difference (gr/lb)

Heating

 70
 37
 50
 32.8

Cooling

 75
 17
 50
 46.9


Infiltration:

 Method
 Construction quality
 Fireplaces

 Simplified
 Semi-tight
 0


Heating

Component	Btuh/ft²	Btuh	% of load
Walls	5.1	10445	20.1
Glazing	40.1	17730	34.1
Doors	22.2	453	0.9
Ceilings	1.2	2876	5.5
Floors	4.5	11002	21.1
Infiltration	1.6	3603	6.9
Ducts		5948	11.4
Piping		0	0
Humidification		0	0
Ventilation		0	0
Adjustments		0	0
Total		52058	100.0

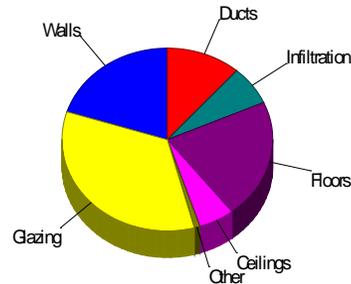

Cooling


Component	Btuh/ft²	Btuh	% of load
Walls	2.5	5046	12.5
Glazing	34.4	15218	37.6
Doors	11.2	228	0.6
Ceilings	1.7	4108	10.1
Floors	0	0	0
Infiltration	0.4	823	2.0
Ducts		10045	24.8
Ventilation		0	0
Internal gains		5020	12.4
Blower		0	0
Adjustments		0	0
Total		40489	100.0

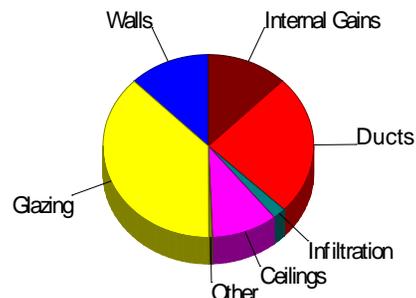
 Latent Cooling Load = 5383 Btuh
 Overall U-value = 0.156 Btuh/ft²-°F, Window / Floor Area = 18.2 %

Data entries checked.



First Floor

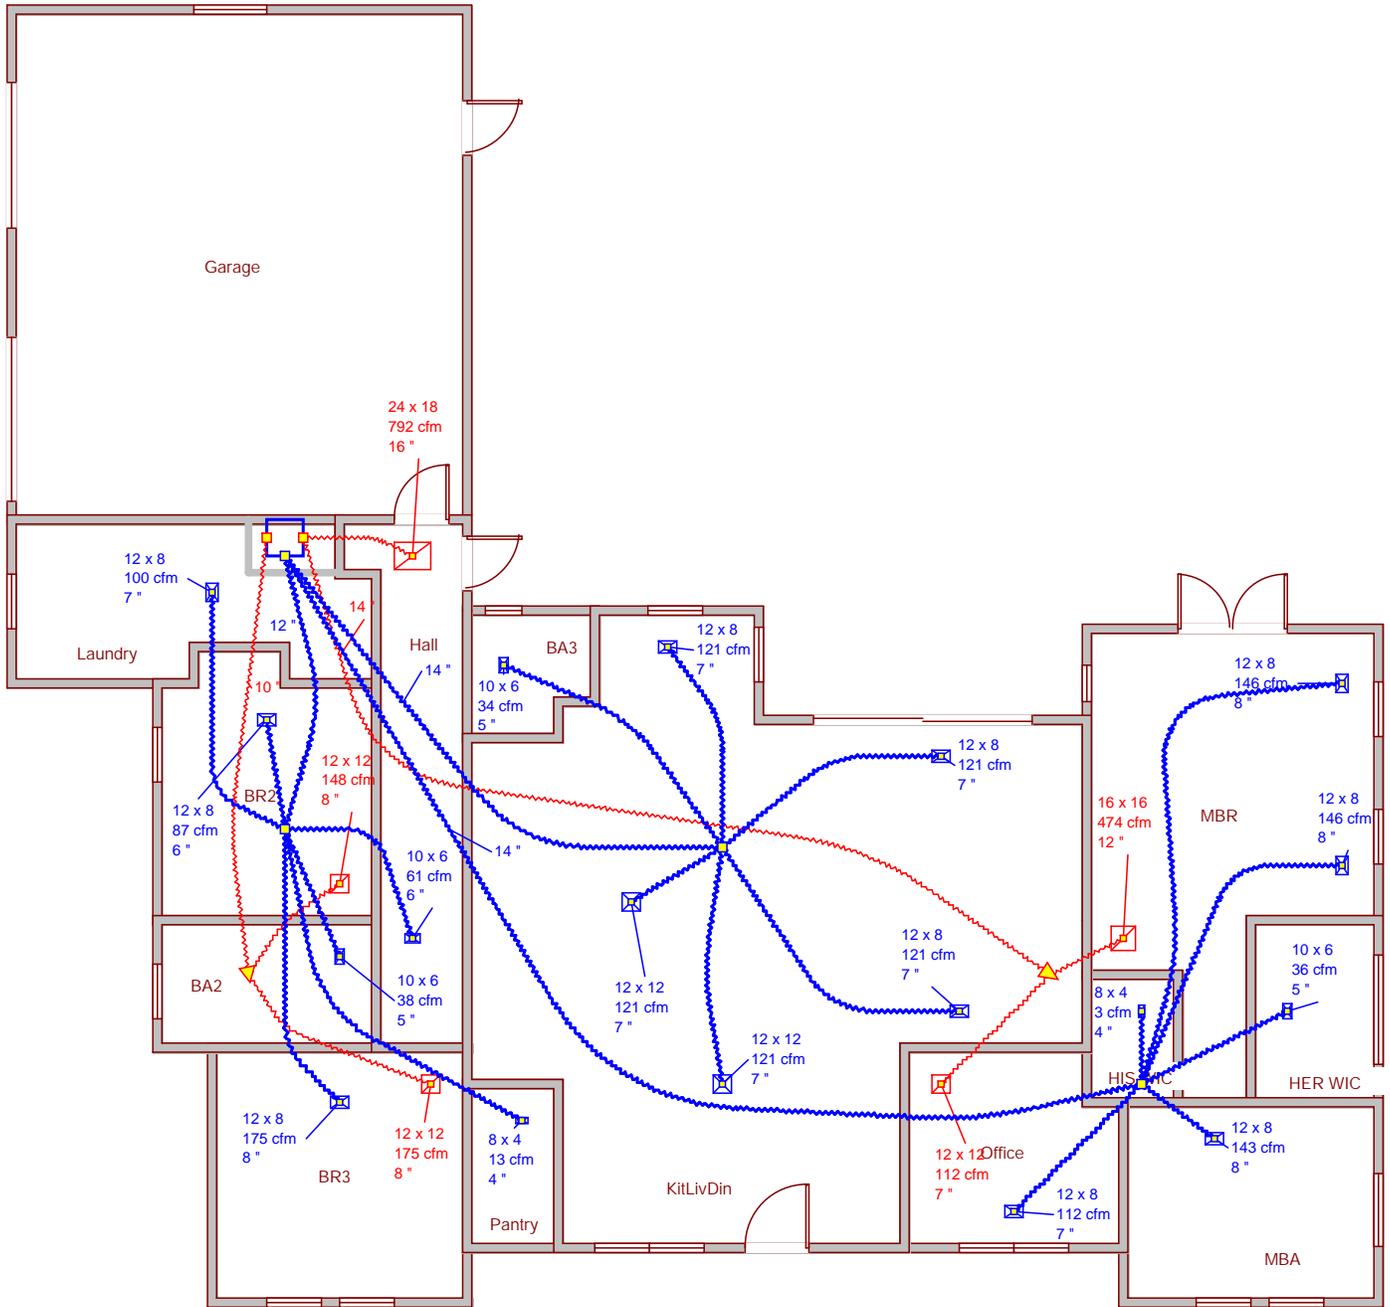

Job #: Spates - XXX TBD
Performed by E-Calcs Plus, Inc for:
Spates - XXX TBD
XXX TBD
Lake City, FL

E-Calcs Plus, Inc
Serving all of Florida
Phone: 833.322.5271 License: HERS Rater ID# 0757810
www.ecalcsplus.com eric@ecalcsplus.com

Scale: 1 : 126
Page 1
Right-Suite® Universal 2025
25.0.03 RSU28253
2026-Jan-26 14:28:44
...D\Spates - XXX TBD 1.26.2026.rut



Duct System Summary

Entire House

E-Calcs Plus, Inc

Job: Spates - XXX TBD
 Date:
 By: E-Calcs Plus, Inc

Serving all of Florida Phone: 833.322.5271 Email: eric@ecalcsplus.com Web: www.ecalcsplus.com License: HERS Rater ID# 0757810

Project Information

For: Spates - XXX TBD
 XXX TBD, Lake City, FL

	Heating	Cooling
External static pressure	0.50 in H2O	0.50 in H2O
Pressure losses	0.16 in H2O	0.16 in H2O
Available static pressure	0.34 in H2O	0.34 in H2O
Supply / return available pressure	0.205 / 0.135 in H2O	0.205 / 0.135 in H2O
Lowest friction rate	0.089 in/100ft	0.089 in/100ft
Actual air flow	0 cfm	1700 cfm
Total effective length (TEL)		382 ft

Supply Branch Detail Table

Name	Design (Btuh)	Htg (cfm)	Clg (cfm)	Design FR	Diam (in)	H x W (in)	Duct Matl	Actual Ln (ft)	Ftg.Eqv Ln (ft)	Trunk
BA2	c 900	0	38	0.143	5.0	0x0	VIFx	23.1	120.0	st1
BA3	c 798	0	34	0.119	5.0	0x0	VIFx	47.8	125.0	st2
BR2	c 2073	0	87	0.145	6.0	0x0	VIFx	21.6	120.0	st1
BR3-A	c 4166	0	175	0.131	8.0	0x0	VIFx	31.8	125.0	st1
HER WIC	c 867	0	36	0.104	5.0	0x0	VIFx	73.2	125.0	st3
HIS WIC	c 81	0	3	0.106	4.0	0x0	VIFx	68.2	125.0	st3
Hall	c 1444	0	61	0.135	6.0	0x0	VIFx	26.9	125.0	st1
KitLivDin	c 2892	0	121	0.121	7.0	0x0	VIFx	44.8	125.0	st2
KitLivDin-A	c 2892	0	121	0.130	7.0	0x0	VIFx	37.4	120.0	st2
KitLivDin-B	c 2892	0	121	0.120	7.0	0x0	VIFx	45.4	125.0	st2
KitLivDin-C	c 2892	0	121	0.118	7.0	0x0	VIFx	49.4	125.0	st2
KitLivDin-D	c 2892	0	121	0.122	7.0	0x0	VIFx	43.6	125.0	st2
Laundry	c 2386	0	100	0.132	7.0	0x0	VIFx	31.0	125.0	st1
MBA	c 3413	0	143	0.106	8.0	0x0	VIFx	69.2	125.0	st3
MBR	c 3466	0	146	0.089	8.0	0x0	VIFx	95.6	135.0	st3
MBR-A	c 3466	0	146	0.096	8.0	0x0	VIFx	83.2	130.0	st3
Office	c 2661	0	112	0.103	7.0	0x0	VIFx	74.1	125.0	st3
Pantry	c 308	0	13	0.126	4.0	0x0	VIFx	38.3	125.0	st1

Supply Trunk Detail Table

Name	Trunk Type	Htg (cfm)	Clg (cfm)	Design FR	Veloc (fpm)	Diam (in)	H x W (in)	Duct Material	Trunk
st1	Peak AVF	0	474	0.126	603	12.0	0 x 0	VinIFlx	
st2	Peak AVF	0	641	0.118	599	14.0	0 x 0	VinIFlx	
st3	Peak AVF	0	586	0.089	548	14.0	0 x 0	VinIFlx	

Return Branch Detail Table

Name	Grille Size (in)	Htg (cfm)	Clg (cfm)	TEL (ft)	Design FR	Veloc (fpm)	Diam (in)	H x W (in)	Stud/Joist Opening (in)	Duct Matl	Trunk
rb3	0x0	0	175	126.3	0.107	501	8.0	0x 0		VIFx	rt2
rb2	0x0	0	148	121.4	0.111	423	8.0	0x 0		VIFx	rt2
rb4	0x0	0	474	147.6	0.091	604	12.0	0x 0		VIFx	rt1
rb5	0x0	0	112	151.6	0.089	418	7.0	0x 0		VIFx	rt1
rb1	0x0	0	792	71.2	0.189	567	16.0	0x 0		VIFx	

Return Trunk Detail Table

Name	Trunk Type	Htg (cfm)	Clg (cfm)	Design FR	Veloc (fpm)	Diam (in)	H x W (in)	Duct Material	Trunk
rt2	Peak AVF	0	323	0.107	591	10.0	0 x 0	VinIFlx	
rt1	Peak AVF	0	586	0.089	548	14.0	0 x 0	VinIFlx	



Static Pressure and Friction Rate
Entire House
E-Calcs Plus, Inc

Job: Spates - XXX TBD
 Date:
 By: E-Calcs Plus, Inc

Serving all of Florida Phone: 833.322.5271 Email: eric@ecalcsplus.com Web: www.ecalcsplus.com License: HERS Rater ID# 0757810

Project Information

For: Spates - XXX TBD
 XXX TBD, Lake City, FL

Available Static Pressure

	Heating (in H2O)	Cooling (in H2O)
External static pressure	0.50	0.50
Pressure losses		
Coil	0	0
Heat exchanger	0	0
Supply diffusers	0.03	0.03
Return grilles	0.03	0.03
Filter	0.10	0.10
Humidifier	0	0
Balancing damper	0	0
Other device	0	0
Available static pressure	0.34	0.34

Total Effective Length

	Supply (ft)	Return (ft)
Measured length of run-out	31	8
Measured length of trunk	64	53
Equivalent length of fittings	135	90
Total length	231	152
Total effective length		382

Friction Rate

	Heating (in/100ft)		Cooling (in/100ft)	
Supply Ducts	0.089	OK	0.089	OK
Return Ducts	0.089	OK	0.089	OK

Fitting Equivalent Length Details

Supply 4AD=60, 11A=20, 11G=5, 11G=5, 1A=35, 11G=5, 11G=5: TotalEL=135
 Return 6M=20, 11M=20, 5D=40, 11G=5, 11G=5: TotalEL=90

