



REVISIONS	


SOFTPLAN  
ARCHITECTURAL DESIGN SOFTWARE

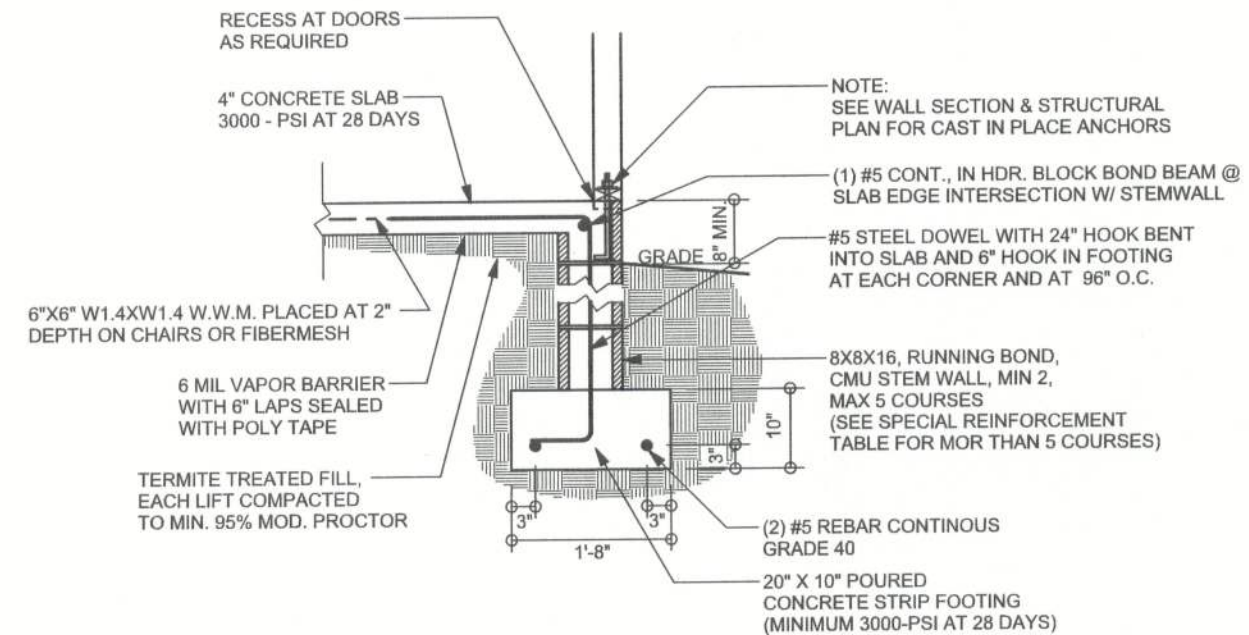


**F9**  
**S-2** STEM WALL FOOTING  
SCALE: 1/2" = 1'-0"

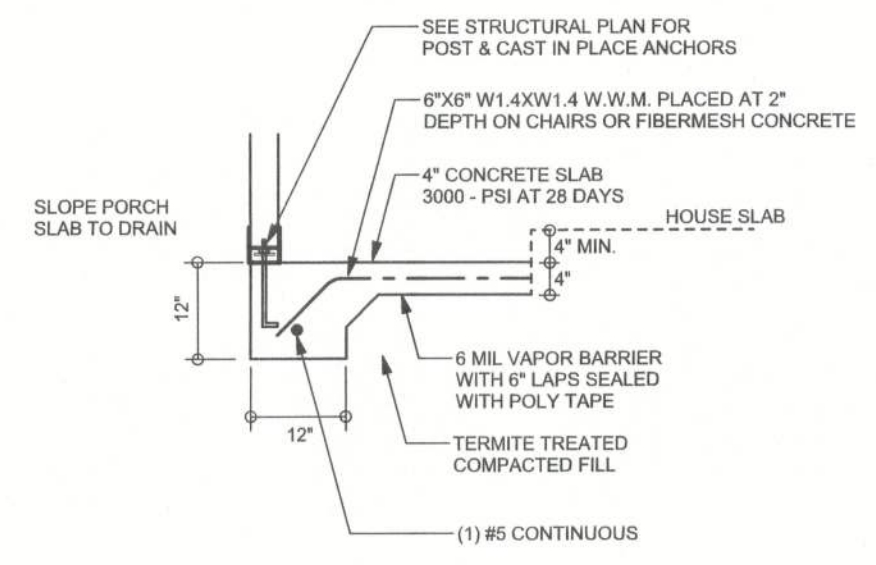


**F5**  
**S-2** PORCH FOOTING  
SCALE: 1/2" = 1'-0"

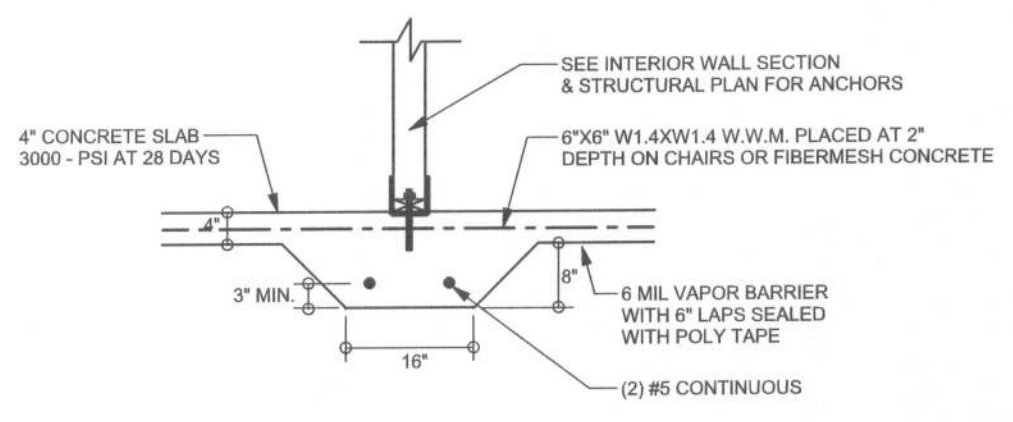


**F2**  
**S-2** INTERIOR BEARING FOOTING  
SCALE: 1/2" = 1'-0"

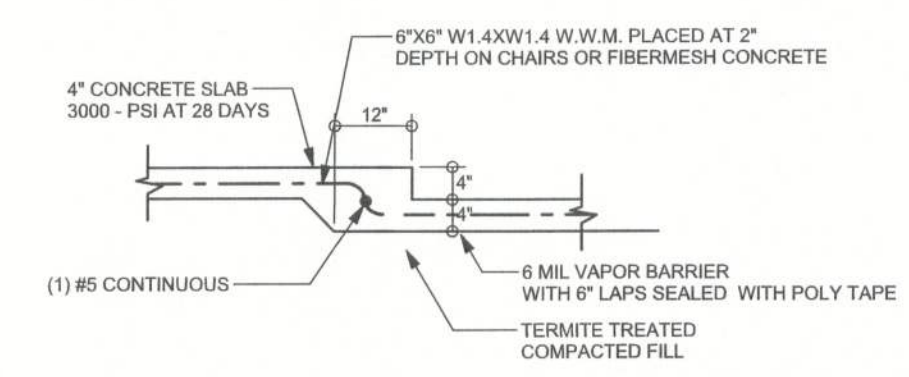


**F6**  
**S-2** TYPICAL NON-BEARING STEP FOOTING  
SCALE: 1/2" = 1'-0"

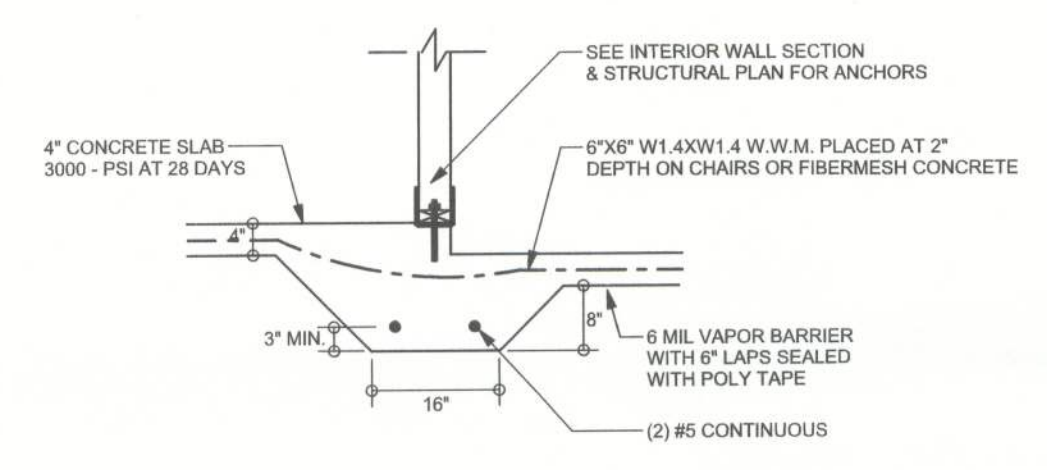


**F3**  
**S-2** INTERIOR BEARING STEP FOOTING  
SCALE: 1/2" = 1'-0"

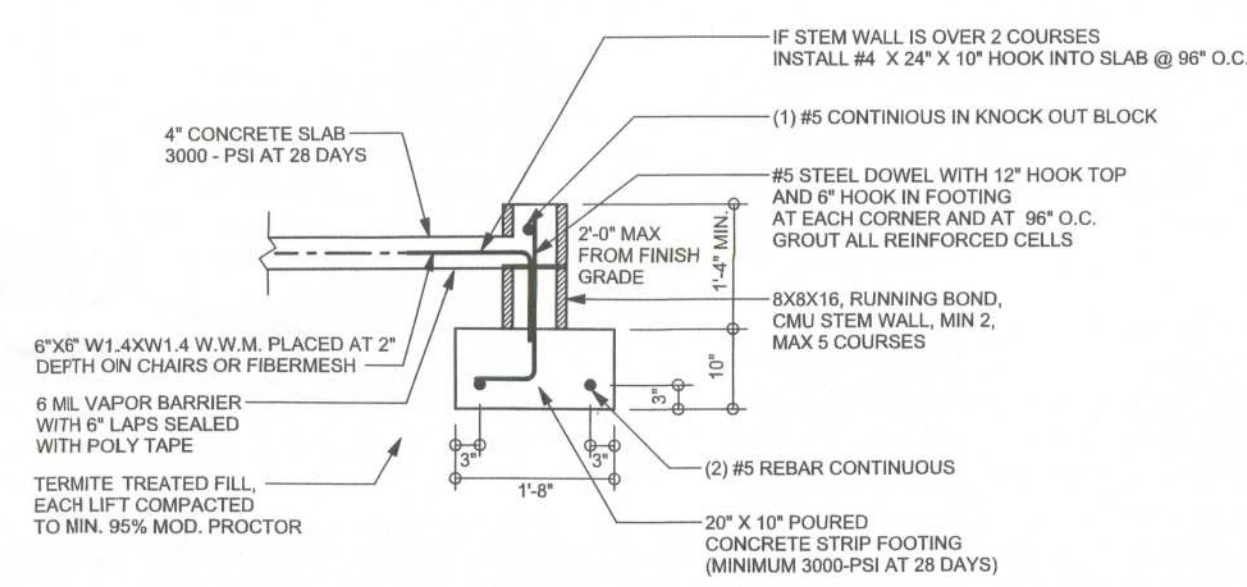


**F18**  
**S-2** STEM WALL CURB FOOTING  
SCALE: 1/2" = 1'-0"

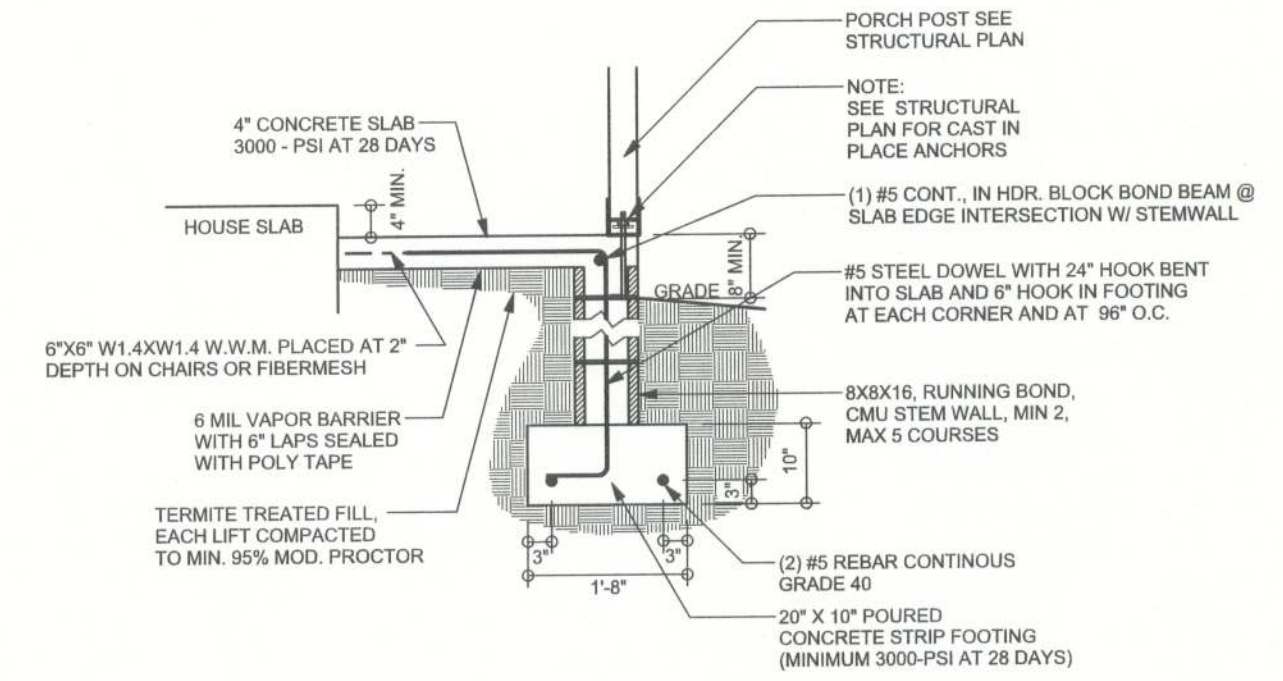

**F12**  
**S-2** ALT. STEM WALL PORCH FOOTING  
SCALE: 1/2" = 1'-0"

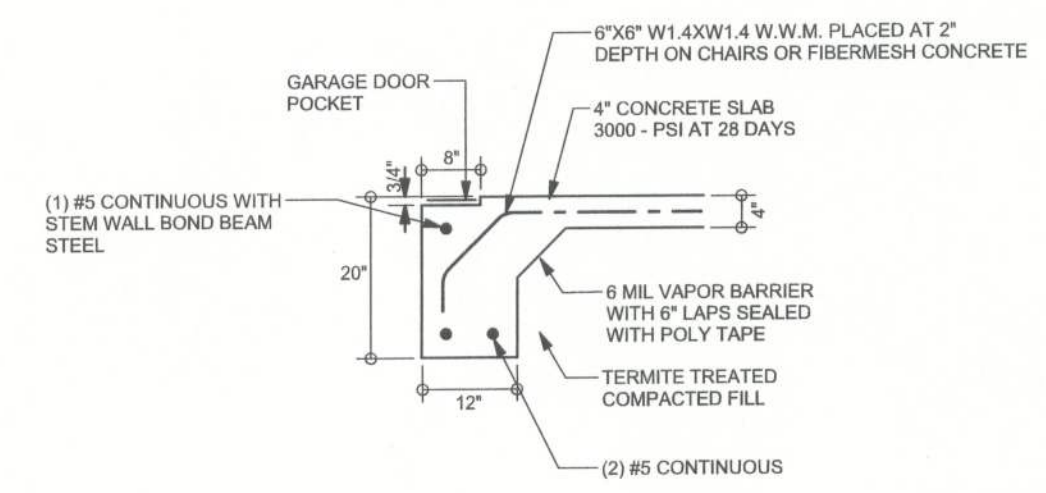

**F13**  
**S-2** ALT. STEM WALL GARAGE DOOR FOOTING  
SCALE: 1/2" = 1'-0"

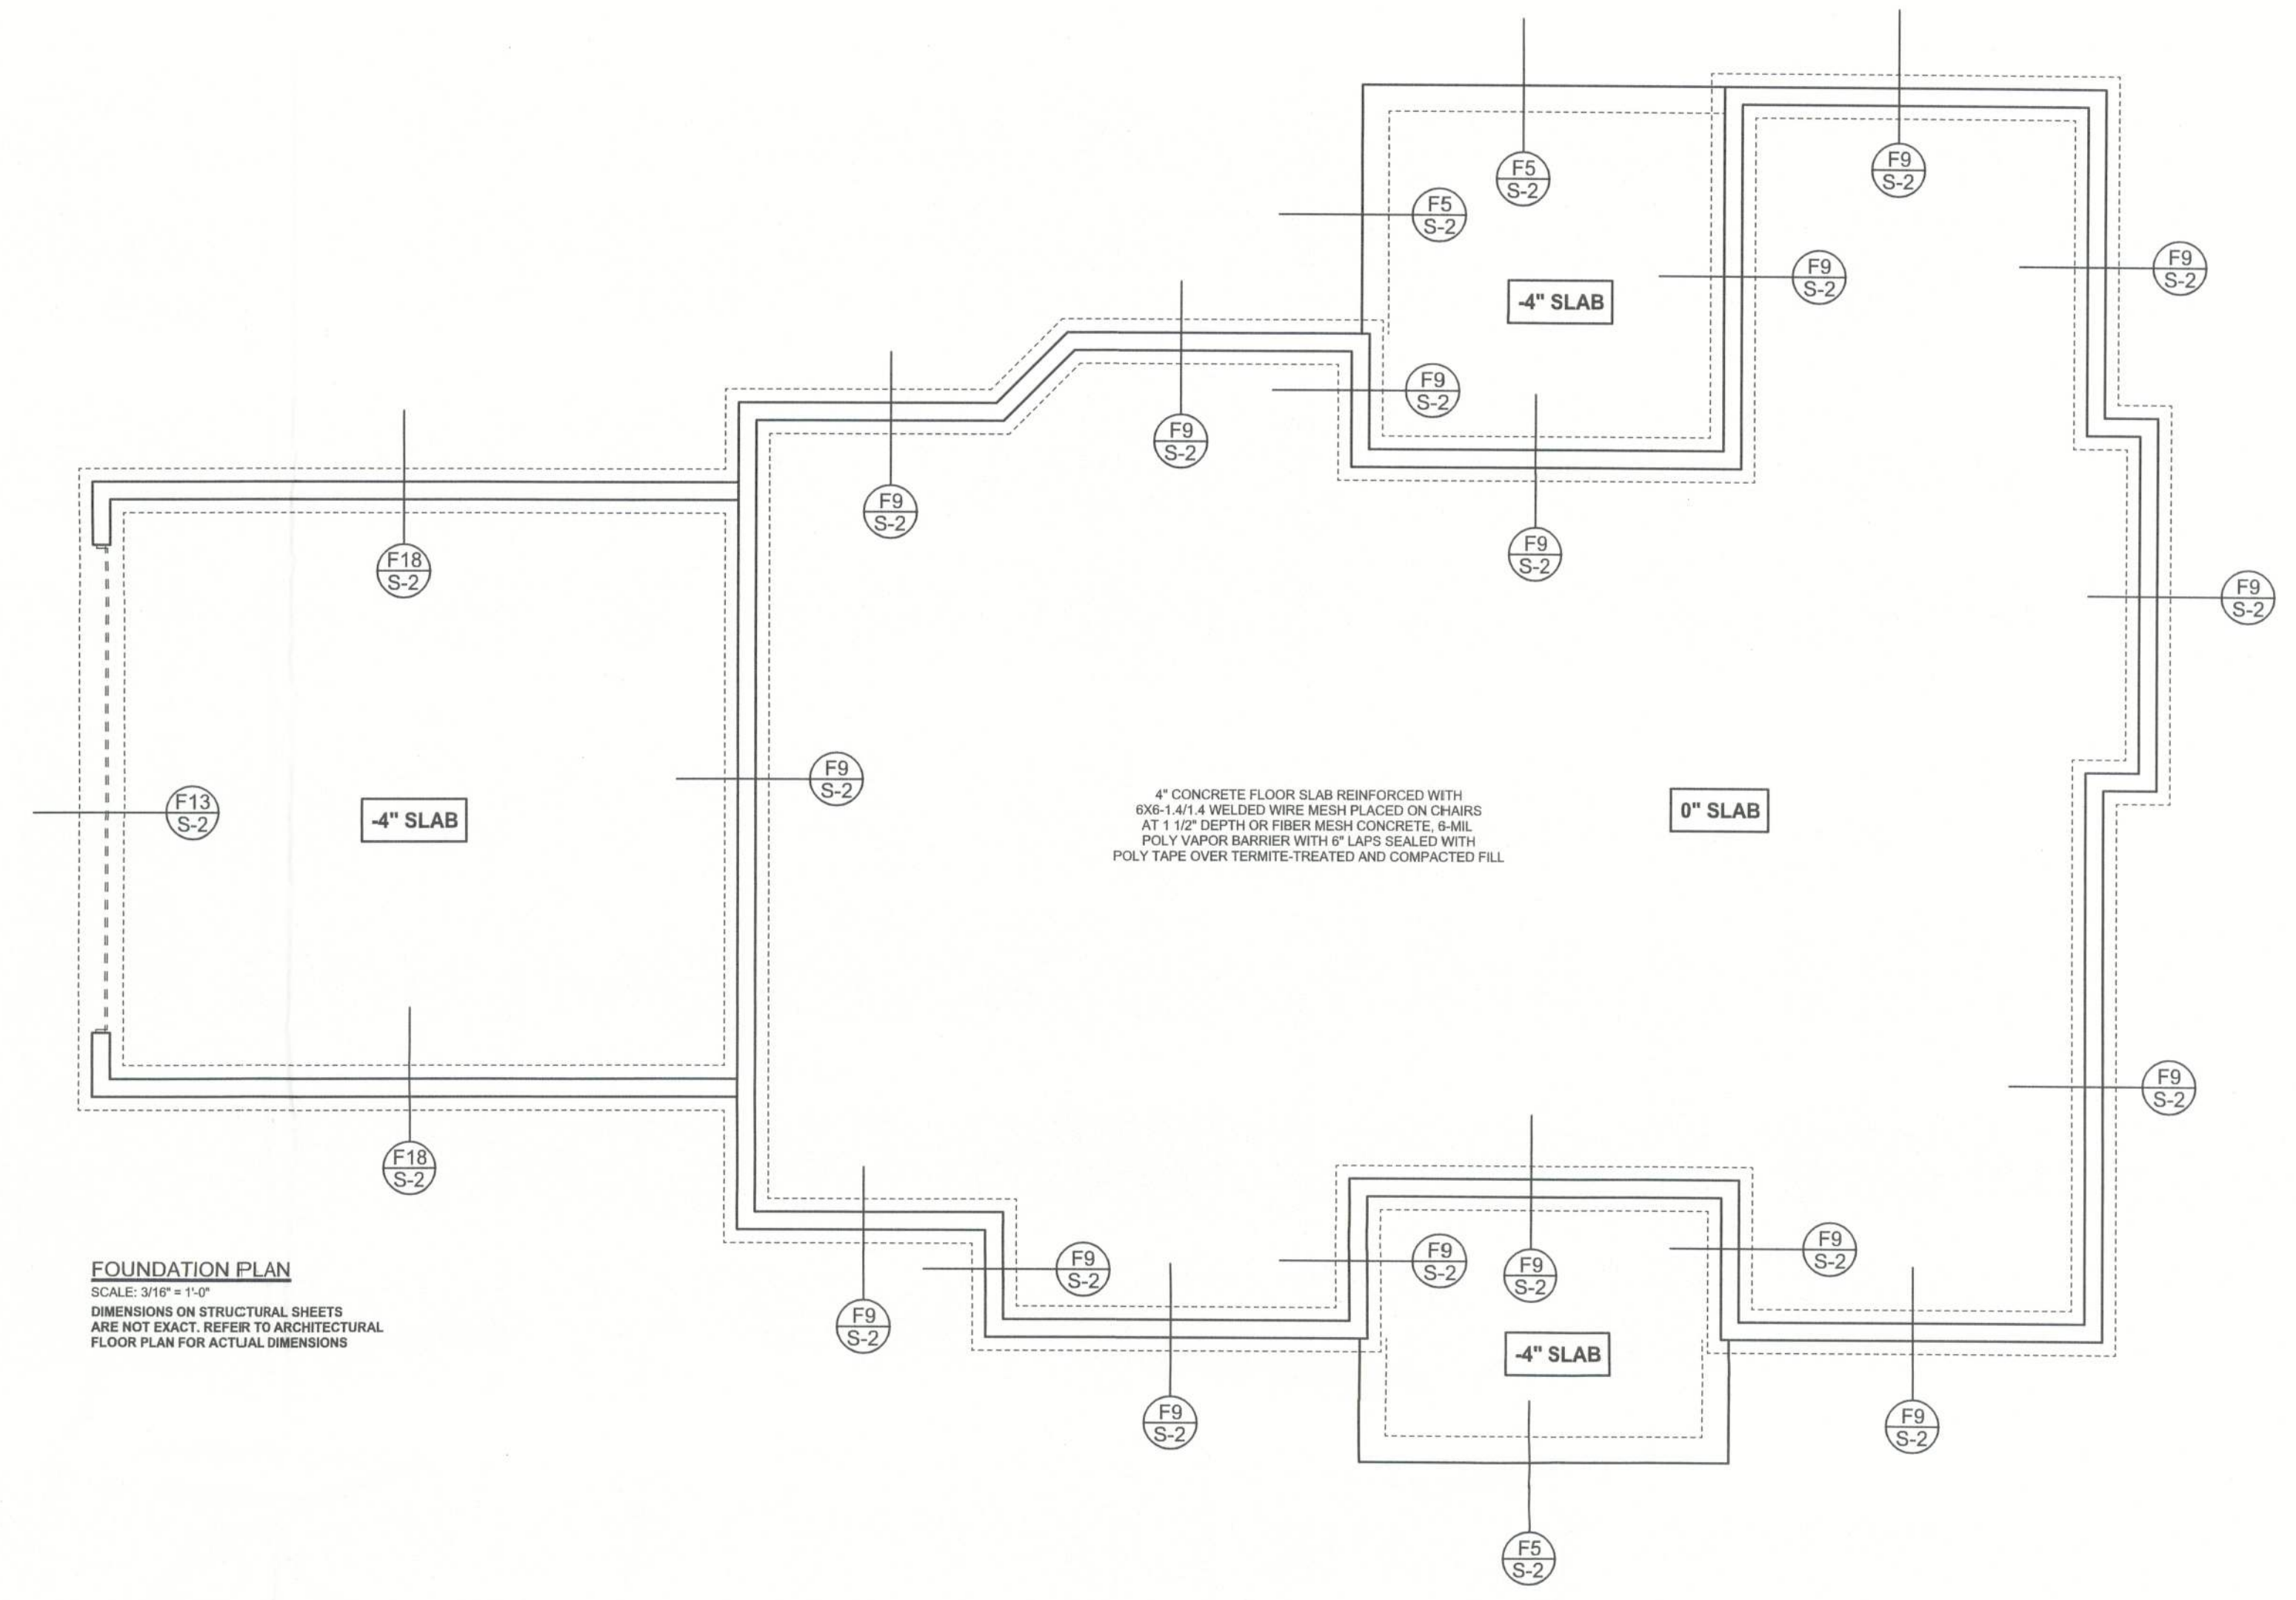

**FOUNDATION PLAN**  
SCALE: 3/16" = 1'-0"  
DIMENSIONS ON STRUCTURAL SHEETS ARE NOT EXACT. REFER TO ARCHITECTURAL FLOOR PLAN FOR ACTUAL DIMENSIONS

### TALL STEM WALL TABLE

The table assumes 60 ksi reinforcing bars with 6" hook in the footing and bent 24" into the reinforced slab at the top. The vertical steel is to be placed toward the tension side of the CMU wall (away from the soil pressure, within 2" of the exterior side of the wall). If the wall is over 6' high, add Duralwall ladder reinforcement at 16" O.C. vertically or a horizontal bond beam with 1#5 continuous at mid height. For higher parts of the wall 12" CMU may be used with reinforcement as shown in the table below.

STEMWALL HEIGHT (FEET)	UNBALANCED BACKFILL HEIGHT	VERTICAL REINFORCEMENT FOR 8" CMU STEMWALL (INCHES O.C.)			VERTICAL REINFORCEMENT FOR 12" CMU STEMWALL (INCHES O.C.)		
		#5	#7	#8	#5	#7	#8
3.3	3.0	96	96	96	96	96	96
4.0	3.7	96	96	96	96	96	96
4.7	4.3	88	96	96	96	96	96
5.3	5.0	56	96	96	96	96	96
6.0	5.7	40	80	96	80	96	96
6.7	6.3	32	56	80	56	96	96
7.3	7.0	24	40	56	40	80	96
8.0	7.7	16	32	48	32	64	80
8.7	8.3	8	24	32	24	48	64
9.3	9.0	8	16	24	16	40	48

WINDLOAD ENGINEER: Mark Disoway, P.E. No. 53915, P.O. Box 868, Lake City, FL 32056, 386-754-5419

**DIMENSIONS:** Stated dimensions supersede scaled dimensions. Refer all questions to Mark Disoway, P.E. for resolution. Do not proceed without clarification.

**COPYRIGHTS AND PROPERTY RIGHTS:** Mark Disoway, P.E. hereby expressly reserves its common law copyrights and property right in these instruments of service. This document is not to be reproduced, altered or copied in any form or manner without first the express written permission and consent of Mark Disoway.

**CERTIFICATION:** I hereby certify that I have examined this plan, and that the applicable portions of the plan, relating to wind engineering comply with section 1606, Florida building code 2001, to the best of my knowledge.

**LIMITATION:** This design is valid for one building, at specified location.

MARK DISOWAY  
P.E. 53915

*Mark Disoway*  
SEAL

### DON REED CONSTRUCTION

Daugherty Residence

ADDRESS:  
Columbia County, Florida

Mark Disoway P.E.  
P.O. Box 868  
Lake City, Florida 32056  
Phone: (386) 754 - 5419  
Fax: (386) 269 - 4871

PRINTED DATE:  
September 30, 2005

DRAWN BY: David Disoway

CHECKED BY:

FINALS DATE:  
30 / Sep / 05

JOB NUMBER:  
509307

DRAWING NUMBER  
**S-2**

OF 3 SHEETS