






REAR ELEVATION

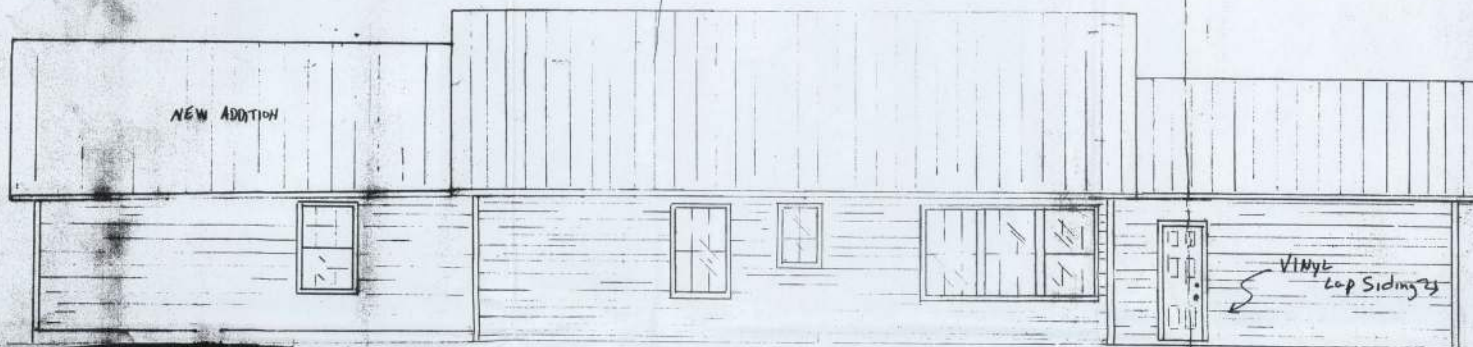

NEW RIGHT SIDE ELEVATION
SALSBY ADDITION


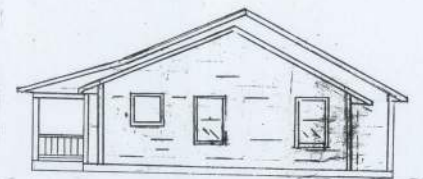












LEFT SIDE ELEVATION

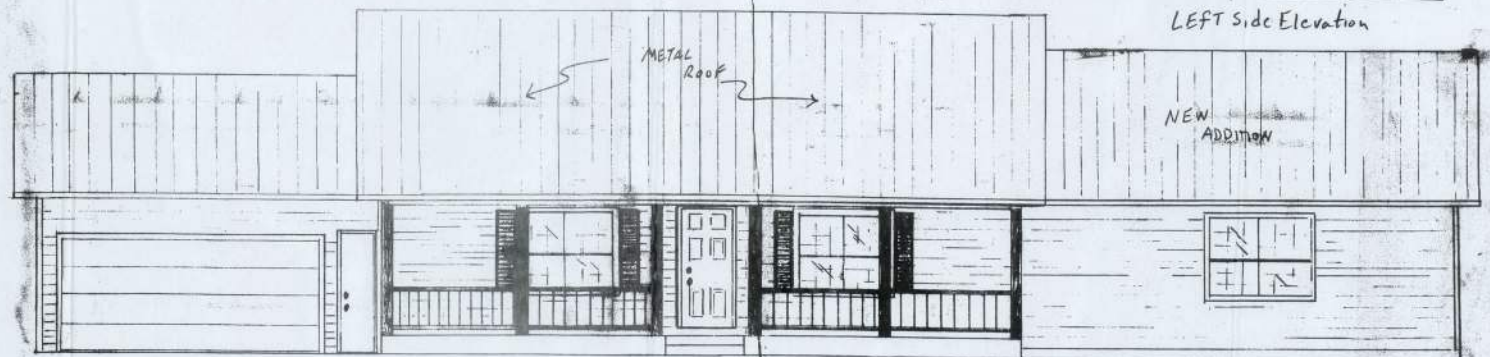

FRONT ELEVATION 1" = 1/4" SCALE

16'0" 8'-1" 10'-4"

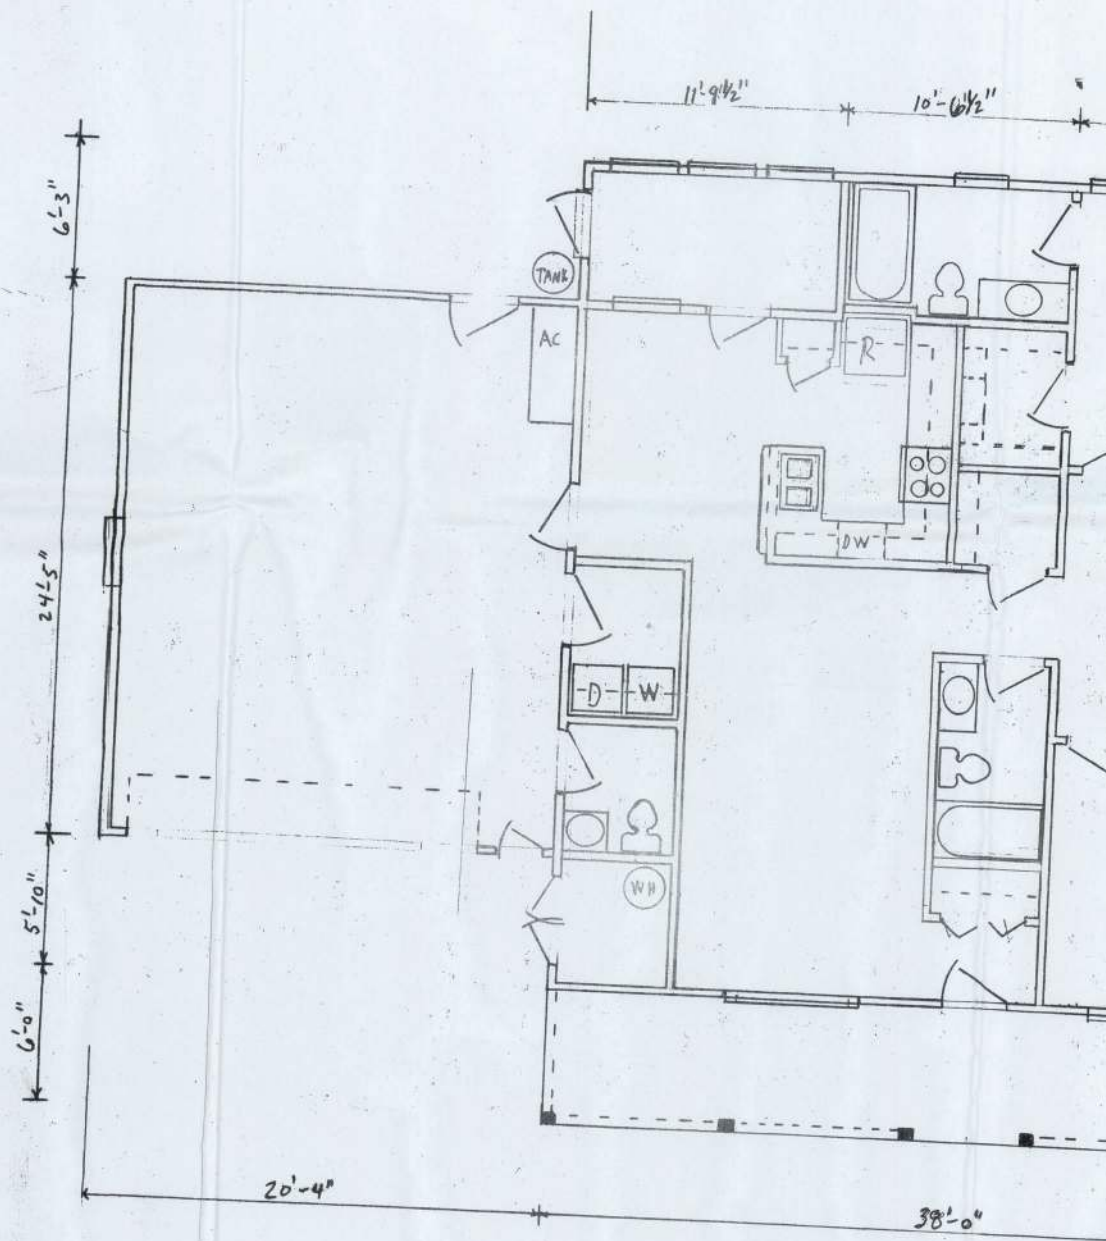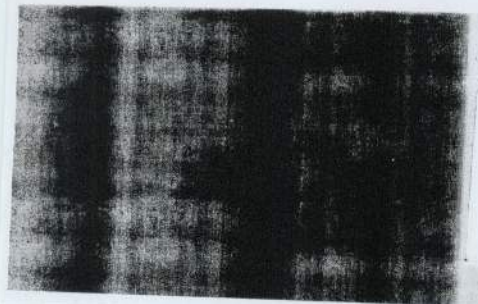

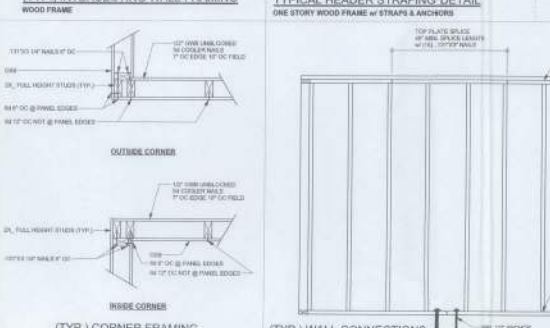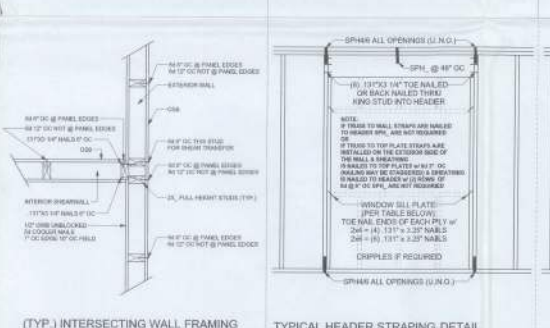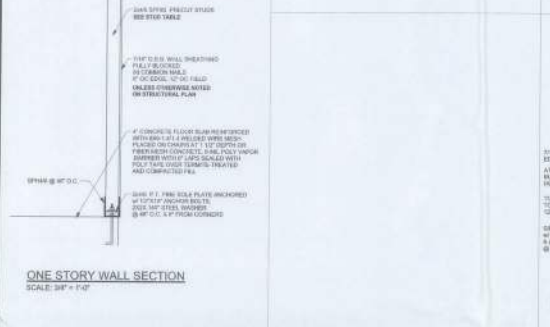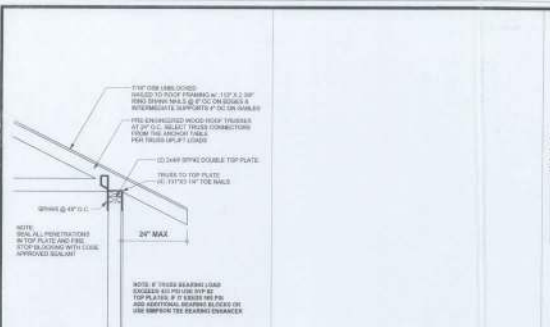

GENERAL NOTES:

1. ALL WALLS SHALL BE CONSTRUCTED WITH 2x6 STUDS AND 2x4 WALL FRAMING.
2. EXTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
3. INTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
4. ALL WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.

ANCHOR TABLE

WALL TYPE	WALL THICKNESS	WALL HEIGHT	WALL WEIGHT	WALL AREA	WALL VOLUME
1	12"	10'	1000	100	1000
2	12"	12'	1200	120	1200
3	12"	14'	1400	140	1400
4	12"	16'	1600	160	1600
5	12"	18'	1800	180	1800
6	12"	20'	2000	200	2000
7	12"	22'	2200	220	2200
8	12"	24'	2400	240	2400
9	12"	26'	2600	260	2600
10	12"	28'	2800	280	2800
11	12"	30'	3000	300	3000
12	12"	32'	3200	320	3200
13	12"	34'	3400	340	3400
14	12"	36'	3600	360	3600
15	12"	38'	3800	380	3800
16	12"	40'	4000	400	4000
17	12"	42'	4200	420	4200
18	12"	44'	4400	440	4400
19	12"	46'	4600	460	4600
20	12"	48'	4800	480	4800
21	12"	50'	5000	500	5000
22	12"	52'	5200	520	5200
23	12"	54'	5400	540	5400
24	12"	56'	5600	560	5600
25	12"	58'	5800	580	5800
26	12"	60'	6000	600	6000
27	12"	62'	6200	620	6200
28	12"	64'	6400	640	6400
29	12"	66'	6600	660	6600
30	12"	68'	6800	680	6800
31	12"	70'	7000	700	7000
32	12"	72'	7200	720	7200
33	12"	74'	7400	740	7400
34	12"	76'	7600	760	7600
35	12"	78'	7800	780	7800
36	12"	80'	8000	800	8000
37	12"	82'	8200	820	8200
38	12"	84'	8400	840	8400
39	12"	86'	8600	860	8600
40	12"	88'	8800	880	8800
41	12"	90'	9000	900	9000
42	12"	92'	9200	920	9200
43	12"	94'	9400	940	9400
44	12"	96'	9600	960	9600
45	12"	98'	9800	980	9800
46	12"	100'	10000	1000	10000

1. ALL WALLS SHALL BE CONSTRUCTED WITH 2x6 STUDS AND 2x4 WALL FRAMING.
2. EXTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
3. INTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.

1. ALL WALLS SHALL BE CONSTRUCTED WITH 2x6 STUDS AND 2x4 WALL FRAMING.
2. EXTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
3. INTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.

1. ALL WALLS SHALL BE CONSTRUCTED WITH 2x6 STUDS AND 2x4 WALL FRAMING.
2. EXTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
3. INTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.

1. ALL WALLS SHALL BE CONSTRUCTED WITH 2x6 STUDS AND 2x4 WALL FRAMING.
2. EXTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
3. INTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.

1. ALL WALLS SHALL BE CONSTRUCTED WITH 2x6 STUDS AND 2x4 WALL FRAMING.
2. EXTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
3. INTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.

1. ALL WALLS SHALL BE CONSTRUCTED WITH 2x6 STUDS AND 2x4 WALL FRAMING.
2. EXTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
3. INTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.

REVISIONS

NO.	DESCRIPTION	DATE
1	Initial Design	10/1/2020
2	Revised Design	10/15/2020
3	Final Design	10/30/2020

1. ALL WALLS SHALL BE CONSTRUCTED WITH 2x6 STUDS AND 2x4 WALL FRAMING.
2. EXTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
3. INTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.

1. ALL WALLS SHALL BE CONSTRUCTED WITH 2x6 STUDS AND 2x4 WALL FRAMING.
2. EXTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
3. INTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.

1. ALL WALLS SHALL BE CONSTRUCTED WITH 2x6 STUDS AND 2x4 WALL FRAMING.
2. EXTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
3. INTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.

1. ALL WALLS SHALL BE CONSTRUCTED WITH 2x6 STUDS AND 2x4 WALL FRAMING.
2. EXTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
3. INTERIOR WALLS SHALL BE FINISHED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.


REVISIONS

SOFTPLAN
SOFTWARE FOR ARCHITECTS


TALL STEM WALL TABLE

The table assumes 60 psi concrete with 4" steel in the footing and that 24" into the foundation slab within the stem wall shall be placed around the exterior and 12" in the center of the stem wall. If the exterior wall is internal, the wall is not 4" high and the exterior wall reinforcement is 4" high and the foundation reinforcement is 4" high and the length of the wall is 12" into the wall with reinforcement as shown in the table below.

STEM WALL HEIGHT (FEET)	MINIMUM REINFORCEMENT (FEET)	MINIMUM REINFORCEMENT (FEET)	MINIMUM REINFORCEMENT (FEET)	MINIMUM REINFORCEMENT (FEET)	MINIMUM REINFORCEMENT (FEET)
3.5	3.0	3.0	3.0	3.0	3.0
4.0	3.7	3.7	3.7	3.7	3.7
4.7	4.3	4.3	4.3	4.3	4.3
5.3	5.0	5.0	5.0	5.0	5.0
6.0	5.7	5.7	5.7	5.7	5.7
6.7	6.3	6.3	6.3	6.3	6.3
7.3	7.0	7.0	7.0	7.0	7.0
8.0	7.7	7.7	7.7	7.7	7.7
8.7	8.3	8.3	8.3	8.3	8.3
9.3	9.0	9.0	9.0	9.0	9.0

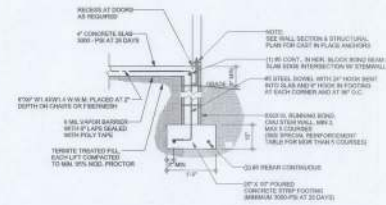

F1
S-2
SCALE: 1/2\"/>



F1
S-2
SCALE: 1/2\"/>


STRUCTURAL PLAN NOTES

- SN-1 ALL LOAD BEARING FRAME WALL & PORCH HEADERS SHALL BE A MINIMUM OF (2) 2X12 SP 80 U.N.G.
- SN-2 ALL LOAD BEARING FRAME WALL HEADERS SHALL HAVE (1) JACK STUD & (1) KING STUD EACH SIDE (U.N.G.)
- SN-3 DIMENSIONS ON STRUCTURAL SHEETS ARE NOT EXACT. REFER TO ARCHITECTURAL FLOOR PLAN FOR ACTUAL DIMENSIONS.
- SN-4 PERMANENT TRUSS BRACING IS TO BE INSTALLED AT LOCATIONS AS SHOWN ON THE SEALED TRUSS DRAWINGS. LATERAL BRACING IS TO BE RESTRAINED PER BC21-03. BC21-03, BC21-04 & BC21-05 ARE FURNISHED BY THE TRUSS SUPPLIER, WITH THE SEALED TRUSS PACKAGE.

WALL LEGEND

	EXTERIOR WALL
	INTERIOR NON-LOAD BEARING WALL
	INTERIOR LOAD BEARING WALL W/O UPLIFT
	INTERIOR LOAD BEARING WALL W UPLIFT

HEADER LEGEND




TOTAL SHEAR WALL SEGMENTS

	REQUIRED	ACTUAL
TRANSVERSE	21.0'	22.0'
LONGITUDINAL	21.0'	41.0'



STRUCTURAL PLAN
SCALE: 1/4\"/>

EXISTING

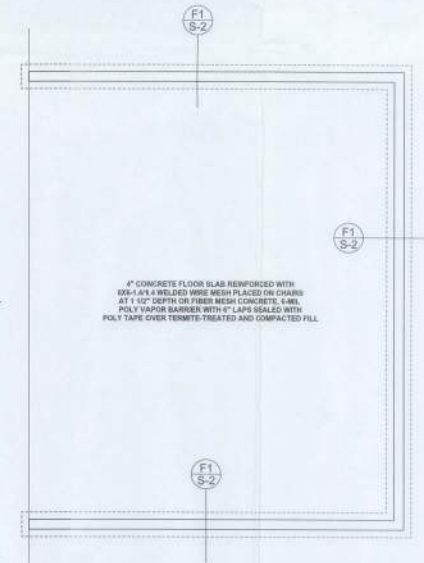

FOUNDATION PLAN
SCALE: 1/4\"/>

APPROVED ENGINEER: Mark Discoway
P.E. No. 35015, P.O. Box 100, Lake City, FL 33602

REVISIONS:
1. Initial drawings were prepared by Mark Discoway, P.E. for the purpose of the foundation design. The drawings are not to be used for any other purpose without the written permission and review of Mark Discoway.

CERTIFICATION: I hereby certify that I have prepared this plan, and that I am a duly licensed Professional Engineer in the State of Florida, and that I am not providing any other services to the client without the written permission and review of Mark Discoway.

DATE: 05/14/2014

05/14/2014

Milton Builders

Saulsby Addition

ADDRESS:
Lake Jeffrey Rd.
Gainesville, FL 32609
Mark Discoway P.E.
163 SW Midtown Place
Suite 103
Lake City, Florida 32025
Phone: (386) 754 - 5419
Fax: (386) 269 - 4871

PRINTED DATE:
Monday, May 5, 2014

DRAWN BY: STRUCTURAL 01

SCALE DATE:
05/14/14

JOB NUMBER:
140346

DRAWING NUMBER:
S-2

OF 2 SHEETS