# Cool and Cobb Engineering Company

Date: 10/13/2021

Job: Rosalina Linom

Location: 422 SW Emerald St
Lake City, FL 32024

#### PILING DESIGN ANALYSIS

The load requirements for the pilings designed to assist in supporting the identified areas of the subject residence were determined. The selected piling locations and the specific piling are identified on the Pier Identification and Location Plan attached. The calculated total loads on the piles in the specific location, including both dead and live loads are documented in the attached table which is designated as Attachment "A". Based on the total load requirements for each of these piles, the 12ALS driver is to be employed. The 12ALS torque driver should be employed with a selected gauge pressure of \_1,000 \_\_\_\_ psi, which will provide pile capacity, including the 2 to 1 safety factor, of \_37,332 \_lbs. which is greater than the maximum calculated total load of \_12,000 \_\_\_ lbs. which occurs on the pile identified as no. \_1 \_\_. Based on this analysis, the use of the 12ALS torque driver for the piles with a specific gauge pressure of \_1,000 \_\_\_ psi and a minimum depth of 10' is approved and certified as meeting all of the requirements of the Florida Building Code 2020 7<sup>th</sup> Edition, and good engineering practice. This is not to be the primary support structure, but a supplement support to assist in support of the weight of the structure, which will reduce the total pressure on the existing soils. After completion of installation, Cool and Cobb Engineering Company shall be supplied with a drilling log of the location and depths of each pile installed so they can evaluate the installation and prepare the "As Built" drawings.

### **General Notes:**

- 1. All piles to be installed in accordance with ICC ES AC 358
- 2. A log of each pile to be kept by Contractor noting depth and final torque installed for each pile.
- 3. Minimum pile depth to be 10'-0".
- 4. All pile calculations are based on a maximum spacing of 8'-0".
- 5. All pile calculations are done using a maximum standard spacing of 8'-0".
- 6. Helical piles installed less than 48" apart are to be battered 10° away from each other.
- 7. This design is based on the loads of the structure placed on the shallow soils under the structure.
- 8. No deep soils geotechnical testing information was provided for this design.
- 9. This design does not address any possible sink hole activity as defined in Florida Statute § 627.706.

### 10/13/2021

Kenneth F. Wheeler, P.E. State of Florida Professional Engineer No. 60417 This item has been electronically sealed by Kenneth F. Wheeler using a digital signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

203 W. Main St. Avon Park, FL 33825 Office: (863) 657-2323 Fax: (863) 657-2324

Contractor: Solid Foundations

**Solid Foundations** 1910 SW Main Blvd Lake City, FL 32025 855-227-0300



SF Representative: Jimbo Willis

Cell: (386)288-3240

Email: <u>Jimmie@solidfoundations.com</u>


www.solidfoundations.com



ADDRESS: 422 SW Emerald St.

EMAIL: marble\_knight8@yahoo.com

Phone: 386-288-6516

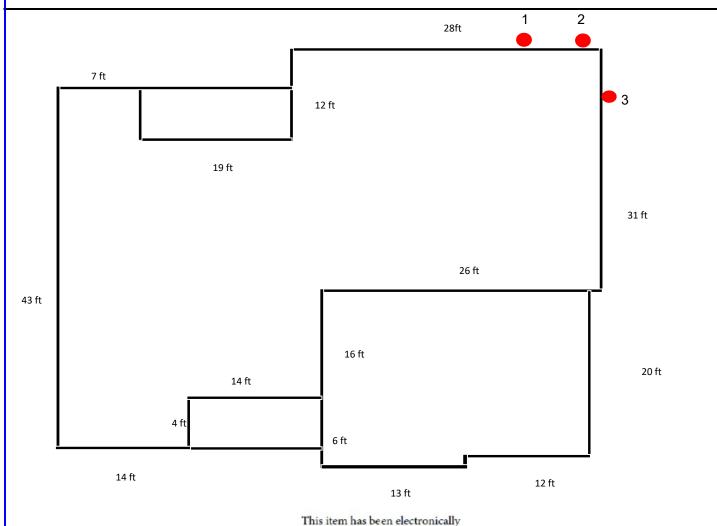

Cool and Cobb Engineering Co. 203 W. Main St. Avon Park, FL 33825 sealed by Kenneth F. Wheeler using a digital signature and date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

10/13/2021 Kenneth F. Wheeler, P.E. PE# 60417

Push Pier Model 300:

Low Profile Bracket:

Polyurethane 700:

Push Pier Model 250: Helical Pier:

Polyurethane 430:

Crawl Space Pier:

Porch Bracket: -4x6 Wood Beam: □

Interior Pier:

Windows/Doors:

Floor Joist:



# Cool and Cobb Engineering Company

Date:	10/13/2021	
Job:	Rosalina Linom	
Location:	422 SW Emerald St	
	Lake City, FL 32024	
		Attachment "A"
	Total Load on Pile	(Live Load + Dead Load)
PILE NO.		TOTAL CALCULATE LOAD
1		12,000 lbs
2		12,000 lbs
3		12,000 lbs
		This is an horal and a second
		This item has been electronically
		sealed by Kenneth F. Wheeler
		using a digital signature and date.
		Printed copies of this document
		are not considered signed and
		sealed and the signature must be
		verified on any electronic copies.
		Maximum Total Load on Pile: 12,000.00 lbs

Cool and Cobb Engineering Co. 203 W. Main St. Avon Park, FL 33825

# PLANETARY ANCHOR DRIVES 9,000 FT LBS - 12,000 FT LBS



### **OUTPUT SPEED & TORQUE**

OUTPUT	TSPEED	OUTPUT	TORQUE	OUTPUT	SPEED	OUTPUT	TORQUE
GPM	RPM	PSI	FT-LBS	GPM	RPM	PSI	FT-LBS
8	9	1,500	3,905	8	7	1,500	4,945
10	12	1,700	4,425	10	9	1,700	5,605
12	14	1,900	4,945	12	11	1,900	6,265
14	16	2,100	5,465	14	13	2,100	6,925
16	19	2,300	5,990	16	15	2,300	7,585
18	21	2,500	6,510	18	17	2,500	8,245
20	24	2,700	7,030	20	19	2,700	8,905
24	26	2,900	7,550	24	20	2,900	9,565
26	28	3,200	8,070	26	22	3,200	10,225
28	31	3,300	8,590	28	24	3,300	10,880
30	33	3,500	9,100	30	26	3,500	11,500
32	38			32	30		
34	40			34	32		
36	42			36	33		
38	45			38	35		
40	47			40	37		
42	49			42	39		
44	52			44	41		
46	54			46	43		

Avon Park, FL 33825	46
	9ALS-
	OUTPUT S
	GPM
	8
	12

10/13/2021

PE# 60417

203 W. Main St.

Kenneth F. Wheeler, P.E.

Cool and Cobb Engineering Co.


9ALS	- LOW PRE	SSURE - 300	OPSI	12AL	S-LOW PRE	SSURE - 30	00 PSI
OUTPUT	SPEED	OUTPUT	TORQUE	OUTPUT	T SPEED	OUTPUT	TORQUE
GPM	RPM	PSI	FT-LBS	GPM	RPM	PSI	FT-LBS
8	7	1 000	3 298	8	6	1 000	4 148
12	11	1 200	3 957	12	9	1 200	4 978
16	15	1 400	4617	16	12	1 400	5 808
20	19	1 600	5 276	20	15	1 600	6 6 3 7
24	22	1 800	5 936	24	18	1 800	7 467
28	26	2 000	6 596	28	21	2 000	8 296
32	30	2 200	7 255	32	24	2 200	9 126
36	33	2 400	7 915	36	27	2 400	9 956
40	37	2 600	8 574	40	30	2 600	10 785
44	41	2 800	9 234	44	33	2 800	11 615
48	42	3 000	9 893	48	35	3 000	12 445

		Capac	ty calcula	capacity calculation examples		
<b>Drive Head</b>	FSI Model#	회	Diff. PSI	Equation	Ultimate	Allowable
Eskridge 50-16	HP288	6	1400	Kt x Torque (9 x 4,262)	38,358 lbs	19,179 lbs
Prodig X9K5	HA150	10	1400	Kt x Torque (10 x 4,509) 45,090 lbs 22,545 lbs	45,090 lbs	22,545 lbs
Pengo MDT-12	HP350	7	1400. HT	Kt x Torque (7 x 7.671) 53.697 lbs 26.848 lbs	53.697 lbs	26.848 lbs

Model #	Shaft Dia. (O.D.)	Wall Thickness	Max Torque	Deformation @	Torque Factor (K.)	Ultimate Capacity
HP237	2-3/8"	0.154"	2,500	2,500	10	25 kips
HP287	2-7/8"	0.203	2,600	5,300	6	50.4 kips
HP288	2-7/8"	0.276	2,900	7,500	6	71.1 kips
HP350	3-1/2"	0.340	17,500	14,500	7	122.5 kips
HP450	4-1/2"	0.337	22,000	18,500	5.5	121 kips
HA150	1-1/2" square		6,500	4,500	10	65 kips
HA175	1-3/4" square		10,000	7,500	10	100 kips

Output speed and torque apecifications are THEORETICAL. Speed and torque output are dependent on the overall system efficiencies associated with the prime movers hydraulic system.

This document should be used for information and comparative purposes only. When determining criteria, & application specific information is required, please contact DIGCA.

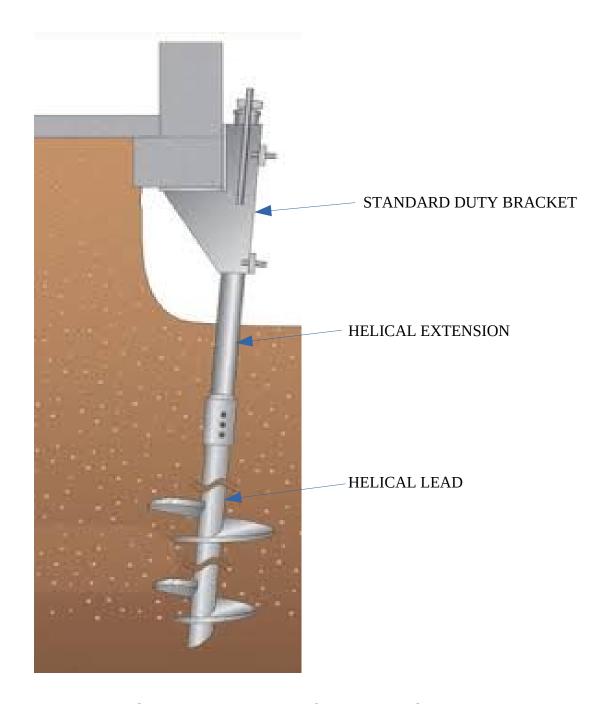

## STANDARD DUTY BRACKET (35 KIPS)

**HELICAL LEAD – 7' with 10"/12" Flights, 2 7/8" OD, .217 Wall** (MAXIMUM TORQUE NOT TO EXCEED 10,000 FT LBS. ULTIMATE CAPACITY IS 72 KIPS)

HELICAL EXTENSION - 7', 2 7/8" OD, .217 Wall



10/13/2021 Kenneth F. Wheeler, P.E.  $PE\#\,60417$ 

1418 E. Busch Blvd., Suite 311 Tampa FL 33612 813-930-2846 Cool and Cobb Engineering Co. 203 W. Main St. Avon Park, FL 33825