



16 X 80 - Approx. 1130 Sq. Ft.

2-BEDROOM / 2-BATH

14'-10"

All room dimensions include closels and square foolage figures are approximate.
 Transom windows are available on optional 9-0° sidewall houses only.
 Available with Lineals or Shutters around windows.
 Live Oak Homes reserves the right to modify product offering at any time.

being installed Manufacturer Address of home Installer: Typical pier spacing NOTE: If home is a single wide fill out one half of the blocking plan if home is a triple or quad wide sketch in remainder of home I understand Lateral Arm Systems cannot be used on any home (new or used) where the sidewall ties exceed 5 ft 4 in. Mobile Home Permit Worksheet longitudinal Show locations of Longitudinal and Lateral Systems (use dark lines to show these locations) marriage wal Length x width installer's initials License # of end of home ころになって Application Number: capacity bearing Home installed to the Manufacturer's Installation Manual Home is installed in accordance with Rule 15-C New Home Load Double wide Single wide interpolated from Rule 15C-1 pier spacing table and their pier pad sizes below (required by the mfg.) Other pier pad sizes l-beam pier pad size Triple/Quad List all marriage wall openings greater than 4 foot Perimeter pier pad size Longitudinal Stabilizing Device (LSD) Manufacturer (HVLL Trehoclogies 1101 LV Longitudinal Stabilizing Device w/ Lateral Arms Manufacturer (HVLL Trehoclogies 1101 LV 2 000 psf Opening ps wall openings 4 foot or greater. Use this Draw the approximate locations of marriage ps ps ps symbol to show the piers. (sq in) Footer size TIEDOWN COMPONENTS 16" x 16" PIER SPACING TABLE FOR USED HOMES PIER PAD SIZES 4'6 (256)Serial # Installation Decal # Wind Zone II **Used Home** 2 18 1/2" x 18 Pier pad size 1/2" (342) 3 0 MIXAL 10H6A10073404 115 20" x 20" (400) 0 Wind Zone III 1.7057 22" x 22" (484) Longitudinal Marriage wall (# within 2' of end of home spaced at 5' 4" oc Shearwall Sidewall Date: POPULAR PAD SIZES 17 3/16 x 25 17 1/2 x 25 3 1/4 x 26 18.5 x 18.5 Pad Size 26 x 26 20×20 OTHER TIES 24 x 24 16 x 18 6 x 16 24" X 24" FRAME TIES (576)* ANCHORS 00 00 5 ft

26" x 26' (676)

00

88

676

ထ် ထဲ ထဲ οõ

Mobile Home Permit Worksheet

The pocket penetrometer tests are rounded down to or check here to declare 1000 lb. soil without POCKET PENETROMETER TEST

without testing.

× assumed 1000 ×

POCKET PENETROMETER TESTING METHOD

- 1. Test the perimeter of the home at 6 locations
- 2 Take the reading at the depth of the footer
- 3. Using 500 lb. increments, take the lowest reading and round down to that increment



TORQUE PROBE TEST

showing 275 inch pounds or less will require 5 foot anchors here if you are declaring 5' anchors without testing The results of the torque probe test is inch pounds or check

Note: A state approved lateral arm system is being used and 4 ft. anchors are required at all centerline tie points where the torque test anchors are allowed at the sidewall locations. I understand 5 ft reading is 275 or less and where the mobile home manufacturer may requires anchors with 4000 lb holding capacity Installer's initials

ALL TESTS MUST BE PERFORMED BY A LICENSED INSTALLER

Installer Name

Date Tested

na-97-9096 APMIL HOL

Electrical

Connect electrical conductors between multi-wide units, but not to the main power source. This includes the bonding wire between mult-wide units. Pg. t^2-25

Connect all sewer drains to an existing sewer tap or septic tank. Pg. 12.25

Connect all potable water supply piping to an existing water meter, water tap, or other independent water supply systems. Pg. 12.25

Application Number:

Date:

Site Preparation

Debris and organic material removed પીર્ડ Water drainage: Natural Swale

Pad

Other

Fastening multi wide units

Type Fastener: Type Fastener: Type Fastener: N

Floor:

Roof: Walls:

Length: NA Length:

roofing nails at 2" on center on both sides of the centerline will be centered over the peak of the roof and fastened with galv For used homes a min. 30 gauge, 8" wide, galvanized metal strip Spacing: Spacing: Spacing: 2

Gasket (weatherproofing requirement)

a result of a poorly installed or no gasket being installed. I understand a strip of tape will not serve as a gasket. homes and that condensation, mold, meldew and buckled marriage walls are I understand a properly installed gasket is a requirement of all new and used

Installer's initials

Type gasket N A

Between Walls Bottom of ridgebeam Yes Between Floors Installed Yes

Weatherproofing

Fireplace chimney installed so as not to allow intrusion of rain water. Siding on units is installed to manufacturer's specifications. Yes The bottomboard will be repaired and/or taped. Yes


Miscellaneous

Skirting to be installed. Yes Electrical crossovers protected. Yes Range downflow vent installed outside of skirting. Yes Dryer vent installed outside of skirting. Yes Other: Drain lines supported at 4 foot intervals., Yes Z

Installer verifies all information given with this permit worksheet manufacturer's installation instructions and or Rule 15C-1 & 2 is accurate and true based on the

Installer Signature

Date 03-27-2025

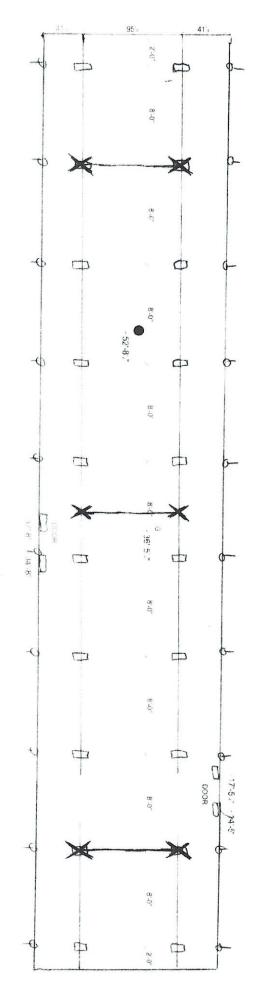

SUPPORT PIER/TYP

FOUNDATION NOTES.
THIS DRAWING IS DESIGNED FOR THE STANDARD WING ZONE AND IS TO BE USED IN CONJUNCTION WITH THE INSTALLATION MANUAL AND ITS SUPPLEMENTS.
FOOTINGS ARE SHOWN FOR EXAMPLE ONLY QUANTITY AND SPACING MAY VARY SASED ON PACTIVE SCIL CONDITION ETC.
FOOTINGS ARE REQUIRED AT SUPPORT POSTS. SEE INSTALLATION MANUAL FOR REQUIREMENTS.

16 X 80 2-BEDROOM / 2-BATH

- MAIN ELECTRICAL

 BLECTRICAL CROSSOVER

 SEWER DROPS

 WATER INLET

 RETURN AIR (WOPT HEAT PUMP OH DUCT)

 WATER CROSSOVER (IF ANY)

 SUPPLY AIR (WOPT, HEAT PUMP OH DUCT)
- GAS INLET (IF ANY)

Frame piers 4'01/2 with 17x25 abs pad

Oliver Technologies 1101 LV (6)

License Number: IH	/ 1025656 / 1 Name: RODNE	EY A. CARMICHAEL	
Order #: 6515	Label # 117922	Manufacturer LINC COCK	(Check Size of Home)
U-manumat I) A	el Guemarez	Year Model 91192	Single
Homeowner Kul	et OuemakeL	LU L. J	Double
Address:	aul Pearce In	Length & Width:	Triple
City/State/Zip: A	aut riakie en V. A.b.	Type Longitudinal System	HUD Label #:
City/State/Zip: D	RE CITY	Type Lateral Arm System	Soil Bearing / PSF:
Date Installed	309-1119	New Home Used Home	Torque Probe / in-lbs:
Date filstaned		Data Plate Wind Zone:	Permit #

STATE OF FLORIDA INSTALLATION CERTIFICATION LABEL

117922

LABEL#

DATE OF INSTALLATION

RODNEY A. CARMICHAEL

NAME

Installed Wind Zone

Wayne Free

IH / 1025656 / 1

6515

LICENSE # ORDER #
CERTIFIES THAT THE INSTALLATION OF THIS MOBILE HOME IS
IN ACCORDANCE WITH FLORIDA STATUTES 320,8249, 320,8325
AND RULES OF THE HIGHWAY SAFETY AND MOTOR VEHICLES.

INSTRUCTIONS

PLEASE WRITE DATE OF
INSTALLATION AND AFFIX
LABEL NEXT TO HUD LABEL.
USE PERMANENT INK PEN
OR MARKER ONLY.
COMPLETE INFORMATION
ABOVE AND KEEP ON FILE
FOR A MINIMUM OF 2 YEARS.
YOU ARE REQUIRED TO
PROVIDE COPIES WHEN
REQUESTED.

District No. 1 - Ronald Williams

District No. 2 - Rocky Ford

District No. 3 - Robby Hollingsworth

District No. 4 - Toby Witt District No. 5 - Tim Murphy

BUILDING AND ZONING DEPARTMENT



BOARD OF COUNTY COMMISSIONERS • COLUMBIA COUNTY

MOBILE HOME INSTALLER **OBLIGATION LETTER**

Rodney Carmichael.		, license number
(Print Name)	(Company Name)	

IH 10250510 , do hereby agree to affix the installation decal onto this manufactured home as required by law and provide a copy of this decal to the permitting authority.

I further understand that once these decals become available I must provide them to obtain any further permits in Columbia County, Florida.

03-27-2025

Job Information

Job Name: <u>GULMUREZ</u> Location: 1030 SW Paul Plance Ln.

Application or Permit #: