# **ABBREVIATIONS**

_		<u> </u>
	A/C	AIR COOLING UNIT
	ADJ	ADJACENT
	AFF	ABOVE FINISHED FLOOR
	AHU	AIR HANDLING UNIT
	ALUM	ALUMINUM
	BLK	BLOCK
	BOT	BOTTOM
	BRG	BEARING
	CJ	CONTROL JOINT
	CLG	CEILING
	COL	COLUMN
	CONC	CONCRETE
	CONT	CONTINUOUS
	CPT	CARPET
	DIA	DIAMETER
	DN	DOWN
	DWG	DRAWING
	EA	EACH
	ELEC	ELECTRIC
	EQ	EQUAL
	FF	FINISH FLOOR
	FTG	FOOTING
	НВ	HOSE BIB
	HDR	HEADER
	HGT	HEIGHT
	MAX	MAXIMUM
	MIN	MINIMUM
	NTS	NOT TO SCALE
	OPNG	OPENING
	SIM	SIMILAR

#### area tabulation 'a'

GARAGE	403 SF
FRONT PORCH	38 SF
REAR PATIO	104 SF
FLOOR 1 LIVING	1,776 SF
TOTAL LIVING	1,776 SF

GARAGE	403 SF
FRONT PORCH	117 SF
REAR PATIO	104 SF
FLOOR 1 LIVING	1,776 SF
TOTAL LIVING	1,776 SF

# Radford

## **INDEX**

VLT

UNO

#### ARCHITECTURAL

**TYPICAL** 

UNLESS NOTED OTHERWISE

- GENERAL NOTES & LEGENDS
- **EXTERIOR ELEVATIONS**
- SLAB PENETRATION PLAN
- FLOOR PLANS
- SECTIONS & DETAILS
- INTERIOR DETAILS
- **ROOF PLAN**
- ELECTRICAL PLANS
- CONSTRUCTION DETAILS

GARAGE	403 SF
FRONT PORCH	38 SF
REAR PATIO	104 SF
FLOOR 1 LIVING	1,776 SF
TOTAL LIVING	1,776 SF

#### area tabulation 'b'

GARAGE	403 SF
FRONT PORCH	117 SF
REAR PATIO	104 SF
FLOOR 1 LIVING	1,776 SF
TOTAL LIVING	1,776 SF

39' - 1776 - RH Florida Region (Frame)

# **REVISIONS**

1 \L v	1010	140
NUMBER	DATE	DESCRIPTION
01	03.04.2021	Added Elevations A1 & B1
02	06.14.21	Added outlet to BR2, Relocate & noted outlets to meet 6' max from wall break & 12' max between outlet spacing at habitable rooms (E1.1)
03	07.08.21	Added floor break transition strips to plan
04	07.21.21	Added Elevations A4 & B4
05	08.02.21	labeled egress windows, labeled accessible bath, smoke/carbon alarms near appliances noted
06	08.24.21	Added stemwall option
07	09.08.21	Carbon / smoke alarm moved 3' min away from bathroom door/opening with tub/shower

# **BUILDING CODE COMPLIANCE**

ALL CONSTRUCTION TO COMPLY WITH LOCAL CODES AND ORDINANCE CURRENTLY IN USE WITH THE LOCAL JURISDICTION.

PRODUCT: NEW SINGLE FAMILY DETACHED

OCCUPANCY CLASSIFICATION:

RESIDENTIAL R-3

CONSTRUCTION CLASS: UNPROTECTED

CONSTRUCTION TYPE:

TYPE VB

EMERGENCY ESCAPE:

EGRESS OR RESCUE WINDOWS FROM SLEEPING ROOMS SHALL HAVE MINIMUM OF

FOLLOW ALL APPLICABLE STATE AND LOCAL CODES. FLORIDA STATE SUPPLEMENTS AND AMENDMENTS.

2020 Florida Building Code, Residential, 7th Edition

2017 National Electrical Code, NFPA 70





Reserve at Jewel Lake 160 SW Bre Lane Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third porty without written permission and consent of Century Communities.


MODEL:
RADFORD

SHEET NO:


- Keynotes | Legend

  1. CORROSION RESISTANT ROOF TO WALL FLASHING AT ALL ROOF / WALL INTERSECTIONS.
  2. CORROSION RESISTANT SCREEN LOUVERED VENTS, SIZE AS NOTED.
  3. BRICK WAINSCOT WITH SLOPED BRICK ROWLOCK CAP.
  4. STONE WAINSCOT WITH SLOPED STONE CAP.

- 3 1/2" VINYL TRIM SURROUND 36" H. GUARDRAIL AS REQUIRED

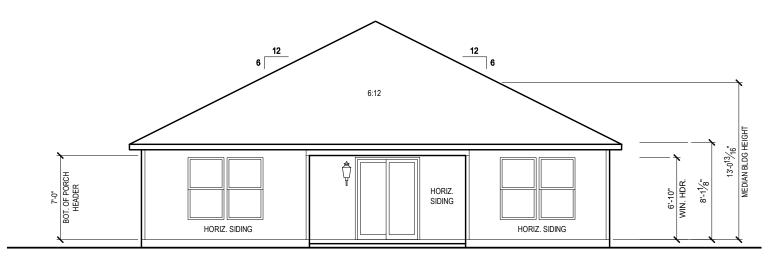

# REAR ELEVATION 'A1' 1/8" = 1'-0" @ 11x17 1/4" = 1'-0" @ 22x34

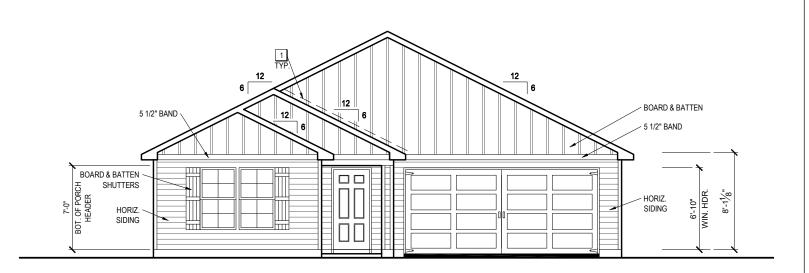

# FRONT ELEVATION 'A1' 1/8" = 1'-0" @ 11x17 1/4" = 1'-0" @ 22x34








Reserve at Jewel Lake Lot 013 160 SW Bre Lane Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written

MODE!	PLAN NUMBER:	thir per
RADFORD	. (0	d party mission Century
	Co	an
DRAWING TITLE:	RELEASE DATE:	witho d c ommu
EXTERIOR ELEVATIONS	02.22.2021	onsent
		ritte


SHEET NO:

1.1-A1

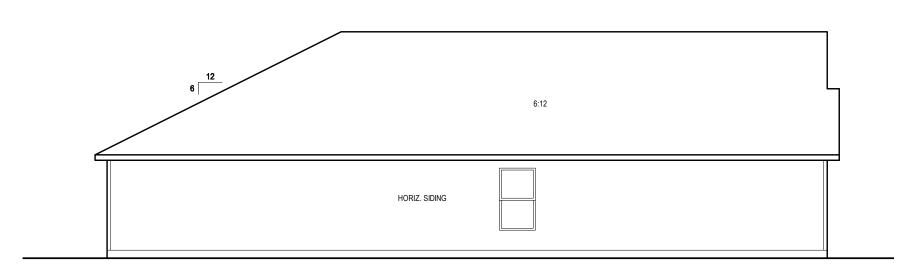

## **LEFT SIDE ELEVATION 'A1'**

1/8" = 1'-0" @ 11x17 1/4" = 1'-0" @ 22x34

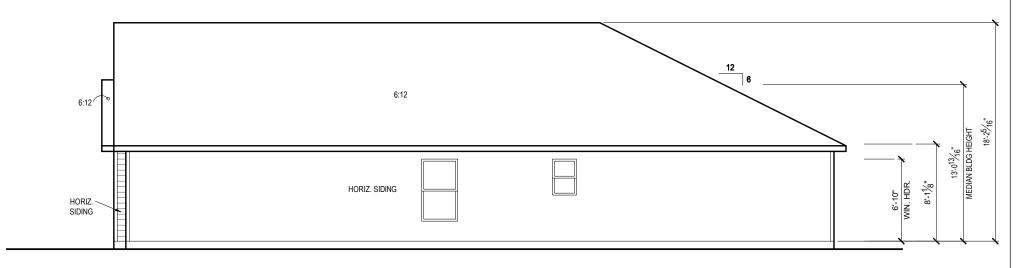

# RIGHT SIDE ELEVATION 'A1' 1/8" = 1'-0" @ 11x17 1/4" = 1'-0" @ 22x34







Reserve at Jewel Lake Lot 013 160 SW Bre Lane Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written permission and consent of Century Communities.

PLAN NUMBER: 33911776	RELEASE DATE: 02.22.2021
-----------------------	--------------------------

DRAWING TITLE:


EXTERIOR ELEVATIONS

MODEL:
RADFORD SHEET NO:

1.2-A1

#### GENERAL SLAB FOUNDATION NOTES

- PLUMBING CONTRACTOR SHALL FIELD VERIFY ALL PLUMBING LOCATIONS.
- REFER TO EXTERIOR ELEVATIONS FOR BRICK/STONE LOCATIONS.
- GARAGE SLAB SHALL SLOPE TOWARD GARAGE DOOR OPENING.

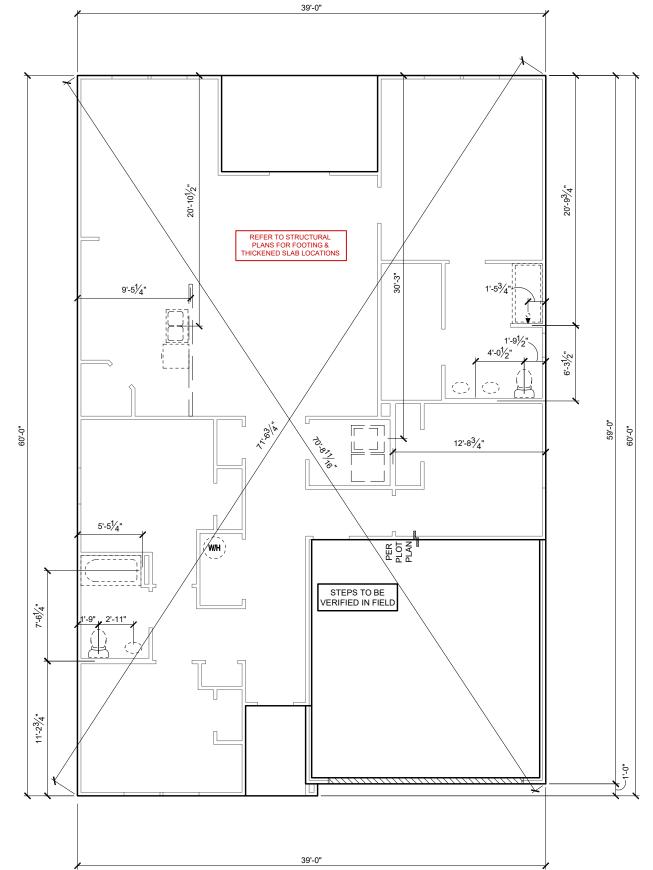

# SLAB PENETRATION PLAN 'A1' 1/8" = 1'-0" @ 11x17 1/4" = 1'-0" @ 22x34







Reserve at Jewel Lake Lot 013 160 SW Bre Lane Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written permission and consent of Century Communities.

	PLAN NUMBER:
	33911776
	RELEASE DATE:
ION PLAN	02.22.2021

DRAWING TITLE:
SLAB PENETRATION MODEL:
RADFORD

SHEET NO:

2.1-A

#### **NOTES & LEGENDS**

- 1. REFER TO ENGINEERING STRUCTURAL DRAWINGS (S-#) FOR BEARING WALL LOCATIONS AND FOR ALL BEAM & HEADER SIZES AND BEARING WALL LOCATIONS
- 2. ALL BEARING WALLS SHALL BE 16" O.C. WALL CONST. W/ DOUBLE TOP PLATE U.N.O.
- 3. ALL INTERIOR NON BEARING DOOR & WINDOW HEADERS SHALL BE (1) 2x4 OR (1) 2x6 W/VERTICAL CRIPPLERS @ 2'-0" O.C. TO MATCH WALL WIDTH UNLESS NOTED OTHERWISE.
- 4. (2) HOSE BIBS SHALL BE INSTALLED, LOCATION TO BE DETERMINED BY PLUMBING CONTRACTOR

2X4 FRAME WALL

BALLOON FRAME WALL (PER STRUCTURALS)

#### **KEYNOTES**


- A1 GARAGE CEILING 5/8" TYPE X DRYWALL
  VERTICAL SURFACE WALLS 1/2" DRYWALL
  A2 22"X30" ATTIC ACCESS CONSTRUCTED WITH GYP. BD. (5/8" TYPE X
  AT GARAGE) WITH DOOR TRIM FRAME ACCESS SUPPORT
  A3 PROVIDE 6" MIN. FLAT CLG AT A

- A3 PROVIDE 6" MIN. FLAT CLG AT ANGLED CLG CONDITION
  A4 PULL DOWN STAIRS 255" x 6"
  A5 TEMPERED SAFETY GLASS PER IRC R308.4
  A6 HOUSE TO GARAGE DOOR SEPARATION. PROVIDE APPROVED 20
  MINUTE RATED DOOR PER IRC 302.5.1
  A7 A/C CONDENSER PAD. REFER TO SITE PLAN FOR FINAL LOCATION.
  VERIFY CONNECTION TO CONC. PAD W/ MANUF. SPECS
  A8 1/2" TYPE X DRYWALL AT ACCESSIBLE AREAS UNDER STAIRS
  A9 LOUVERED DOOR W/ GAS FURNACE

- D1 DRYWALL SOFFIT 12" DROP FROM CEILING LINE
- D2 DRYWALL SOFFIT 8" DROP FROM CEILING LINE
- K1 39" KNEE WALL WITH CAP PER SPECS
- K2 38" KNEE WALL WITH 1x CAP
- K3 46" KNEE WALL WITH CAP PER SPECS
- K4 34 1/2" KNEE WALL
- K5 42" KNEE WALL WITH 1x CAP
- K6 KNEE WALL WITH 1x CAP 42" ABOVE STAIR NOSING OR LANDING
- P1 30" X 60" SHOWER ENCLOSURE PER SPECS P2 30"X60" TUB PER SPECS
- S1 BOX STAIR WITH 38" KNEE WALL & 1X CAP
- S2 1X CAPPED STRINGER, TOP AT 3" ABOVE TREAD
- S3 HANDRAIL AT +36" ABV. STAIR NOSING OR LANDING

## area tabulation 'a'

GARAGE	403 SF
FRONT PORCH	38 SF
REAR PATIO	104 SF
FLOOR 1 LIVING	1,776 SF
TOTAL LIVING	1,776 SF

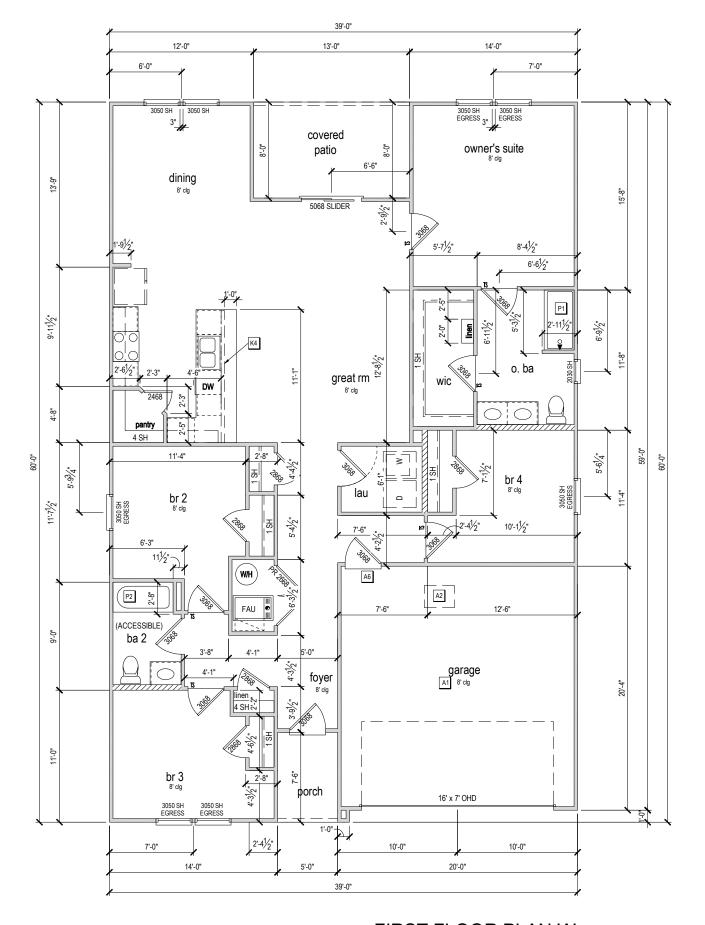

## FIRST FLOOR PLAN 'A'

1/8" = 1'-0" @ 11x17 1/4" = 1'-0" @ 22x34







Reserve at Jewel Lake Lot 013 160 SW Bre Lane Lake City, FL 32024

Century Communities expressly Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written permission and consent of Century Communities.

33911776 FLOOR PLAN

MODEL:
RADFORD

SHEET NO:

3.1-A

FIRST

#### ATTIC VENT CALCULATION

ATTIC VENTILATION TO COMPLY w/ F.B.C RESIDENTIAL CODE. THE REQUIRED NET FREE VENTILATING AREA OF NOT LESS THAN 1/150 OF THE SPACE VENTILATED. AREA MAY BE REDUCED TO 1/300 PROVIDED THAT 40 TO 50 PERCENT OF THE REQ'D VENTILATING AREA IS PROVIDED IN THE UPPER PORTION OF THE SPACE TO BE VENTILATED AT LEAST 3 FEET ABOVE EAVE OR CORNICE WITH THE BALANCE OF THE REQ'D VENTILATION PROVIDED BY THE EAVE OR CORNICE VENTS.

MANUFACTURE SELECTED TO VERIFY THE NET FREE VENTILATION OF THE VENT PRODUCT SELECTED AND TO MAINTAIN THE REQUIRED VENTILATION.

DO NOT LOCATE VENTS ON ROOF PLANE(S) FACING STREET.


ROOF VENTIL	ATION CAL	CULATIONS	
ROOF AREA	2,523 SF		
TOTAL NET FREE AREA REQ'D (1 TO 300)	1211.0 SQ. IN.		
MAIN HOUSE INLET (SOFFIT) VENTILATION	100.0 LF x	6.4 SQ. IN / LINEAR FT =	640.0 SQ. IN.
POD VENT(S) REQUIRED WITH BASE HOUSE	9	VENTS AT 70.0 SQ. IN EA. =	630.0 SQ. IN.
LOWER VENTING PROVIDED (605.5 SQ. IN. REQ'D)	640.0 SQ. IN	50.4%	
UPPER VENTING PROVIDED (605.5 SQ. IN. REQ'D)	630.0 SQ. IN	49.6%	

#### NOTE: TYPICAL VENTILATION INCLUDES:

SOFFIT VENTS

(AREA: 6.4 SQ. IN PER FOOT - VERIFY WITH MANUFACTURE)
2. LOMANCO 770\* ATTIC VENT LOCATED 12" MIN. FROM RIDGE

(AREA: 70 SQ. IN. - VERIFY W MANUFACTURE)
\*(1) LOMANCO 770D VENT AT 140 S.I. EA.CAN BE USED IN PLACE OF (2) 770 VENTS.

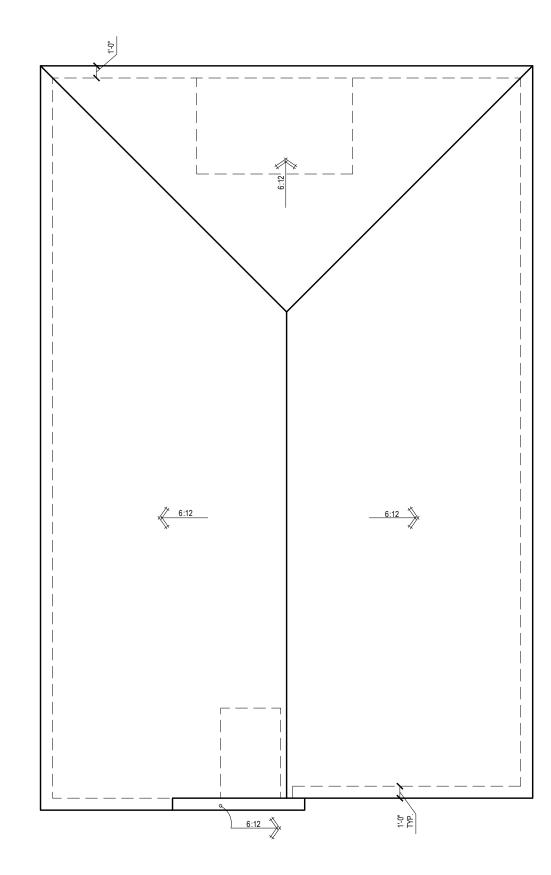

# ROOF PLAN 'A' 1/8" = 1'-0" @ 11x17

1/4" = 1'-0" @ 22x34







Reserve at Jewel Lake Lot 013 160 SW Bre Lane Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written permission and concent of

MODEL:	PLAN NUMBER:	permi
RADFORD	33911776	party ssion a Century (
DRAWING TITLE:	RELEASE DATE:	witho nd c Commu
ROOF PLAN	02.22.2021	onsent
		ritt

#### ELECTRICAL LEGEND


\$	SWITCH		$\rightleftharpoons$	110v RECEPTACLE			
\$3	3 WAY SWITCH		$\Rightarrow$	110v SWITCHED RECEPTACLE			
\$4	4 WAY SWITCH		⊕= SW⊾	110v ABOVE COUNTER RECEPTACLE. GFI PROTECTED AT KITCHEN, BATH & LAUNDRY			
-⇔-	WALL MOUNTED LIGHT		, D	110v DEDICATED RECEPTACLE FOR SECURITY/STRUCTURED WIRING PANEL			
			GFI <u>●</u>	GFI OUTLET			
	LED DOWNLIGHT VP=VAF	POR PROTECTED	220v	220v RECEPTACLE			
	DISCONNECT			110v FLOOR RECEPTACLE			
$\perp$	CEILING FIXTURE OUTLET	B = BRACE FOR FUTURE FAN	<b>№</b>	DISPOSAL			
ΙŸ	CEILING TIX TORE OUTLET	H = HANGING	• •	CHIME			
		P = OPT. PENDANT		BATH EXHAUST FAN			
(s)	SMOKE DETECTOR	JUKE DETECTOR		CEILING FAN PREWIRE WITH BRACING FOR			
C	C SMOKE/CARBON MONOXIDE ALARM			FUTURE FAN			
	PROVIDE ADDITIONAL EXTERIOR MELTUEDDROOF DEGEDTAGE MITTIN AS SECTION COMPENSION CHAITS						

- PROVIDE ADDITIONAL EXTERIOR WEATHERPROOF RECEPTACLE WITHIN 15 FEET OF CONDENSING UNITS INSTALL GFCI AND ARC FAULT CIRCUIT INTERRUPTER PROTECTION PER NEC SECTIONS 210.52G ALL GARAGE OUTLETS SHALL BE ON A DEDICATED CIRCUIT IONIZATION SMOKE ALARMS WITH AN ALARM-SILENCING SWITCH SHALL NOT BE INSTALLED LESS THAN 10 FEET (3048 MM)
- HORIZONTALLY FROM A PERMANENTLY INSTALLED COOKING APPLIANCE.

  DWGS. ARE DIAGRAMMATICAL 8 INDICATE THE GENERAL ARRANGEMENT OF THE ELECTRICAL WORK. ANY DISCREPANCIES ON THE DOCUMENTS SHALL BE CALLED TO THE ARCHITECT'S ATTENTION PRIOR TO THE COMMENCEMENT OF WORK DO NOT SCALE ELECTRICAL DRAWINGS.

#### **KEYNOTES**

- E1 ELECTRICAL PANEL PER SPECS
- E2 INSTALL GFI OUTLET UNDER SINK FOR FUTURE DISPOSAL
- E3 DOOR CHIME TRANSFORMER LOCATION
- E4 MECHANICAL ROOMS TO INCLUDE KEYLESS LIGHT, PLUG AND DISCONNECT FOR AIR HANDLER
- E5 COACH LIGHT ONLY IF REQUIRED BY LOCAL MUNICIPALITY. INSTALL AT 68" AFF
- E6 INSTALL COACH LIGHT AT 68" AFF

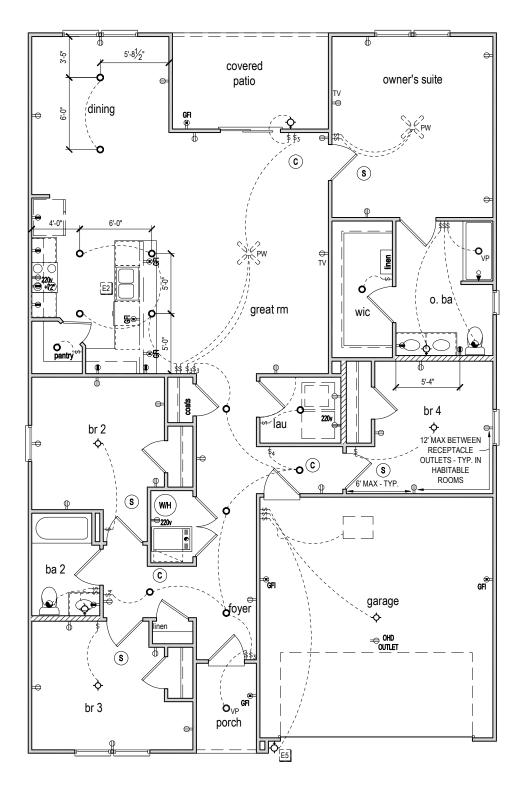

## FIRST FLOOR ELECTRICAL PLAN 'A'

1/8" = 1'-0" @ 11x17 1/4" = 1'-0" @ 22x34



6-24-2022

Reserve at Jewel Lake Lot 013 160 SW Bre Lane Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third porty without written permission and consent of Century Communities.

DRAWING TITLE:
FIRST FLOOR ELEC MODEL:
RADFORD

SHEET NO:

E1.1

# **REVISION SUMMARY**

#### **ABBREVIATIONS**

A.B.	Anchor Bolt	Flr. Sys.	Floor System	PSF	Pounds per square for
Abv.	Above	F.O.M.	Face Of Masonry	P.T.	Pressure Treated
Adj.	Adjustable	Ft.	Foot / Feet	Rad.	Radius
A.F.F.	Above Finished Floor	Ftg.	Footing	Reg'd.	Required
ALT.	Alternate	Galv.	Galvanized	Rm.	Room
Bm.	Beam	G.C.	General Contractor	Rnd.	Round
B/Beam	Bottom of Beam	G.F.I.	Ground Fault Interrupter	S.F.	Square Ft.
Brg.	Bearing	G.T.	Girder Truss	SHT	Sheet
Cant.	Cantilever	Hdr.	Header	S.L.	Side Lights
Cir.	Circle	Hgt.	Height	S.P.F.	Spruce Pine Fir
Clg.	Ceiling	Int.	Interior	Sq.	Square
CĴ	Control Joint	K/Wall	Kneewall		Southern Yellow Pine
Col.	Column	L.F.	Linear Ft.	Thik'n.	Thicken
Cont.	Continuous	Mas.	Masonry	T.O.B.	Top of Block
Dbl.	Double	Max	Maximum	T.O.M.	Top of Masonry
Dia.	Diameter	Min	Minimum	T.O.P.	Top of Plate
Ea.	Each	M.L.	Microlam	Trans.	Transom Window
E.W.	Each Way	Mir.	Mirror	Typ.	Typical
Elec.	Electrical	Mono	Monolithic	U.N.O.	Unless Noted Otherwis
Elev.	Elevation	N.T.S.	Not to Scale	Vert.	Vertical
E.O.R	Engineering or Record	O.C.	On center	V.L.	Versalam
Ext.	Exterior	Opn'g.	Opening	VTR	Vent through Roof
Exp.	Expansion	Opt.	Optional	W	Washer
F.B.C.	Florida Bldg. Code	Pc.	Piece	W/	With
Fin. Flr.	Finished Floor	P.L.	Parallam	W.A.	Wedge Anchor
Flr.	Floor	PLF	Pounds per linear foot	Wd	Wood
Fdn.	Foundation	Plt. Ht.	Plate Height	WP	Water Proof

# CENTURY COMPLETE **39-1776 RADFORD A RH**

#### **GENERAL STRUCTURAL NOTES**

#### SECTION R318 PROTECTION AGAINST TERMITES

ESTICIDES, BAITING SYSTEMS, AND PESTICIDES APPLIED TO WOOD, OR OTHER APPROVEI ETHODS OF TERMITE PROTECTION LABELED FOR USE A PREVENTIVE TREATMENT TO NEW

**TERMITE SPECIFICATIONS** 

- METHOD OF TREATMENT SHALL BE APPROVED BY THE GOVERNING JURISDICTION "LIQUID BORATE OR BOR-A-COR" PRODUCT METHODS MUST BE DETERMINED AT PERMIT STAGE AND PRODUCT APPROVAL DATA MUST BE ON FILE WITH THE BUILDING DEPARTMENT.

  PRESSURE TREATED LUMBER THAT HAS BEEN CUT OR DRILLED THAT EXPOSES UNTREATED
- PORTIONS OF WOOD ARE REQUIRED TO BE FIELD TREATED TO PREVENT INSECT INFESTATION OPTIONAL BORATE APPLIED TO ALL FRAME MEMBERS WITHIN 24" A.F.F.

#### - - NOTICE TO BUILDER AND ALL SUBCONTRACTORS-

FIS THE INTENT OF THE ENGINEER LISTED IN THE TITLEBLOCK OF THESE DOCUMENTS THAT THESE OCUMENTS BE ACCURATE, PROVIDING LICENSED PROFESSIONALS CLEAR INFORMATION. EVERY TTEMPT HAS BEEN MADE TO PREVENT ERROR. THE BUILDER AND ALL SUBCONTRACTORS ARE

- JURIEU 10:
  REVIEW ALL THE INFORMATION CONTAINED IN THESE DOCUMENTS, PRIOR TO THE COMMENCEMENT OF ANY WORK. THE ENGINEER ARE NOT RESPONSIBLE FOR ANY PLAN ERFOMISSIONS, OR MISINTERPRETATIONS UNDETECTED AND NOT REPORTED TO THE ENGINEER
- SHALL STRICTLY OBSERVE ALL APPLICATION CODES DURING THE COURSE OF CONSTRUCTION INCLUDING ALL STATE, CITY, AND COUNTY BUILDING, ZONING, ELECTRICAL, MECHANICAL, PLUMBING AND FIRE CODES. CONTRACTOR SHALL VERIFY ALL CODE REQUIREMENTS PRIOR TO
- PLUMINING AND THE OUDES. CUNITAGE THAT STRALL VERIFT ALL OUDE REQUIREMENTS FROM TO COMMENCEMENT OF WORK. THE ARCHITECT / ENGINEER SHALL NOT BE RESPONSIBLE FOR SAFETY PROCEDURES, THE MEAN AND METHODS OF CONSTRUCTION, TECHNOLOGIES, OR THE CONTRACTION TO CARRY OUT THE WORK IN ACCORDANCE WITH THE DRAWINGS AND SPECIFICATIONS OR RELATED CODES. THE FRAMING PLAN SHOWN INDICATES THE "TRUSS SYSTEM AND IS THE RESPONSIBILITY OF THE TRUSS SYSTEM ENGINEER (DESIGN PROFESSIONAL OF RECORD). THE TRUSS DESIGN ENGINEER
- (DELEGATED ENGINEER) HAS FINAL, RESPONSIBILITY FOR EACH INDIVIDUAL TRUSS AND TRUSS PROFILE, AND IS TO SUBMIT A FINAL SET OF TRUSS ENGINEERING SIGNED AND SEALED TRUSS
- PORAUMOS TO DESIGN PROFESSIONAL OF RECORD FOR REVIEW PRIOR TO FABRICATION ANY DISCREPANCY OR ERROR IN DIMENSIONS OR NOTES WITH IN THIS FLAN SHALL SE BROUGHT TO THE ATTENTION OF THE DESIGN PROFESSIONAL FOR CLARIFICATION PRIOR TO JCTION. STRUCTION MUST BE IN ACCORDANCE TO THE INFORMATION FOUND IN THESE
- ALL CUNSTRUCTION MUST BE IN A REACONDAING. THE INFORMATION FOUND IN THESE PLANS SHOULD DOCUMENTS. ANY QUESTIES HE IN A REACONDAING THE INFORMATION FOUND IN THESE PLANS SHOULD BE DIRECTED TO DUR QUALITY ASSURANCE MANSAGER AT 321-97-9491 IMMEDIATELY. NO BACK CHARGES WILL BE CONSIDERED FOR REIMBURSAMERT AT 321-97-9491 IMMEDIATELY. NO BACK ADVANCED NOTIFICATION AND APPROVAL BY THE ENGINEER. PAYMENTS WILL BE MADE IN ACCORDANCE TO THE TERMS OF THE AGREEMENT.

#### HOME MAINTENANCE & INSPECTIONS

YEARLY MAINTENANCE AND INSPECTIONS BY THE BUILDER/HOMEOWNER ARE NECESSARY FOR THE FUTURE LIFE OF THIS HOME. CARE MUST BE TAKEN TO CHECK WINDOWS AND DOORS FOR CALILKING REMOVE LEAVES AND DEBRIS OFF ROOFS, MAKE SURE THAT WATER FLOW IS AWAY FROM THE HOUSE AND HAVE YOUR HOME REPAINTED EVERY 3 - 5 YEARS TO PROTECT HOUSE AND HAVE YOUR HOME REPAIN LED EVERY 3 - 5 YEARS 10 PROTECT THE COATINGS. THE DESIGNER AND ENGINEER OF RECORD ARE NOT RESPONSIBLE FOR THE UPKEEP OF THE HOME AND WILL NOT BE HELD LIABLE FOR INSTANCES THAT MAY OCCUR OVER THE NORMAL LIFE OF THE HOME WITHOUT PROPER MAINTENANCE.

#### CAST IN PLACE REINFORCED CONCRETE

- PLUS OR MINUS 1\*, AND HAVE 2 TO 5% ARE ENTRAINMENT, AND A MAXIMUM WATERICEMENT RATIO OF 0.63
  HONGS SHALL BE PROVIDED AT DISCONTINUOUS ENDS OF ALL TOP BARS OF BEAMS.
  HORIZONTAL FOOTING BARS SHALL BE BENT 25' AROUND CORNERS OR CORNER BARS WITH A 25' LAP PROVIDED EA WAY.
  CONCRETE COVER MIN. 3" WHEN EXPOSED TO EARTH OR 11 (2" TO FORM U.N.O.
  FIBER MESH LENGTH SHALL BE ½" TO 2", DOSAGE AMOUNT SHALL BE FROM 1.0 TO 1.5 LBS PER CUBIC YARD IN ACCORDANCE WITH THE
  MANUFACTURERS AND SHALL COMPLY WITH ASTM CL116
  ALL REINFORCING STEEL / STIRRUPS AND TIES SHALL BE NEW DOMESTIC DEFORMED BARS FREE FROM RUST, SCALE 8 OIL 8 SHALL MEET ASTM A615/
  ASTM GRADE OU NO. REINFORCING FOR FOOTING SHALL BE SUPPORTED ON PRECAST CONCRETE PADS. STEEL WINE OR PLASTIC SUPPORT. TOP
  REINFORCING SHALL BE FOSITIVELY SUPPORTED BY TEMPORARY STRINGERS. DOWELS FOR COLUMNS & FILLED CELLS SHALL BE SECURED IN. REINFORCING SHALL BE POSITIVELY DEPT LIBERTOR BY LEINFORCEY SHRINGERS. DOWELS FOR COLUMNING A FILLED CELLS SHALL BE SECURED IN PLACE BY USING ADDITIONAL OF SECURIOR SHELD FOR COLUMN SHALL BE SECURED IN PLACE BY USING ADDITIONAL SHALL BE AS FER DETAIL MSB6/DI.

  HIGH STREND SHALL SHA

- HOLLOW LOAD BEARING UNITS SHALL BE NORMAL WEIGHT, GRADE N, TYPE 2, CONFORMING TO ASTM C90-014, WITH A MINIMUM NET COMPRESSIVE STRENGTH OF 2000 PSI (Tim = 2000 PSI) (Tim = 2000

- ALL EXTERIOR WOOD STUDS WALLS, BEARING WALLS, SHEAR WALLS, AND MISC. STRUCTURAL WOOD FRAMING MEMBERS (I.E. BLOCKING OR GABLE END BRACING) SHALL BE EITHER AS SPECIFIED IN PLAN OR IN DETAILS, IF CONFLICTS OCCUR BETWEEN PLAN AND DETAILS, THE STRONGEST MATERIAL BLUE SLEED, AT A MINIMIM, ALL WOOD STRUCTURAL FRAMING MEMBERS SHALL BE SPE #2.

  ALL LLIMBER SPECIFIED ON DRAWINGS ARE INTENDED FOR DRY USE ONLY (MOISTURE CONTENT 19% OR LESS), JUNO, ALL WATERPROOFING AND FIRS SAFETY SYSTEMS ARE THE RESPONSIBILITY OF THE CONTRACTOR HAND ARE TO BE DESSIDED AND DETAILS OF OTHERS HAVE STUD STRUCTURED AND DETAILS OF THE STAFETY OF THE SAFETY SHEED WITH SHEAR SHEED STRUCTURED AND DETAILS WERE STRUCTURED AND STRUCTURED AND DETAILS OF THE STUD UP TO 1 TO AS SHALL HAVE STUD PROTECTION SHELDS. ALL HOLES OVER 11 TO BLEET OF THE STUD UP TO 1 TO BLEETY PLOY ON MAY UP THE NEW PRESSURE TREATED WOODS USE CHEMICALS THAT ARE CORROSIVE TO STEEL. IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIETY THE TYPE OF WOOD THE ATMENTATION TO SELECT APPROPRIATE CONNECTORS THAT RESIST SCORPSIONS RESPONSIBILITY TO VERIETY THE TYPE OF WOOD THE ATMENTATION TO SELECT APPROPRIATE CONNECTORS THAT RESIST SCORPSIONS OF REXAMPLE, ACC-C, ACC-D, CBA-A OR CA-B REQUIRE HOT CIPIPED BAU VANUED OR STAINLESS STEEL FASTENERS. DOT SODIUM BORATE (SBX) DOES NOT.
- CBA-A OR CA-B REQUIRE HOT-DIPPED GALVANIZED OR STAINLESS STELE FASTENERS. DOT SODIUM BORATE (SBX) DOES NOT.

  ALL EXPOSED WOOD OR WOOD IN CONTACT WITH LEARTH OR CONCRETE TO BE PRESSURE TREATED.

  UNTREATED WOOD SHALL NOT BE IN DIRECT CONTACT WITH CONCRETE OR MASONRY. SEAT PLATES SHALL BE PROVIDED AT BEARING LOCATIONS
  WITHOUT WOOD ENT OP PLATES.

  SEE PLAN FOR STUD PACK AND BEAM NAILING PATTERNS.

  SEE PLAN FOR STUD PACK AND BEAM NAILING PATTERNS

  ALL ENGINEERED LUMBER TO HAVE THE FOLLOWING MIN VALUES U.N.O.

  PARALLAM COLUMNS: 18E Fb = 2400 PSI

  MICROLAM (LV) BEAMS: SUPE Fb = 2500 PSI

  GILLAM BEAMS: SIPSP 24F-VS LAYUP (1.7 EF B=2400 PSI) MIN.

  SEE PLAN NOTE FOR ADDITIONAL ROOF, WALL, SHEAR WALL AND FLOOR SHEATHING REQUIREMENTS ALONG WI NAILING INFORMATION OTHERWISE:

  ROOF DECK PL WOOD C-CLO, EXTERIOR OR OSE.

  PLAN OSE PLAN NOTE FOR ADDITIONAL ROOF, WALL, SHEAR WALL AND FLOOR SHEATHING SHALL FINISH FLUSH TO EXTERIOR WALL FACE.

  PLAN OSE PLAN NOTE OF GROUP 1 APA PARTIES (1824) SHEATHING SHALL FINISH FLUSH TO EXTERIOR OR WALL FACE.

  PLAN OSE PLAN NOTE OF GROUP 1 APA PARTIES (1824) SHEATHING SHALL FINISH FLUSH TO EXTERIOR OR WALL FACE.

  PLAN OSE PLAN NOTE OF GROUP 1 APA PARTIES (1824) STATEMENT OF SEVENISH STATEMENT OF SEVENISH CAPACITY OF SEVENISH SOURCES.

- 2. FLOOR SHEATHING: T&G AC GROUP 1 APA RATED (4824) SHEATHING SHALL FINISH FLUSH TO EXTERIOR WALL FACE.
  WALL SHEATHING: J'<sub>K</sub>: TSHUCUTURAL 10S BEYPOSURE 1 (197), RATEO 50S EXPOSURE 1 (197) EFECIFIC GRAVITY, G=0.50, MIN.). A MINIMUM J'<sub>K</sub>: SPACE IS RECOMMENDED BETWEEN PANELS AT EDGE AND END JOINTS TO ALLOW FOR EXPANSION. PER R604.3 SHEATHING SHALL NOT BE USED AS WEATHER RESISTANCE BARRIER UNLESS SPECIFIED.
  LATH AND LATH ATTACHMENTS SHALL BE OF CORROSION-RESISTANT MATERIALS. EXPANDED METAL OR WOVEN WIRE LATH SHALL BE ATTACHED TO WOOD SHEATHING WITH L'<sub>K</sub>: LONG, 11 GAGE MALS HAVING A J'<sub>K</sub>: NEAD, OR 1 J'<sub>K</sub>: LONG, 16 GAGE STAPLES, SPACED IN ACCORDANCE WITH ASTM C1062 OR C1327, OR AS OTHERWISE APPROVED (REF. 2020 FBC-R7103.7.1).

#### STRUCTURAL STEEL

- MATERIAL SPECIFICATIONS: WIDE FLANGE SECTIONS: ASTM A992, GRADE 50, Fy=50 KSI TUBE STEEL (HSS): ASTM A500, GRADE B, Fy = 46 KSI PIPE STEEL: ASTM F3125, TYPE E OR S, Fy = 35 KSI ALL OTHER STRUCTURAL & MISC. STEEL: A36 Fy=36 KSI STRUCTURAL CONNECTIONS: ALL STRUCTURAL
- STEEL: ASTM F3125, TYPE E OR S, Fy = 35 KSI ALL OTHER STRUCTURAL & MISC. STEEL: A36 Fy-36 KSI STRUCTURAL CONNECTIONS: ALL STRUCTURAL BOLTS TO BE A325 U.N.O.
  STRUCTURAL BOLTS SMALLER THAN 5/8\* DIA. TO BE A307 THREADED ROD SHALL CONFORM TO A36 OR A307 ANCHOR BOLTS SHALL CONFORM TO A5TM F1554 ALL BOLTS CAST IN CONCRETE: ASTM A36 OR A370 FSHOP AND FIELD WELDS: E70XX ELECTRODES STEEL REINFORCEMENT SHOP DRAWINGS TO BE PROVIDED TO ENGINEER OF RECORD BEFORE FABRICATION FOR REVIEW AND APPROVED EXTRACTION STRUCTURAL BOLTS TO BE A325N MOLTS. ALL A325N BOLTS SHALL BE BROUGHT TO A "SNUG-TIGHT" CONDITION, AS DEFINED IN THE SPECIFICATION. SLIP CRITICAL (SC) BOLTS MUST BE FULLY TENSIONED PER SPECIFICATION STRUCTURAL BOLTS TO SHALL BOLTS TO AST AND A TO A STATE A THE STRUCTURAL BOLTS SHALL BOLTS THE AST AND A THE ADDRESS AND SHALL BOLTS SHALL BOLTS SHALL BOLTS THE ADDRESS AND SHALL BY THAN 56" DIA. TO BE A307 THERADED ROOS SHALL CONFORM TO A STATE FIRST ALL BOLTS CAST IN CONCRETE.
- WELDS SHALL BE  $\frac{1}{4}$  "UNO.

  SHOP DRAWINGS OF ALL STRUCTURAL STEEL SHALL BE SUBMITTED TO THE ENGINEER OF RECORD FOR REVIEW PRIOR TO FABRICATION. SHOP SYMDUS ANAWINSS OF ALL INCLUIS COMPLETE DETAILS AND SCHEDULES SUBMITTED TO THE ENGINEER OF RECORD FOR REVIEW PRIOR TO PARTICAL STEEL MEMBERS, PROCEDURES, AND DIAGRAMS NICLUDING DETAILS OF CUTTS, CAMBERS, HOLES, PROFILES, SIZES, SPACING, AND LOCATIONS OF STRUCTURAL MEMBERS, CONNECTION ATTACHMENTS, FASTENERS, LOAD, TOLERANCES, AND OTHER PERTINENT DATA. INDICATE WELDS BY STANDARD AWS SYMBOLS AND SHOW SIZE, LENGTHS, AND TYPES OF WELDS. PROVIDE SETTING DRAWINGS, TEMPLATES, AND DIRECTIONS FOR INSTALLATION OF
- A CERTIFIED TESTING AGENCY SHALL BE ENGAGED TO PERFORM INDUSTRY STANDARD INSPECTIONS TO ENSURE CONFORMANCE WITH PLANS AND

- ALL PREFABRICATED WOOD TRUSSES SHALL BE SECURELY FASTENED TO THEIR SUPPORTING WALLS OR BEAMS WITH HURRICANE CLIPS OR

- ALL PREFABRICATED WOOD TRUSSES SHALL BE SECURELY FASTENED TO THEIR SUPPORTING WALLS OR BEAMS WITH HURRICANE CLIPS OR ANCHORS PER STRUCTURAL PLAN
  ANCHORS PER STRUCTURAL PLAN
  PREFABRICATED WOOD TRUSSES SHALL BE DESIGNED IN ACCORDANCE WITH THE LATEST EDITION OF THE "NATIONAL DESIGN SPECIFICATION FOR STRESS-GRADE LUMBER AND ITS FASTENERS" AS RECOMMENDED BY THE NATIONAL FOREST PRODUCTS ASSOCIATION.
  TRUSS MEMBERS AND CONNECTIONS SHALL BE FROPORTIONED WITH A MAXIMUM ALLOWABLE STRESS INCREASE FOR LOAD DURATION OF 25%) TO WITHSTAND THE LUFE LOADS GIVEN IN THE NOTES AND TOTAL DEAD LOAD.
  BRIDDING FOR PRE-ENGIEERED TRUSSES SHALL BE AS REQUIRED BY THE TRUSS MANUFACTURER UNLESS NOTED ON THE PLANS.
  TRUSS ELEVATIONS AND SECTIONS ARE FOR GENERAL CONFIGURATION OF TRUSSES ONLY. WEB MEMBERS ARE NOT SHOWN, BUT SHALL BE
  DESIGN SPECIFICATIONS FOR LIGHT WEIGHT METAL PLATE CONNECTED WOOD TRUSSES PER THE TRUSS PLATE INSTITUTE TPLATEST EDITION.
  PREF-ENGINEERED WOOD TRUSSES SHALL BE DESIGNED BY THE MANUFACTURER IN ACCORDANCE WITH SPECIFICATIONS FOR CLORE AND SHOWN OF THE MANUFACTURER IN ACCORDANCE WITH SPECIFICATIONS AND SECTIONS OF A PLATE OF THE PREMADERS SHALL BE AND PERMANENT STRUCTURE THE AND PLATEST FOR THE PREMADERS OF TRUSSES SHALL BE ASSOCIATED AND DETAILS SHOWNING MEMBER SIZES BRACING, ANCHORAGE. CONNECTIONS, TRUSS
  SUBMITTALS SHALL INCLUDE TRUSS FRAMING PLANS AND DETAILS SHOWNING MEMBER SIZES BRACING, ANCHORAGE. CONNECTIONS, TRUSS
  COCATIONS AND PERMANENT STRUCTURE FACE INSMITTAL LOCATIONS, AND PERMANENT BRACING ANDOR BRIGOING AS REQUIRED FOR RECEION AND FOR THE PERMANENT STRUCTURE. CUSTINES HOUSE, INCLUDING STRUCTURE FOR THE PERMANENT STRUCTURE. EACH SUBMITTAL SHALL BE SIGNED AND SEALED BY A FLORIDA REGISTERED STRUCTURAL ENGINEER. SUBMIT 3 COPIES FOR REVIEW AND APPROVAL PRIOR TO
- THE TRUSS MANUFACTURER SHALL DETERMINE ALL SPANS WORKING POINTS, BEARING POINTS, AND SIMILAR CONDITIONS. TRUSS SHOP DRAWINGS SHALL SHOW ALL TRUSSES, ALL BRACING MEMBERS, AND ALL TRUSS TO TRUSS HANGERS.

UPLIFT CONNECTORS SUCH AS HURRICANE CLIPS, TRUSS ANCHORS AND ANCHOR BOLTS ARE ONLY REQUIRED ON MEMBERS IN WALLS THAT ARE EXPOSED TO UPLIFT OR LATERAL FORCES. INTERIOR LOAD BEARING WALLS ARE NOT ALWAYS EXPOSED TO UPLIFT FORCES. THE MEMBERS OF THESE WALLS WOULD NOT NEED TO HAVE CONNECTORS APPLIED. PLEASE COORDINATE THE TRUSS ENGINEER FOR THE LOCATION OF THESE WALLS AND STRUCTURAL PLANS FOR MORE INFO.

- MISSED "J" BOLTS FOR WOOD BEARING WALLS MAY BE SUBSTITUTED WITH 1/2" DIA. EPOXY ANCHORS WITH 7" EMBEDMENT. SIMPSON "SET" EPOXY ADHESIVE BINDER FOLLOWING ALL MANUFACTURER'S RECOMMENDATIONS OR SIMPSON 1/2" TITEN HD BOLTS WITH MINIMUM 7" EMBEDMENT. SEE PLAN FOR EMBEDMENT DETH'A TFLOOR STEPS.
  FOR MISSED VERT. DOWELS, DRILL A 3/4" DIAMETER HOLE 6" DEEP AT THE LOCATION OF THE OMITTED REBAR AND INSTALL A 32" LONG #5 BAR INTO THE EPOXY FILLED HOLE. USE A TWO PART EMBEDMENT EPOXY (SIMPSON HIGH STENGTH EPOXY-TIE ANCHORING ADHESIVE) MIXED PER THE
- MANUFACTURER'S INSTRUCTIONS. ASSURE THAT ALL DUST AND DEBRIS FROM DRILLING ARE REMOVED FROM THE HOLE BY BRUSHING AND USING COMPRESSED AIR PRIOR TO APPLYING THE EPOXY. ALLOW THE EPOXY TO CURE TO THE MANUFACTURER'S SPECIFICATIONS, THEN FILL THE CELL IN 'HE NORMAL WAY DURING BOND BEAM POUR.
  'OR MORTAR JOINTS LESS THAN 1/4", PROVIDE (1) #5 VERT. IN CONC. FILLED CELL EACH SIDE OF THE JOINT (BAR DOES NOT HAVE TO BE CONT. TO
- FOOTING ).

  MISSED LINTEL STRAPS FOR MASONRY CONSTRUCTION MAY BE SUBSTITUTED WITH (1) SIMPSON MTSM16 TWIST STRAP WI (4) ½"x 2½" TITENS TO MASONRY AND (7)-10d NAILS TO TRUSS FOR UPLIFTS LESS THAN 860 LBS (USE (2) MTSM16 FOR UPLIFTS LESS THAN 1660#). IF CORNER STRAP IS MISSED, CONTRACTOR IS TO INSTALL (2) SIMPSON HGAM10 WI (4) 14" x 1 1/2" SDS SCREWS AND (5) 1/4" x 2 14" TITENS ONE EACH SIDE OF TRUSS.

  MISSED, CONTRACTOR IS TO INSTALL (2) SIMPSON HGAM10 WI (4) 14" x 1 1/2" SDS SCREWS AND (5) 1/4" x 2 14" TITENS ONE EACH SIDE OF TRUSS. CONNECTION
- MISSED, CONTRACTOR 13 OHISTARE (2.) SIMPSON RATIONAL WIND AT 12 MS 25 MS 21MS 11 MS 10 MS 21 MS 11 MS 10 MS 21 MS 11 MS 20 MS 21 MS 11 MS 20 MS 21 MS 11 MS 20 MS 21 MS IF STRAPS ARE MISSED UNDER GIRDER JAMB STUD LOCATIONS.

#### STRUCTURAL DESIGN CRITERIA

#### **CODE CRITERIA**

- FLORIDA FIRE PREVENTION CODE 7TH EDITION (2020)
- NEPA 70-17 NATIONAL ELECTRICAL CODES (NEC 2017) BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE - (ACI 318-14)

- BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES (ACI 530-13).
- NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION 2018 EDITION
- WOOD FRAMED CONSTRUCTION MANUAL 2018 EDITION
- APA PLYWOOD DESIGN SPECIFICATION E30-16 AMERICAN SOCIETY OF CIVIL ENGINEERS: ASCE/SEI 7-16

#### GENERAL ROOF LOADING

	SHINGLE	METAL	TILE	HEAVY
	ROOF (PSF)	ROOF (PSF)	ROOF (PSF)	ROOF (PSF)
TOP CHORD LL	20	20	20	20
TOP CHORD DL	10	10	15	25
BOTTOM CHORD LL*	0	0	0	0
BOTTOM CHORD DL	10	10	10	10
TOTAL (PSF)	40	40	45	55
BOTTOM CHORD LL (OPT) ATTICS W/ LIMITED STORAGE ATTICS W/ HEAVY STORAGE  * ATTICS W/ NO STORAGE (NON CONCURPENT)	20 50 10			

NOTE: LL REDUCTIONS ARE ALLOWED PER CODE BUT ONLY WITH WRITTEN APPROVAL FROM EOR OR INDICATED ON PLAN

#### GENERAL FLOOR LOADING

TOP CHORD LL TOP CHORD DL	40 (PSF) 10 (PSF)	COMMENTS:
BOTTOM CHORD LL BOTTOM CHORD DL	0 (PSF) 5 (PSF)	

#### SPECIAL FLOOR LOADING

CONIES/ DECKS	40(PSF)	d. A SINGLE CONCENTRATED I
CONIES OVER 100 SQ:FT	100(PSF)	APPLIED IN ANY DIRECTION A
HT STORAGE	125(PSF)	POINT ALONG THE TOP.
ARDRAILS AND HANDRAILS	200(LBS)(d)	f. BALUSTERS AND PANELS FIL
ARDRAIL IN-FILL COMPONENTS	50 (LBS)(f)	SHALL BE DESIGNED TO WIT
AIRS / NON SLEEPING ROOMS	40 (PSF)	A HORIZONTALLY APPLIED N
EPING ROOMS	30 (PSF)	LOAD OF 50 POUNDS ON AN
RARIES - STACK ROOMS	150(PSF)	EQUAL TO 1 SQ. FT.
BITABLE ATTICS SERVED	' '	1
FIXED STAIRS	30(PSF)	

SSENGER VEHICLE GARAGES 50(PSF) DEFLECTION CRITERIA

WIND LOADING CRITERIA

OTE: MEAN ROOF HEIGHT FOR TYPICAL SINGLE STORY HOME IS 15FT, AND F

#### ASCE 7-16 WALL DESIGN ALLOWABLE COMPONENTS AND CLADDING WIND PRESSURES AND SUCTIONS FOR MEAN ROOF HEIGHT < 60 ft

EFFECTIVE WIND AREA (SQ FEET)	(+) \	PRESSUF /ALUE DE VALUE D	NOTE	SPR		WIND PRESSURE AND SUCTION DIAGRAM
AREA		4		-	3	~
10 - 19.99	(9)	(+) 25.5 (-) 26.6	Œ	D	(+) 25.5 (-) 33.6	
20 - 49.99	0	(+) 24.4 (-) 26.6	(	D	(+) 24.4 (-) 30.8	$\langle / \rangle$
50 - 99.99	Œ	(+) 22.8 (-) 23.8	Œ	Ð	(+) 22.8 (-) 28.0	
> 100	ල	(+) 21.7 (-) 23.8	Œ	Đ	(+) 21.7 (-) 26.6	(4) (5)(5) (4) (3)
GARAGE DOO		ORS*		9	SOFFIT	
9'-0" x 7'-0"		16'-0" x 7'	-0"			heist
(+) 22.5 (-) 25.5	<b>(</b>	(+) 21.7 (-) 24.1	⊗		+) 25.5 (-) 33.6	DIAGRAM

#### GENERAL PRESSURE NOTES

### I<u>LES:</u> MULTIPLY THE ABOVE PRESSURES BY 1.67 TO GET ULTIMATE WIND

- OTHERWISE USE LOAD ASSOCIATED WITH THE LOWER EFFECTIVE AREAS DESIGNATED AREAS WHERE THE ULTIMATE WIND SPEED IS 140 MPH OR

S0 NOTES & SCHEDULES

	NOTEO & CONEDULEO	l	
S1	FOUNDATION PLAN		
S2	ROOF FRAMING PLAN		
SN	NOTES & SCHEDULES		
D1	FOUNDATION DETAILS		
D2	FRAMING DETAILS		
D3	FRAMING DETAILS		
D4	FRAMING DETAILS		
D5	FRAMING DETAILS		




Signing Date: 06/27/2022


LOT 13 ESERVE @ JEWEL LAKI 160 SW BRE LANE

PLAN NUMBER: 33911776

RADFORD

SHEET

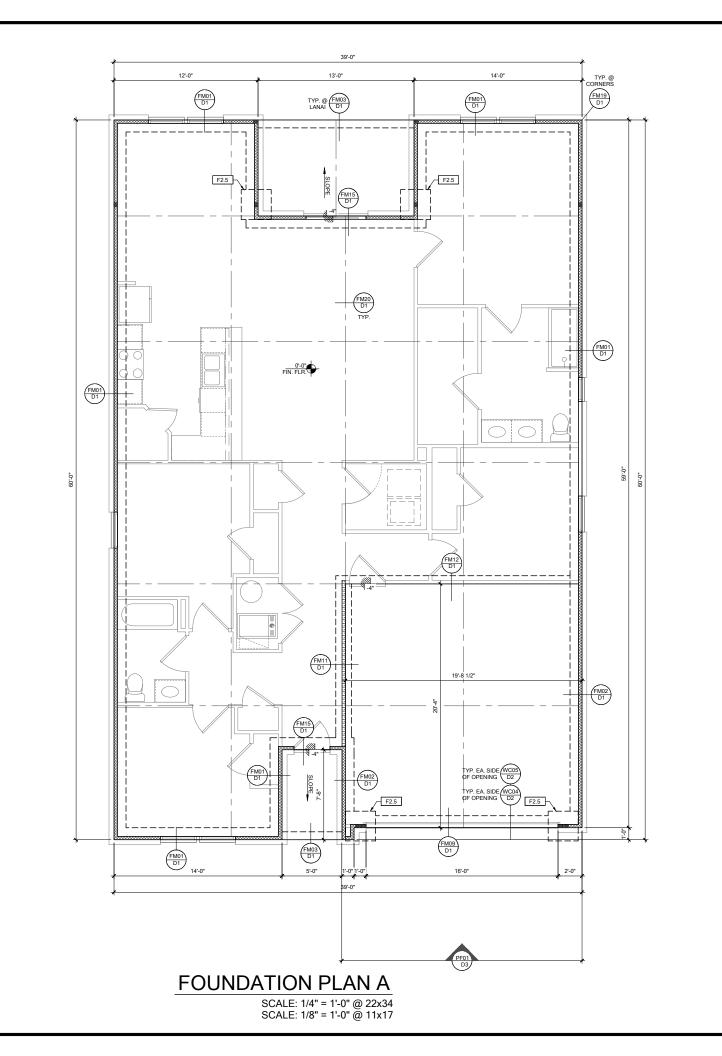

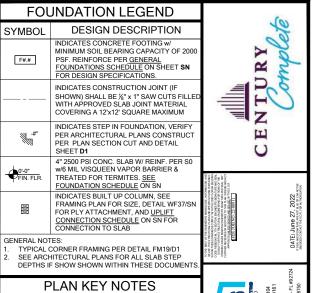

LOT 13 ESERVE @ JEWEL LAKE 160 SW BRE LANE LAKE CITY, FL 32024

WALL TYPE							
SYMBOL	DESIGN DESCRIPTION						
	2x_INTERIOR BEARING SHEARWALL - SEE BEARING WALL SCHEDULE ON SHEET SN FOR REQUIREMENTS.						
	INDICATES BEARING WALL SEE <u>BEARING</u> WOOD BEARING SCHEDULE ON SN						
	INTERIOR NON-BRG. WALL BY BUILDER						
	2x WOOD FRAME EXTERIOR WALL (SEE PLAN FOR MORE INFO)						

BUILDER NOTE:
ANY DISCREPANCY OR ERROR IN DIMENSIONS OR NOTES
SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGN
PROFESSIONAL FOR CLARIFICATION PRIOR TO
COMMENCEMENT OF CONSTRUCTION


PLAN NUMBER: 33911776

DRAWING TITLE: FOUNDATION PLAN A

SHEET NO:


RADFORD


**S1** 

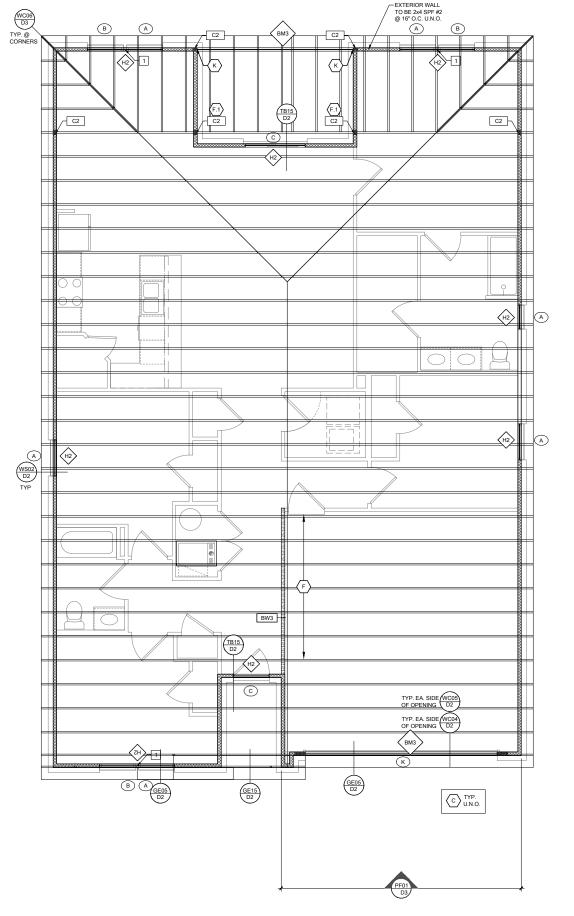


## ROOF FRAMING PLAN A

SCALE: 1/4" = 1'-0" @ 22x34 SCALE: 1/8" = 1'-0" @ 11x17

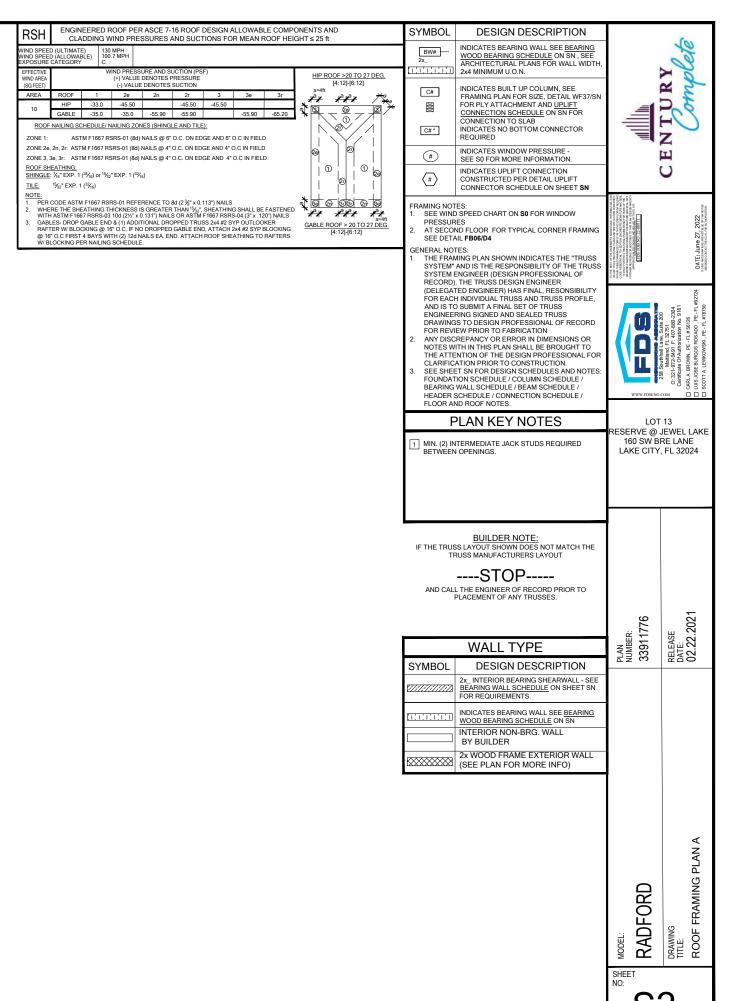

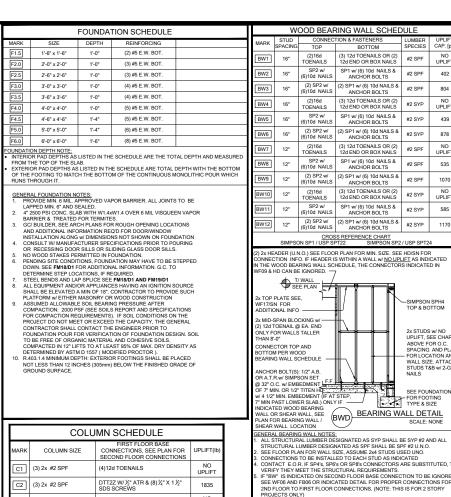

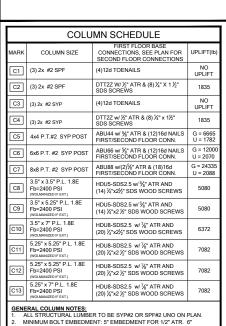

- ALL STRUCTURAL LUMBER TO BE SYPE? OR SPFE? UNO ON PLAN. MINIMUM BOLT EMBEDMENTS: "S'EMBEDMENT FOR 1/2" ATT. 6" EMBEDMENT FOR 1/2" ATT. 6" EMBEDMENT FOR 1/3" ATT. 8" EMBEDMENT FOR 1/3" ATT. 9" ATT.
- CONNECTIONS SHALL BE INSTALLED ON NARROW OR WIDE FACE PER SIMPSON TC-SCLCLM

		W	OOD BEAF							
_	MAR	K STUD		TION & FASTENERS	LUMBER	UPLIFT	MARK	MARK HEADER SIZE		
	BW			(3) 12d TOENAILS OR (2) 12d END OR BOX NAILS	#2 SPF	NO UPLIFT	(H1)	w/ 7/16	2x6 #2 SYP " FLITCH PLATE 2x8 #2 SYP	
	BW	2 16"	SP2 w/ (6)10d NAILS	SP1 w/ (6) 10d NAILS & ANCHOR BOLTS	#2 SPF	402	(H2)	w/ 7/16 (2)	" FLITCH PLATE 2x10 #2 SYP " FLITCH PLATE	
	BW	16"	(2) SP2 w/ (6)10d NAILS	(2) SP1 w/ (6) 10d NAILS & ANCHOR BOLTS	#2 SPF	804	(2) 2x12 #2		2x12 #2 SYP	
+	BW	16"	(2)16d TOENAILS	(3) 12d TOENAILS OR (2) 12d END OR BOX NAILS	#2 SYP	NO UPLIFT	H5	2.	3/4" x 11 1/4" LVL 2.0E Fb=2600	
	BW	16"	SP2 w/ (6)10d NAILS	SP1 w/ (6) 10d NAILS & ANCHOR BOLTS	#2 SYP	439	(H6)	2.	8/4" x 9 1/4" LVL 0E Fb=2600	
-	BW	16"	(2) SP2 w/ (6)10d NAILS	(2) SP1 w/ (6) 10d NAILS & ANCHOR BOLTS	#2 SYP	878	(H7)	w/ 1"	2x10 #2 SYP FLITCH PLATE	
,	BW	7 12"	(2)16d TOENAILS	(3) 12d TOENAILS OR (2) 12d END OR BOX NAILS	#2 SPF	NO UPLIFT	₩8	(2) 1 3/4" x 7 1/4" LV 2.0E Fb=2600		
1	BW	12"	SP2 w/ (6)10d NAILS	SP1 w/ (6) 10d NAILS & ANCHOR BOLTS	#2 SPF	535		HEADER SUPPORT		
	BW	12"	(2) SP2 w/ (6)10d NAILS	(2) SP1 w/ (6) 10d NAILS & ANCHOR BOLTS	#2 SPF	1070	OPEN SIZ			
	BW1	0 12"	(2)16d TOENAILS	(3) 12d TOENAILS OR (2) 12d END OR BOX NAILS	#2 SYP	NO UPLIFT	1'-0" -		JACKS EA ENE (1)	
	BW1	1 12"	SP2 w/ (6)10d NAILS	SP1 w/ (6) 10d NAILS & ANCHOR BOLTS	#2 SYP	585	4'-0" -		(2)	
	BW1	2 12"	(2) SP2 w/ (6)10d NAILS	(2) SP1 w/ (6) 10d NAILS & ANCHOR BOLTS	#2 SYP	1170	10'-0" -		(3)	
		SIMPS	CROS ON SP1 / USP S	SS REFERENCE CHART PT22 SIMPSON SP2	/ USP SPT2	4	**PRC	VIDE (3)	TUDS @ 16" O.C. 1 2x CRIPPLE STU TO STUD w/ (2) 5	

JACKS EA END KINGS EA END JACKS EA END KINGS/EA END

SIMPSON SPH4 TOP & BOTTOM

FOR LOCATION ANI WALL SIZE. ATTACI STUDS T&B w/ 2-GL NAILS

FOR FOOTING TYPE & SIZE

L ½" MIN. SPACE

\_\_ 2x STUDS @ 24" O.C. MAX

BEARING WALL DETAIL
SCALE: NONE

L TOP PLATES AND SILL PLATES SHALL BE THE SAME SPECIES AS THE WOO

STUDS. F THE BEARING WALL IS INDICATED WITH THE BW1, BW4, BW7, BW10, THESE WAI IS ARE ONLY SUPPORTING THE FLOOR LOAD AND DO NOT HAVE UPLIFT.

WALLS ARE ONE. SOPPORTING THE PLOOF COOR AND ON NOT PAVE OPEN T THE STUDS ARE TOE NAILED TO THE PLATE AND THE 2X PLATE CAN BE ATTACHED WITH HARD CASED NAILS (GUN NAILS) AND WILL NOT REQUIRE T ANCHOR BOLT ATTACHMENT INDICATED IN THE BEARING WALL SCHEDULE.

2x4 SPF#2 w/ 2-12d NAILS @ 24" O.C

ROOF TRUSS -

SIMPSON DTC w/4-8d NAILS TO -

TOP PLATE AND 2-8d NAILS @ SLOT @ 4'-0" O.C. MAX

2x PT BOTTOM PLATE -

CRIPPLE STUDS @ 16" O.C. w/ (1) SIMPSON SP2 CONNECTOR @ TOP AND BOTTOM PROVIDE (3) 2x CRIPPLE STUDS BELOW ANY GIRDER TRUSS BEARING OVER HEADE PHOVIDE (3) 2X CHIPPLE STUDS BELVOW ANY GIRDLER I RUSS BEARING OVER HEAD. ONNECT G.T. TO STUD W. (2) SIMPSON HTS20 STRAPS AND CONNECT BOTTOM OF TUD TO HEADER W. (2) SIMPSON HTS20 STRAPS, U.N.O. (IF STUD IS LESS THAN 10° ALL THEN USE SIMPSON CSI BINSTALLED FROM BOTTOM OF HEADER, UP STUD VER TOP PLATE & BACK DOWN OTHER SIDE OF WALL TO BOTTOM OF HEADER. ASTEN STRAP w/ (2) 10d NAILS @ 3" O.C.) FASTENING REQUIREMENTS & SEE PLANS FOR SIZE)

HEADER SCHEDULE

FLAN. F HEADER IS ON THE 2ND FLOOR SEE PLAN FOR

SIMPSON SP4 HTT4 w/ (18) 16d x 2 1/2" NAILS & 5/8"¢ A.T.R. EPOXIED w/ 6" MIN. EMBEDMENT (MIN.) BASE CONNECTION AT EACH SIDE U.N.O. ON PLANS (IF AT STEP, 6" MIN. EMBEDMENT PAST

ES: OPENINGS GREATER THAN 4'-0" PROVIDE (2) 2x SILL PLATE w/ A35 CLIPS EACH SIDE. NO TOP PLATE SPLICES SHALL OCCUR OVER SIMPSON SP4 / USP SPT4 SIMPSON SP6 / USP SPT6 SIMPSON SP8 / USP SPT8 NO TOP PLATE SPLICES SHALL OCCUR OVER
OR WITHIN 2 FEET OF HEADER.
HOLD DOWN CONNECTIONS NOT REQUIRED AT
BEARING WALLS WITHOUT UPLIFT.


HD TYPICAL FRAMING CONNECTIONS AT OPENINGS

		BEAM SCHEDULE			
MARK	BEAM SIZE	FASTENING SCHEDULE			
BM1	(2) 2x8 SYP #2 w/ 7/16" OSB FLITCH PLATE		LAN L	LAN	
BM2	(2) 2x10 SYP #2 w/ 7/16" OSB FLITCH PLATE.	(2) ROWS OF 12d @ 12" O.C. TYP. EACH SIDE	U.N.O. ON FRAMING PLAN	U.N.O. ON FRAMING PLAN	
ВМЗ	(2) 2x12 SYP #2 w/ 7/16" OSB FLITCH PLATE.		E	Æ	
BM4	(2) 1 3/4"x11 1/4" LVL 2.0E Fb=2600		HTS20	HTW20	
BM5	(2) 1 3/4"x11 7/8" LVL 2.0E Fb=2600	(00.00 / 00.00 /	18 OR (2)	CONNECTOR (2) LSTA18 OR (2) HTW20 <u>LUMN:</u> (2) HTA16	
BM6	(2) 1 3/4"x16" LVL 2.0E Fb=2600	(2) ROWS 1/4" x 3 1/2" SDS WOOD SCREWS @ 16" O.C TYP. EACH SIDE OR (2) ROWS OF 12d NAILS @ 12" O.C. TYP. EACH SIDE	SIMPSON CONNECTOR OST: (2) LSTA18 OR (3 NU COLUMN: (2) HETA:	USP CONNECTOR T: (2) LSTA18 OF J COLUMN: (2) HT	
ВМ7	(3) 2x10 SYP #2 w/ (2) 7/16" OSB FLITCH PLATES		SIMPSON CONNECTOR WOOD POST: (2) LSTA18 OR (2) HTS20 CMU COLUMN: (2) HETA16	WOOD POST:	
BM8	(3) 1 3/4"x9 1/4" LVL 2.0E Fb=2600		MOOI	WOOD	
GENEE	AL BEAM NOTES:				

ENERAL BEAM NOTES: VERIFY WITH PLAN CORRECT LENGTH OF BEAMS REQUIRED (MIN 4" BEARING EACH


END)
SEE PLAN FOR TOP OR BOTTOM OF BEAM NDICATIONS
BEAMS ARE NOT TO BE BOILLED OR NOTCHED IN ANY WAY WITHOUT WRITTEN
APPROVAL FROM THE E.O.R.
ALL LIVIS MAY BE SUBSTITUED WITH POWER BEAM GLUELAM FB3000 E-2.1 FV-300
EQUAL TO SIZE OF LIVI CALLED OUT ON PLAN.

NON-BRG INTERIOR WALL SEE HD/SN FOR ADDITIONAL HEADER INFORMATION 0.S.B. EACH SIDE 2x BLOCKING TO O.S.B. w/ 2-8d EA. END HEADER, SEE PLAN FOR LOCATION AND SIZE EDGE VIEW 3-16d COMMON NAILS, TYP 2x8 w/ 2-16d TOE -NAILS EA. END ⅓6" OSB w/6d NAILS @ 16" O.C. TO SIDE AND TOP NAILER 2x w/ 2-16d TOE NAILS EA. END 2x4 SPF CONT. BLOCKING ATTACHED TO 7/6" OSB w/ 2-8d NAIL 7'-0" MAX OPENING

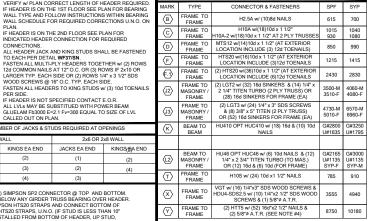

SIMPSON - CONNECTOR SCHEDULE

- DENAILS. LL TRUSS TO TRUSS CONNECTIONS ARE PROVIDED BY TRUSS MANUFACTURER, U.N.O ON
- FOR SINGLE PLY TRUSSES, SCAB ON FULL HEIGHT SYP #1 2"x4" TO TRUSS VERTICAL WEB w/ (2) ROWS OF 10d NAILS @ 3" O.C. STAGGERED.
  MINIMUM A.T.R. EMBEDMENT: 5" EMBEDMENT FOR 1/2" A.T.R. 6" EMBEDMENT FOR 7/8" A.T.R.
  8" EMBEDMENT FOR 7/8" A.T.R. (IF AT STEP, DEPTH IS FROM LOWER SLAB).
- MINIMAL CONNECTOR UNO ON FRAMING PLAN ON FOR ALL ROOF / FLOOR TRUSSES TO I
- CONNECTION FOR ALL ROOF FFLOOR TRUSSES TO MASONRY WALLS! LIMITELES/ICP WALLS UNO ON PLAN CONNECTION AT 24" OR 32" O.C. PENDING VERTICALS FOR ALL FLOOR TRUSSES PARALLEL TO MASONRY WALLS SEE DETAIL FB12/D3 FOR MORE INFORMATION CONNECTION FOR ALL HIP JACK (CORNER JACK) TO MASONRY WALLS/ICF WALLS/LINTELS CONNECTION FOR ALL CONTINUOUS RIM BOARD TO TO FOP OF MASONRY AT 32" O.C. MAX. W (2) AT EACH CORNER, G.C. TO VERIFY LOCATION DOES NOT CONFLICT W/TJI (IF APPLICABLE) LAYOUT
- CONNECT ALL FLOOR TRUSSES TO INTERIOR BEARING WOOD WALL/BEAMS w/ (2) 12d
- B MINIMAL CONNECTOR UNO ON FRAMING PLAN CONNECTION FOR JACK TRUSS TO WOOD WALL OR BEAM C MINIMAL CONNECTOR UNO ON FRAMING PLAN

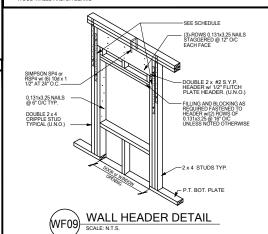

(2)- 2y TOP PLATE REYOND -(F)-(0) -BH 2x STUDS BEYOND. SEE PLAN (IF 2 STORY SHEET STA FROM BOTT G / FLOOR SYSTEM —A— 2x RIBBON OR BLOCKING BETWEEN FLOOR SYSTEM **HORIZONTAL** AT ALL PANEL BLOCKING LOCATIONS SHALL BE MIN 2 X 4 #2 SPF TURNED VERTICAL W 7/16" FLITCH PLATE TO W! (2) 12 TOENAILS EA. END. NAIL FLITCH PLATE TO VERTICAL W! (4) 8d NAILS

WALL ELEVATION DIAGRAM SINGLE NAIL EDGE SPACING DOUBLE NAIL EDGE SPACING

(2) 8d NAILS @ 3" O.C. STAGGERED FOR SHEATHING VERTICAL BLOCKING SECTION X-X

CH PER NAILING SCHEDULE. PANEL EDGES WILL NEED TO BE TACHED TO STUD AND OR BLOCKING AT ALL EDGES. A MINIMUM 1/8" ACE IS RECOMMENDED BETWEEN PANELS AT EDGES AND END NETRATE SURFACE MORE THAN 1/8".

A NAIL AT BASE 2 ROWS @ 4" O.C. w/ 8d COMMON NAIL

(B) NAIL AT TOP PLATE TWO ROWS @ 4" O.C. w/ 8d COMMON NAIL

NAIL OPENING PERIMETER W/ (2) ROWS @ 4" O.C. W/ 8d COMMON NAIL


NAIL INTERIOR AT 6" O.C. w/ 8d COMMON NAIL.

E STAGGER ALL VERTICAL JOINTS & NAIL @ 4" O.C.

(F) PLYWOOD SPLICES @ HEADER - NAIL SHEATHING TO HEADER w/ 8d COMMON NAILS @ 4\* O.C. (2) ROWS @ TOP & BOTT.

 $\mbox{\ \ \, }$  (2) 8d NAILS @ 3" O.C. TO EACH TRUSS END OR @ VERTICAL MEMBER IF GABLE END.

TB13\ WALL SHEATHING INSTALL & NAILING SCHEDULE

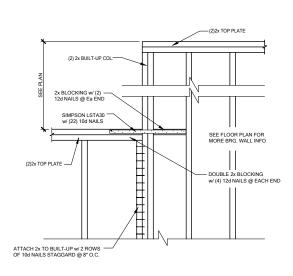


LOT 13 RESERVE @ JEWEL LAKE 160 SW BRE LANE LAKE CITY, FL 32024 PLAN NUMBER: 33911776

RADFORD

NTURY

2x4 STUDS, PER PLAN - TOP SPLICE BEYOND AGAINST 2x8 STUD -AT ALL EXTERIOR CONDITIONS —
ATTACH 2x STUDS TO TOP PLATE w/ 4-16d NAILS (2 ON EA SIDE) 2x8 STUDS, PER PLAN (SIM w/2x6 STUDS) -PROVIDE 2x4 ON TOP OF 2x8 TO BLOCK — OUT TOP PLATE ATTACH w/ 2-ROWS OF 12d @ 3" O.C. (SOLID BLOCK w/ 2x6) TOP PLATE TRANSITION PIPE OR DUCT W PENETRATION
THRU TOP PLATE W MORE THAN
50% OF TOP PLATE WIDTH
INSTALL SIMPSON PSPNS162
W12-16d NAILS TOP AND BOTTOM
AT ALL EVERING CONDITIONS 2x TOP PLATE WITH 2-ROWS OF 12d @ 3" O.C., TYPICAL - TOP PLATE SPLICE AT ALL EXTERIOR CONDITIONS ATTACH 2X STUDS TO TOP PLATE W/ (4) 16d NAILS (2 ON EA. SIDE) TYP BOTTOM SPLICE OVER STUD TOP PLATE SPLICE



2-2x4 LAMINATIONS w/ 3-2x\_LAMINATIONS w/ 2-ROWS OF ROWD OF STAGGERED 10d STAGGERED 16d COMMON WIRE NAILS D = 0.148°, L= 3°) OR EQUAL (D = 0.162°, L= 3-1/2°) OR EQUAL


NOTES:


1. ADJACENT NAILS ARE DRIVEN FROM OPPOSITE SIDES OF THE COLUMN.

2. ALL NAILS PENETRATE AT LEAST ¾" OF THE THICKNESS OF THE LAST LAMINATION

REFER TO NDS SECTION 15.3 FOR ADDITIONAL INFO.

MULI-PLY FASTENING (WF37) SCALE: 3/4" = 1'-0" @ 22x34 SCALE: 3/8" = 1'-0" @ 11x17

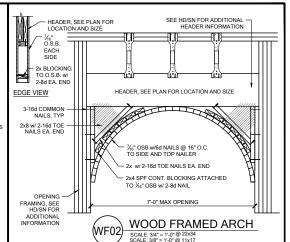

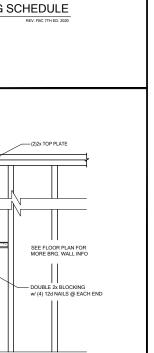

SHEET NO: WALL STEP @ BRG. FRAME WALL SCALE: 3/4" = 1'-0" @ 22x34 SCALE: 3/8" = 1'-0" @ 11x17

