

BEARING HEIGHT SCHEDULE

	9'-0"
	11'-0"

2X6 EXTERIOR WALLS

NOTES:

- 1) REFER TO HDB 91 (RECOMMENDATIONS FOR HANDLING INSTALLATION AND TEMPORARY BRACING) REFER TO ENGINEERED DRAWINGS FOR PERMANENT BRACING REQUIRED.
- 2) ALL TRUSSES (INCLUDING TRUSSES UNDER VALLEY FRAMING) MUST BE COMPLETELY DECKED OR REFER TO DETAIL V05 FOR ALTERNATE BRACING REQUIREMENTS.
- 3) ALL VALLEYS ARE TO BE CONVENTIONALLY FRAMED BY BUILDER.
- 4) ALL TRUSSES ARE DESIGNED FOR 2.0 C MAXIMUM SPACING, UNLESS OTHERWISE NOTED.
- 5) ALL WALLS SHOWN ON PLACEMENT BEARING, UNLESS OTHERWISE NOTED.
- 6) 5Y42 TRUSSES MUST BE INSTALLED WITH THE TOP BEING UP.
- 7) ALL ROOF TRUSSES HANGERS TO BE SIMPSON H5326 UNLESS OTHERWISE NOTED. ALL FLOOR TRUSSES HANGERS TO BE SIMPSON TH4422 UNLESS OTHERWISE NOTED.
- 8) BEAMHANGER/INTEL (H08) TO BE FURNISHED BY BUILDER.

SHOP DRAWING APPROVAL

THIS LAYOUT IS THE SCALE SOURCE FOR FABRICATION OF TRUSSES AND VIDS. ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS, REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

Engineered Sherry Date: _____

Approved by: _____ Date: _____



Bunnell

PHONE: 904-437-3349 FAX: 904-437-3984

PHONE: 904-772-6100 FAX: 904-772-1973

Jacksonville

Lake City

PHONE: 904-755-6844 FAX: 904-755-7973

Sanford

PHONE: 407-322-0059 FAX: 407-322-5553

BUILDER

HUGO ESCALANTE

NORRIS RES.

TEAM DESIGN

CUSTOM

DATE: 2-20-06

REVISION


SCALE: NTS

DATE: 2-20-06

REVISION

SCALE: NTS

DATE: 2-20-06

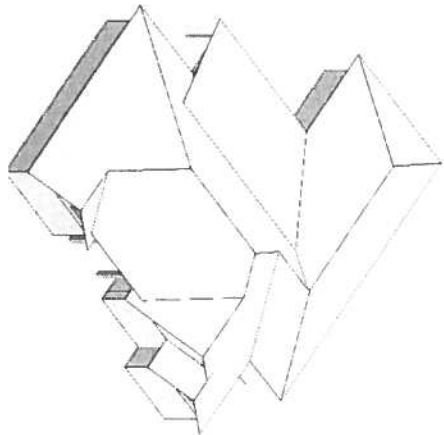

7/12 PITCH
3/12 SHED ON
REAR PORCH
2' OH

