
MITEK PLATE APPROVAL #'S 2197.2-2197.4, BOISE EWP PRODUCT #'S LVL FL1644-R2, BCI JOISTS FL1392-R2

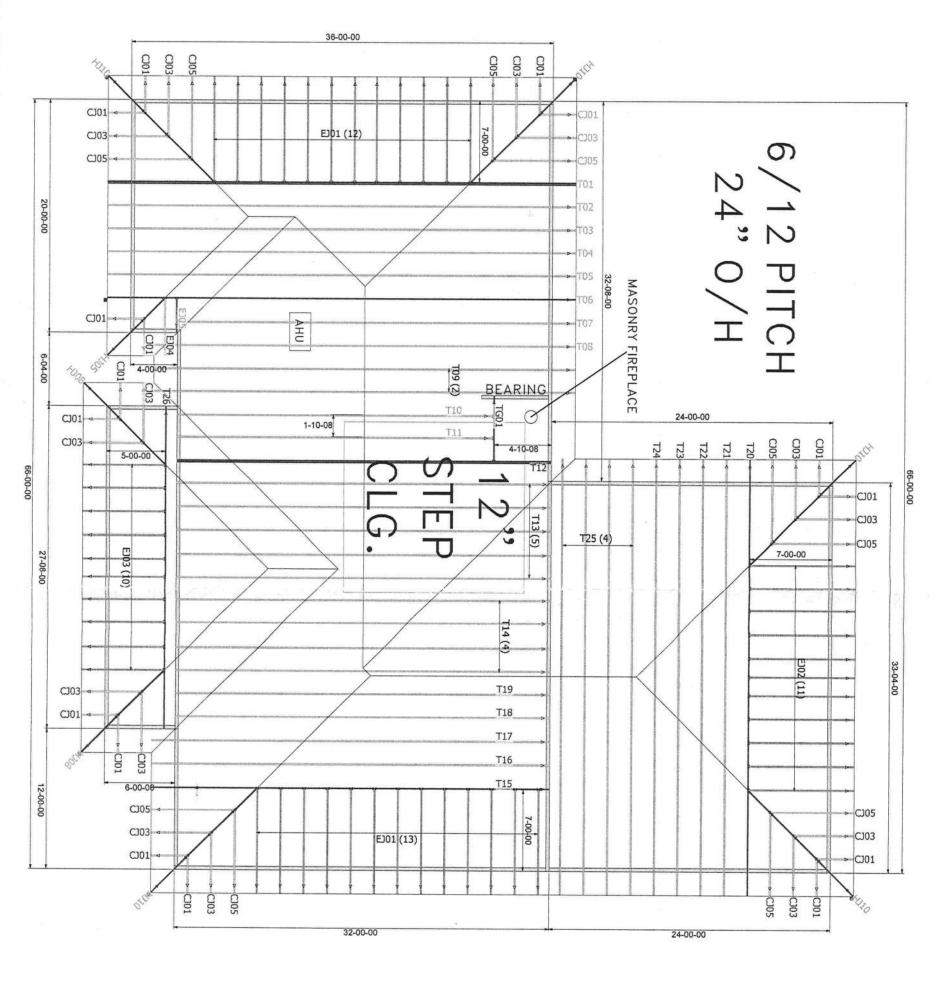

THE ARROW HEAD AT THE END OF THE TRUSS ON THE TRUSS PLACEMENT PLAN GLAYOUT)
CORRESPONDS WITH THE LEFT SIDE OF THE LEFT SIDE O 3

DRAWING, USE THIS AS AN ORIENTATION GUIDE WHEN SETTING THE IRUSSES ON THE STRUCTURE.

eral Notes:

5

Per ANS/IFP1 1:2002 all "Truss to Wall" connections are the responsibility of the Building Designer, not the Fruss Manufacturer.

- Use Manufacturer's specifications for all hanger nonnections unless noted otherwise.

- Trusses are to be 24° o. U.N.O.

- All hangers are to be Simpson or equivalent U.N.O.

- Use 10d x 1 1/2" Nails in hanger connections to single ply

Trusses are not designed to support brick U.N.O.

Dimensions are Feet-Inches' Sixteenths

No back charges will be accepted by Builders FirstSource unless approved in writing first. 850-835-4541

ACQ lumber is corrisive to truss plates. Any ACQ lumb that comes in contact with truss plates (i.e. scabbed on tails) must have an approved barrier applied first.

Refer to BCSI-B1 Summary Sheet-Guide for handling. Installing and Bracing of Metal Plate Connected Wood Truss prior to and during truss installation.

It is the responsibility of the Contractor to ensure of the proper orientation of the truss placement plans as to the construction documents and field conditions of the structure orientation. If a reversed or flipped layout is required, it will be supplied at no extra cost by Builders FirstSource.

It is the responsibility of the Contractor to make sure the placement of trusses are adjusted for plumbing drops, can lights, ect..., so the trusses do not interfere with these

All common framed roof or floor systems must be designed as to NOT impose any loads on the floor trusses below. The floor trusses have not been designed to carry any additional loads from above.

This truss placement plan was not created by an engineer, but rather by the Builders Firs/Source staff and is solely to be used as an installation guide and does not require a seal. Complete truss engineering and analysis can be found on the truss design drawings which may be sealed by the truss design engineer.

Sable end trusses require continuous bottom chord bearing. Refer to local codes for wall framing

Although all attempts have been made to do so, trussess may not be designed symmetrically. Please refer to the individual truss drawings and truss placement plans for proper orientation and placement.

Builders

FIRSTSOURCE

Lake City PHONE: 386-755-6894

Jacksonville PHONE: 904-772-6100 FAX: 386-755-7973

FAX: 904-772-1973 Tallahassee

PHONE: 850-576-5177

GIEBEIG CONST

egal Add

Sullivan Res.

Custom riginal Ref#:

3 - 14 - 21KLH Floor 2 Job#: N/A 2714404 Roof Job #: 2714404