

Columbia County Building Permit Application

Revised 9-23-04

For Office Use Only Application # _____ Date Received _____ By _____ Permit # 1079/24518
 Application Approved by - Zoning Official _____ Date _____ Plans Examiner _____ Date _____
 Flood Zone _____ Development Permit _____ Zoning _____ Land Use Plan Map Category _____
 Comments _____

Applicants Name Wiregrass Home Builders Phone 850 656 5669 x111
 Address 2258 Remington Green Circle Tall. Fl. 32308
 Owners Name Wiregrass Home Builders Phone 850 656 5669
 911 Address 306 S.E. LINDSEY GLEN
 Contractors Name ROBERT EGERS, Human Scale Builders Phone 904 635 2326
 Address 3365 Eunice Road Jacksonville, Fl. 32250
 Fee Simple Owner Name & Address Wiregrass Home Builders
 Bonding Co. Name & Address N/A
 Architect/Engineer Name & Address Freeman Design Group, Lake City, Fl.
 Mortgage Lenders Name & Address N/A

Circle the correct power company FL Power & Light ~~Clay Elec.~~ - ~~Suwannee Valley Elec.~~ - ~~Progressive Energy~~
 Property ID Number 03-45-17-0748-113 Estimated Cost of Construction 80,000
 Subdivision Name HAIGHT-ASHBURY Lot 13 Block 1 Unit 1 Phase 1
 Driving Directions BAY AVE. + 441, EAST TO COUNTRY CLUB, TURN (R) ON COUNTRY CLUB TO S/D ON LEFT ACROSS FROM ENTRANCE TO PARK.

Type of Construction FF Frame on SLAB Number of Existing Dwellings on Property 0
 Total Acreage .50 Lot Size 71x120 Do you need a - Culvert Permit or Culvert Waiver or Have an Existing Drive
 Actual Distance of Structure from Property Lines - Front 27 Side 25'8" Side 19'4" Rear 129'10"
 Total Building Height 16'3.5" Number of Stories 1 Heated Floor Area 1328 Roof Pitch 5/12

Application is hereby made to obtain a permit to do work and installations as indicated. I certify that no work or installation has commenced prior to the issuance of a permit and that all work be performed to meet the standards of all laws regulating construction in this jurisdiction.

OWNERS AFFIDAVIT: I hereby certify that all the foregoing information is accurate and all work will be done in compliance with all applicable laws and regulating construction and zoning.

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOU PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

Owner Builder or Agent (including Contractor)

FORREST F. BOONE

STATE OF FLORIDA
COUNTY OF COLUMBIA

Contractor Signature

Contractors License Number _____

Competency Card Number _____

NOTARY STAMP/SEAL

Sworn to (or affirmed) and subscribed before me

this 1st day of May 2006.

Personally known X or Produced Identification _____

James A. Olson

Notary Signature

CK# 9404

Columbia County Building Permit Application

452.58

Revised 9-23-04

For Office Use Only Application # 0603-118 Date Received 3-31-06 By LA Permit # _____
 Application Approved by - Zoning Official BLK Date 05-04-06 Plans Examiner OKJTH Date 4-26-06
 Flood Zone X Per Plat Development Permit N/A Zoning RSF-2 Land Use Plan Map Category RES. L-Dev
 Comments SITE PLAN ON PLANS
656-5475

Applicants Name Robert + Eggers
Lifestyles Development Co. Phone 850 656 5669
 Address 2858 REMINGTON GREEN CIRCLE
 Owners Name WIReGRASS HomeBUILDER Phone 850 933 0434
 911 Address 306 S.E. LINDALE GLEN Lake City FL 32024
 Contractors Name HERB SEAL Phone 850 656 5669
 Address 2858 REMINGTON GREEN CIRCLE
 Fee Simple Owner Name & Address WIReGRASS HomeBUILDER
 Bonding Co. Name & Address N/A
 Architect/Engineer Name & Address FREEMAN DESIGN GROUP
 Mortgage Lenders Name & Address N/A

Circle the correct power company - FL Power & Light - Clay Elec. - Suwannee Valley Elec. - Progressive Energy
 Property ID Number 03-45-17-07486-113 Estimated Cost of Construction 80,000
 Subdivision Name HAIGHT-ASHBURY Lot 13 Block _____ Unit _____ Phase _____
 Driving Directions Bayview + 441, EAST TO COUNTRY CLUB (R) + SOUTH TO 50 ON LEFT

Type of Construction SF FRAME ON SLAB Number of Existing Dwellings on Property 0
 Total Acreage .50 Lot Size 71X120 Do you need a Culvert Permit or Culvert Waiver or Have an Existing Drive
 Actual Distance of Structure from Property Lines - Front 27' Side 25'2" Side 19'4" Rear 129'10"
 Total Building Height 16'3.5" Number of Stories 1 Heated Floor Area 1328 Roof Pitch 5/12
PORCH 25 GARAGE 404 TOTAL 1757

Application is hereby made to obtain a permit to do work and installations as indicated. I certify that no work or installation has commenced prior to the issuance of a permit and that all work be performed to meet the standards of all laws regulating construction in this jurisdiction.

OWNERS AFFIDAVIT: I hereby certify that all the foregoing information is accurate and all work will be done in compliance with all applicable laws and regulating construction and zoning.

WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOU PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT.

[Signature]
 Owner Builder or Agent (Including Contractor)

STATE OF FLORIDA
 COUNTY OF COLUMBIA

Sworn to (or affirmed) and subscribed before me
 this 17 day of March 20 06
 Personally known X or Produced Identification _____

[Signature]
 Contractor Signature
 Contractors License Number CBC 024618
 Competency Card Number _____
 NOTARY STAMP/SEAL

[Signature]
 Notary Signature



1311 MESSAGE 4/27/06


STATE OF FLORIDA
DEPARTMENT OF HEALTH

APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT

Permit Application Number 06-0344N

PART II - SITE PLAN

Scale: Each block represents 5 feet and 1 inch = 50 feet.

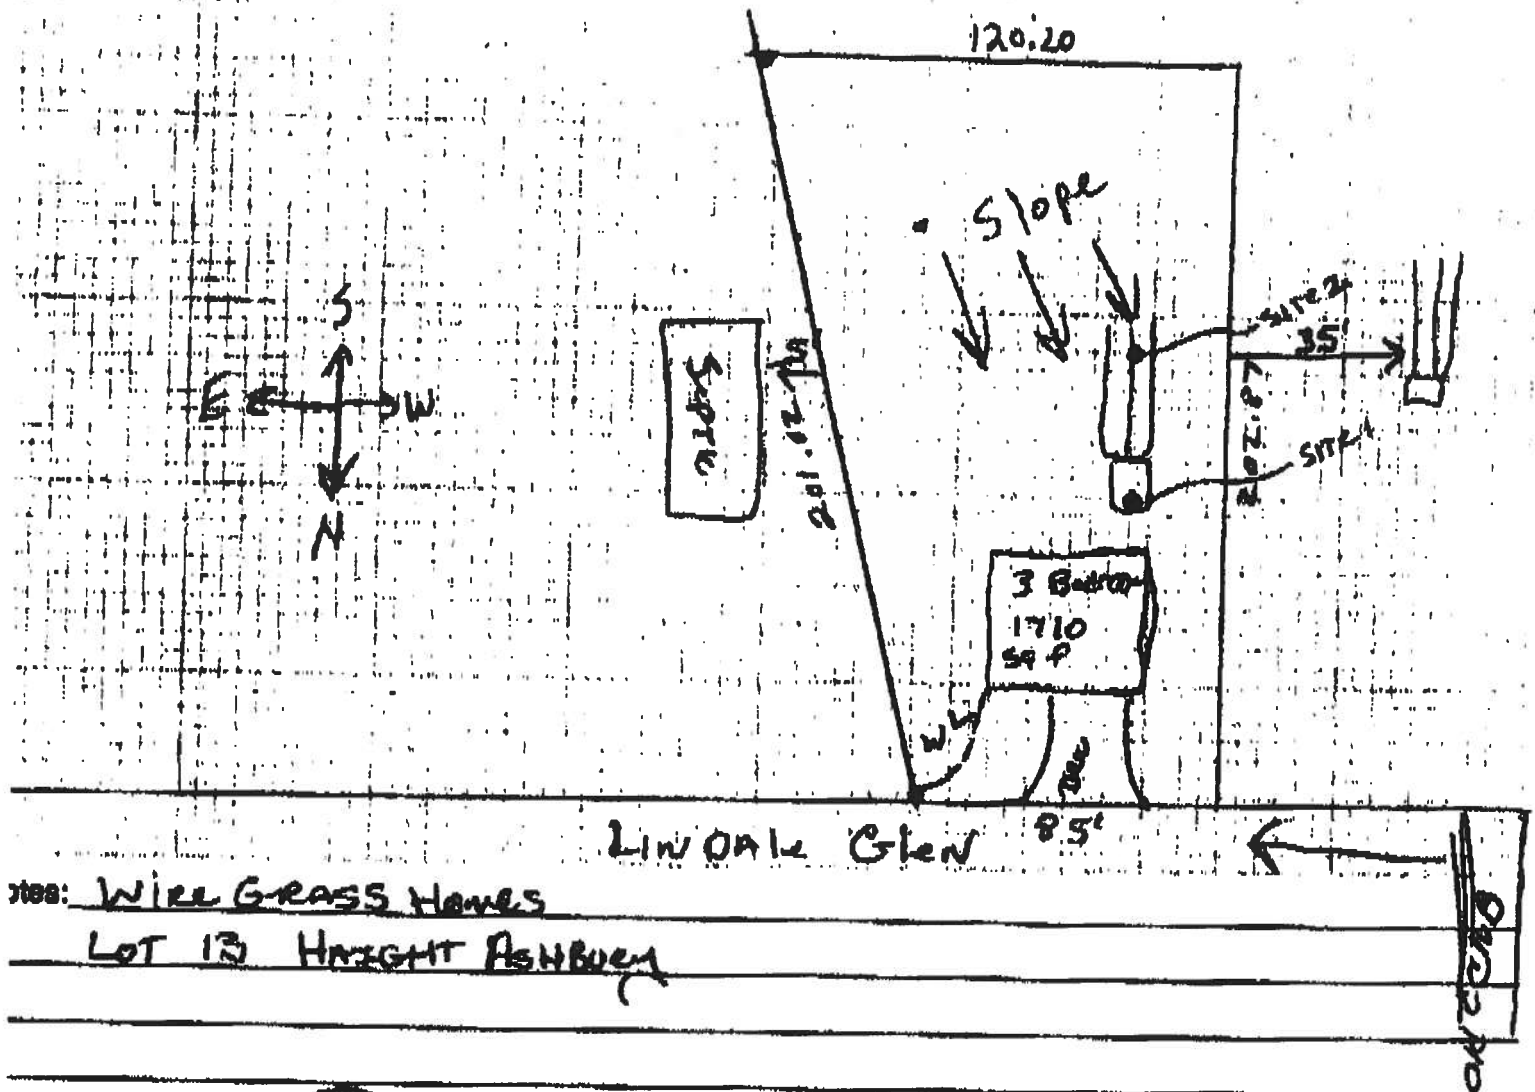Site: WILL GRASS HOMESLOT 13 HIGHT ASHBOURNSite Plan submitted by: Robert W. Ford

Signature

an Approved ✓

Not Approved _____

Agent _____

Title

Date 4/7/06

County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT

Columbia County Property Appraiser

DB Last Updated: 3/7/2006

Parcel: 03-4S-17-07486-113

2006 Proposed Values

[Tax Record](#)
[Property Card](#)
[Interactive GIS Map](#)
[Print](#)

Owner & Property Info

Search Result: 1 of 1

Owner's Name	WIREGRASS HOME BUILDERS INC
Site Address	
Mailing Address	P O BOX 2253 DOTHAN, AL 36302
Brief Legal	LOT 13 HAIGHT-ASHBURY S/D. WD 1021-2921.

Use Desc. (code)	VACANT (000000)
Neighborhood	3417.00
Tax District	2
UD Codes	MKTA06
Market Area	06
Total Land Area	0.470 ACRES

Property & Assessment Values

Mkt Land Value	cnt: (1)	\$18,000.00
Ag Land Value	cnt: (0)	\$0.00
Building Value	cnt: (0)	\$0.00
XFOB Value	cnt: (0)	\$0.00
Total Appraised Value		\$18,000.00

Just Value	\$18,000.00
Class Value	\$0.00
Assessed Value	\$18,000.00
Exempt Value	\$0.00
Total Taxable Value	\$18,000.00

Sales History

Sale Date	Book/Page	Inst. Type	Sale VImp	Sale Qual	Sale RCode	Sale Price
6/30/2004	1021/2921	WD	V	U	02	\$115,000.00

Building Characteristics

Bldg Item	Bldg Desc	Year Blt	Ext. Walls	Heated S.F.	Actual S.F.	Bldg Value
NONE						

Extra Features & Out Buildings

Code	Desc	Year Blt	Value	Units	Dims	Condition (% Good)
NONE						

Land Breakdown

Lnd Code	Desc	Units	Adjustments	Eff Rate	Lnd Value
000000	VAC RES (MKT)	1.000 LT - (.470AC)	1.00/1.00/1.00/1.00	\$18,000.00	\$18,000.00

Columbia County Property Appraiser

DB Last Updated: 3/7/2006

1 of 1

Disclaimer

24518

Notice of Treatment

Applicator: **Florida Pest Control & Chemical Co. (www.flapest.com)**Address: 1414 AveCity: 1Phone: 232-701-1111Site Location: Subdivision Hastings SubLot # 13Block# 1Permit # 1Address 306 So LincolnProduct usedActive Ingredient% Concentration☐ Premise Imidacloprid 0.1%☐ Termidor Fipronil 0.12%☐ Bora-Care Disodium Octaborate Tetrahydrate 23.0%

Type treatment:

☐ Soil☐ WoodArea TreatedSquare feetLinear feetGallons Applied1111111111111111

As per Florida Building Code 104.2.6 – If soil chemical barrier method for termite prevention is used, final exterior treatment shall be completed prior to final building approval.

If this notice is for the final exterior treatment, initial this line _____.

Date _____

Time _____

Print Technician's Name _____

Remarks: _____


Applicator - White

Permit File - Canary

Permit Holder - Pink

10/05



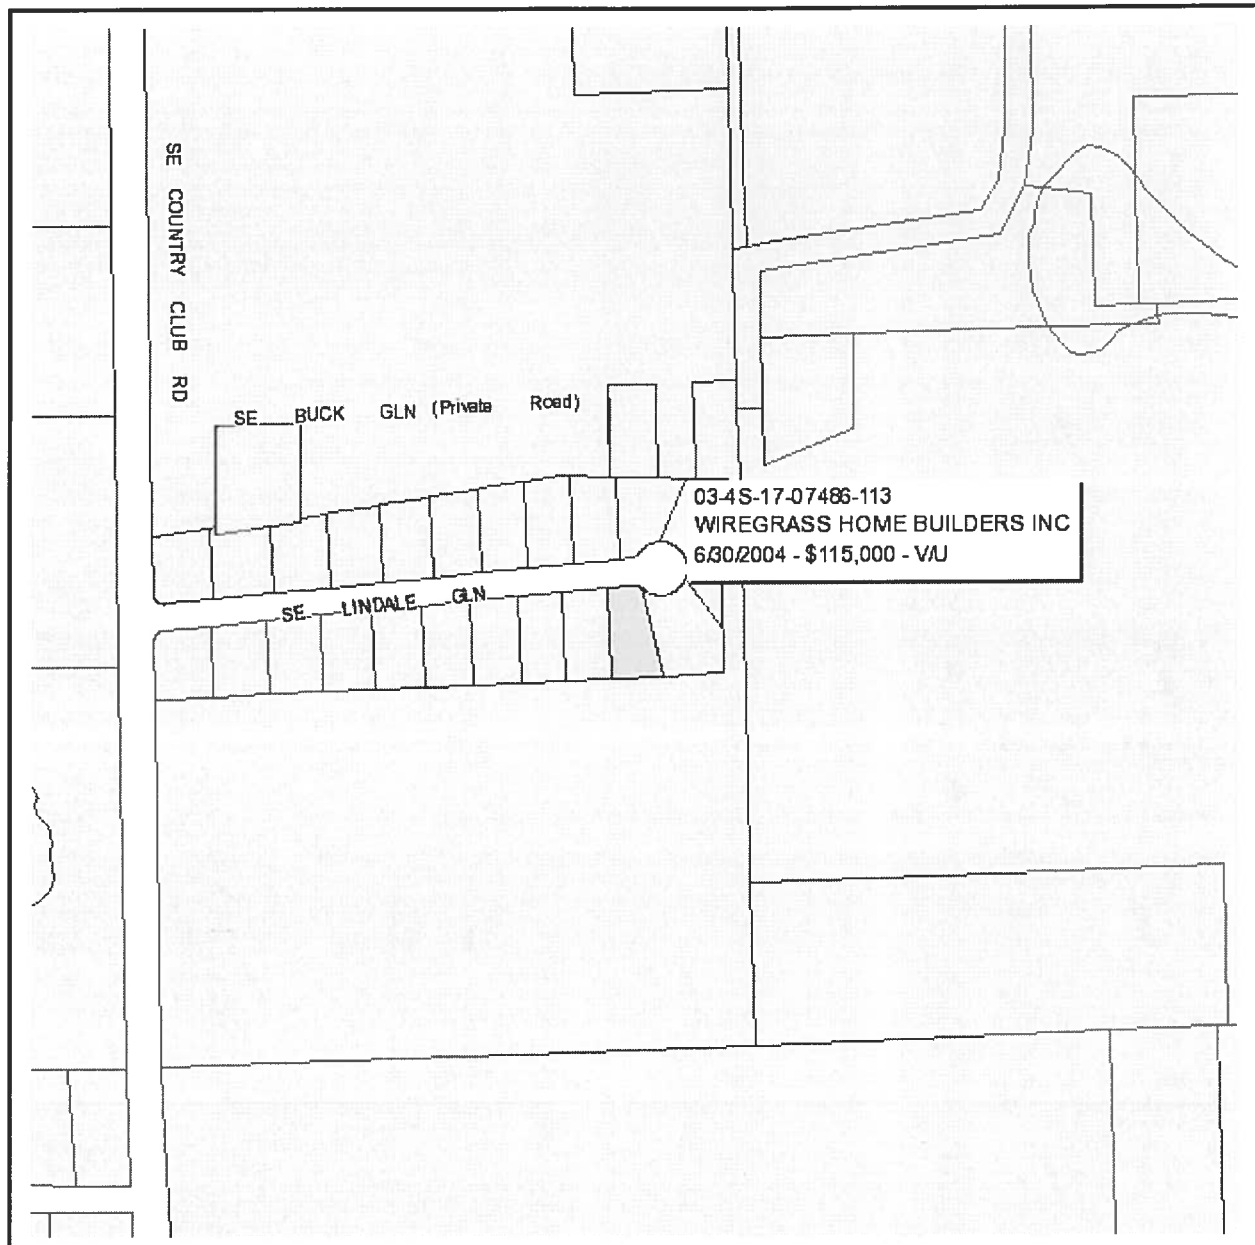

Columbia County Property Appraiser


J. Doyle Crews, CFA - Lake City, Florida - 386-758-1083

PARCEL: 03-4S-17-07486-113 - VACANT (000000)

LOT 13 HAIGHT-ASHBURY S/D. WD 1021-2921.

Name: WIREGRASS HOME BUILDERS INC	LandVal	\$18,000.00
Site:	BldgVal	\$0.00
Mail: P O BOX 2253	ApprVal	\$18,000.00
DOTHAN, AL 36302	JustVal	\$18,000.00
Sales Info 6/30/2004 \$115,000.00V / U	Assd	\$18,000.00
	Exmpt	\$0.00
	Taxable	\$18,000.00

0 170 340 510 ft



This information, GIS Map Updated: 2/7/2006, was derived from data which was compiled by the Columbia County Property Appraiser Office solely for the governmental purpose of property assessment. This information should not be relied upon by anyone as a determination of the ownership of property or market value. No warranties, expressed or implied, are provided for the accuracy of the data herein, it's use, or it's interpretation. Although it is periodically updated, this information may not reflect the data currently on file in the Property Appraiser's office. The assessed values are NOT certified values and therefore are subject to change before being finalized for ad valorem assessment purposes.

Wiregrass Home Builders Inc.

2858 Remington Green Circle
Tallahassee, Florida 32308

Telephone (850) 656 5669
Fax (850) 656 9226

To: Building and Zoning Dept.
Columbia County, Florida

From : Forrest Boone

Re: Authorized representatives

Effective immediately Robert Eggers of Human Scale Builders will be our sole authorized representative and builder in Columbia County. The documents and plans currently in your possession which relate to lots 13,17 and 18 of the Haight -Ashbury subdivision and lot 37 of the Price Creek Landing subdivision are the property of Wiregrass Home Builders Inc. and should be delivered to Robert Eggers upon completion of your review process. This letter of authorization should replace any previous authorization given other persons and any such previously given authorization is now null and void.

Thank you for your assistance. We continue to appreciate all you do to facilitate building in Columbia County in such a timely manner.


FORREST F. BOONE

Columbia County Building Department Culvert Permit

Culvert Permit No.
000001079

DATE 05/15/2006 PARCEL ID # 03-4S-17-07486-113
APPLICANT ROBERT EGGERS PHONE 904-635-2326
ADDRESS 3365 EUNICE ROAD JACKSONVILLE FL 32250
OWNER WREGRASS HOME BUILDERS PHONE 850-656-5669
ADDRESS 306 SE LINDALE GLEN LAKE CITY FL 32025
CONTRACTOR ROBERT EGGERS PHONE 904-635-2326
LOCATION OF PROPERTY BAYA AVE EAST, R CUNTRY CLUB RD, L INTO HAIGHT ASHBUEY S/D
THEN LAST LOT ON RIGHT BEFORE CUL-DE-SAC

SUBDIVISION/LOT/BLOCK/PHASE/UNIT HAIGHT-ASHBURY 13

SIGNATURE

INSTALLATION REQUIREMENTS



Culvert size will be 18 inches in diameter with a total length of 32 feet, leaving 24 feet of driving surface. Both ends will be mitered 4 foot with a 4 : 1 slope and poured with a 4 inch thick reinforced concrete slab.

INSTALLATION NOTE: Turnouts will be required as follows:

- a) a majority of the current and existing driveway turnouts are paved, or;
- b) the driveway to be served will be paved or formed with concrete.

Turnouts shall be concrete or paved a minimum of 12 feet wide or the width of the concrete or paved driveway, whichever is greater. The width shall conform to the current and existing paved or concreted turnouts.



Culvert installation shall conform to the approved site plan standards.



Department of Transportation Permit installation approved standards.



Other _____

**ALL PROPER SAFETY REQUIREMENTS SHOULD BE FOLLOWED
DURING THE INSTALATION OF THE CULVERT.**

135 NE Hernando Ave., Suite B-21
Lake City, FL 32055
Phone: 386-758-1008 Fax: 386-758-2160

Amount Paid 25.00



FLORIDA ENERGY EFFICIENCY CODE FOR BUILDING CONSTRUCTION

Florida Department of Community Affairs Residential Whole Building Performance Method A

Project Name: **Height Ashbury Lot 13**
Address:
City, State: ,
Owner:
Climate Zone: **South**

Builder: **Robert Eggers**
Permitting Office: **Columbia County**
Permit Number: **24518**
Jurisdiction Number: **221400**

- | | | |
|--|--------------------------------|-----------------------|
| 1. New construction or existing | New | ___ |
| 2. Single family or multi-family | Single family | ___ |
| 3. Number of units, if multi-family | 1 | ___ |
| 4. Number of Bedrooms | 3 | ___ |
| 5. Is this a worst case? | Yes | ___ |
| 6. Conditioned floor area (ft ²) | 1328 ft ² | ___ |
| 7. Glass area & type | Single Pane | Double Pane |
| a. Clear glass, default U-factor | 0.0 ft ² | 136.0 ft ² |
| b. Default tint | 0.0 ft ² | 0.0 ft ² |
| c. Labeled U or SHGC | 0.0 ft ² | 0.0 ft ² |
| 8. Floor types | | |
| a. Slab-On-Grade Edge Insulation | R=0.0, 170.0(p) ft | ___ |
| b. N/A | | ___ |
| c. N/A | | ___ |
| 9. Wall types | | |
| a. Frame, Wood, Exterior | R=13.0, 1360.0 ft ² | ___ |
| b. N/A | | ___ |
| c. N/A | | ___ |
| d. N/A | | ___ |
| e. N/A | | ___ |
| 10. Ceiling types | | |
| a. Under Attic | R=30.0, 1460.8 ft ² | ___ |
| b. N/A | | ___ |
| c. N/A | | ___ |
| 11. Ducts | | |
| a. Sup: Unc. Ret: Unc. AH: Attic | Sup. R=6.0, 47.0 ft | ___ |
| b. N/A | | ___ |

- | | |
|--|----------------------------------|
| 12. Cooling systems | |
| a. Central Unit | Cap: 24.0 kBtu/hr
SEER: 13.00 |
| b. N/A | ___ |
| c. N/A | ___ |
| 13. Heating systems | |
| a. Electric Heat Pump | Cap: 24.0 kBtu/hr
HSPF: 8.00 |
| b. N/A | ___ |
| c. N/A | ___ |
| 14. Hot water systems | |
| a. Electric Resistance | Cap: 50.0 gallons
EF: 0.90 |
| b. N/A | ___ |
| c. Conservation credits | ___ |
| (HR-Heat recovery, Solar | |
| DHP-Dedicated heat pump) | |
| 15. HVAC credits | MZ-C, PT, CF, ___ |
| (CF-Ceiling fan, CV-Cross ventilation, | |
| HF-Whole house fan, | |
| PT-Programmable Thermostat, | |
| MZ-C-Multizone cooling, | |
| MZ-H-Multizone heating) | |

Glass/Floor Area: 0.10

Total as-built points: 18804

Total base points: 23596

PASS

I hereby certify that the plans and specifications covered by this calculation are in compliance with the Florida Energy Code.

PREPARED BY: W. H. H. H. H.

DATE: 3/15/06

I hereby certify that this building, as designed, is in compliance with the Florida Energy Code.

OWNER/AGENT: _____

DATE: _____

Review of the plans and specifications covered by this calculation indicates compliance with the Florida Energy Code. Before construction is completed this building will be inspected for compliance with Section 553.908 Florida Statutes.



BUILDING OFFICIAL: _____

DATE: _____

SUMMER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT							
GLASS TYPES											
.18 X Conditioned X BSPM = Points Floor Area				Type/SC	Overhang Ornt Len Hgt		Area X SPM X SOF = Points				
.18	1328.0	32.50	7768.8	Double, Clear	W	1.5	6.0	60.0	61.59	0.92	3392.6
				Double, Clear	N	1.5	3.0	6.0	31.93	0.84	160.3
				Double, Clear	E	1.5	6.0	45.0	68.60	0.92	2832.2
				Double, Clear	S	1.5	6.0	15.0	58.45	0.87	766.4
				Double, Clear	S	1.5	6.0	10.0	58.45	0.87	511.0
				As-Built Total:				136.0		7662.4	
WALL TYPES											
Area X BSPM = Points				Type	R-Value		Area X SPM = Points				
Adjacent	0.0	0.00	0.0	Frame, Wood, Exterior	13.0		1360.0		2.40		3264.0
Exterior	1360.0	2.70	3672.0								
Base Total:				1360.0		3672.0		As-Built Total:		1360.0	
				3264.0							
DOOR TYPES											
Area X BSPM = Points				Type	Area X SPM = Points						
Adjacent	0.0	0.00	0.0	Exterior Wood			20.4		9.40		191.8
Exterior	39.4	6.40	252.4	Exterior Wood			19.0		9.40		179.0
Base Total:				39.4		252.4		As-Built Total:		39.4	
				370.7							
CEILING TYPES											
Area X BSPM = Points				Type	R-Value		Area X SPM X SCM = Points				
Under Attic	1328.0	2.80	3718.4	Under Attic	30.0		1460.8		2.77 X 1.00		4046.4
Base Total:				1328.0		3718.4		As-Built Total:		1460.8	
				4046.4							
FLOOR TYPES											
Area X BSPM = Points				Type	R-Value		Area X SPM = Points				
Slab	170.0(p)	-20.0	-3400.0	Slab-On-Grade Edge Insulation	0.0		170.0(p)		-20.00		-3400.0
Raised	0.0	0.00	0.0								
Base Total:				-3400.0		As-Built Total:		170.0		-3400.0	
INFILTRATION											
Area X BSPM = Points						Area X SPM		= Points			
1328.0 18.79 24953.1						1328.0 18.79		24953.1			

SUMMER CALCULATIONS**Residential Whole Building Performance Method A - Details**

ADDRESS: , , ,

PERMIT #:

BASE					AS-BUILT										
Summer Base Points: 36964.7					Summer As-Built Points: 36896.7										
Total Summer Points	X	System Multiplier	=	Cooling Points	Total Component	X	Cap Ratio	X	Duct Multiplier (DM x DSM x AHU)	X	System Multiplier	X	Credit Multiplier	=	Cooling Points
36964.7		0.4266		15769.2	36896.7		1.000		(1.073 x 1.165 x 1.08)		0.262		0.857		11202.6
					36896.7		1.00		1.350		0.262		0.857		11202.6

WINTER CALCULATIONS

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT							
GLASS TYPES											
.18 X Conditioned X BWPM = Points Floor Area				Type/SC	Overhang Ornt Len Hgt		Area X WPM X WOF = Points				
.18	1328.0	2.36	564.1	Double, Clear	W	1.5	6.0	60.0	3.98	1.00	238.3
				Double, Clear	N	1.5	3.0	6.0	4.38	0.98	25.8
				Double, Clear	E	1.5	6.0	45.0	3.30	1.02	151.6
				Double, Clear	S	1.5	6.0	15.0	3.12	1.02	47.6
				Double, Clear	S	1.5	6.0	10.0	3.12	1.02	31.8
				As-Built Total:				136.0	495.1		
WALL TYPES Area X BWPM = Points				Type	R-Value		Area X WPM = Points				
Adjacent	0.0	0.00	0.0	Frame, Wood, Exterior	13.0		1360.0	0.60		816.0	
Exterior	1360.0	0.60	816.0								
Base Total:				1360.0		816.0					
				As-Built Total:		1360.0		816.0			
DOOR TYPES Area X BWPM = Points				Type	R-Value		Area X WPM = Points				
Adjacent	0.0	0.00	0.0	Exterior Wood			20.4	2.80		57.1	
Exterior	39.4	1.80	71.0	Exterior Wood			19.0	2.80		53.3	
Base Total:				39.4		71.0					
				As-Built Total:		39.4		110.4			
CEILING TYPES Area X BWPM = Points				Type	R-Value		Area X WPM X WCM = Points				
Under Attic	1328.0	0.10	132.8	Under Attic	30.0		1460.8	0.10 X 1.00		146.1	
Base Total:				1328.0		132.8					
				As-Built Total:		1460.8		146.1			
FLOOR TYPES Area X BWPM = Points				Type	R-Value		Area X WPM = Points				
Slab	170.0(p)	-2.1	-357.0	Slab-On-Grade Edge Insulation	0.0		170.0(p)	-2.10		-357.0	
Raised	0.0	0.00	0.0								
Base Total:				-357.0		170.0		-357.0			
				As-Built Total:		170.0		-357.0			
INFILTRATION Area X BWPM = Points						Area X WPM = Points					
1328.0 -0.06 -79.7						1328.0 -0.06 -79.7					

WINTER CALCULATIONS**Residential Whole Building Performance Method A - Details**

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT							
Winter Base Points:		1147.2		Winter As-Built Points:						1130.9	
Total Winter Points	X	System Multiplier	= Heating Points	Total Component	X	Cap Ratio	X Duct Multiplier (DM x DSM x AHU)	X System Multiplier	X Credit Multiplier	= Heating Points	
1147.2		0.6274	719.8	1130.9 1130.9		1.000 1.00	(1.099 x 1.137 x 1.14) 1.425	0.426 0.426	0.950 0.950	652.3 652.3	

WATER HEATING & CODE COMPLIANCE STATUS

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,

PERMIT #:

BASE				AS-BUILT					
WATER HEATING				Tank	EF	Number of	X	Tank	X
Number of	X	Multiplier	=	Total	Volume	Bedrooms		Ratio	Multiplier
Bedrooms									
3		2369.00		7107.0	50.0	0.90	3	1.00	2316.36
									1.00
									6949.1
				As-Built Total:					6949.1

CODE COMPLIANCE STATUS

BASE					AS-BUILT				
Cooling	+	Heating	+	Hot Water	=	Total	Cooling	+	Heating
Points		Points		Points		Points	Points		Points
15769		720		7107		23596	11203		652
									6949
									18804

PASS

Code Compliance Checklist

Residential Whole Building Performance Method A - Details

ADDRESS: , , ,

PERMIT #:

6A-21 INFILTRATION REDUCTION COMPLIANCE CHECKLIST

COMPONENTS	SECTION	REQUIREMENTS FOR EACH PRACTICE	CHECK
Exterior Windows & Doors	606.1.ABC.1.1	Maximum: .3 cfm/sq.ft. window area; .5 cfm/sq.ft. door area.	
Exterior & Adjacent Walls	606.1.ABC.1.2.1	Caulk, gasket, weatherstrip or seal between: windows/doors & frames, surrounding wall; foundation & wall sole or sill plate; joints between exterior wall panels at corners; utility penetrations; between wall panels & top/bottom plates; between walls and floor. EXCEPTION: Frame walls where a continuous infiltration barrier is installed that extends from, and is sealed to, the foundation to the top plate.	
Floors	606.1.ABC.1.2.2	Penetrations/openings > 1/8" sealed unless backed by truss or joint members. EXCEPTION: Frame floors where a continuous infiltration barrier is installed that is sealed to the perimeter, penetrations and seams.	
Ceilings	606.1.ABC.1.2.3	Between walls & ceilings; penetrations of ceiling plane of top floor; around shafts, chases, soffits, chimneys, cabinets sealed to continuous air barrier; gaps in gyp board & top plate; attic access. EXCEPTION: Frame ceilings where a continuous infiltration barrier is installed that is sealed at the perimeter, at penetrations and seams.	
Recessed Lighting Fixtures	606.1.ABC.1.2.4	Type IC rated with no penetrations, sealed; or Type IC or non-IC rated, installed inside a sealed box with 1/2" clearance & 3" from insulation; or Type IC rated with < 2.0 cfm from conditioned space, tested.	
Multi-story Houses	606.1.ABC.1.2.5	Air barrier on perimeter of floor cavity between floors.	
Additional Infiltration reqts	606.1.ABC.1.3	Exhaust fans vented to outdoors, dampers; combustion space heaters comply with NFPA, have combustion air.	

6A-22 OTHER PRESCRIPTIVE MEASURES (must be met or exceeded by all residences.)

COMPONENTS	SECTION	REQUIREMENTS	CHECK
Water Heaters	612.1	Comply with efficiency requirements in Table 6-12. Switch or clearly marked circuit breaker (electric) or cutoff (gas) must be provided. External or built-in heat trap required.	
Swimming Pools & Spas	612.1	Spas & heated pools must have covers (except solar heated). Non-commercial pools must have a pump timer. Gas spa & pool heaters must have a minimum thermal efficiency of 78%.	
Shower heads	612.1	Water flow must be restricted to no more than 2.5 gallons per minute at 80 PSIG.	
Air Distribution Systems	610.1	All ducts, fittings, mechanical equipment and plenum chambers shall be mechanically attached, sealed, insulated, and installed in accordance with the criteria of Section 610. Ducts in unconditioned attics: R-6 min. insulation.	
HVAC Controls	607.1	Separate readily accessible manual or automatic thermostat for each system.	
Insulation	604.1, 602.1	Ceilings-Min. R-19. Common walls-Frame R-11 or CBS R-3 both sides. Common ceiling & floors R-11.	

ENERGY PERFORMANCE LEVEL (EPL) DISPLAY CARD

ESTIMATED ENERGY PERFORMANCE SCORE* = 87.0

The higher the score, the more efficient the home.

1. New construction or existing	New	___	12. Cooling systems	
2. Single family or multi-family	Single family	___	a. Central Unit	Cap: 24.0 kBtu/hr ___
3. Number of units, if multi-family	1	___		SEER: 13.00 ___
4. Number of Bedrooms	3	___	b. N/A	___
5. Is this a worst case?	Yes	___	c. N/A	___
6. Conditioned floor area (ft ²)	1328 ft ²	___		___
7. Glass area & type	Single Pane	Double Pane	13. Heating systems	
a. Clear - single pane	0.0 ft ²	136.0 ft ²	a. Electric Heat Pump	Cap: 24.0 kBtu/hr ___
b. Clear - double pane	0.0 ft ²	0.0 ft ²		HSPF: 8.00 ___
c. Tint/other SHGC - single pane	0.0 ft ²	0.0 ft ²	b. N/A	___
d. Tint/other SHGC - double pane			c. N/A	___
8. Floor types				___
a. Slab-On-Grade Edge Insulation	R=0.0, 170.0(p) ft	___	14. Hot water systems	
b. N/A		___	a. Electric Resistance	Cap: 50.0 gallons ___
c. N/A		___		EF: 0.90 ___
9. Wall types			b. N/A	___
a. Frame, Wood, Exterior	R=13.0, 1360.0 ft ²	___	c. Conservation credits	
b. N/A		___	(HR-Heat recovery, Solar	
c. N/A		___	DHP-Dedicated heat pump)	
d. N/A		___	15. HVAC credits	MZ-C, PT, CF, ___
e. N/A		___	(CF-Ceiling fan, CV-Cross ventilation,	
10. Ceiling types			HF-Whole house fan,	
a. Under Attic	R=30.0, 1460.8 ft ²	___	PT-Programmable Thermostat,	
b. N/A		___	MZ-C-Multizone cooling,	
c. N/A		___	MZ-H-Multizone heating)	
11. Ducts				
a. Sup: Unc. Ret: Unc. AH: Attic	Sup. R=6.0, 47.0 ft	___		
b. N/A		___		

I certify that this home has complied with the Florida Energy Efficiency Code For Building Construction through the above energy saving features which will be installed (or exceeded) in this home before final inspection. Otherwise, a new EPL Display Card will be completed based on installed Code compliant features.

Builder Signature: _____ Date: _____

Address of New Home: _____ City/FL Zip: _____



**NOTE: The home's estimated energy performance score is only available through the FLA/RES computer program. This is not a Building Energy Rating. If your score is 80 or greater (or 86 for a US EPA/DOE EnergyStar™ designation), your home may qualify for energy efficiency mortgage (EEM) incentives if you obtain a Florida Energy Gauge Rating. Contact the Energy Gauge Hotline at 321/638-1492 or see the Energy Gauge web site at www.fsec.ucf.edu for information and a list of certified Raters. For information about Florida's Energy Efficiency Code For Building Construction, contact the Department of Community Affairs Energy Gauge Office.*

Version: FLRCPB v3.30)

Residential System Sizing Calculation

Summary

Project Title:
Height Ashbury Lot 13

Code Only
Professional Version
Climate: South


3/15/2006

Location for weather data: Gainesville - User customized: Latitude(29) Temp Range(M)			
Humidity data: Interior RH (50%) Outdoor wet bulb (78F) Humidity difference(51gr.)			
Winter design temperature	31 F	Summer design temperature	98 F
Winter setpoint	70 F	Summer setpoint	75 F
Winter temperature difference	39 F	Summer temperature difference	23 F
Total heating load calculation	19870 Btuh	Total cooling load calculation	20975 Btuh
Submitted heating capacity	% of calc Btuh	Submitted cooling capacity	% of calc Btuh
Total (Electric Heat Pump)	120.8 24000	Sensible (SHR = 0.5)	71.0 12000
Heat Pump + Auxiliary(0.0kW)	120.8 24000	Latent	294.7 12000
		Total (Electric Heat Pump)	114.4 24000

WINTER CALCULATIONS

Winter Heating Load (for 1328 sqft)


Load component		Load	
Window total	136 sqft	2924	Btuh
Wall total	1360 sqft	4216	Btuh
Door total	39 sqft	708	Btuh
Ceiling total	1461 sqft	1899	Btuh
Floor total	170 ft	5372	Btuh
Infiltration	89 cfm	3806	Btuh
Subtotal		18924	Btuh
Duct loss		946	Btuh
TOTAL HEAT LOSS		19870	Btuh

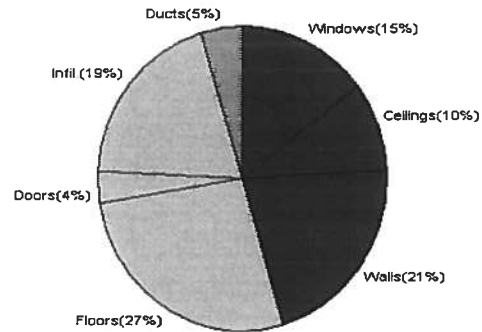

SUMMER CALCULATIONS

Summer Cooling Load (for 1328 sqft)

Load component		Load	
Window total	136 sqft	4729	Btuh
Wall total	1360 sqft	2910	Btuh
Door total	39 sqft	484	Btuh
Ceiling total	1461 sqft	2279	Btuh
Floor total		0	Btuh
Infiltration	78 cfm	1964	Btuh
Internal gain		3000	Btuh
Subtotal(sensible)		15366	Btuh
Duct gain		1537	Btuh
Total sensible gain		16903	Btuh
Latent gain(infiltration)		2692	Btuh
Latent gain(internal)		1380	Btuh
Total latent gain		4072	Btuh
TOTAL HEAT GAIN		20975	Btuh

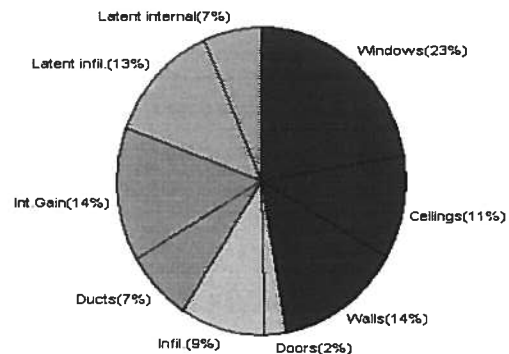

EnergyGauge® System Sizing based on ACCA Manual J.
PREPARED BY: *[Signature]*
DATE: *3/15/06*

System Sizing Calculations - Winter

Residential Load - Component Details

Project Title:
Height Ashbury Lot 13

Code Only
Professional Version
Climate: South

Reference City: Gainesville (User customized) Winter Temperature Difference: 39.0 F

3/15/2006

Window	Panes/SHGC/Frame/U	Orientation	Area X	HTM=	Load
1	2, Clear, Wood, DEF	N	60.0	21.5	1290 Btuh
2	2, Clear, Wood, DEF	E	6.0	21.5	129 Btuh
3	2, Clear, Wood, DEF	S	45.0	21.5	968 Btuh
4	2, Clear, Wood, DEF	W	15.0	21.5	322 Btuh
5	2, Clear, Wood, DEF	W	10.0	21.5	215 Btuh
Window Total			136		2924 Btuh
Walls	Type	R-Value	Area X	HTM=	Load
1	Frame - Exterior	13.0	1360	3.1	4216 Btuh
Wall Total			1360		4216 Btuh
Doors	Type		Area X	HTM=	Load
1	Wood - Exter		20	17.9	366 Btuh
2	Wood - Exter		19	17.9	342 Btuh
Door Total			39		708Btuh
Ceilings	Type	R-Value	Area X	HTM=	Load
1	Under Attic	30.0	1461	1.3	1899 Btuh
Ceiling Total			1461		1899Btuh
Floors	Type	R-Value	Size X	HTM=	Load
1	Slab-On-Grade Edge Insul	0	170.0 ft(p)	31.6	5372 Btuh
Floor Total			170		5372 Btuh
Infiltration	Type	ACH X	Building Volume	CFM=	Load
	Natural	0.40	13280(sqft)	89	3806 Btuh
	Mechanical			0	0 Btuh
Infiltration Total				89	3806 Btuh

Totals for Heating	Subtotal	18924 Btuh
	Duct Loss(using duct multiplier of 0.05)	946 Btuh
	Total Btuh Loss	19870 Btuh

Key: Window types (SHGC - Shading coefficient of glass as SHGC numerical value or as clear or tint)

(Frame types - metal, wood or insulated metal)

(U - Window U-Factor or 'DEF' for default)

(HTM - ManualJ Heat Transfer Multiplier)

Key: Floor size (perimeter(p) for slab-on-grade or area for all other floor types)

System Sizing Calculations - Summer

Residential Load - Component Details

Project Title:
Height Ashbury Lot 13

Code Only
Professional Version
Climate: South

Reference City: Gainesville (User customized) Summer Temperature Difference: 23.0 F 3/15/2006

Window	Type	Overhang		Window Area(sqft)			HTM		Load	
	Panes/SHGC/U/InSh/ExSh Ornt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded		
1	2, Clear, DEF, N, N	N	1.5	6	60.0	0.0	60.0	24	24	1440 Btuh
2	2, Clear, DEF, N, N	E	1.5	3	6.0	1.7	4.3	24	74	359 Btuh
3	2, Clear, DEF, N, N	S	1.5	6	45.0	45.0	0.0	24	39	1080 Btuh
4	2, Clear, DEF, N, N	W	1.5	6	15.0	0.0	15.0	24	74	1110 Btuh
5	2, Clear, DEF, N, N	W	1.5	6	10.0	0.0	10.0	24	74	740 Btuh
Window Total					136					4729 Btuh
Walls 1	Type	R-Value			Area		HTM		Load	
	Frame - Exterior	13.0			1360.0		2.1		2910 Btuh	
	Wall Total			1360.0					2910 Btuh	
Doors 1 2	Type	R-Value			Area		HTM		Load	
	Wood - Exter				20.4		12.3		251 Btuh	
	Wood - Exter				19.0		12.3		234 Btuh	
Door Total			39.4					484 Btuh		
Ceilings 1	Type/Color	R-Value			Area		HTM		Load	
	Under Attic/Dark	30.0			1460.8		1.6		2279 Btuh	
	Ceiling Total			1460.8					2279 Btuh	
Floors 1	Type	R-Value			Size		HTM		Load	
	Slab-On-Grade Edge Insulation	0.0			170.0 ft(p)		0.0		0 Btuh	
	Floor Total			170.0					0 Btuh	
Infiltration	Type	ACH			Volume		CFM=		Load	
	Natural	0.35			13280		77.6		1964 Btuh	
	Mechanical						0		0 Btuh	
	Infiltration Total						78		1964 Btuh	

Internal gain	Occupants	Btuh/occupant	Appliance	Load
	6	X 300 +	1200	3000 Btuh

Totals for Cooling	Subtotal	15366 Btuh
	Duct gain(using duct multiplier of 0.10)	1537 Btuh
	Total sensible gain	16903 Btuh
	Latent infiltration gain (for 51 gr. humidity difference)	2692 Btuh
	Latent occupant gain (6 people @ 230 Btuh per person)	1380 Btuh
	Latent other gain	0 Btuh
TOTAL GAIN		20975 Btuh

Key: Window types (SHGC - Shading coefficient of glass as SHGC numerical value or as clear or tint)
(U - Window U-Factor or 'DEF' for default)
(InSh - Interior shading device: none(N), Blinds/Daperies(B) or Roller Shades(R))
(ExSh - Exterior shading device: none(N) or numerical value)
(Ornt - compass orientation)

From: The Columbia County Building Department
Plans Review
135 NE Hernando Av.
P. O Box 1529
Lake City Florida, 32056-1529

Reference to a building permit application Number: **0603-118**

Herb Seal Owner Wiregrass Homebuilders lot 13 of Haight-Ashbury Subdivision

On the date of April 3, 2006 application 0603-118 and plans for construction of a single family dwelling were reviewed and the following information or alteration to the plans will be required to continue processing this application. If you should have any question please contact the above address, or contact phone number (386) 758-1163 or fax any information to (386) 754-7088.

Please include application number 0603-118 when making reference to this application.


1. Please submit a recorded (with the Columbia County Clerk Office) notice of commencement before any inspections can be preformed by the Columbia County Building Department.
2. Please provide a copy of a signed released site plan from the Columbia County Environmental Health Department which confirms approval of the waste water disposal system.
3. Please show compliance with the FRC-2004 sections R309 Garage: R309.1
A: Opening protection: Openings from a private garage directly into a room used for sleeping purposes shall not be permitted. Other openings between the garage and residence shall be equipped with solid wood doors not less than 13/8 inches (35 mm) in thickness, solid or honeycomb core steel doors not less than 13/8 inches (35 mm)

thick, or 20-minute fire-rated doors. The attic access door will be required to have the same fire rating as the door described in section R309.1 of the FRC-2004.


4. R309.1.1 Duct penetration. Ducts in the garage and ducts penetrating the walls or ceilings separating the dwelling from the garage shall be constructed of a minimum No. 26 gage (0.48 mm) sheet steel or other approved material and shall have no openings into the garage.

5. Show on the electrical plan the location of the electrical service overcurrent protection device. This device shall be installed on the exterior of structures to serve as a disconnecting means. Conductors used from the exterior disconnecting means to a panel or sub panel shall have four-wire conductors, of which one conductor shall be used as an equipment ground.

Thank you,

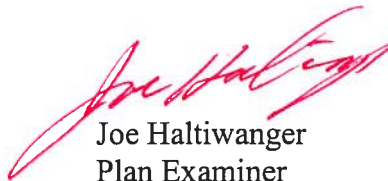

Joe Haltiwanger
Plan Examiner
Columbia County Building Department

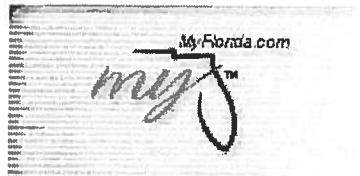
[Log On](#)

Public Services

[Search for a Licensee](#)
[Apply for a License](#)
[View Application Status](#)
[Apply to Retake Exam](#)
[Find Exam Information](#)
[File a Complaint](#)
[AB&T Delinquent Invoice & Activity List Search](#)

User Services

[Renew a License](#)
[Change License Status](#)
[Maintain Account](#)
[Change My Address](#)
[View Messages](#)
[Change My PIN](#)
[View Continuing Ed](#)

[Term Glossary](#)
[Online Help](#)

[DBPR Home](#) | [Online Services Home](#) | [Help](#) | [Site Map](#)

4:31:43 PM

Licensee Details

Licensee Information

Name: **PLATT, FRANK KEITH (Primary Name)**
LIFESTYLES DEVELOPMENT CO (DBA Name)
Main Address: **PO BOX 18848**
PANAMA CITY BEACH Florida 32417
County: **BAY**

License Mailing:


License Location: **PO BOX 18848**
PANAMA CITY BEACH FL 32417
County: **BAY**


License Information


License Type: **Certified Building Contractor**
Rank: **Cert Building**
License Number: **CBC034453**
Status: **Current,Active**
Licensure Date: **07/04/1985**
Expires: **08/31/2006**


Special Qualifications **Qualification Effective**
Bldg Code Core
Course Credit
Qualified Business License Required **02/20/2004**


[View Related License Information](#)
[View License Complaint](#)
[Terms of Use](#) | [Privacy Statement](#)

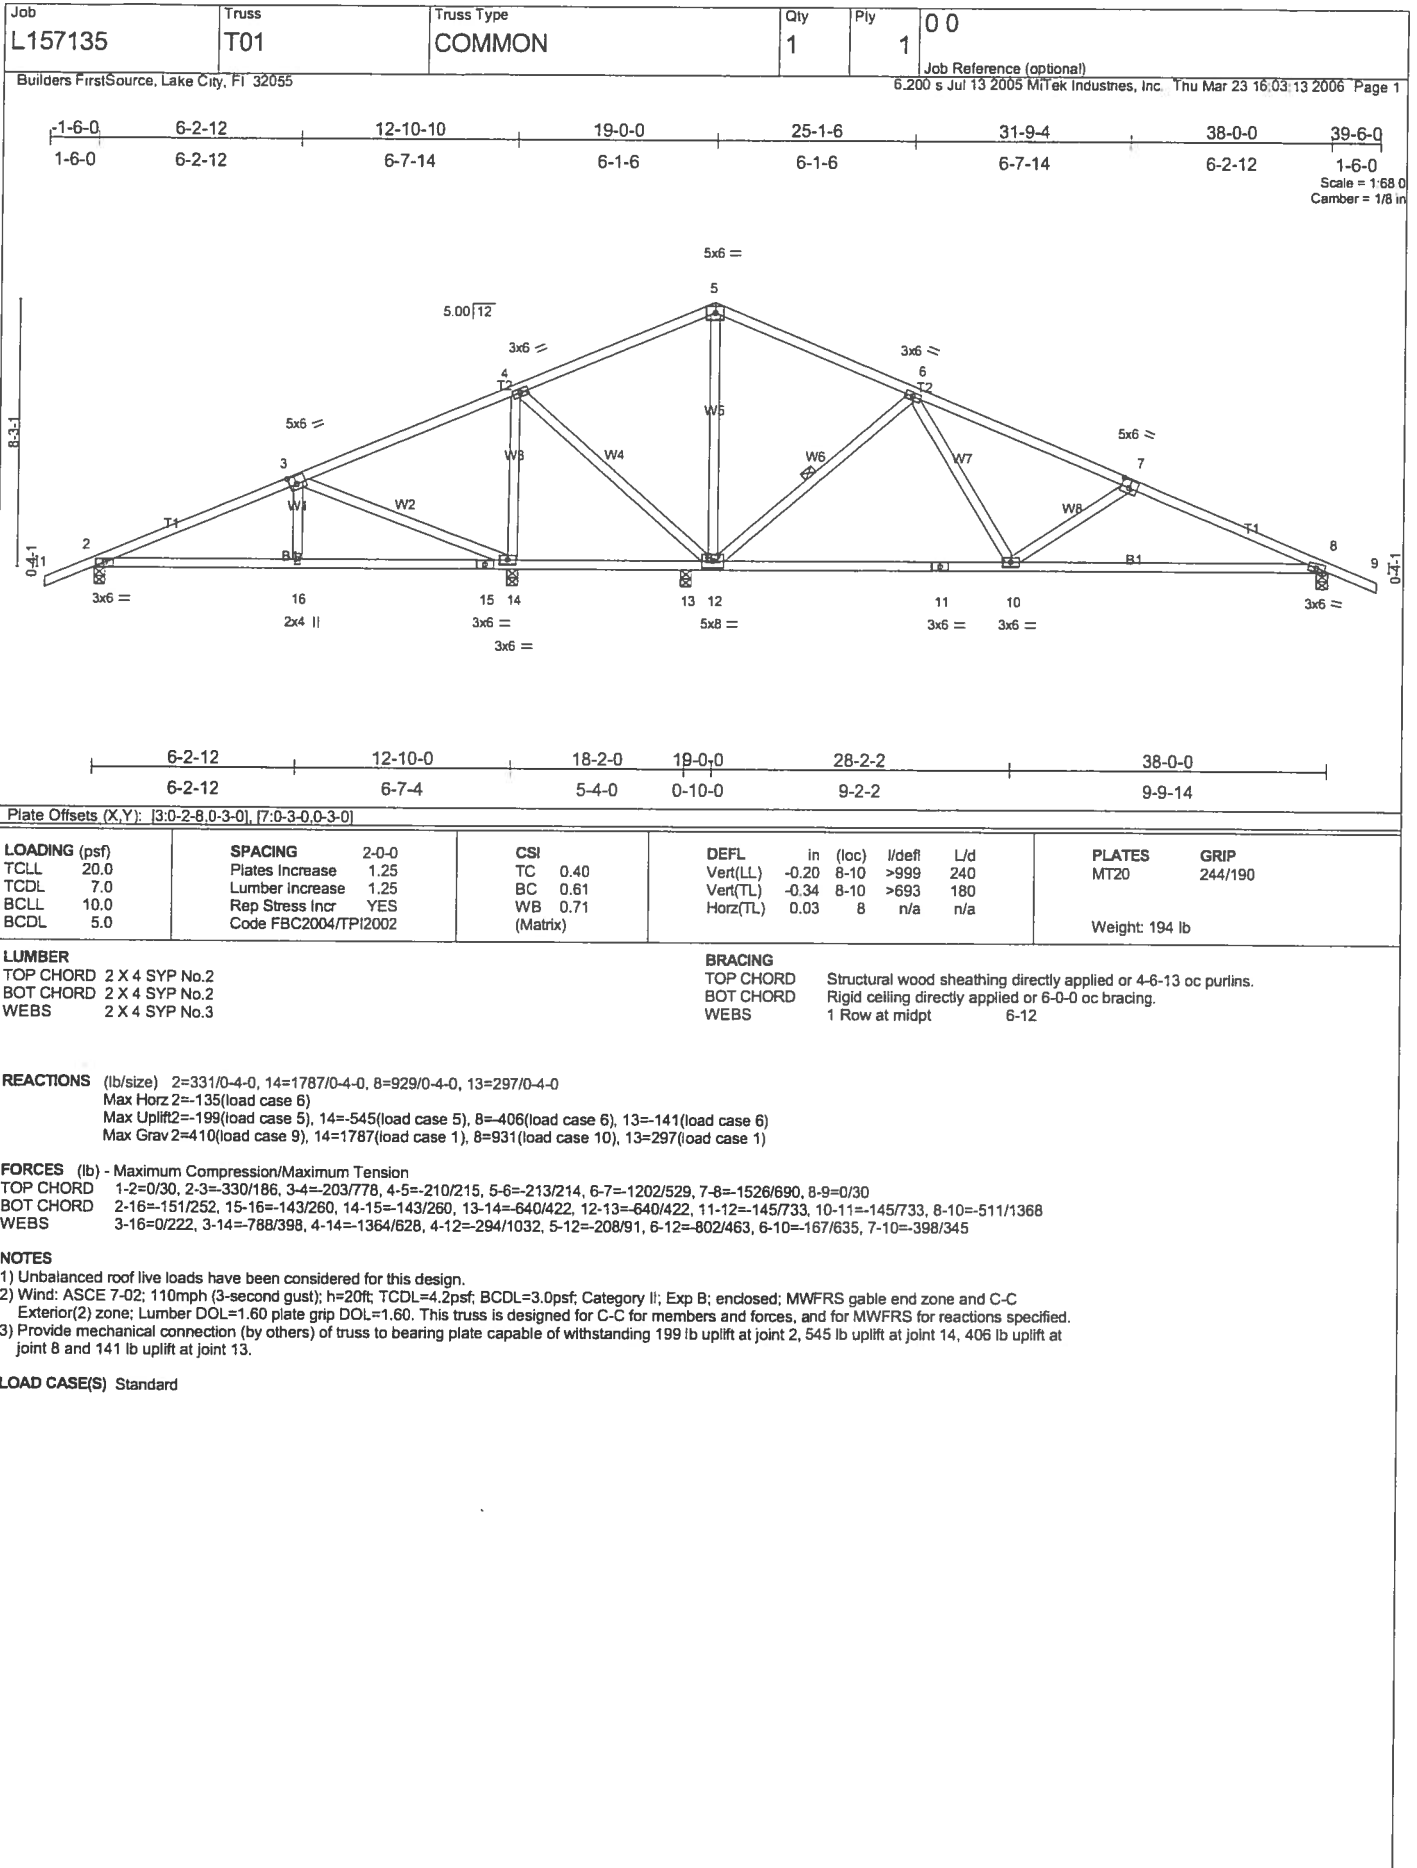


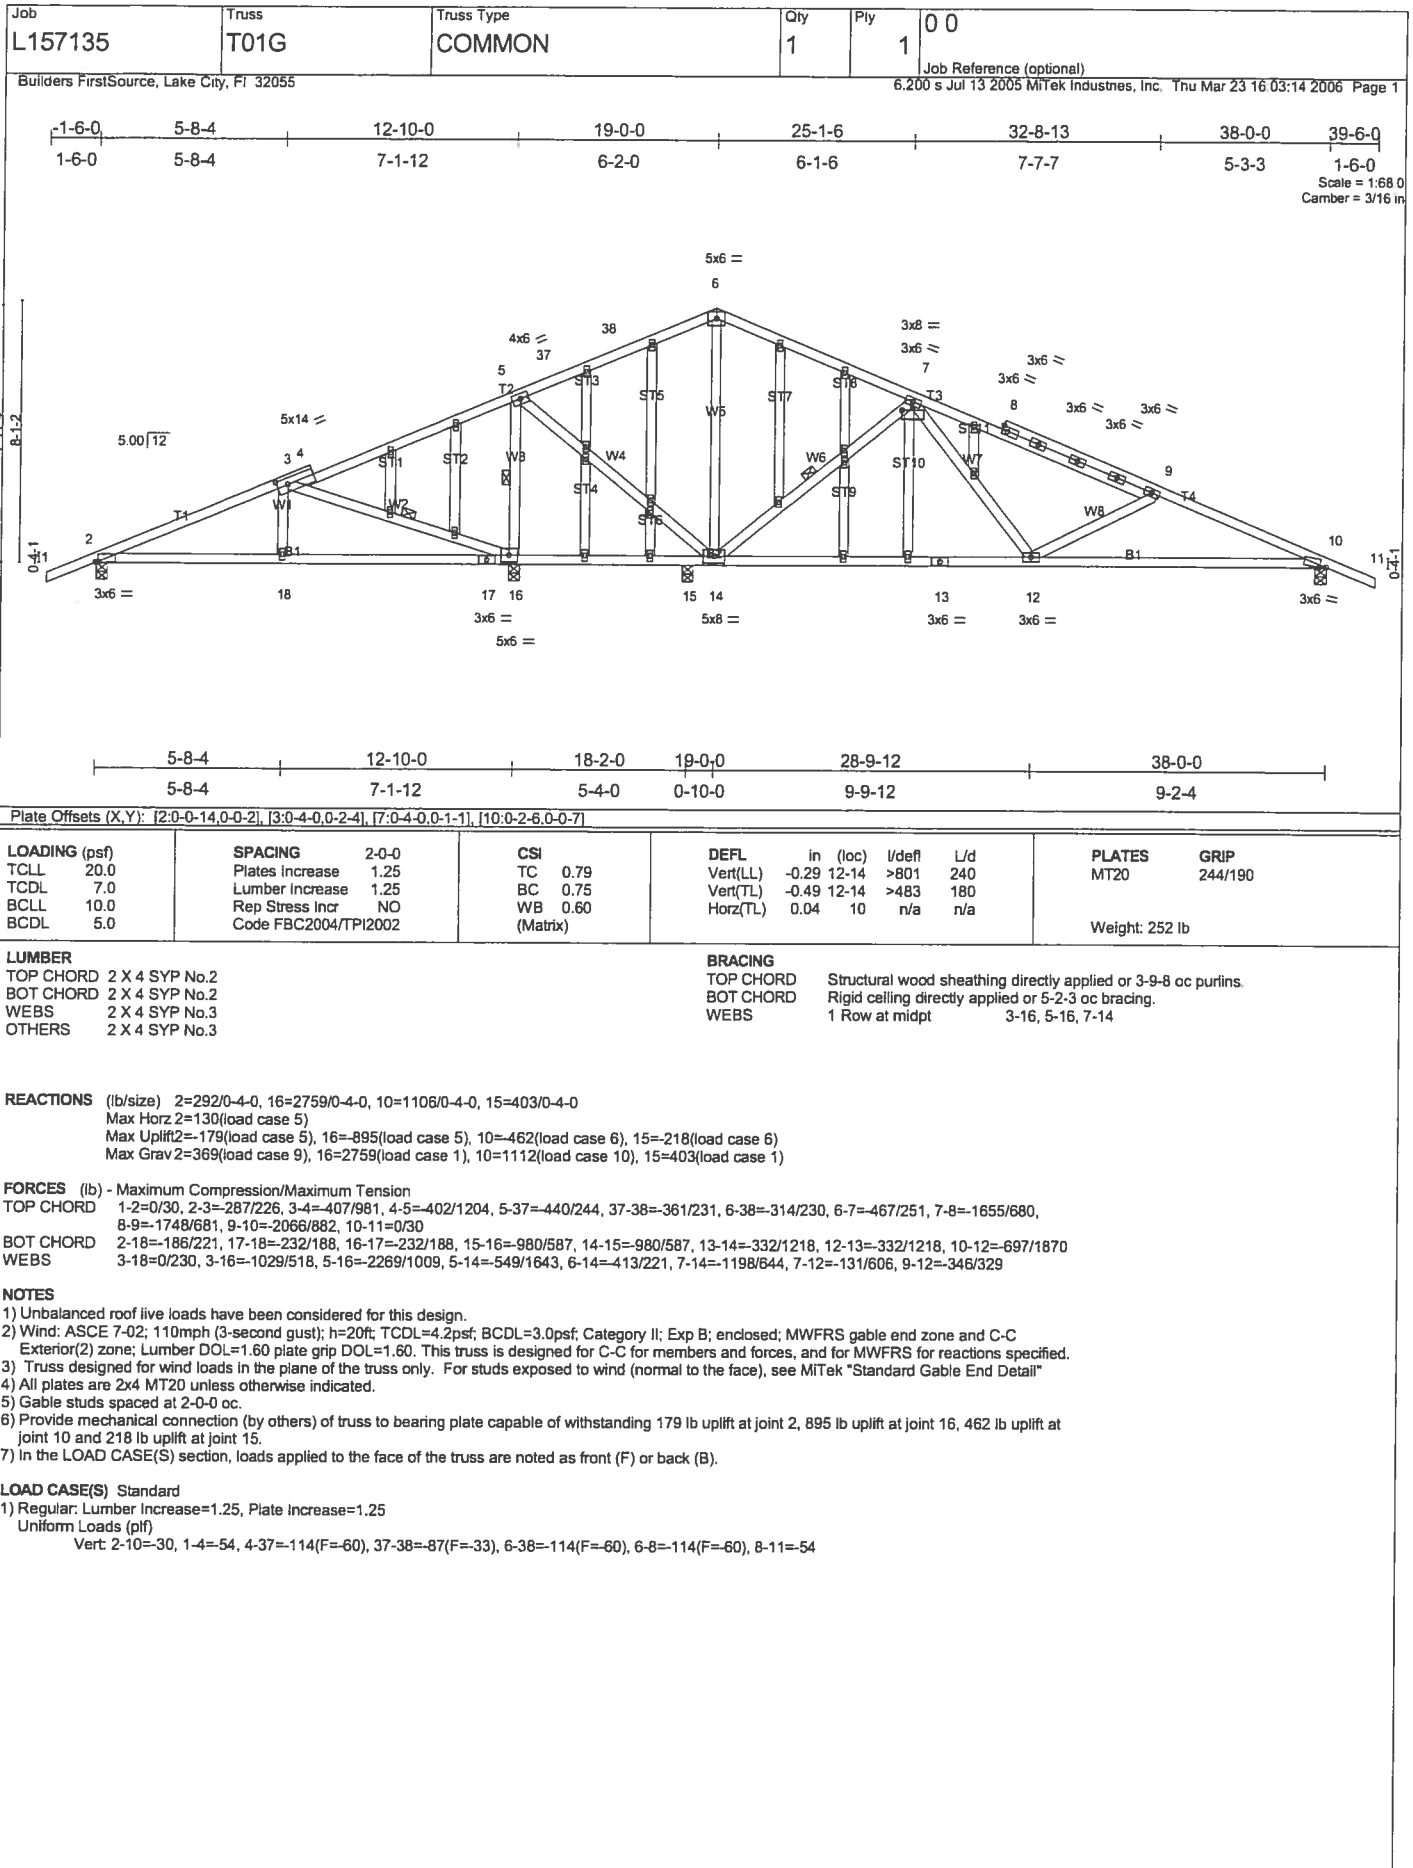

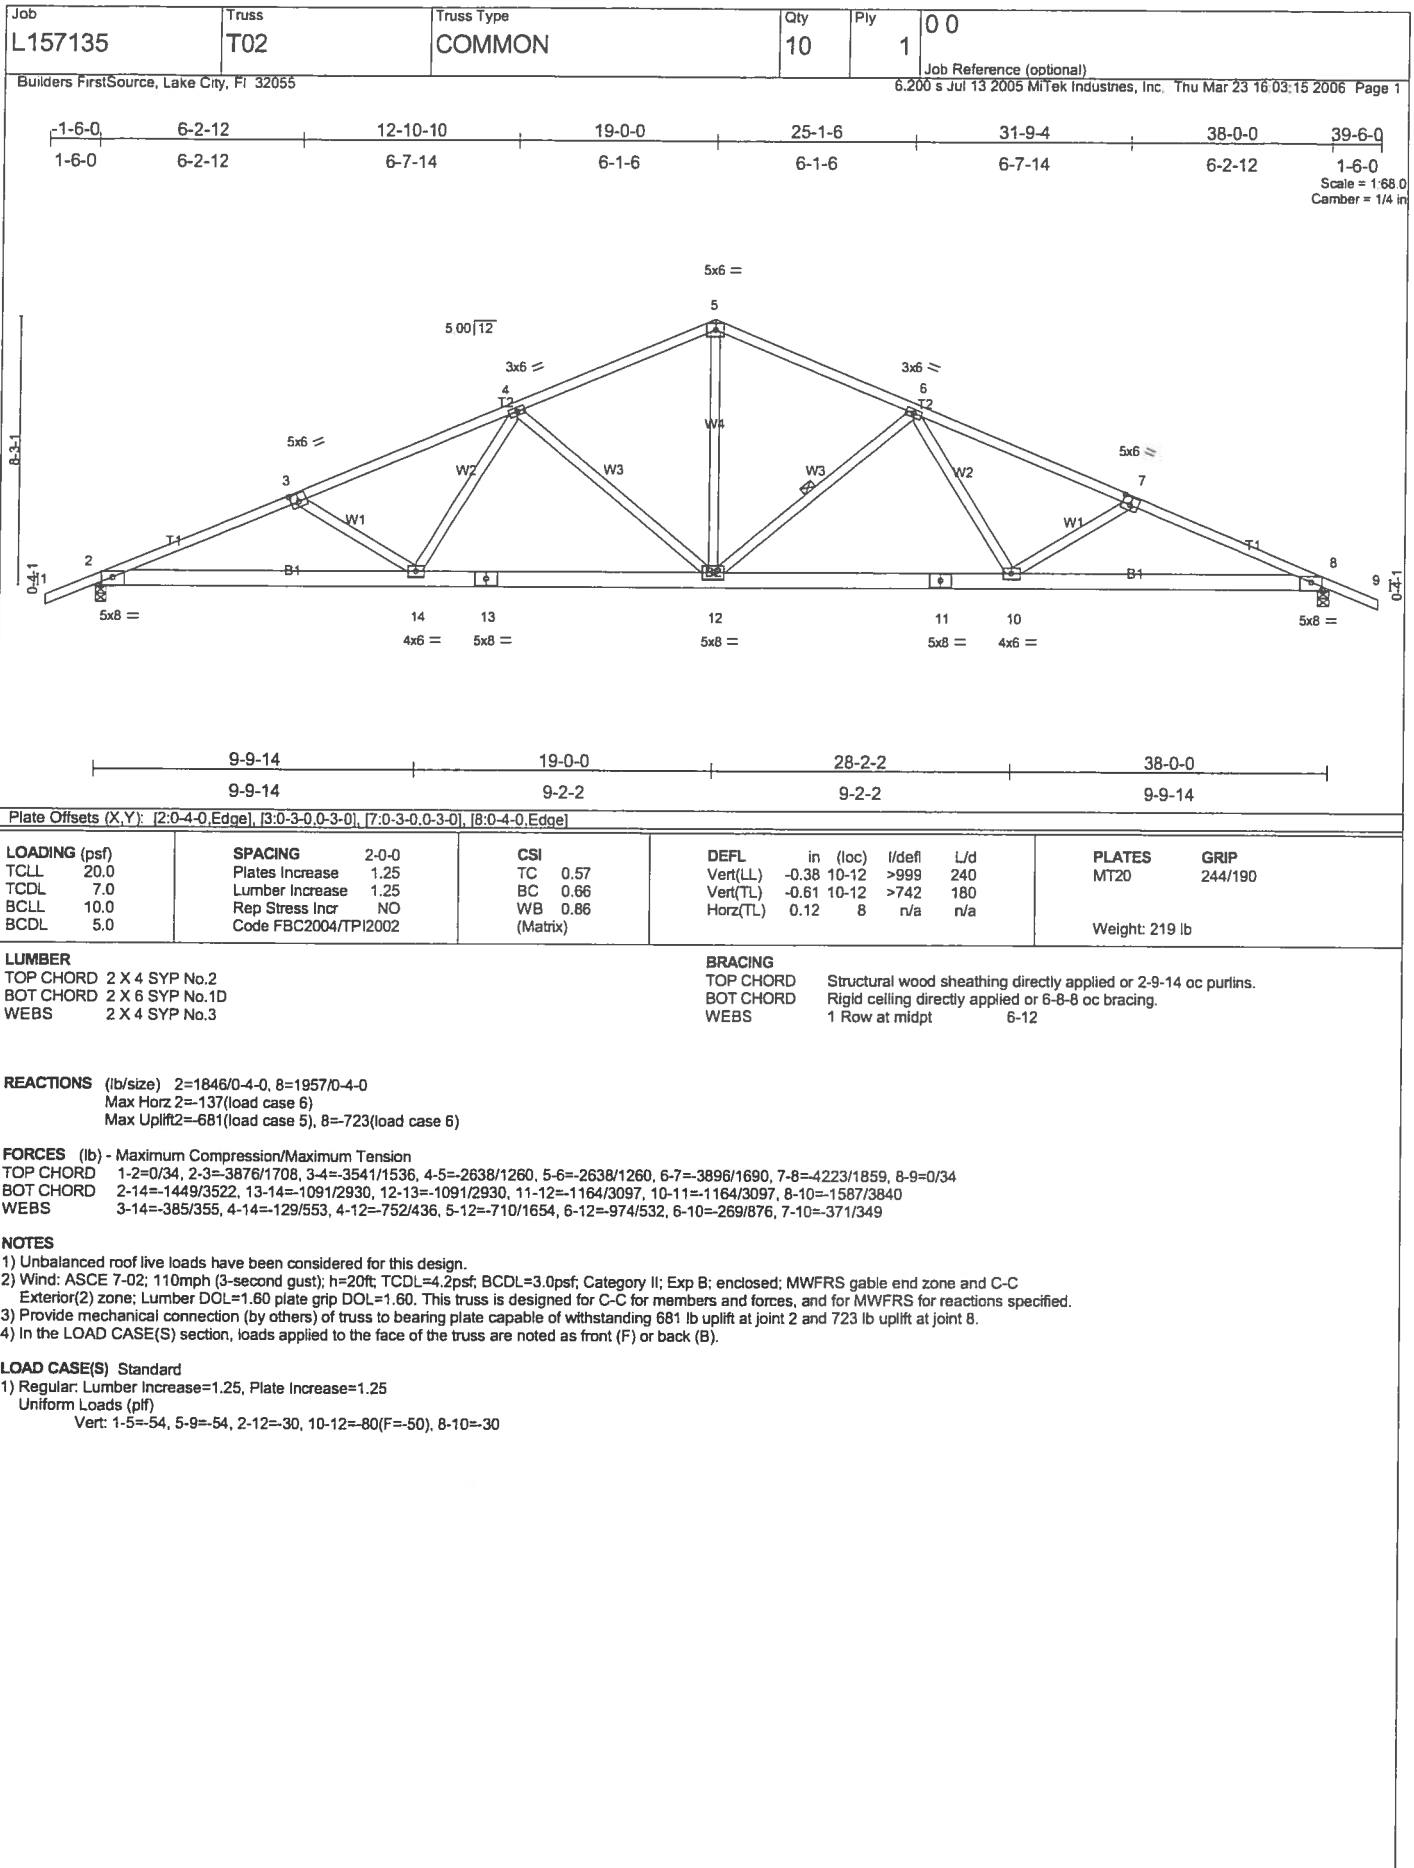

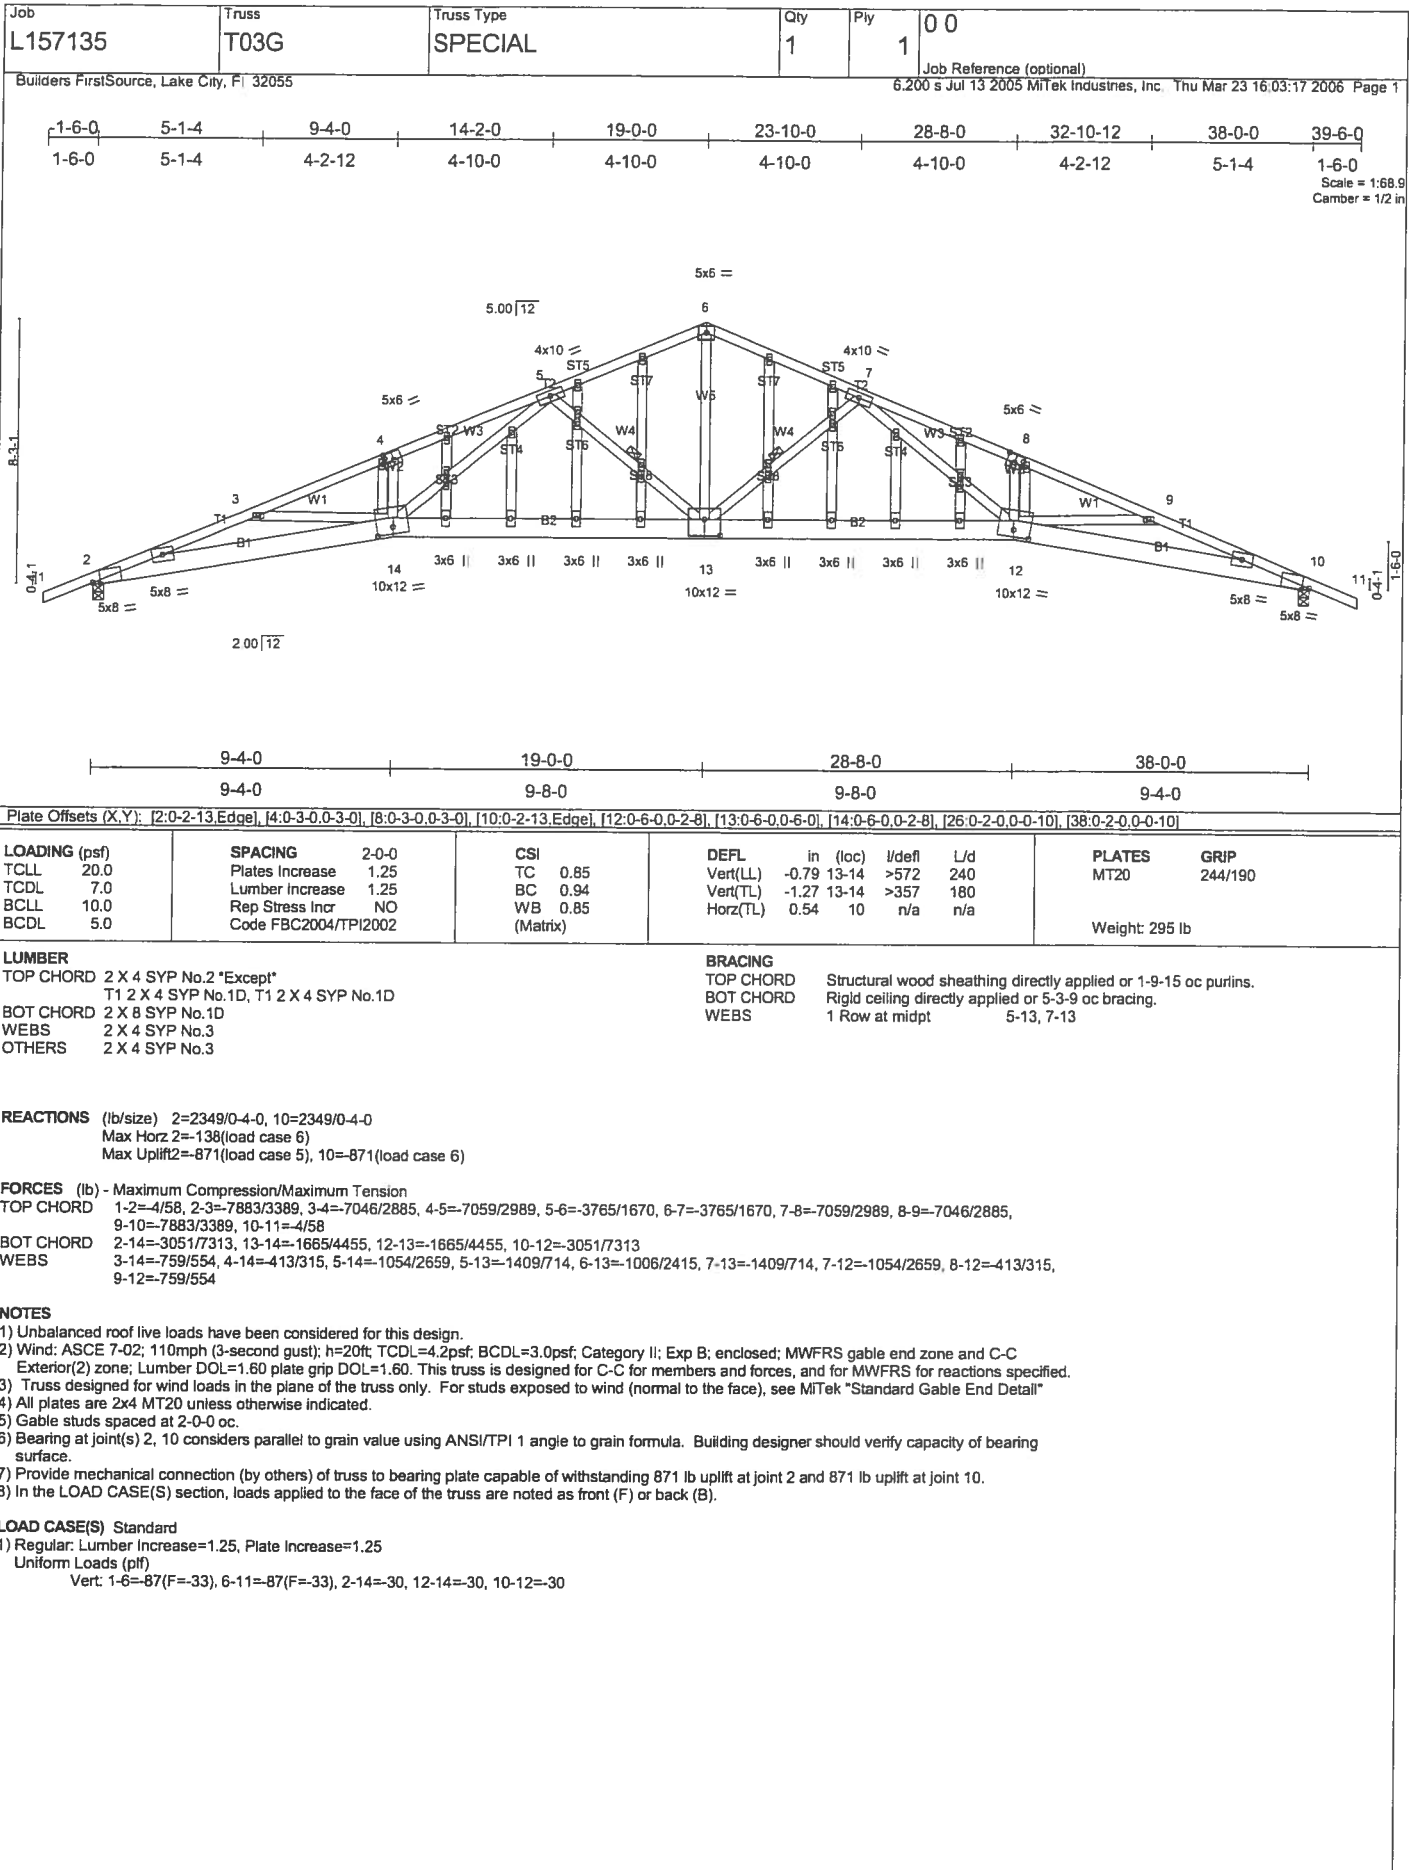

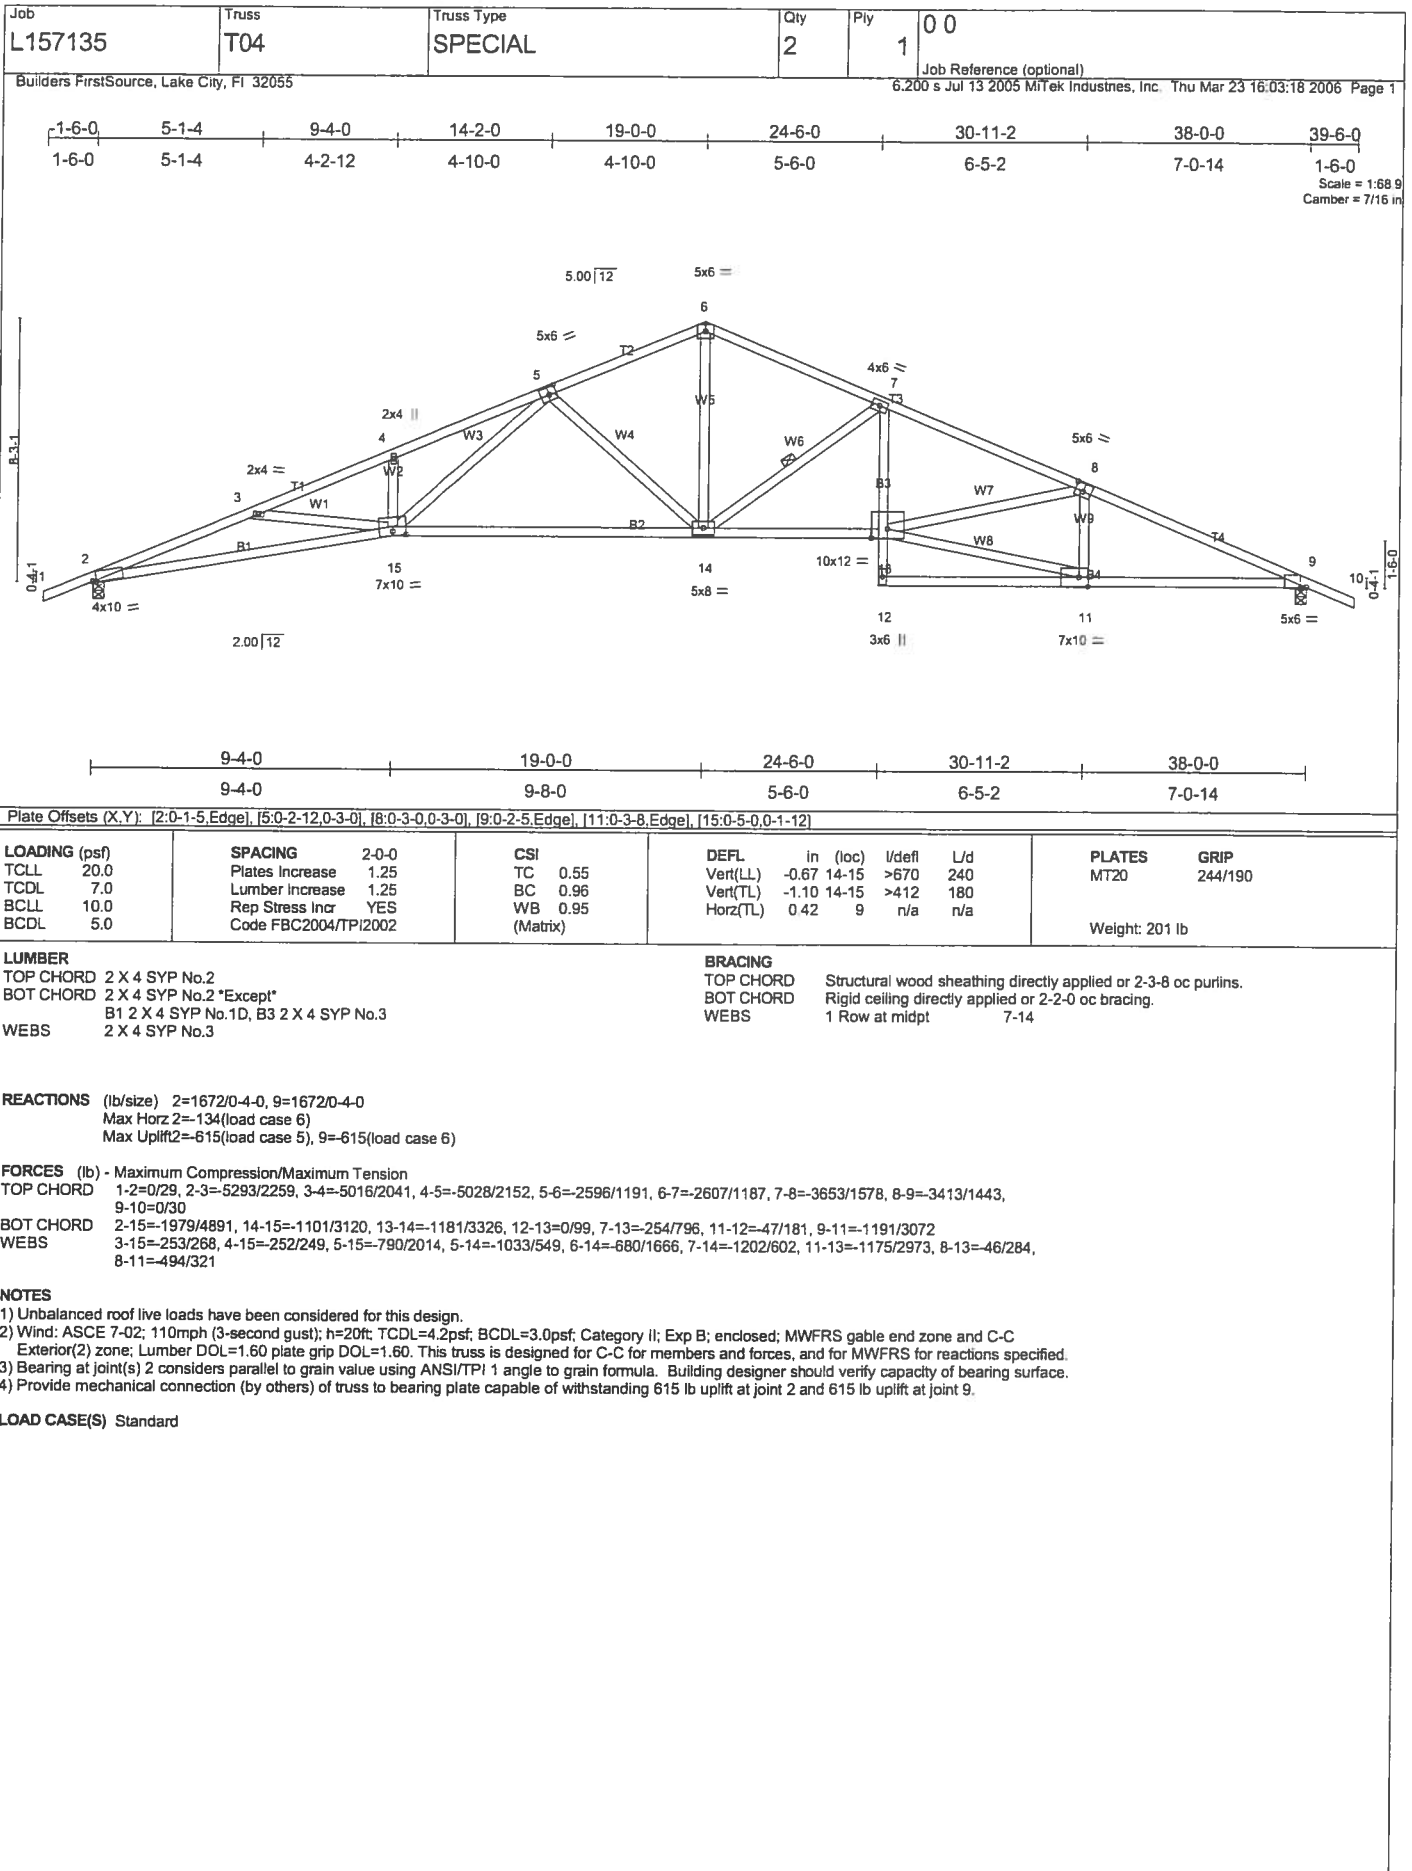

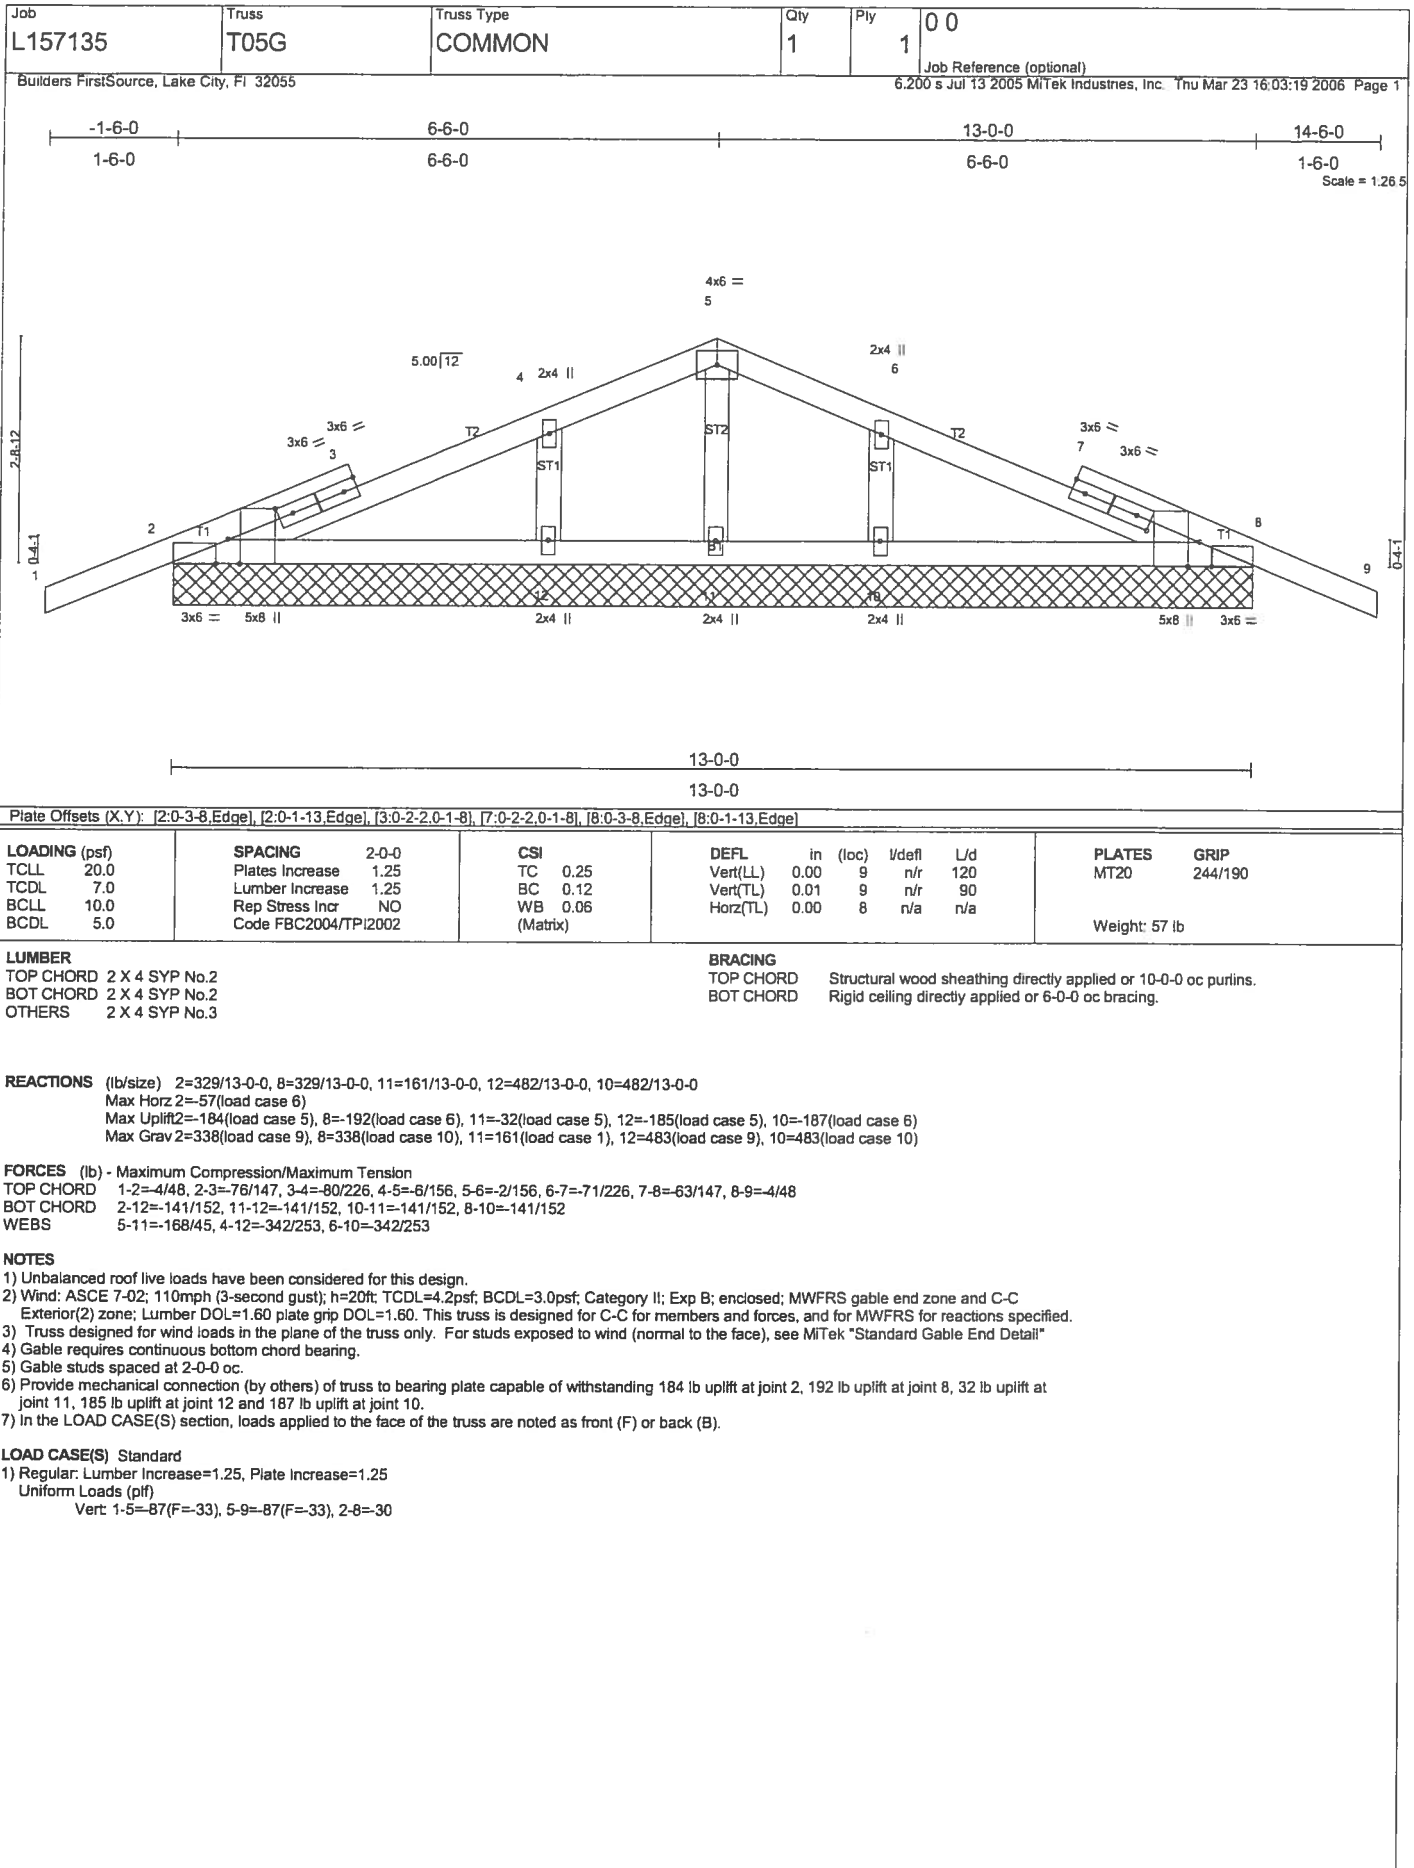

Job L157135	Truss T06	Truss Type COMMON	Qty 2	Ply 1	00	Job Reference (optional)
Builders FirstSource, Lake City, FL 32055			6.200 s Jul 13 2005 MiTek Industries, Inc. Thu Mar 23 16:03:20 2006 Page 1			

LOADING (psf) TCLL 20.0 TCCL 7.0 BCLL 10.0 BCDL 5.0	SPACING 2-0-0 Plates Increase 1.25 Lumber Increase 1.25 Rep Stress Incr YES Code FBC2004/TPI2002	CSI TC 0.29 BC 0.39 WB 0.08 (Matrix)	DEFL in (loc) l/defl L/d Vert(LL) -0.06 2-6 >999 240 Vert(TL) -0.10 2-6 >999 180 Horz(TL) 0.01 4 n/a n/a	PLATES GRIP MT20 244/190 Weight: 49 lb
--	---	---	--	--


LUMBER TOP CHORD 2 X 4 SYP No.2 BOT CHORD 2 X 4 SYP No.2 WEBS 2 X 4 SYP No.3	BRACING TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins. BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
--	---


REACTIONS (lb/size) 2=622/0-4-0, 4=622/0-4-0
 Max Horz 2=-62(load case 6)
 Max Uplift 2=-273(load case 5), 4=-273(load case 6)

FORCES (lb) - Maximum Compression/Maximum Tension
 TOP CHORD 1-2=0/30, 2-3=-842/366, 3-4=-842/366, 4-5=0/30
 BOT CHORD 2-6=-205/718, 4-6=-205/718
 WEBS 3-6=0/236

NOTES
 1) Unbalanced roof live loads have been considered for this design.
 2) Wind: ASCE 7-02: 110mph (3-second gust); h=20ft; TCDL=4.2psf; BCDL=3.0psf; Category II; Exp B; enclosed; MWFRS gable end zone and C-C Exterior(2) zone; Lumber DOL=1.60 plate grip DOL=1.60. This truss is designed for C-C for members and forces, and for MWFRS for reactions specified.
 3) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 273 lb uplift at joint 2 and 273 lb uplift at joint 4.

LOAD CASE(S) Standard

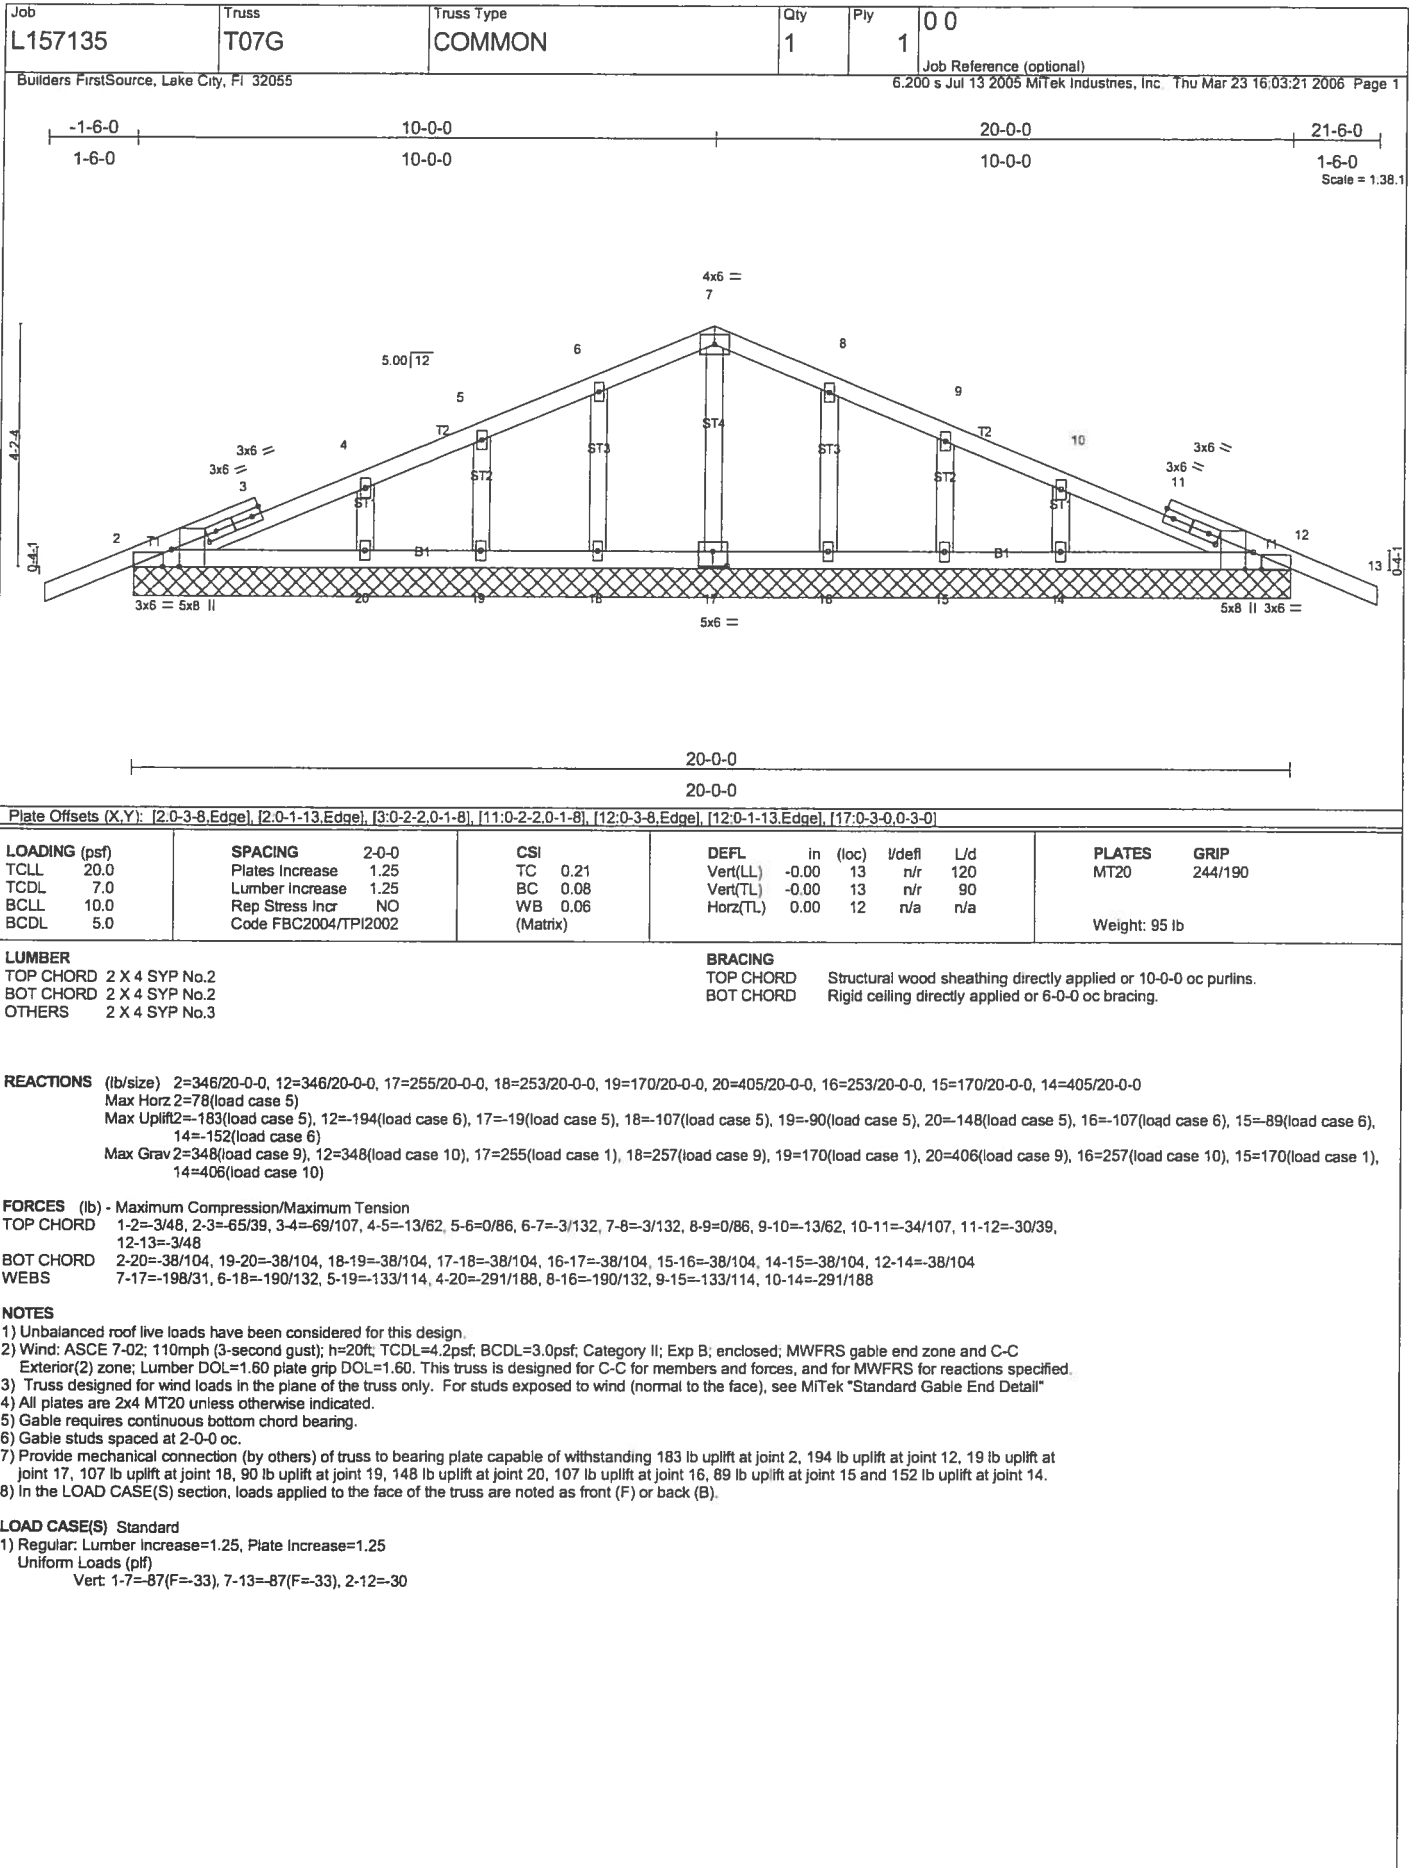

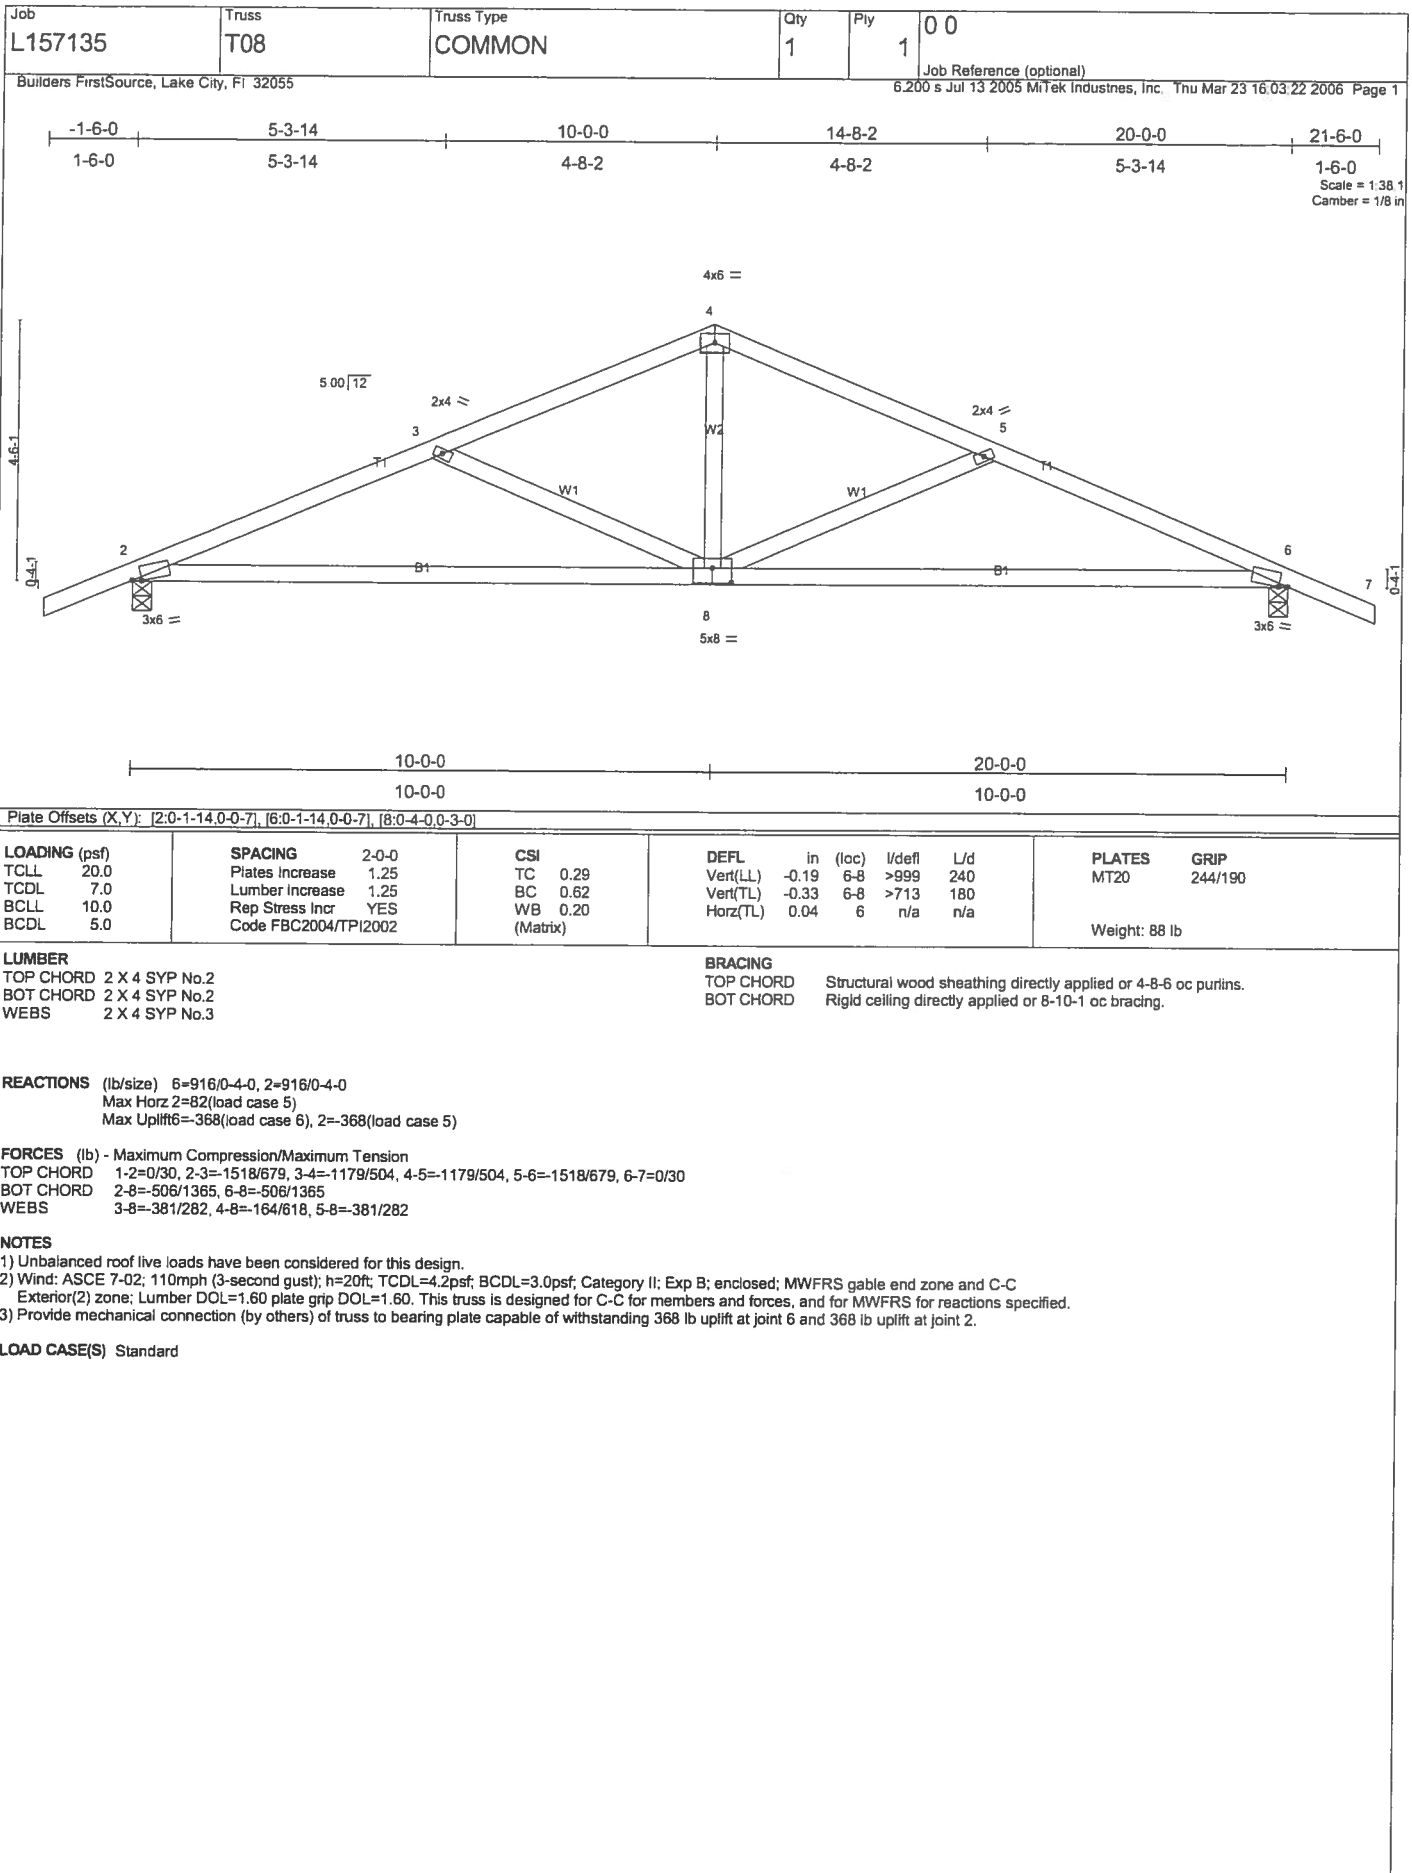


Symbols

PLATE LOCATION AND ORIENTATION



* Center plate on joint unless dimensions indicate otherwise. Dimensions are in inches. Apply plates to both sides of truss and securely seat.

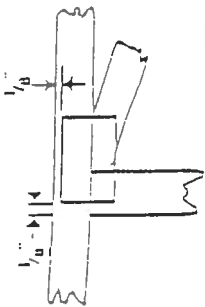

* For 4 x 2 orientation, locate plates 1/8" from outside edge of truss and vertical webs.



* This symbol indicates the required direction of slots in connector plates.

PLATE SIZE

4" x 4"


The first dimension is the width perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING




Indicates location of required continuous lateral bracing.

BEARING



Indicates location of joints at which bearings (supports) occur.

Numbering System

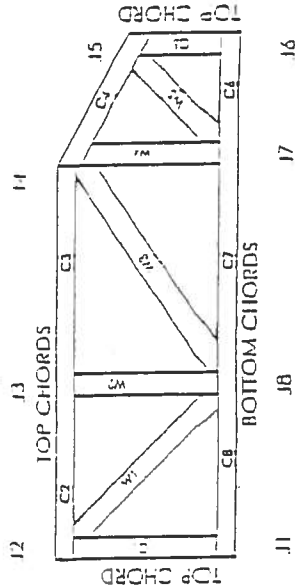


JOINTS AND CHORDS ARE NUMBERED CLOCKWISE AROUND THE TRUSS STARTING AT THE LOWEST JOINT FARTHEST TO THE LEFT.

WEBS ARE NUMBERED FROM LEFT TO RIGHT.

CONNECTOR PLATE CODE APPROVALS

BOCA	96-31, 96-67
ICBO	3907, 4922
SNCCI	9667, 9432A
WISC/DIHR	960022 W, 970036-11
IHER	561



MITelk Engineering Reference Sheet: H11-7473

© 1993 MITelk® Holdings, Inc.

General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
2. Cut members to bear tightly against each other.
3. Place plates on each face of truss at each joint and embed fully. Avoid knots and waste at joint locations.
4. Unless otherwise noted, locate chord splices at 1/4 panel length (1/8" from adjacent joint).
5. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
6. Unless expressly noted, this design is not applicable for use with fire retardant or preservative treated lumber.
7. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
8. Plate type, size and location dimensions shown indicate minimum plating requirements.
9. Lumber shall be of the species and size, and in all respects, equal to or better than the grade specified.
10. Top chords must be sheathed or purlins provided at spacing shown on design.
11. Bottom chords require lateral bracing at 11' spacing, or less, if no ceiling is installed, unless otherwise noted.
12. Anchorage and / or load transferring connections to trusses are the responsibility of others unless shown.
13. Do not overload roof or floor trusses with stacks of construction materials.
14. Do not cut or alter truss member or plate without prior approval of a professional engineer.
15. Care should be exercised in handling, erection and installation of trusses.



BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

NOTICE OF ACCEPTANCE (NOA)

Ceco Door Products
9159 Telecom Drive
Milan, TN 38358

out swing

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Series "Regent" & "Omega" 18 ga. 3⁰-7⁰ Outswing Commercial Steel Door

APPROVAL DOCUMENT: Drawing No. RD0087, titled "3-0 x 7-0 Series", sheets 1 through 7 of 7, dated 5/30/97 with revision C dated 2/24/00, prepared by the manufacturer, bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: Large and Small Missile Impact

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.


ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.


This NOA renews NOA # 00-0315.03 and consists of this page 1 as well as approval document mentioned above. The submitted documentation was reviewed by Manuel Perez, P.E.




NOA No 03-0411.01
Expiration Date August 14, 2008
Approval Date: May 15, 2003
Page 1

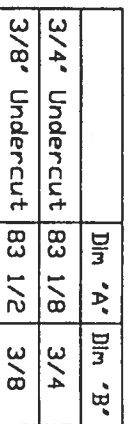


RD0087
Sheet 1 of 7

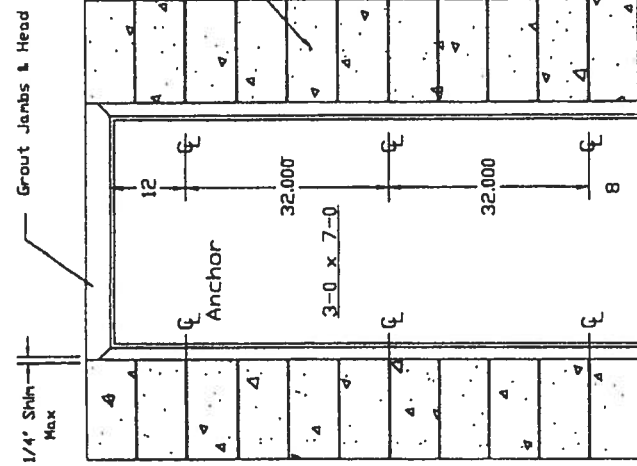




Masonry "T" Anchor

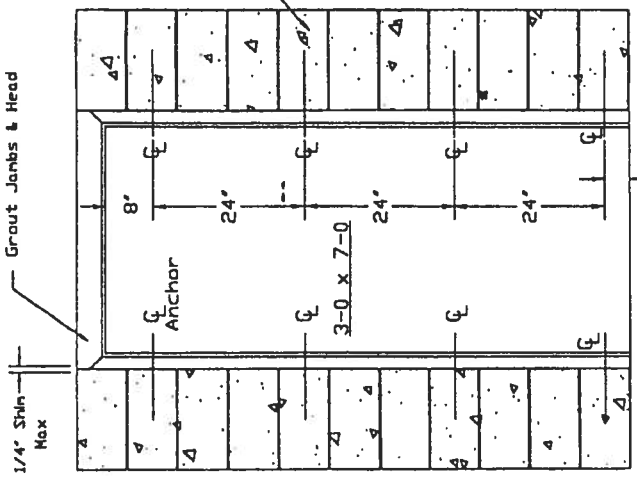

Existing Opening Anchor Into Block

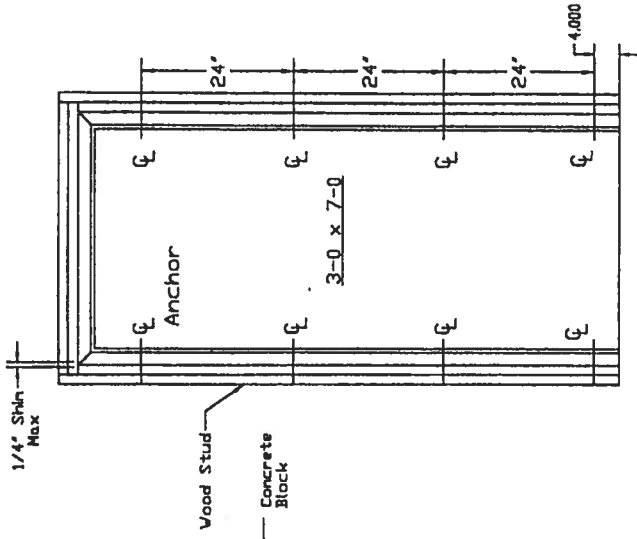

Existing Opening Anchor Into Wood Stud

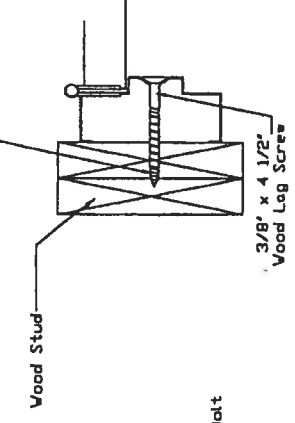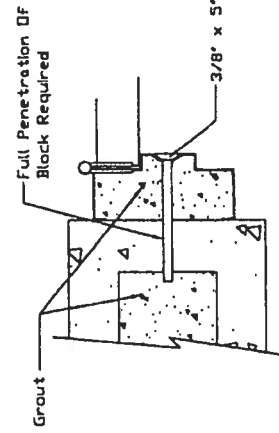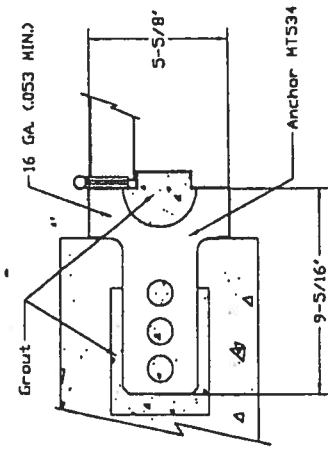







NOTES:
1. SEE SHEET 7 FOR BILL OF MATERIALS

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 02-0411.01
Expiration Date 06/16/2008
By *Shawmut Design*
Primary Code Product Control
Division

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE *TYPE 08/08/00*
BY *Shawmut Design*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 00-0315-03


2/21/00 JAK	Revised Format, Transferred Information from NOA
7/22/97 GWS	Revised Sheet Number
ISSUE	REVISIONS
DRAWN BY: GWS	DATE: 5/30/97
DRAWING NUMBER: RD0087	Sheet 2 of 7

Frame Anchor
Installation Details
CECO DOOR PRODUCTS
Milan, Tennessee 38358

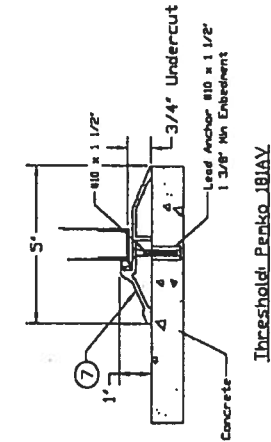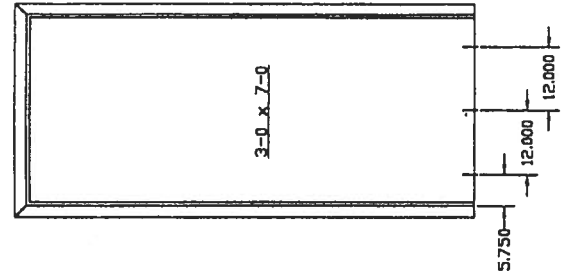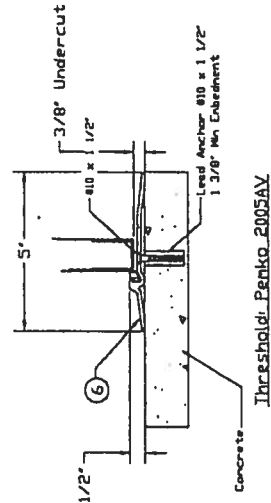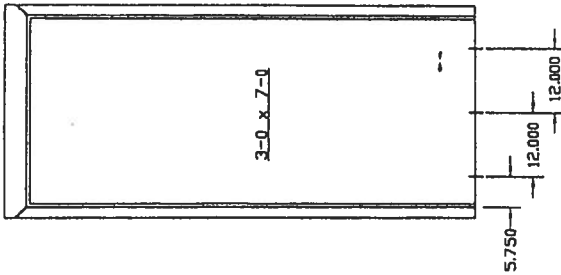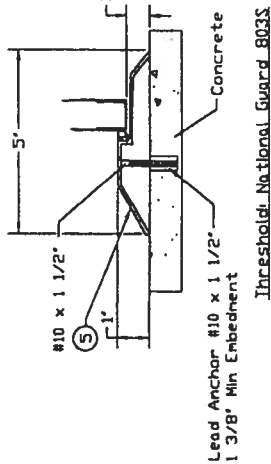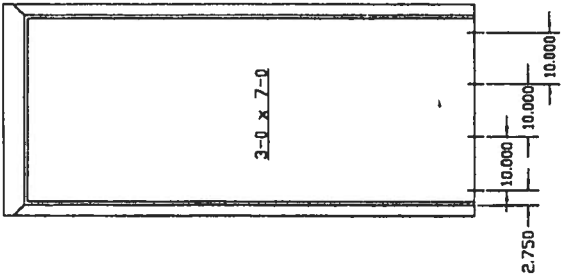


NOTE: 1. All thresholds shown are made from extruded aluminum with slide-in vinyl weatherstrip insert.

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 03-041-DJ
Expiration Date 03/16/2008
By *Manuel Perez*
Miami-Dade Product Control
Division

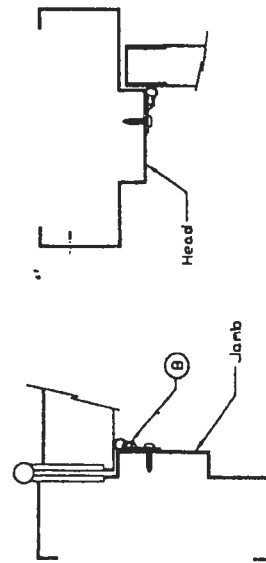


Weatherstrip Penko 303AS

NOTE:
2. LOCATION: ALONG THE ENTIRE HEAD AND JAMB
PERIMETER. ATTACHED WITH THIRTY FOUR (34)
#8 X 3/4" PPH SMS SPACED AT 6' O/C.

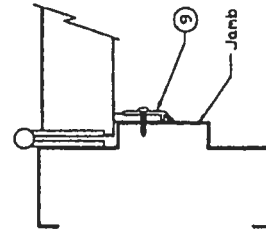

Weatherstrip National Guard 130NA

NOTE:
3. LOCATION: ALONG THE ENTIRE HEAD AND JAMB
PERIMETER. ATTACHED WITH THIRTY FOUR (34)
#8 X 3/4" PPH SMS SPACED AT 6' O/C.

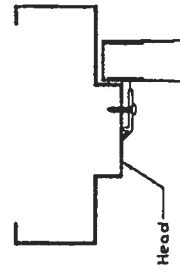

MATERIAL SPECIFICATIONS:

Threshold & Weatherstrip Installation details


NOTE: 4. See Sheet 7 for Bill of Material

CECO DOOR PRODUCTS
Millen, Tennessee 37358

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE *June 08 2000*
BY *Manuel Perez*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 00-0315-03


2/25/00	Revised Formal, Transferred
7/12/97	Information from NOA
7/12/97	Revised Sheet Number
ISSUE	REVISIONS
DRAWN BY: GWS	DATE: 5/30/97

RD0087
Sheet 3 of 7

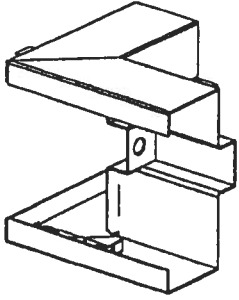


Interlocking Fold Over Tab

Frame Head

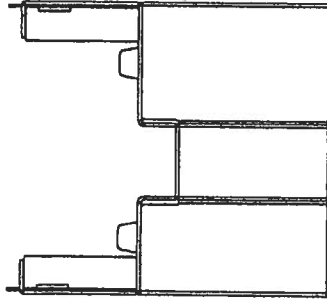

Frame Jamb

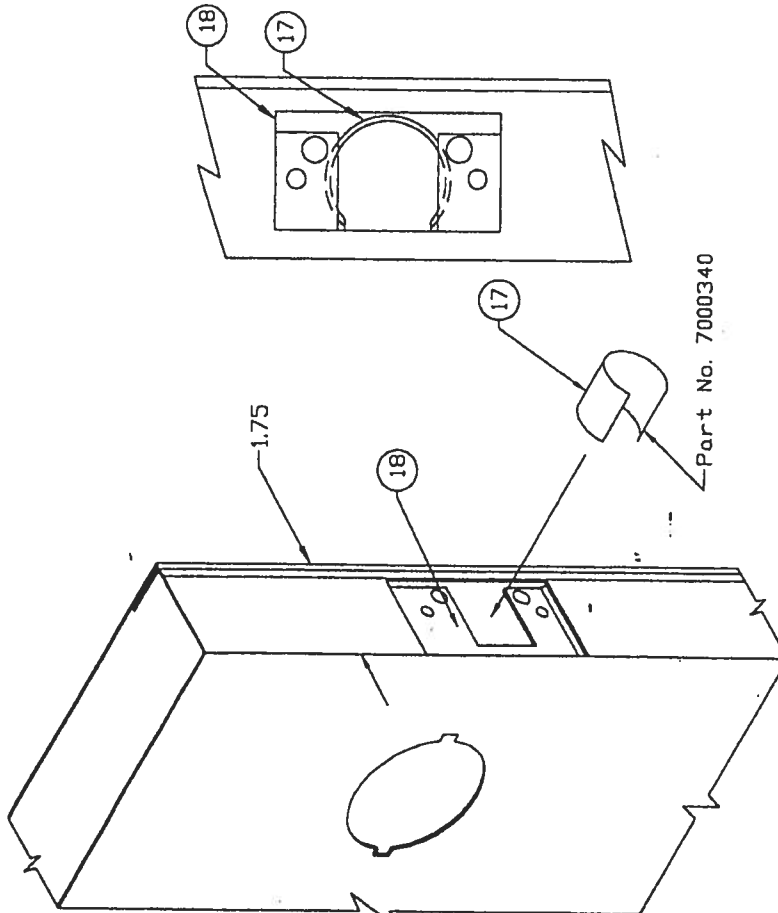

Note: 1. For Cylindrical Lock Only
2. See Sheet 7 For Bill Of Material

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 03-0411.01
Expiration Date 06/14/2008
By *M. M. M. M.*
Milan Door Product Company
Division

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE *June 08/2000*
BY *M. M. M. M.*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 00-0315-03

7/2/97 GWS	7/2/97 GWS	7/2/97 GWS
Revised Format, Transferred Information from NOA	Revised Sheet Number	
ISSUE		
REVISIONS		
DRAWN BY: GWS	DATE: 6/06/97	
DRAWING NUMBER: RD0087		

Cylindrical Lock Reinforcement
and "SF" Series Frame Corner
Installation Details

 CECO DOOR PRODUCTS
Milan, Tennessee 38358

MATERIAL SPECIFICATIONS:

5.75 MIN.
DEPTH

Masonry Line

No Anchors Required

Caulk Perimeter
(Exterior & Interior)

1/4" Shim Max

Masonry Line
Caulk Perimeter

1.75


See Sheet 3 For Weatherstrip Options

See Sheet 2 For Anchor Options

Caulk Perimeter
1/4" Shim Max

See Sheet 3 For Threshold Options

Concrete Slab

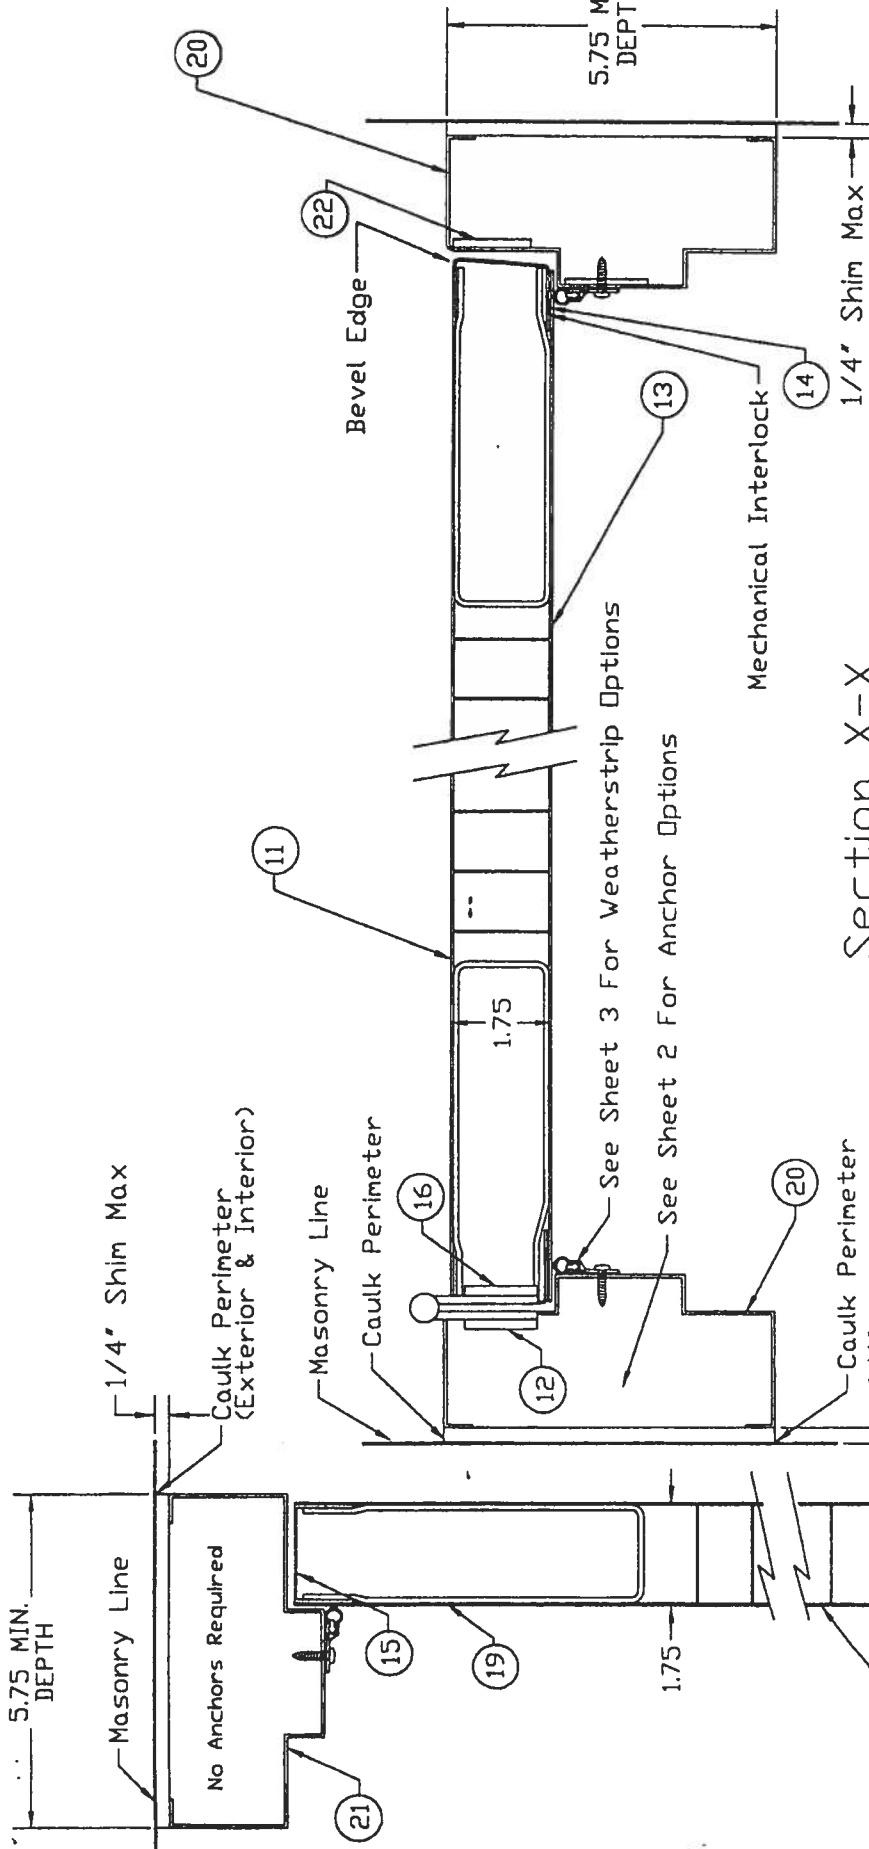

Section X-X

Note: See Sheet 7 For Bill Of Material


PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 03-0411-01
Expiration Date 2015-12-31
By: *Manuel Diaz*
Miami, Florida Product Control
Division

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE: *June 08/2010*
BY: *Manuel Diaz*
FEDUCO CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. *00-0311-03*


Revised Form, Transferred
Information from NOA
7/22/97
Revised Sheet Number

ISSUE
DRAWN BY: GWS
DATE: 5/30/97
REVISIONS
DRAWING NUMBER: RD0087
Sheet 5 of 7

Cross Section View
Regent Door
CECO DOOR PRODUCTS
Milan, Tennessee 38358

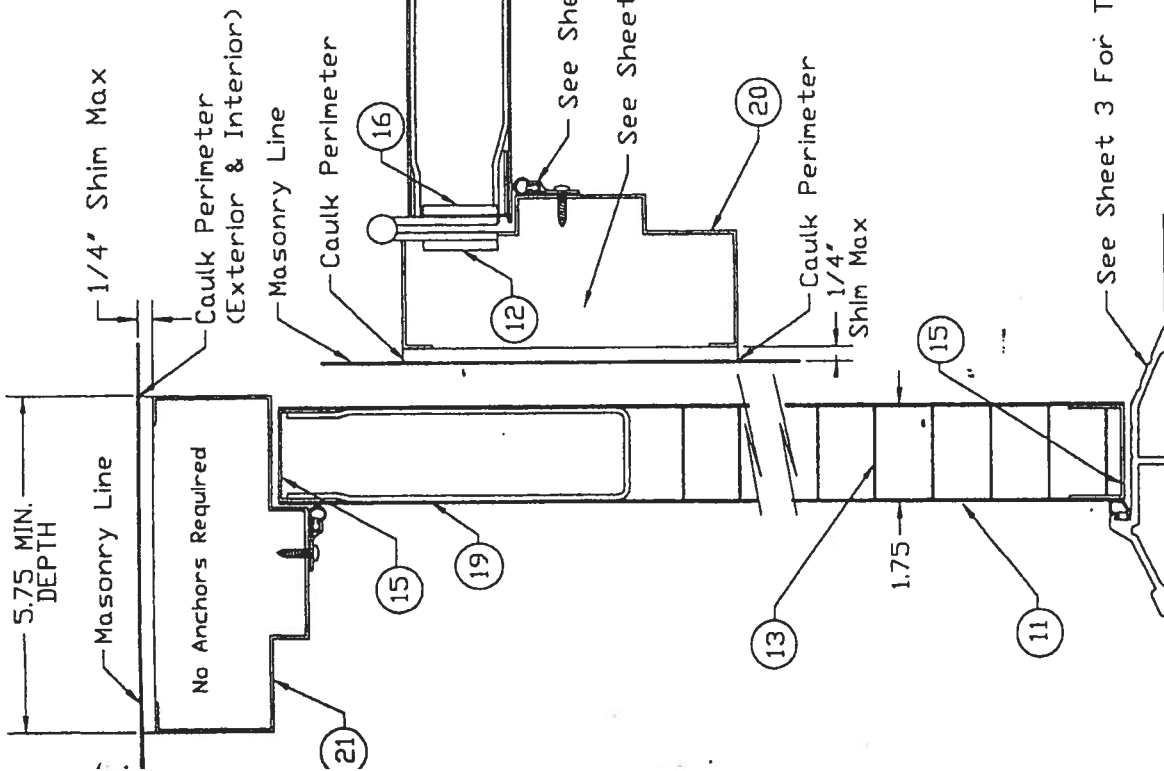

Section X-X

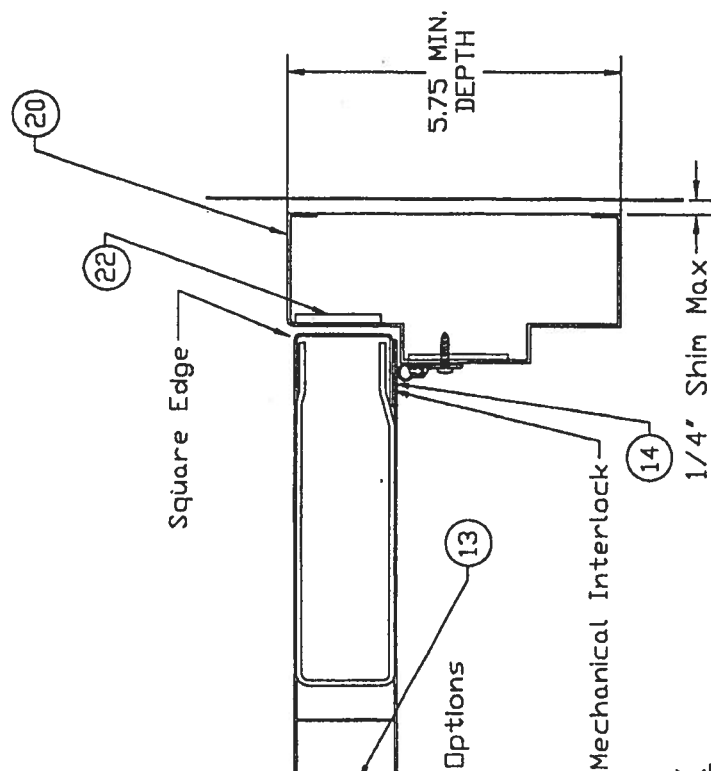

Note: See Sheet 7 For Bill Of Material

See Sheet 3 For Threshold Options

Section Y-Y

Concrete Slab

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE: June 08, 2000
BY: [Signature]
PRODUCT CONTROL DIV'S ON
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 00-031503

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 03-0411-01
Expiration Date: June 14, 2008
By: [Signature]
Miami-Dade Product Control
Division

2/25/00 JAR	Revised Formet, Transferred Information from NOA	7/22/97 GWS	Revised Sheet Number
ISSUE		REVISIONS	
DRAWN BY: GWS		DATE: 5/30/97	
DRAWING NUMBER: RD0087			
Sheet 6 of 7			

MATERIAL SPECIFICATIONS:

Cross Section View
Omega Door

CECO DOOR PRODUCTS
Milan, Tennessee 38358

ITEM	QTY	DESCRIPTION	MATERIAL	SIZE
1	1	SCHLAGE SERIES A53P'D GRADE 2, LATCH LOCK, SINGLE LEVER DR KNOB OPERATED		
2	1	HARKS SERIES 170AB GRADE 2, LATCH LOCK, INSIDE/OUTSIDE LEVER OPERATED		
3	1	YALE SERIES A53070 GRADE 2 LATCH LOCK, SINGLE LEVER DR KNOB OPERATED		
4	1	CAULK FOR INSTALLATION AND WEATHERSTRIP ADAPTER SCREWS FRAME PERIMETER (INSIDE & OUT) AND FRAME SILL CORNERS	GE SILICONE HOUSEHOLD SEALANT	
5	1	NATIONAL GUARD #8035		
6	1	PEMKO #2005AV		
7	1	PEMKO #181AV		
8	1	PEMKO #303AS HIGH SURFACE APPLIED EXTRUDED ALUMINUM WEATHERSTRIP ADAPTER WITH A SILICON (TH) BULB INSERT		
9	1	NATIONAL GUARD #130VA 1-1/4" WIDE X 0.188" SURFACE APPLIED EXTRUDED ALUMINUM WEATHERSTRIP ADAPT. WITH A FOAM INSERT		
10	3	HAGAR BB1279, 4-1/2" X 4-1/2" X .0134" THICK STEEL HINGE EACH ATTACHED WITH EIGHT #12-24 X 1/2" FH MS		
11	1	FACE SHEET CONFORMING TO ASTM A366 AND ASTM-A568	COMMERCIAL QUALITY COLD ROLLED STEEL (MINIMUM YIELD STR. OF Fy=36,000 psi)	18 GAUGE (.042" MIN. THICK)
12	3	HINGE REINFORCING PLATE PLATE SPOT WELDED TO FRAME JAMB AT EACH HINGE LOCATION	STEEL	1-1/4" X 9" X 7 GA.
13	1	CORE: FULL HONEYCOMB CORE PERMANENTLY BONDED TO THE INSIDE OF EACH FACE SKIN WITH NON-FLAMMABLE ADHESIVE	PHENOLIC RESIN-IMPREGNATED KRAFT PAPER	1-1/8" CELL
14	1	DEFLEX 3500 STRUCTURAL ADHESIVE EPOXY		
15	1	ROLL FORMED STEEL CHANNEL ON THE TOP AND BOTTOM OF THE DOOR SPOT WELDED TO EXTERIOR AND GLUED TO INTERIOR SKIN		1" X 1-3/4" X 1" X 16 GA. (.053" MIN)
16	3	DOOR HINGE REINFORCEMENT	28 GA. GALV.	1-1/4" X 9" X 7 GA.
17	1	DOOR LATCH REINFORCEMENT, STEEL "C" RING	STEEL	.015" THICK X 1.313 INSIDE DIAMETER
18	1	DOOR LOCK REINFORCEMENT	STEEL	16 GA. (.053")
19	1	DOOR CLOSER REINFORCEMENT, ROLLED FORM CHANNELS TACK WELDED TO DOOR END CHANNELS		
20	2	SERIES "SF" FRAME JAMB, DOUBLE RABBIT PROFILE	16 GA. (.053" MIN.) STEEL	2" FACE, 5-3/4" DEPTH MIN.
21	1	FACE SHEET CONFORMING TO ASTM A366 AND ASTM-A653	COMMERCIAL QUALITY COLD ROLLED STEEL	2" FACE, 5-3/4" DEPTH MIN.
22	1	SERIES "SF" FRAME HEAD, DOUBLE RABBIT PROFILE	16 GA. (.053" MIN.) STEEL	
		FACE SHEET CONFORMING TO ASTM A366 AND ASTM-A653	COMMERCIAL QUALITY COLD ROLLED STEEL	
		JAMB LOCK STRIKE REINFORCING PLATE	STEEL	1-1/8" X 2-1/2" X 12 GA.

APPROVED AS COMPLYING WITH THE SOUTH FLORIDA BUILDING CODE DATE <u>June 08, 2000</u> BY <u>Manuel</u> PRODUCT COMPLIANCE DIVISION BUILDING CODE COMPLIANCE OFFICE ACCEPTANCE NO. <u>00-0314-03</u>		PRODUCT RENEWED as complying with the Florida Building Code Acceptance No. <u>03-0411-01</u> Expiration Date <u>08/14/2008</u> <u>Manuel</u> Division Chief		Revised Format, Transferred Information from NOA 7/22/97 GWS	Revised Sheet Number 7/22/97 GWS
MATERIAL SPECIFICATIONS:				ISSUE DRAWN BY: GWS DATE: 6/02/97	REVISIONS
3-0 x 7-0 Series Bill Of Materials				DRAWING NUMBER: RD0087 Sheet 7 of 7	
 CECO DOOR PRODUCTS Milan, Tennessee 38358					



BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

NOTICE OF ACCEPTANCE (NOA)

Ceco Door Products
9159 Telecom Drive
Milan, TN 38358

IN SWING

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: The Ceco Series Single Flush / Embossed Inswing Commercial Steel Doors -Impact

APPROVAL DOCUMENT: Drawing No RD0728, titled "3-0 x 7-0 , Series Regent, Omega, Imperial, Versa door", prepared by manufacturer, sheets 1 through 9 of 9 dated 05/22/02 and latest revised on 10-10-02, bearing the Miami-Dade County Product Control Approval stamp with the Notice of Acceptance number and approval date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: Large and Small Missile Impact

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.


This NOA consists of this page 1 as well as approval document mentioned above.

The submitted documentation was reviewed by Ishaq I. Chanda, P.E.



NOA No 02-0807.04
Expiration Date: October 31, 2007
Approval Date: October 31, 2002
Page 1

Frame Corners Welded (T3)

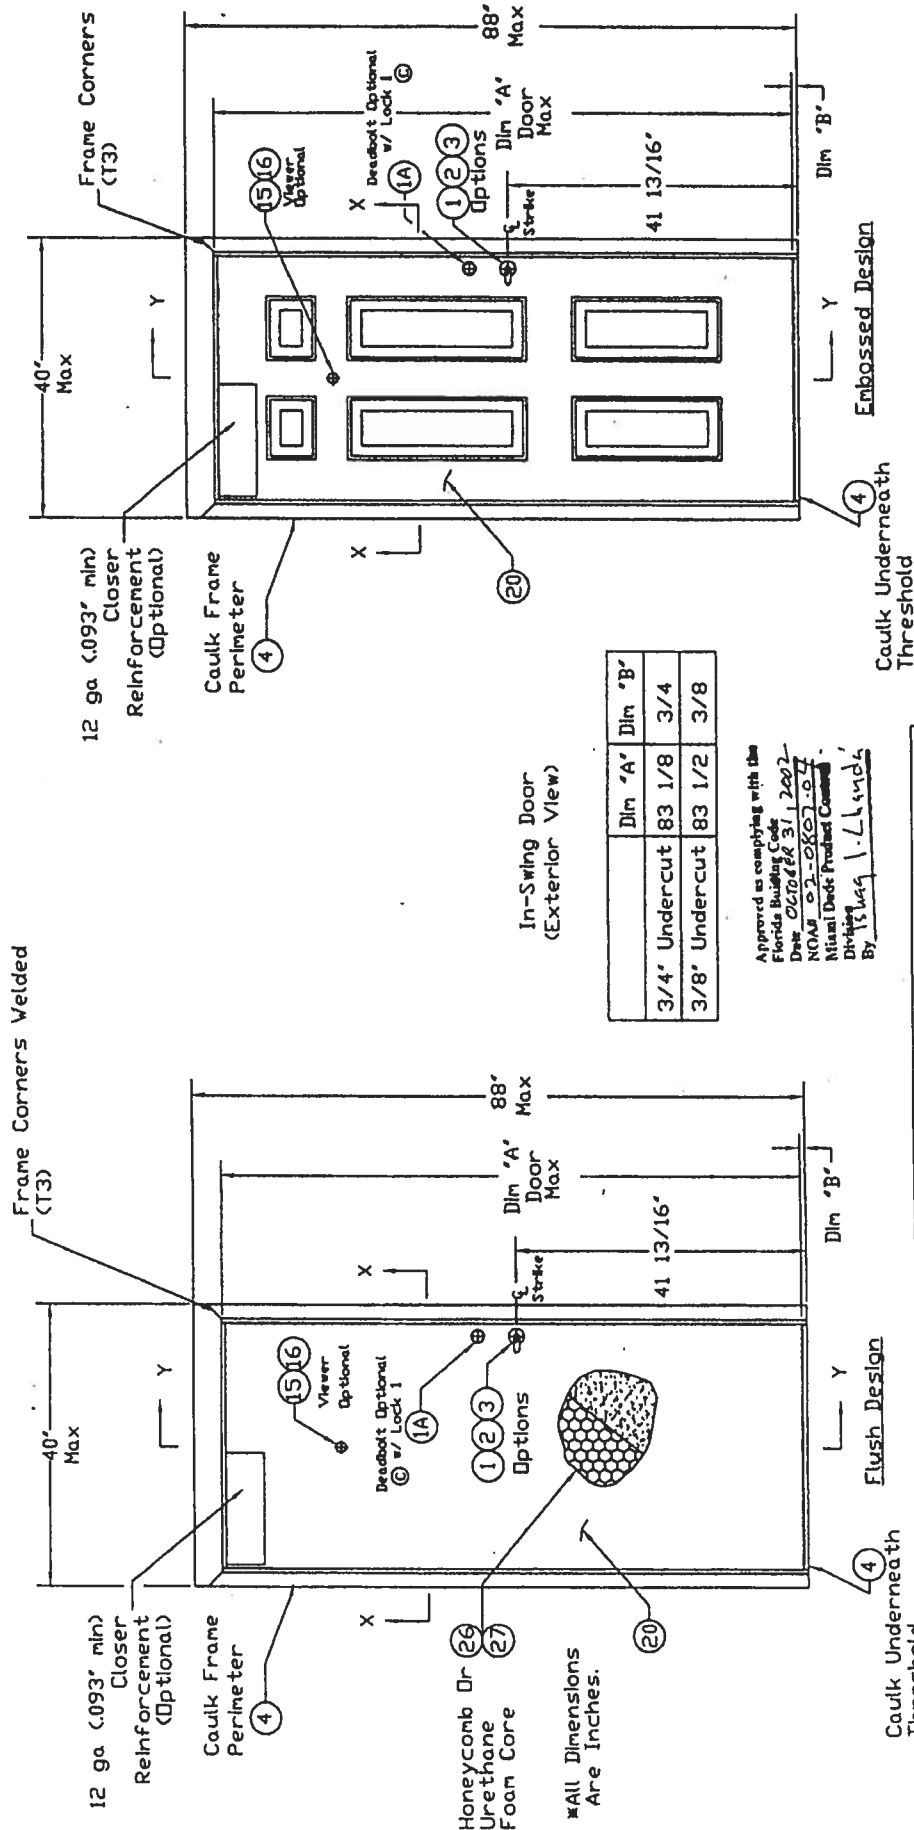

In-Swing Door
(Exterior View)

	Dim 'A'	Dim 'B'
3/4" Undercut	83 1/8	3/4
3/8" Undercut	83 1/2	3/8

Approved as complying with the
Florida Building Code
Date: 06/08/04 3/1/2002
NOA# 03-0807-07
Milan Door Products Company
Dividing
By: 15/04/1-11/04/04

■ All Dimensions
Are Inches.

Design Pressure Rating		
	Where Water Infiltration Requirement Is Needed	Where Water Infiltration Requirement Is Not Needed
Positive	Not Approved	+70 PSF
Negative	Not Approved	-70 PSF

Notes:

- 1) In-swing Not Approved For Water Infiltration
- 2) This Door Does Not Need A Hurricane Protection System
- 3) Hinge Spacing Is 33" O.C., 13" From Top Of Frame & 9" From The Bottom.

Sheet 2	Frame Anchor Installation
Sheet 3	Threshold Installation
Sheet 3	Weatherstrip Installation
Sheet 4	Door Latch Reinforcement
Sheet 5-8	Cross Section View
Sheet 9	Bill Of Material

MATERIAL SPECIFICATIONS:

Finish: Rust Inhibitive Primer

3-0 x 7-0 Series

Regent, Omega, Imperial, & Versadoor
In-Swing Elevation Drawing

CECO DOOR PRODUCTS

Milan, Tennessee 38358

ISSUE REVISIONS

DRAWN BY: LT

DATE: 5/22/02

DRAWING NUMBER:

RD0728

Sheet 1 of 9

Revised Per Marked-Up Drawings From LT

Revised Per Marked-Up Drawings From LT

10/10/02

10/10/02

10/10/02

10/10/02

10/10/02


10/10/02

Min. 3500 PSI


Min 3500 PSI

Wm 3500 PSI

Existing Opening Anchor Into Wood Stud

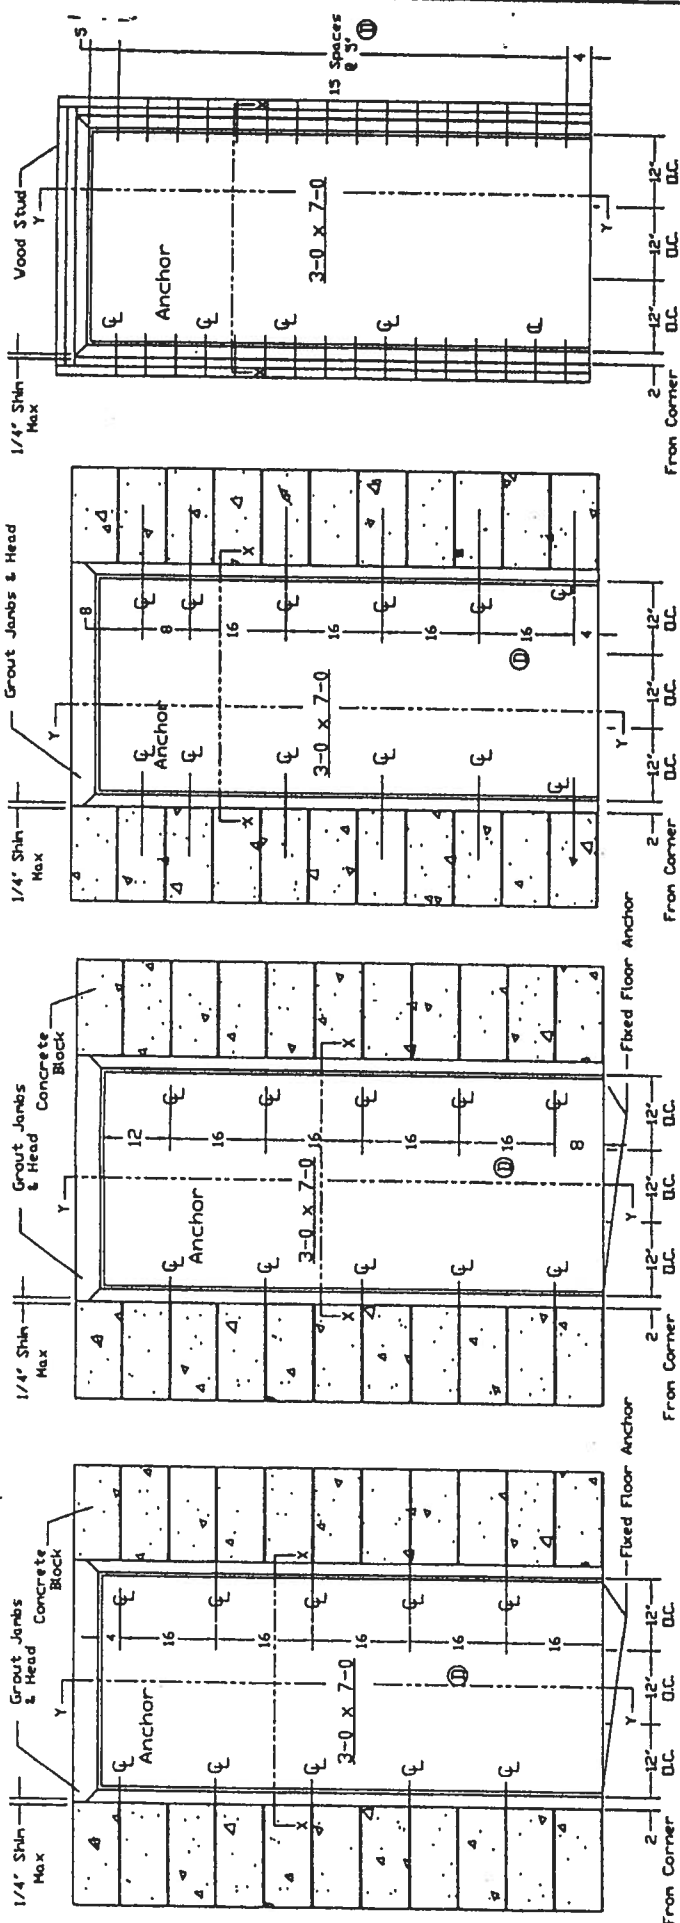

ALL DIMENSIONS ARE INCHES

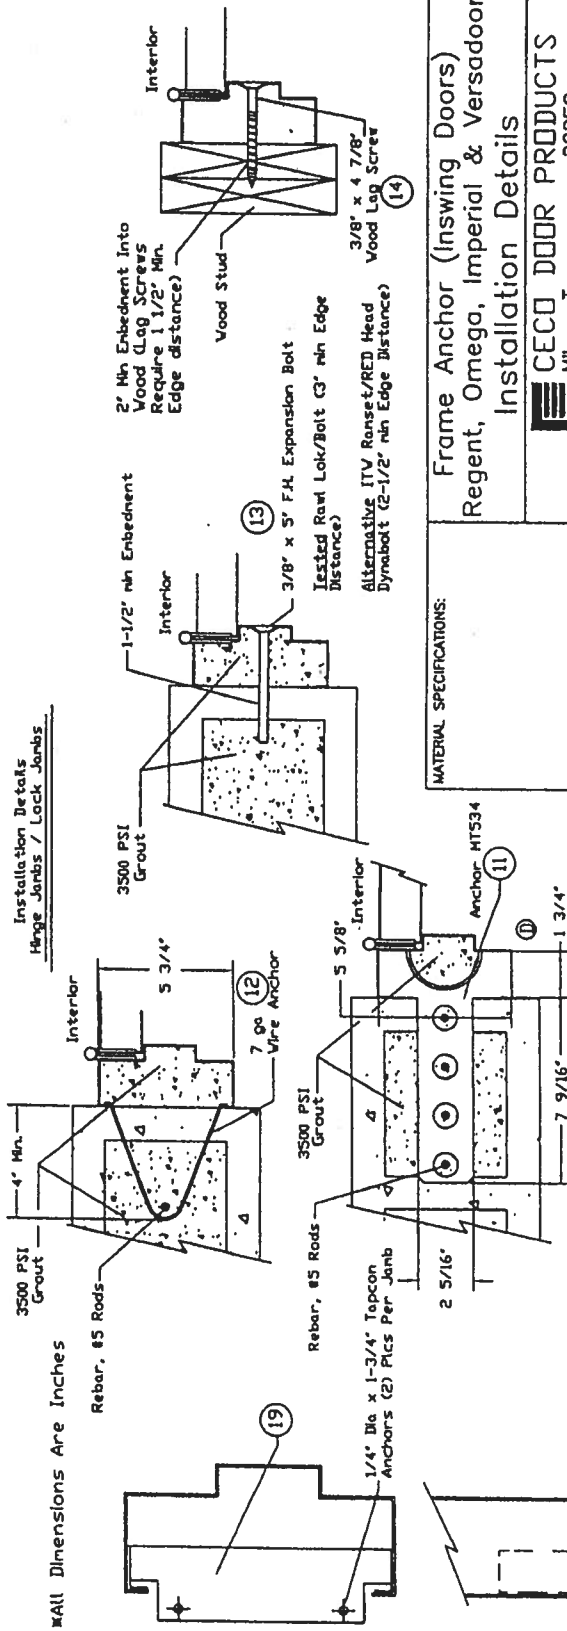


Approved as complying with the
Florida Building Code
Date OCT 31, 2002
NOA# 02-0207-04
Miami Dade Product Control
Division
By Shas J. Chaudh

A 1/2" x 1/4" LT	Revised Per Marked -Up Drawings From Ishaq Chanda.	
	ISSUE	REVISIONS
DRAWN BY:	LT	DATE: 5/22/02
DRAWING NUMBER: RD0728		
Sheet 2 of 9		

Frame Anchor (Inswing Doors)
Regent, Omega, Imperial & Versadoor
Installation Details

CECO DOOR PRODUCTS
Milan, Tennessee 38358


*Note: Structural Member At Header Must Be Designed To carry 58.3#/ft. load Imposed And Must Be Reviewed By Building Official.

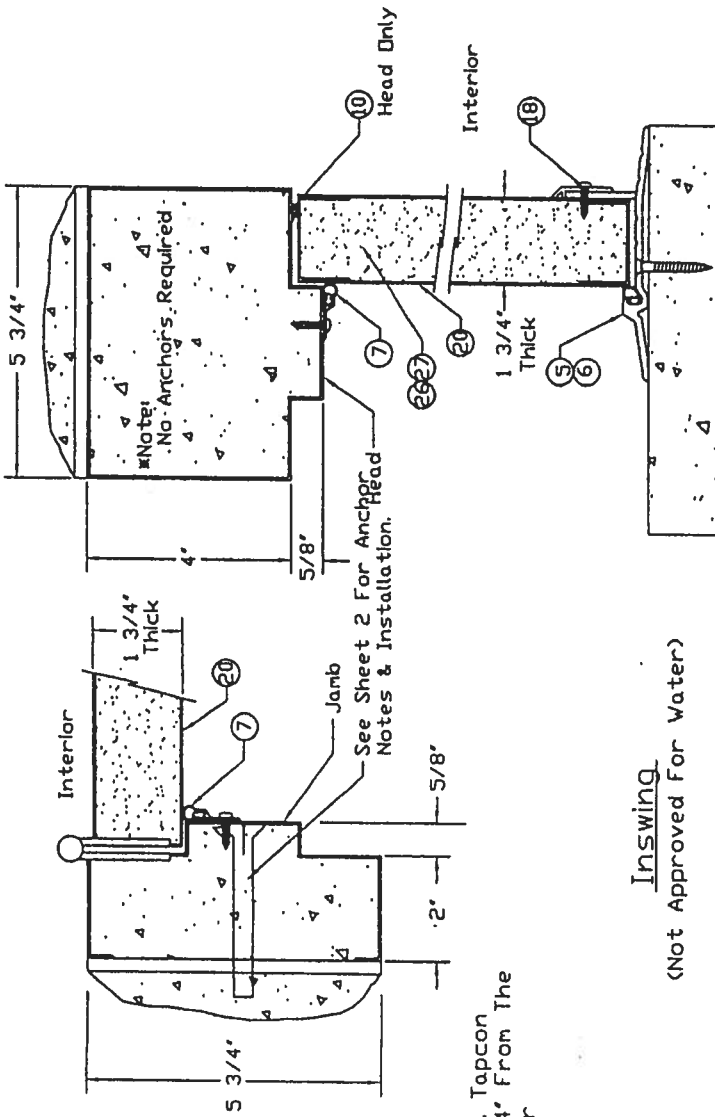


Section Y-Y

Inswing
(Not Approved for Water)

Note: Thresholds Not Approved For Water.

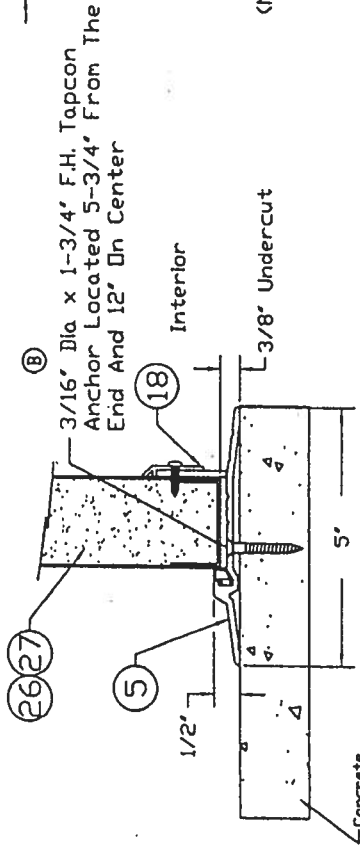

Threshold: Penko 2005AV

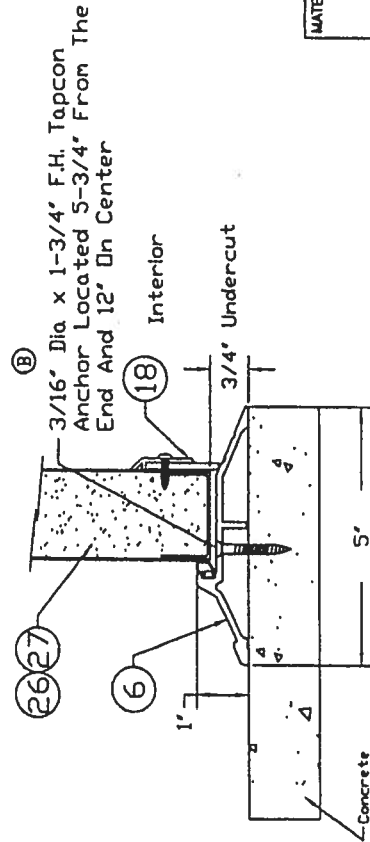

Threshold: Penko 181AV

Approved as complying with the
Florida Building Code
Date: OCT 31, 2002
NOA# 02-030704
Miami Dade Product Control
Division
By: [Signature]


B	Revised Per Marked-Up Drawings From Ishaq Chanda
C	Revised Per Marked-Up Drawings From Ishaq Chanda
LT	Issue

ISSUE	REVISIONS
DRAWN BY: LT	DATE: 5/22/02


RD0728
Sheet 3 of 9

MATERIAL SPECIFICATIONS:
Threshold & Weatherstrip (Inswing Doors)
Regent, Omega, Imperial, Versadoor
Installation Details


CECO DOOR PRODUCTS
Milan, Tennessee 38358

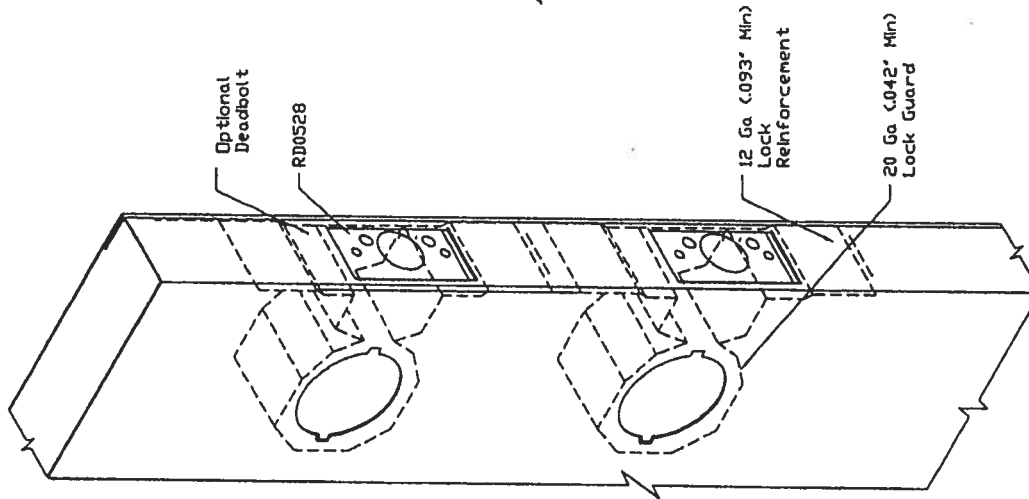

Schlage AL53PD

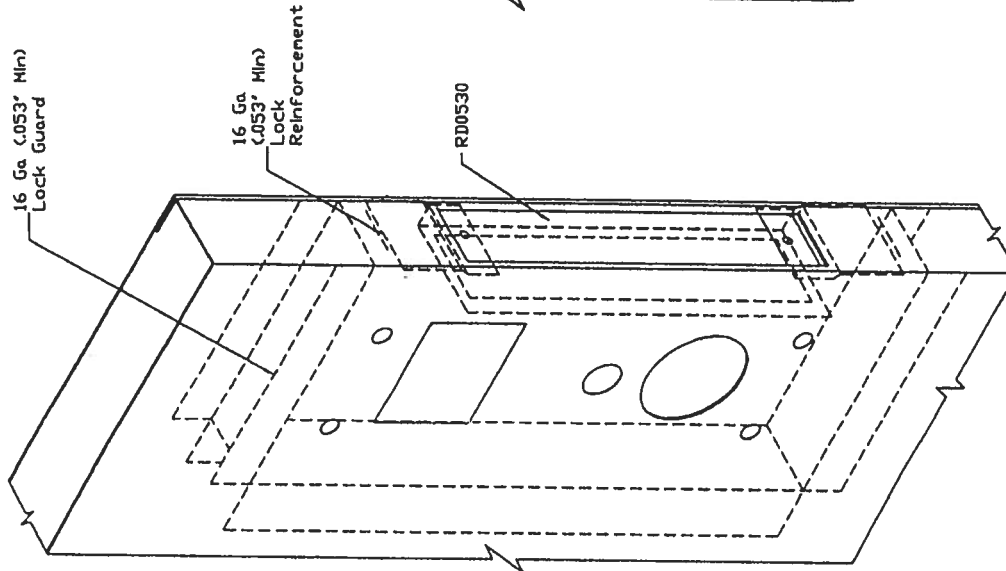

Saflok MT

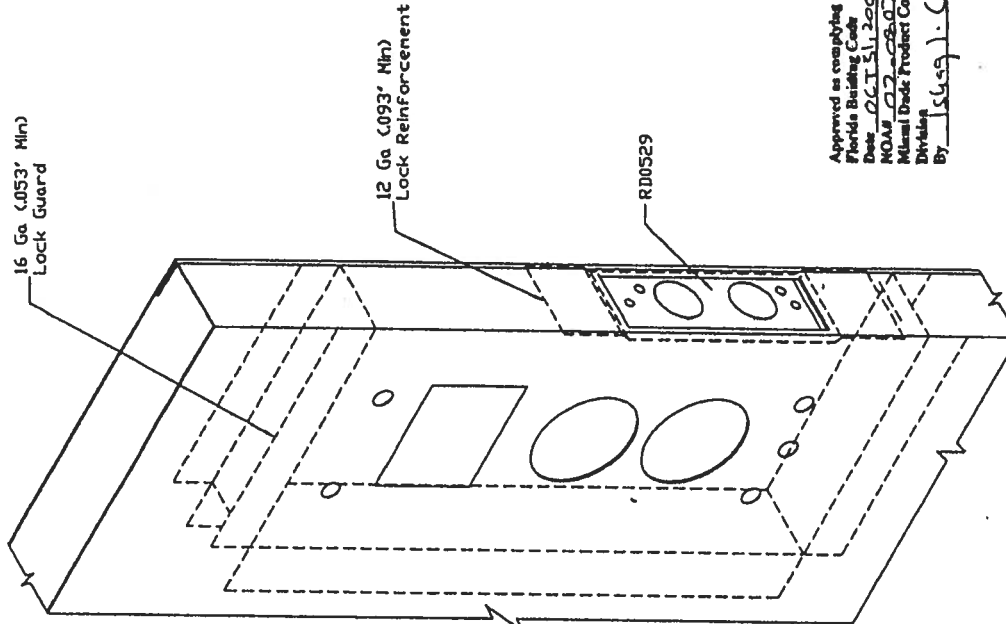

Saflok Premier SL2500

Approved as complying with the
Florida Building Code
Date: OCT 31, 2002
NOAH 02-08-01-04
Miami Desk Product Control
Division
By: [Signature]


MATERIAL SPECIFICATIONS:

Lock Reinforcement (Inswing Doors)
Regent, Omega, Imperial, Versadoor
Reinforcement Details

 **CECO DOOR PRODUCTS**
Milan, Tennessee 38358

A	Added RD0528, RD0529 & RD0530.		
1/28/02			
LT	ISSUE	REVISIONS	
	DRAWN BY:	DATE:	5/28/02
	LT		
DRAWING NUMBER:			
RD0728			
Sheet 4 of 9			

*Note: Structural Member At Head Must Be Designed To Carry 58.3 #/ft. Load Imposed And Must Be Reviewed By Building Official.

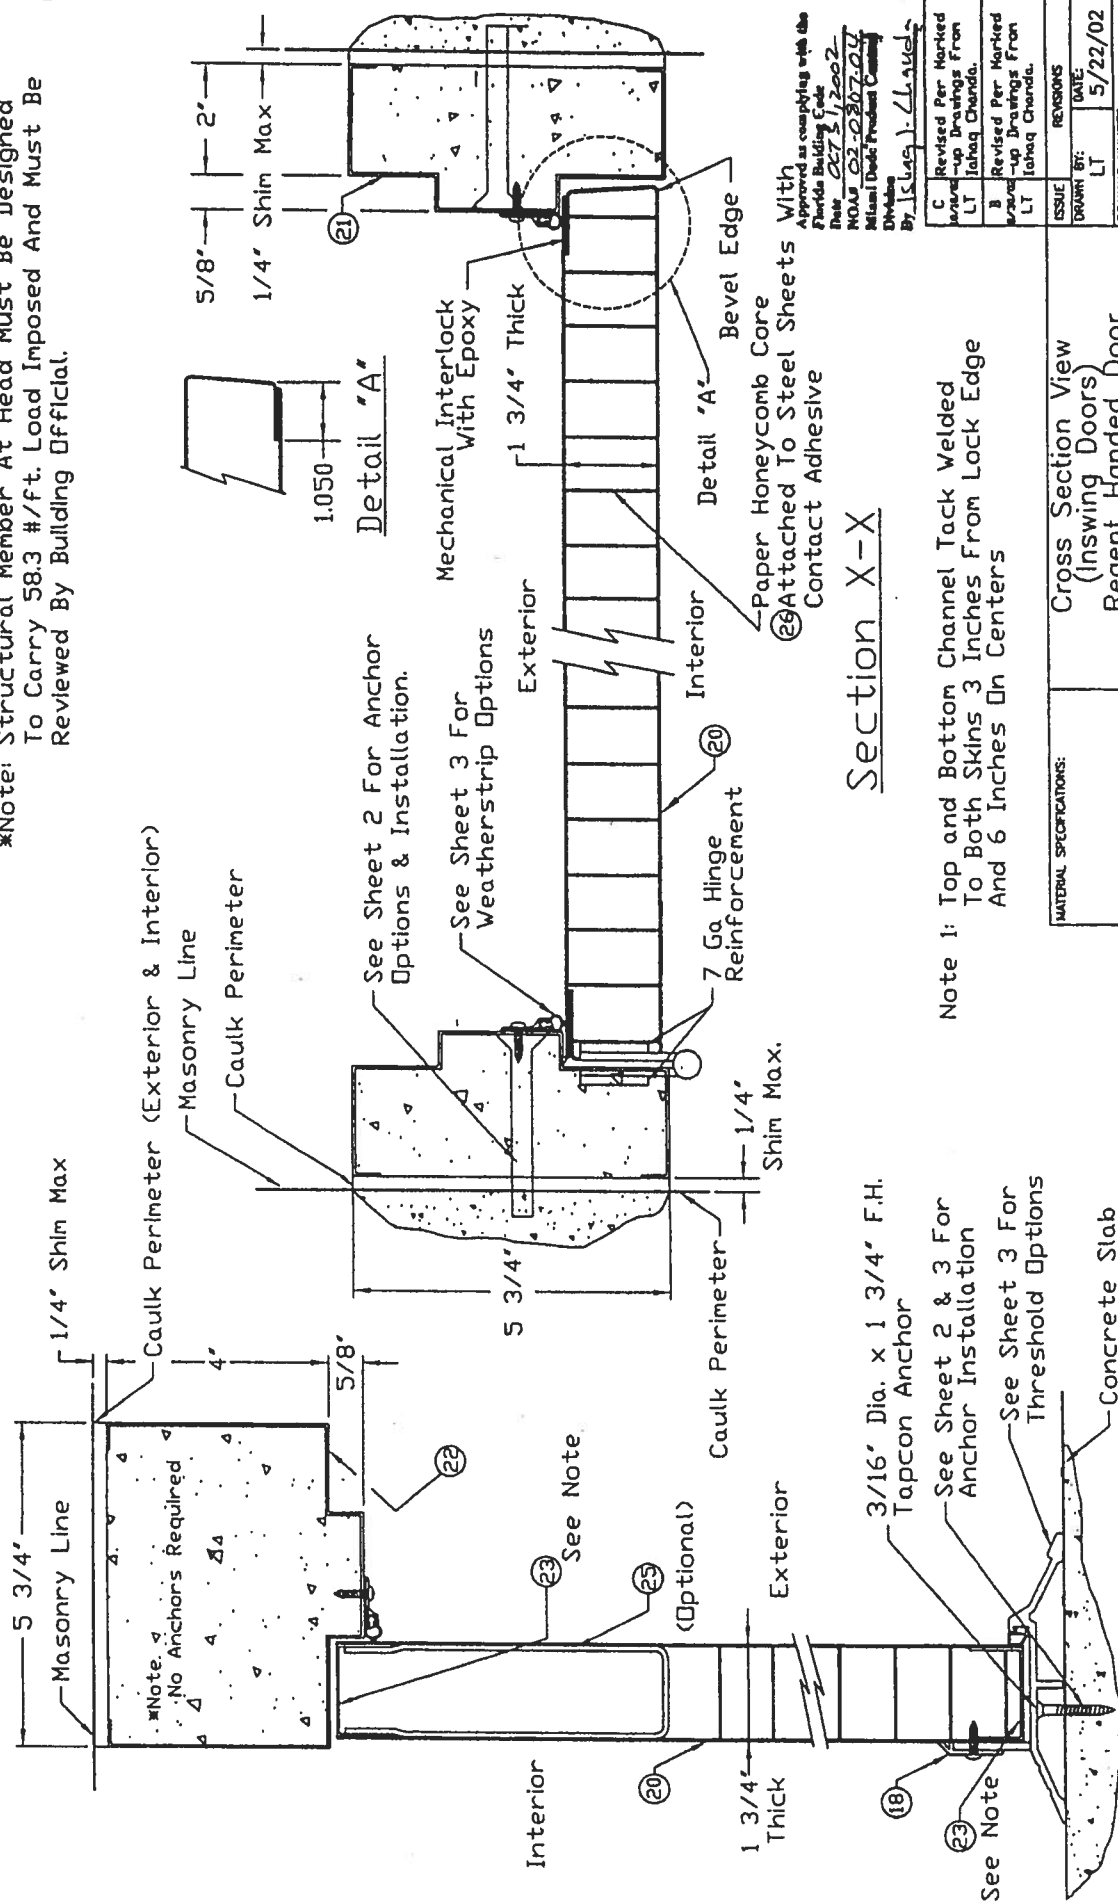

Section X-X

Note 1: Top and Bottom Channel Tack Welded To Both Skins 3 Inches From Lock Edge And 6 Inches On Centers

Section Y-Y

MATERIAL SPECIFICATIONS:


Cross Section View (Inswing Doors) Regent Handed Door	
CECO DOOR PRODUCTS	
Milan, Tennessee 38358	

REVISIONS	DATE
LT	5/22/02
DRAWING NUMBER	
RD0728	
Sheet 5 of 9	

Approved as complying with the Florida Building Code
 Their OCT 31, 2002
 NOA 02-0302-01
 Miami Dade-Piedmont County
 Division
 By: [Signature]

C	Revised Per Marked
LT	Up Drawings From
B	Revised Per Marked
LT	Up Drawings From

*Note: Structural Member At Head Must Be Designed To Carry 58.3 #/ft. Load Imposed And Must Be Reviewed By Building Official.

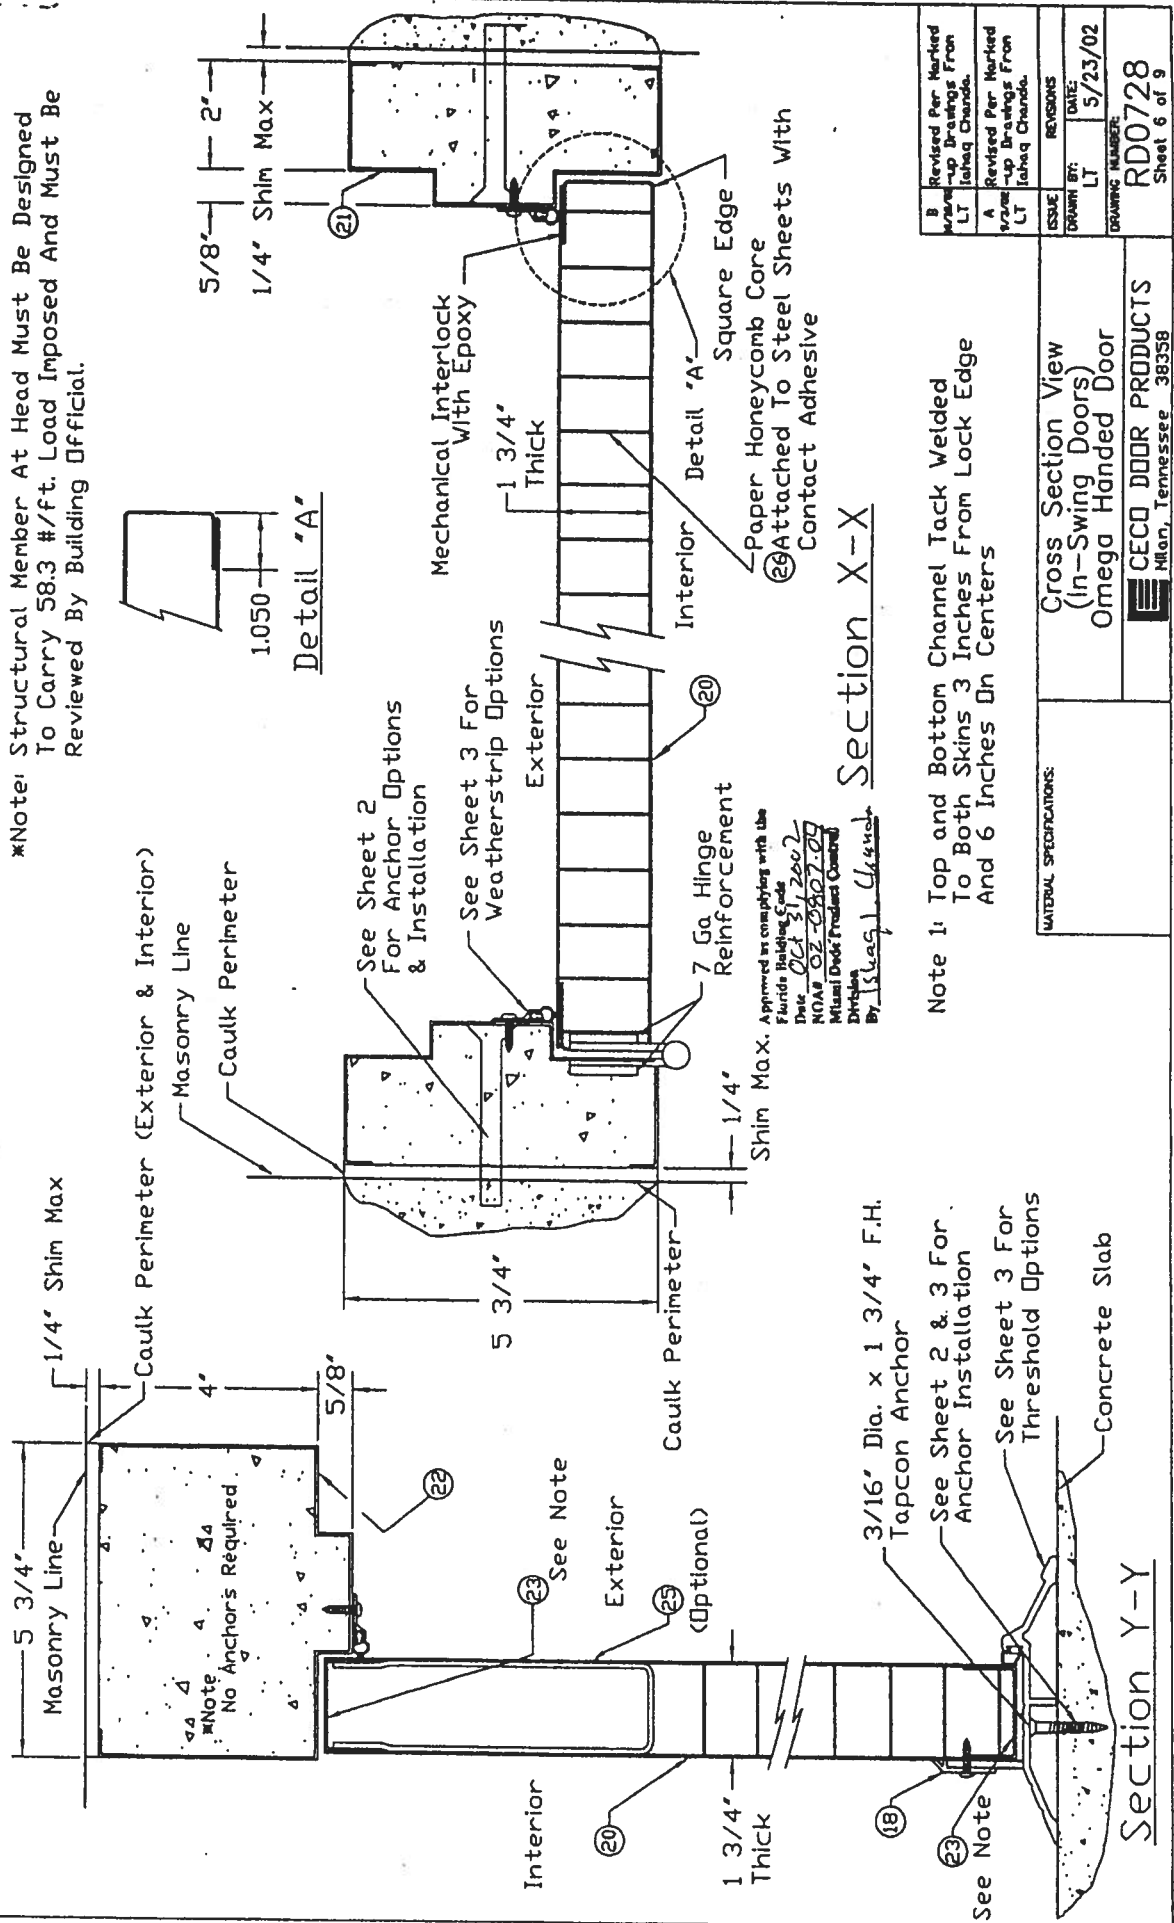

B	Revised Per Marked Drawings From LT Ishaq Chandra.
A	Revised Per Marked Drawings From LT Ishaq Chandra.
ISSUE	REVISIONS
DRAWN BY: LT	DATE: 5/23/02
DRAWING NUMBER: RD0728	Sheet 6 of 9

MATERIAL SPECIFICATIONS:	Cross Section View (In-Swing Doors) Omega Handed Door
	CECO DOOR PRODUCTS Miami, Tennessee 38358

Note: Structural member at Head Must Be Designed To carry 58.3 #/ft. Load Imposed And Must Be Reviewed By Building Official.

Wood Buck
1/4" Shim Max
Caulk Perimeter (Exterior & Interior)
Wood Installation
Caulk Perimeter
See Sheet 2 For Anchor Options & Installation
See Sheet 3 For Weatherstrip Options
Exterior
Interior
7 Ga. Hinge Reinforcement
Caulk Perimeter
Shim Max.
5 3/4"
4"
5/8"
1 3/4" Thick
Exterior
Interior
Detail "A"
Bevel Edge
②⑦ Urethane Foam Core
Mechanical Interlock With Epoxy
1 3/4" Thick
1/4" Shim Max
5/8"

Note: Top & Bottom Channels Assembled Std Method To Skins With Spot Welds & Tape. Channels Are Then Tack Welded To Both Skins 3" From Lock Edge And 6 Inches On Center.

Approved as complying with the
Florida Building Code
Date OCT 21, 2002
NOAH 02-0807-04
Miami Dade Product Control
Division
By Elgas - Cland

B	Revised Per Marked- up Drawings From LT Istang Chanda.
---	--

ISSUE	REVISIONS
DRAWN BY: LT	DATE: 5/23/02
DRAWING NUMBER:	

RD0728
Sheet 8 of 9

Cross Section View
(In-Swing Doors)
Versadoor Handed Door

CECO DOOR PRODUCTS
Milan, Tennessee 38358

Detail "A"

1.050

Section Y-Y

Cylindrical Lock & Lock Reinforcement (RD0528)			Schlage	AL53PD
1A	Deadbolt (Optional) ①		Schlage	B100
2	Dr Cylindrical Lock & Lock Reinforcement		Saflok	Premier SL2500
3	Dr Mortise Lock		Saflok	MT
4	Caulk		Dow Corning	899 Silicone Glazing Sealant
5	Threshold		Penko	2005AV36
6	Dr		Penko	181AV36
7	Weatherstrip		Penko	303AV3684
8	Hinge (Ball Bearing)		Hager or Equal (Attached w/ (8) #12-24 x 1/2 MS Per Hinge)	4-1/2 x 4-1/2 x .134 (Std Weight)
9	Dr (Spring)		Hager or Equal (Attached w/ (8) #12-24 x 1/2 MS Per Hinge)	4-1/2 x 4-1/2 x .134 (Std Weight)
10	Weatherstrip		Penko	S88
11	Frame Anchor		Masonry Tee (RD0057)	16 ga (.053' min) Galv Steel Fymin = 30ksi
12	Dr		Wire, Relaxed Dimension 9' x 8'	#7 (.167' min) Galv Steel Wire (70,000 - 90,000 psi Tensile Strength)
13	Dr		Expansion Bolt	3/8" x 5" F.H. Rawl Lok/Bolt Or 3/8" x 5" F.H. Ranset/RED Head
14	Dr		Wood Lag Screw	3/8" x 4-5/8"
15	Viewer		Hager	1755
16	Dr		MAG Security	8724-C
17	Drip Cap/ Top		Penko	346
18	Sweep		Penko	315 N
19	Floor Anchor		Fixed Floor Anchor	16 ga (.053' min) galvanized Steel
20	Face Sheet A60 Galv Conforming To ASTM A653		Commercial Steel Type B (Minimum Yield Strength 30,000psi)	16 Ga (.053' min)
21	Series SF, Frame Jamb, Double Rabbet Profile, A60 Galv Conforming To ASTM A653		Commercial Steel Type B (Minimum Yield Strength 30,000psi)	2" Face, 5-3/4" Depth Min. (RD00333)
22	Series SF, Frame Head, Double Rabbet, Profile A60 Galv Conforming To ASTM A653		Commercial Steel Type B (Minimum Yield Strength 30,000psi)	4" Face, 5-3/4" Depth Min. (RD00333)
23	Door Channels/ Spot Welded To Bottom Skin		16 Ga (.053' min) A60 Galv Conforming To ASTM A653	16 ga (.053' min) x 1" x 1-3/4" x 1"
24	Glued To Top Skin/ Tack Welded To Both		16 Ga (.053' min) A60 Galv Conforming To ASTM A653	16 ga (.053' min) x 1" x 1-3/4" x 1"
25	Door Channels/ Spot Welded To Bottom Skin		16 Ga (.053' min) A60 Galv Conforming To ASTM A653	16 ga (.053' min) x 1" x 1-3/4" x 1"
26	Taped To Top Skin/ Tack Welded To Both		12 Ga (.093' min) CS Type B	12 ga (.093' min) x 5-3/8" x 16"
27	Closer Reinforcement (Optional)		Non-impregnated Kraft Paper (E)	1.2" Nominal Cell Size
28	Honeycomb Core		Foam Enterprises	2 lb/ft ³ Density
29	Urethane Core			

Approved as complying with the
Florida Building Code
Date Oct 31, 2002
NOAH 02-0802-009
Miami Dade Permit Control
Division
By SLK/1.664 n

B	Revised Per Marked- 10/10/02 Up Drawings From LT	Isaac Chanda.
A	Revised Per Marked- 9/14/02 Up Drawings From LT	Isaac Chanda.

MATERIAL SPECIFICATIONS:		3-0 x 7-0 Series	
In-Swing Bill Of Materials		REVISIONS	
		ISSUE	DATE:
		DRAWN BY: LT	5/28/02
		DRAWING NUMBER:	
		RD0728	
		Sheet 9 of 9	

 **CECO DOOR PRODUCTS**
Milan, Tennessee 38358



January 31, 2002

TO: OUR FLORIDA CUSTOMERS:

Effective February 1, 2002, the following TAMKO shingles, as manufactured at TAMKO's Tuscaloosa, Alabama, facility, comply with ASTM D-3161, Type I modified to 110 mph. Testing was conducted using four nails per shingle. These shingles also comply with Florida Building Code TAS 100 for wind driven rain.

- Glass-Seal AR
- Elite Glass-Seal AR
- ASTM Heritage 30 AR (formerly ASTM Heritage 25 AR)
- Heritage 40 AR (formerly Heritage 30 AR)
- Heritage 50 AR (formerly Heritage 40 AR)

All testing was performed by Florida State certified independent labs.

Please direct all questions to TAMKO's Technical Services Department at 1-800-641-46

TAMKO Roofing Products, Inc.

COLUMBIA COUNTY, FLORIDA

OCCUPANCY

COLUMBIA COUNTY, FLORIDA

Department of Building and Zoning Inspection

This Certificate of Occupancy is issued to the below named permit holder for the building and premises at the below named location, and certifies that the work has been completed in accordance with the Columbia County Building Code.

Parcel Number 03-4S-17-07486-113

Building permit No. 000024518

Use Classification SFD, UTILITY

Fire: 50.22

Permit Holder ROBERT EGGRES

Waste: 150.75

Owner of Building WIREGRASS HOME BUILDERS

Total: 200.97

Location: 306 SE LINDALE GLEN(HAIGHT ASHBURY, LOT 13)

Date: 01/10/2007



[Signature]

Building Inspector

POST IN A CONSPICUOUS PLACE
(Business Places Only)