

Residential System Sizing Calculation

Summary

Project Title:
Lot 10 Jewel Lake II

Lake City, FL 32025


3/1/2022

Location for weather data: Gainesville, FL - Defaults: Latitude(29.7) Altitude(152 ft.) Temp Range(M)			
Humidity data: Interior RH (50%) Outdoor wet bulb (77F) Humidity difference(51gr.)			
Winter design temperature(TMY3 99%)	30 F	Summer design temperature(TMY3 99%)	94 F
Winter setpoint	70 F	Summer setpoint	75 F
Winter temperature difference	40 F	Summer temperature difference	19 F
Total heating load calculation	24162 Btuh	Total cooling load calculation	19624 Btuh
Submitted heating capacity	% of calc Btuh	Submitted cooling capacity	% of calc Btuh
Total (Electric Heat Pump)	100.0 24162	Sensible (SHR = 0.70)	84.7 13510
Heat Pump + Auxiliary(0.0kW)	100.0 24162	Latent	157.4 5790
		Total (Electric Heat Pump)	98.3 19300

WINTER CALCULATIONS

Winter Heating Load (for 1607 sqft)


Load component		Load	
Window total	153 sqft	2208	Btuh
Wall total	1273 sqft	4519	Btuh
Door total	38 sqft	695	Btuh
Ceiling total	1687 sqft	1713	Btuh
Floor total	1607 sqft	8653	Btuh
Infiltration	34 cfm	1471	Btuh
Duct loss		4903	Btuh
Subtotal		24162	Btuh
Ventilation	0 cfm	0	Btuh
TOTAL HEAT LOSS		24162	Btuh

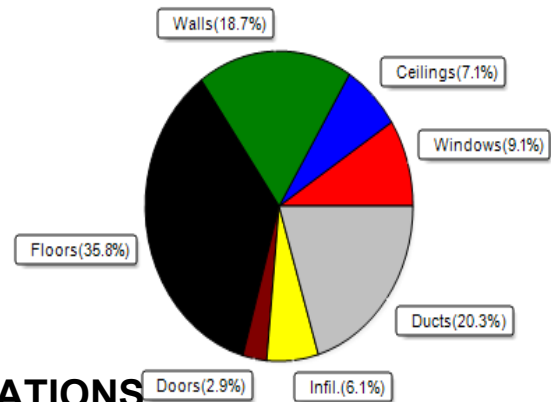

SUMMER CALCULATIONS

Summer Cooling Load (for 1607 sqft)

Load component		Load	
Window total	153 sqft	3550	Btuh
Wall total	1273 sqft	2717	Btuh
Door total	38 sqft	521	Btuh
Ceiling total	1687 sqft	1456	Btuh
Floor total		0	Btuh
Infiltration	25 cfm	524	Btuh
Internal gain		3040	Btuh
Duct gain		4135	Btuh
Sens. Ventilation	0 cfm	0	Btuh
Blower Load		0	Btuh
Total sensible gain		15944	Btuh
Latent gain(ducts)		1210	Btuh
Latent gain(infiltration)		869	Btuh
Latent gain(ventilation)		0	Btuh
Latent gain(internal/occupants/other)		1600	Btuh
Total latent gain		3680	Btuh
TOTAL HEAT GAIN		19624	Btuh

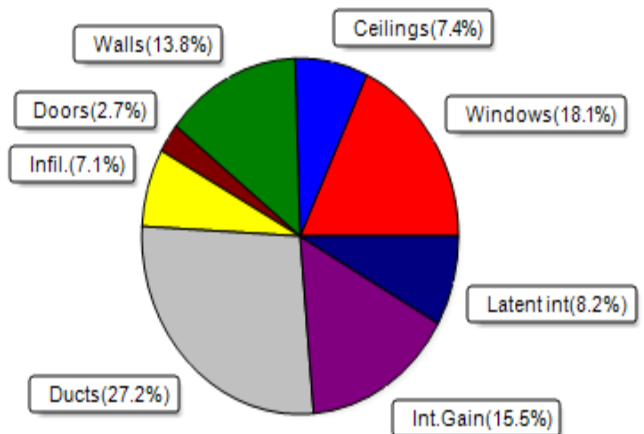

8th Edition

EnergyGauge® System Sizing

PREPARED BY: _____

DATE: 3 / 1 / 2022

System Sizing Calculations - Winter

Residential Load - Whole House Component Details

Lake City, FL 32025

Project Title:
Lot 10 Jewel Lake II
Building Type: User

3/1/2022

Reference City: Gainesville, FL (Defaults) Winter Temperature Difference: 40.0 F (TMY3 99%)

Component Loads for Whole House

Window	Panes/Type	Frame	U	Orientation	Area(sqft)	X	HTM=	Load
1	2, NFRC 0.25	Vinyl	0.36	NE	30.0		14.4	432 Btuh
2	2, NFRC 0.25	Vinyl	0.36	SE	15.0		14.4	216 Btuh
3	2, NFRC 0.25	Vinyl	0.36	SW	60.0		14.4	864 Btuh
4	2, NFRC 0.25	Metal	0.36	SW	33.3		14.4	480 Btuh
5	2, NFRC 0.25	Vinyl	0.36	NW	15.0		14.4	216 Btuh
Window Total					153.3(sqft)			2208 Btuh
Walls	Type	Ornt.	Ueff.	R-Value (Cav/Sh)	Area	X	HTM=	Load
1	Frame - Wood	- Ext	(0.089)	13.0/0.0	91		3.55	324 Btuh
2	Frame - Wood	- Adj	(0.089)	13.0/0.0	126		3.55	448 Btuh
3	Frame - Wood	- Adj	(0.089)	13.0/0.0	157		3.55	559 Btuh
4	Frame - Wood	- Ext	(0.089)	13.0/0.0	273		3.55	969 Btuh
5	Frame - Wood	- Ext	(0.089)	13.0/0.0	169		3.55	601 Btuh
6	Frame - Wood	- Ext	(0.089)	13.0/0.0	64		3.55	227 Btuh
7	Frame - Wood	- Ext	(0.089)	13.0/0.0	39		3.55	137 Btuh
8	Frame - Wood	- Ext	(0.089)	13.0/0.0	353		3.55	1253 Btuh
Wall Total					1273(sqft)			4519 Btuh
Doors	Type	Storm	Ueff.		Area	X	HTM=	Load
1	Insulated - Exterior, n		(0.460)		20		18.4	368 Btuh
2	Insulated - Garage, n		(0.460)		18		18.4	327 Btuh
Door Total					38(sqft)			695Btuh
Ceilings	Type/Color/Surface		Ueff.	R-Value	Area	X	HTM=	Load
1	Vented Attic/L/Shing		(0.025)	38.0/0.0	1687		1.0	1713 Btuh
Ceiling Total					1687(sqft)			1713Btuh
Floors	Type		Ueff.	R-Value	Size	X	HTM=	Load
1	Slab On Grade		(1.180)	0.0	183.3 ft(perim.)		47.2	8653 Btuh
Floor Total					1607 sqft			8653 Btuh
Envelope Subtotal:								17788 Btuh
Infiltration	Type	Wholehouse	ACH	Volume(cuft)	Wall Ratio	CFM=		Load
	Natural		0.16	12856	1.00	33.6		1471 Btuh
Duct load	Average sealed, R6.0, Supply(Att), Return(Att) (DLM of 0.255)							4903 Btuh
All Zones	Sensible Subtotal All Zones							24162 Btuh

Manual J Winter Calculations

Residential Load - Component Details (continued)

Lake City, FL 32025

Project Title:
Lot 10 Jewel Lake II
Building Type: User

3/1/2022

WHOLE HOUSE TOTALS

Totals for Heating	Subtotal Sensible Heat Loss	24162 Btuh
	Ventilation Sensible Heat Loss	0 Btuh
	Total Heat Loss	24162 Btuh

EQUIPMENT

1. Electric Heat Pump	#	24162 Btuh
-----------------------	---	------------

Key: Window types - NFRC (Requires U-Factor and Shading coefficient(SHGC) of glass as numerical values)
or - Glass as 'Clear' or 'Tint' (Uses U-Factor and SHGC defaults)

U - (Window U-Factor)

HTM - (ManualJ Heat Transfer Multiplier)



Version 8

System Sizing Calculations - Summer

Residential Load - Whole House Component Details

Project Title:
Lot 10 Jewel Lake II

Lake City, FL 32025

3/1/2022

Reference City: Gainesville, FL

Temperature Difference: 19.0F(TMY3 99%) Humidity difference: 51gr.

Component Loads for Whole House

Window	Type*						Overhang		Window Area(sqft)			HTM		Load			
	Panes	SHGC	U	InSh	IS	Ornt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded				
1	2 NFRC	0.25, 0.36	No	No	NE		1.0ft.	3.0ft.	30.0	0.0	30.0	12	24	709	Btuh		
2	2 NFRC	0.25, 0.36	No	No	SE		1.5ft.	1.0ft.	15.0	4.4	10.6	12	25	316	Btuh		
3	2 NFRC	0.25, 0.36	No	No	SW		1.5ft.	1.0ft.	60.0	17.6	42.4	12	25	1262	Btuh		
4	2 NFRC	0.25, 0.36	No	No	SW		9.5ft.	1.0ft.	33.3	33.3	0.0	12	25	403	Btuh		
5	2 NFRC	0.25, 0.36	No	No	NW		1.5ft.	1.0ft.	15.0	0.0	15.0	12	24	355	Btuh		
	Excursion													505	Btuh		
	Window Total								153 (sqft)					3550 Btuh			
Walls	Type						U-Value	R-Value	Area(sqft)			HTM		Load			
										Cav/Sheath							
1	Frame - Wood - Ext						0.09	13.0/0.0			91.3	2.3		207	Btuh		
2	Frame - Wood - Adj						0.09	13.0/0.0			126.2	1.7		213	Btuh		
3	Frame - Wood - Adj						0.09	13.0/0.0			157.3	1.7		265	Btuh		
4	Frame - Wood - Ext						0.09	13.0/0.0			273.0	2.3		618	Btuh		
5	Frame - Wood - Ext						0.09	13.0/0.0			169.3	2.3		383	Btuh		
6	Frame - Wood - Ext						0.09	13.0/0.0			64.0	2.3		145	Btuh		
7	Frame - Wood - Ext						0.09	13.0/0.0			38.7	2.3		88	Btuh		
8	Frame - Wood - Ext						0.09	13.0/0.0			353.0	2.3		799	Btuh		
	Wall Total								1273 (sqft)					2717 Btuh			
Doors	Type									Area (sqft)			HTM		Load		
1	Insulated - Exterior									20.0	13.8			276	Btuh		
2	Insulated - Garage									17.8	13.8			245	Btuh		
	Door Total									38 (sqft)					521 Btuh		
Ceilings	Type/Color/Surface						U-Value	R-Value	Area(sqft)			HTM		Load			
1	Vented Attic/Light/Shingle/RB						0.025	38.0/0.0			1687.0	0.86		1456	Btuh		
	Ceiling Total									1687 (sqft)					1456 Btuh		
Floors	Type									R-Value	Size			HTM		Load	
1	Slab On Grade							0.0			1607 (ft-perimeter)			0.0	0	Btuh	
	Floor Total									1607.0 (sqft)					0 Btuh		
	Envelope Subtotal:														8245 Btuh		
Infiltration	Type						Average ACH		Volume(cuft)		Wall Ratio		CFM=		Load		
	Natural						0.12		12856		1		25.2		524	Btuh	
Internal gain							Occupants		Btuh/occupant		Appliance		Load				
							8		X 230		+		1200		3040	Btuh	
	Sensible Envelope Load:														11809 Btuh		
Duct load	Average sealed,Supply(R6.0-Attic), Return(R6.0-Attic)										(DGM of 0.350)				4135 Btuh		
	Sensible Load All Zones														15944 Btuh		

Manual J Summer Calculations

Residential Load - Component Details (continued)

Project Title: Climate:FL_GAINESVILLE_REGIONAL_A
Lot 10 Jewel Lake II

Lake City, FL 32025

3/1/2022


WHOLE HOUSE TOTALS

Whole House Totals for Cooling	Sensible Envelope Load All Zones	11809 Btuh
	Sensible Duct Load	4135 Btuh
	Total Sensible Zone Loads	15944 Btuh
	Sensible ventilation	0 Btuh
	Blower	0 Btuh
	Total sensible gain	15944 Btuh
	Latent infiltration gain (for 51 gr. humidity difference)	869 Btuh
	Latent ventilation gain	0 Btuh
	Latent duct gain	1210 Btuh
	Latent occupant gain (8.0 people @ 200 Btuh per person)	1600 Btuh
	Latent other gain	0 Btuh
	Latent total gain	3680 Btuh
	TOTAL GAIN	19624 Btuh

EQUIPMENT

1. Central Unit	#	19300 Btuh
-----------------	---	------------

*Key: Window types (Panels - Number and type of panes of glass)
(SHGC - Shading coefficient of glass as SHGC numerical value)
(U - Window U-Factor)
(InSh - Interior shading device: none(No), Blinds(B), Draperies(D) or Roller Shades(R))
- For Blinds: Assume medium color, half closed
For Draperies: Assume medium weave, half closed
For Roller shades: Assume translucent, half closed
(IS - Insect screen: none(N), Full(F) or Half(½))
(Ornt - compass orientation)



Version 8