The swimming pools and spas consist of one-piece fiberglass

requirements of the following codes: styles of swimming pools and spas. When installed in accordance to BH surface finish is a neo pentyl glycol gel coat. Blue Hawaiian Pools, a composed of isophtalic resin, vinyl ester resin, and fiberglass. The construction shop-formed over a mold. The material is fiberglass fiberglass division of Latham Pool Products Inc. (BH) produces various reinforced plastic (FRP), a minimum of 1/4 inch (6.4 mm) thick, 2015/2018 International Building Code® (IBC)

2012/2015 IAPMO Uniform Plumbing Code (IAPMO UPC)
2003 ANSI/NSPI-5 Residential Inground Swimming Pools
2012 ANSI/APSP/ICC 5a Residential Inground Swimming Pools **BOCA® National Building Code/2003 (BNBC)** 2018 International Plumbing Code® (IPC) 2012/2015 IAPMO Uniform Plumbing Cod 1997 Uniform Building Code (UBC) 2018 International Residential Code (IRC)

2017 Florida Building Code 6th Edition 2017 Florida Plumbing Code 6th Edition 2017 Florida Fuel/Gas Code 6th Edition 2017 Florida Mechanical Code 6th Edition 2017 Florida Residential Code 6th Edition 2014 ANSI/APSP/ICC-3 Permanently Installed Residential Spas and

2011 ANSI/APSP-16
2018 International Swimming Pool and Spa Code -2006 ANSI/APSP-7
2013 ANSI/APSP/ICC-7 Suction Entrapment Avoidance

2014/2017 National Electric Code (NEC)
2015 Uniform Swimming Pool, Spa, Hot tub Code (IAPMO) 2007 ANSI/ASME-A112.19.8

Models described in Table 2, Table 3, and Table 4 can be placed up to 19-1/2 inches (49.5mm) above ground. These pools and spas may be placed with or without concrete or wood decking. Unless elevated Section AG103.1 of the IRC, and IAPMO IGC-2000*, specified in the Table 1 and Table 4. The units comply with ANSI/NSPI-5, specified in The overall pool dimensions, depths and capacities are shown

must remain full of water at all times. A permanent sign, bearing the comply with the code in effect at the construction site. The pool and spa All plumbing must comply with the IPC or UPC. Electrical work must etc., these portions must be coated with a UV-inhibiting opaque paint portions of the units are protected from sunlight by soil berms, decking,

becomes necessary to drain the pool or spa, contact BH Pools or The pool shell may be damaged if the water level is allowed to drop following statement, must be attached to the pumping equipment below the skimmer. When appreciable draw-down is noticed or if it Notice-The pool or spa is designed to remain full of water at all times

indicating the BH Pools dealer's name, address and telephone number A permanent label must be installed adjacent to the above sign

Installation Procedure:

BH pools and spas may be installed without a soil investigation by a registered design professional(RDP), subject to the building official's approval, provided none of the following conditions are encountered at

the pool or spa excavation The existence of an uncompacted fill in contact with any portion of The existence of uncontrollable groundwater within the depth of

3. The existence of any soil types with an angle of repose that will not

Danger to adjacent structures posed by the proposed pool or spa

confine sand or ½" clean gravel bedding. The existence of any cracks or openings in soil that would not

If any of the conditions above is encountered, excavation must cease

must approve the RDP's report before work is completed. reviewed and recommendations made by the RDP. immediately. The specified conditions at the site must then be The building official

the following conditions.

General

Notes

and ends. The over excavation at the pool bottom is minimum 4 inches the pool. The over excavation is minimum 6 inches(152mm) on the sides (76mm) bedding sand or ½" clean gravel matching the pool or spa (102mm). The backfill for the pool or spa bottom is a layer of 3-inch-thick The pool or spa excavation profile must coincide with the contours of

water level are approximately the same throughout this procedure. tamper and water. The installer must ensure that the backfill level and and backfill operations then commence. The backfill is compacted with manually and be within 1 inch (25mm) of level. Simultaneous waterfill The pool or spa is then set into place using a crane, excavator or After completion of the backfill and plumbing, the decking is placed This backfill layer is compacted using a manual tamper and water

Corporation (AA-527)

Country Road 54E, Zephyrhills, FL are manufactured under a quality Crawford Road, Williams, California; Blue Hawaiian Pools, 40119 Drive Industrial Park, Jane Lew, West Virginia; Blue Hawaiian Pools,

control program with inspections by Columbia Research & Testing

3. That all pools are installed in accordance with manufacturer's

The pools and spas produced by Blue Hawaiian Pools, 176 Viking

121

2. Electrical and plumbing installation comply with the respective codes 1. The construction and pool/spa installation comply with this report and in compliance with the above listed codes as noted in ESR-2014 subject

Decks are prepared as indicated in Figures 1 though 4: Cantilevered concrete decks are constructed as noted in Figure 1

in all cases.

2. Cantilevered decks are constructed with brick or stone as noted

Figure 2 in all cases.

3. Raised bond beams are constructed as noted in Figure 3 in all

Aboveground installations are constructed as noted in Figure 4 in

3109.4 of the IBC Barriers are required where pools are on premises of UBC Group R, Division 3, Occupancies or IBC Group R Occupancies. The barriers must comply with Appendix Chapter 4, Division 1, of the UBC or Section

additional installation details must be followed subject to code official's For installation of pools or spas in expansive soils, the following

1. All surfaces adjacent to the pool or spas must be excavated to a and minimum 6 inches (152 mm) behind the pool walls. minimum depth of 12 inches (305 mm) beneath the pool bottom

The excavated bottom area of the pool or spa must be backfilled keep the pool or structure from settling method necessary to consolidate the native and fill materials to placed against the surface. The term compaction implies any maintained in a moist condition until the first lift of backfill or fill is compacted surfaces and the excavated wall surfaces must be scarified and compacted with mechanical equipment. The 6 inches (152 mm) of all horizontal excavation surfaces must be Any soft or loose soils exposed by step 1 must be removed until exposed material is solid. If the soil is still soft and loose, the upper

while a uniform height of backfill is maintained around the pool or placed in compacted layers of approximately 6 inches (152 mm) to a level equivalent to that of the backfill. The backfill must be The remaining 6 inches (152 mm) must be backfilled below the bottom of the pool or spa, wetted and compacted The pool or spa must be filled with water as backfilling progresses pool or spa and outside the pool walls with compacted clean sand with granular import material to approximately 6 inches (152 mm)

. Positive surface drainage away from the perimeter of the pool and or subdrains must be placed as needed to prevent ponding or saturation of the soil around the perimeter and vicinity of the pool to prevent excessive shrink-swell or volume changes in the soil. expansive soils. Surface area drains and surface drainage swales surrounding deck is required and critical to installations in highly

Pools) and address, pool or spa model designation, a coded serial number and the evaluation report number (ESR-2014). imprinted on the top step of the pool or spa: manufacturer's name (BH BH pools and spas are identified by the following information

That the fiberglass one piece swimming pools and spas are

Research & Testing Corporation (AA-527). The units also bear the label of the quality control agency, Columbia

Blue

4119 Trir

onald R. Poindexter, PE Florida Lic. No. 64901 rinity Dr Santa Rosa CA 95405 Phone 707-494-8761

Page 1 Table of Contents eneral Notes **Pool Models** Spa Models Tables 1

DONAL

Length, width and depth may vary up to 3% - all dimensions are to outside edge of coping, measured from parallel lines.

SIONAL ENGINEERING

Latham Pool Products Inc. **DBA Blue Hawaiian Pools**

ICC Evaluation Report Number (ESR-2014)

Jane Lew, WV Phone: (304) 884-6954 Fax: (304) 884-7198 Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934 Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393 Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214

Project Name and Address	
	_

Contractor

Date

Latham, NY Phone: (800) 833-3800

 ∞

TABLE 1- POOLS

POOL	CODE	SIZE	DEPTHS	GALLONS	WATER	PAGE	POOL
Apollo	ΑP	16', 38'	3'-6", 5'-10"	17.500	555	PAGE 4	TYPE 0
Arcadia	GC	15' 10", 39'-7"	3'-5", 7'-11"	19,600	506	PAGE 4	TYPE
Asbury	В	11'-10", 25'-5"	4'-6"	8,100	264	PAGE 5	TYPE 0
Athens	AT	16', 40'	3'-8", 8'	21,000	585	PAGE 4	TYPEI
Balboa	MP	9'-6", 14'-6"	4', 4'	2,500	115	PAGE 5	TYPE 0
Bay Isle	внву	14'-6", 29'-10"	3', 6'-6"	10,000	318	PAGE 5	TYPE 0
Bay Shore	внва	14'-5", 30'	3'-11", 5'-10"	9,500	298	PAGE 5	TYPE 0
Blue Isle	вны	15', 34'	3'-6", 6'-6"	13,000	410	PAGE 6	TYPE 0
Bristol	FR14	:	3'-6", 6'	11,200	377	PAGE 5	TYPE 0
Cape Cod	Ç		3'-6", 6'	12,000	325	PAGE 4	TYPE 0
Cape May	CM	23'-11"	3'-6", 5'	6,000	211	PAGE 4	TYPE 0
Cayman	FR12	12', 26'	3'-6", 5'-8"	7,600	275	PAGE 6	TYPE 0
Classic Cove	внсс	13'-6", 32'-10"	3', 6'-2"	11,300	376	PAGE 5	TYPE 0
Grand Isle	BHGI	16', 42'	3',7'	19,300	516	PAGE 5	TYPE 0
Hamilton	HMT	15', 34'	3'-6" , 6'	12,000	369	PAGE 4	TYPE 0
Harmony	CIL	10' x 16'	4'	2,550	135	PAGE 6	Type 0
sland Cove	AR∪	11', 22'	3'-6" , 5'	5,200	177	PAGE 5	TYPE 0
lava	JV	12', 26'-9"	3'-6", 5'-5"	6,800	233	PAGE 4	TYPE 0
aredo	6	9'-10", 19'-9"	3'-2", 5'	3,750	138	PAGE 5	TYPE 0
exington	Ξ	16', 36'	3'-6", 7'	18,000	451	PAGE 5	TYPE 0
Mariana	3	14', 35'	3'-7" , 5'-7"	12,400	388	PAGE 4	TYPE 0
Nautilus	FRX	40'	3'-6", 7'	15,600	548	PAGE 6	TYPE 0
Newport	R		3'-7" , 5'-11"	12,800	314	PAGE 5	TYPE 0
Olympic Bay	внов	16', 41'	3'-6", 7'	23,000	656	PAGE 5	TYPE 0
Panama I	BL	11'-10", (35' - 38')	4'-6" , 4'-6"	Varies	Varies	PAGE 6	TYPE 0
Panama II	ВГ	11'-10", (35' - 45')	4'-6", 4'-6"	Varies	Varies	PAGE 6	TYPE 0
Phoenix	E	15', 34'	3'-6", 6'	12,000	375	PAGE 4	TYPE 0
Pleasant Cove	ВНРС	11', 24'	3'-5", 5'-6"	5,000	173	PAGE 5	TYPE 0
Portia	ОВ	16', 40'	3'-6" , 5'-8"	18,900	585	PAGE 4	TYPE 0
Regatta	FR16	16', 35'	3'-6", 6'-6"	15,250	510	PAGE 6	TYPE 0
Sandy Cove	BH38	11', 18'	4'-1"	3,600	177	PAGE 6	TYPE 0
Sea Cove	BHSC		4', 6'-4"	7,000	209	PAGE 5	TYPE 0
Seahaven	RT16	40	3'-6", 7'	15,400	563	PAGE 6	TYPE 0
Sea Shore	BHSH	12', 26'	3'-6", 6'	7,000	264	PAGE 5	TYPE 0
seaswirl	BHSR	-6 ¹¹	3'-4', 5'-6"	6,000	204	PAGE 6	TYPE 0
Sierra	SR	16', 39'	3'-6" , 6'	16,300	500	PAGE 4	TYPE 0
Southwind	BHSW	15', 34'	3'-7", 6'-10"	14,000	424	PAGE 5	TYPE 0
St Augustine	ST	14'-6", 27'-7"	3'-7", 5'-10"	10,000	288	PAGE 4	TYPE 0
Sunburst	CD	16' , 33'	3'-7" , 5'-5"	15,000	480	PAGE 4	TYPE 0
Sunset Bay	BHSY	14', 32'	3'-4", 5'-5"	10,000	365	PAGE 6	TYPE 0
Three Moon Bay	внтв	15', 34'	3'-8", 5'-6"	12,000	427	PAGE 6	TYPE 0
Trident		14', 31'-6"	3-7",7	13,700	396	PAGE 4	TYPE 0
Twin Cove	внтс	11'-7", 27'-6"	3'-3", 5'-1"	6,800	233	PAGE 5	TYPE 0
Venus	<	14', 33'	3'-7", 5'-4"	11,700	416	PAGE 4	TYPE 0
Vienna	GS	15'-7", 34'-8"	3'-7" , 5'-10"	15,000	423	PAGE 4	TYPE 0
Vista Isle	BHVI	12', 28'	3', 6'-10"	8,000	294	PAGE 5	TYPE 0
Wellington	FP	12', 25'-1"	3'-7" , 5'-5"	6,000	213	PAGE 4	TYPE 0

TABLE 3- SPAS

TABLE 4- POOLS

HZE	HZDXL		CODE
8'-6" x 18'	8'-6" x 18'		SIZE
5'	3'-3", 5'		DEPTHS
3600	3000	APPROX. NUMBER	DEPTHS GALLONS PAGE
6	6	NUMBER	PAGE
Туре 0	Type 0	TYPE	POOL

Don Flu 4119 Trini

onald R. Poindexter, PE Florida Lic. No. 64901 rinity Dr Santa Rosa CA 95405 Phone 707-494-8761

HZE

POOL

SPAS	CODE	SIZE	DEPTHS	GALLONS	WATER	PAGE
		WIDTH x LENGTH	SHALLOW, DEEP	APPROX.	SURFACE AREA	
Ewa	RG	8' x 10'	3'-4"	600	52	Page 6
Ewa Fails	RGSW	9' x 10'	3'-4"	600	52	Page 6
Hana	LOS	7'-6" x 7'-6"	3'	450	37	Page 6
Hana Falls	LOSSW	7'-6" x 8'-6"	3	450	37	Page 6
Hilo	Rγ	8' x 10'	3'-4"	600	63	Page 6
Hilo Falls	RYSW	8'-10" x 10"	3'-4"	600	63	Page 6
Kahana	SPKM	7', 10'	3'	350	53	Page 6
Kona	BOS	8'-4" x 8'-4"	34	475	45	Page 6
Kona Falls	BOSSW	8'-4" x 9'-4"	3'	475	45	Page 6
Kula	LRS	7' x 7'	3/	420	31	Page 6
Kula Falls	LRSSW	7' x 8'	3'	420	31	Page 6
Manoa	Z	10' x 10'	3'-4"	550	64	Page 6
Manoa Falls	MSW	10' x 11'	3'-4"	550	64	Page 6
Molokai	S	8' x 12'-5"	3	700	73	Page 6
Molokai Falls	CSSW	9' x 12'-5"	3'	700	73	Page 6
Rectangle tanning ledge RTL	RTL	7'-8" x 15'-8"	10"	900	105	Page 6
Semicircle	TSCT	8'-4" x 16'	10"	400	92	Page 6

ABOVE GROUND INSTALLATION SERIES SERIES SERIES ARU CM B MP LD JV BHCY BHCY BHSC BH38 BHSC BHSH BHSR TABLE 2- POOLS

Latham Pool Products Inc. **DBA Blue Hawaiian Pools**


ICC Evaluation Report Number (ESR-2014)

Latham, NY Phone: (800) 833-3800

Jane Lew, WV Phone: (304) 884-6954 Fax: (304) 884-7198 Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934 Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393 Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214

ı	NO	T	ES


of 8

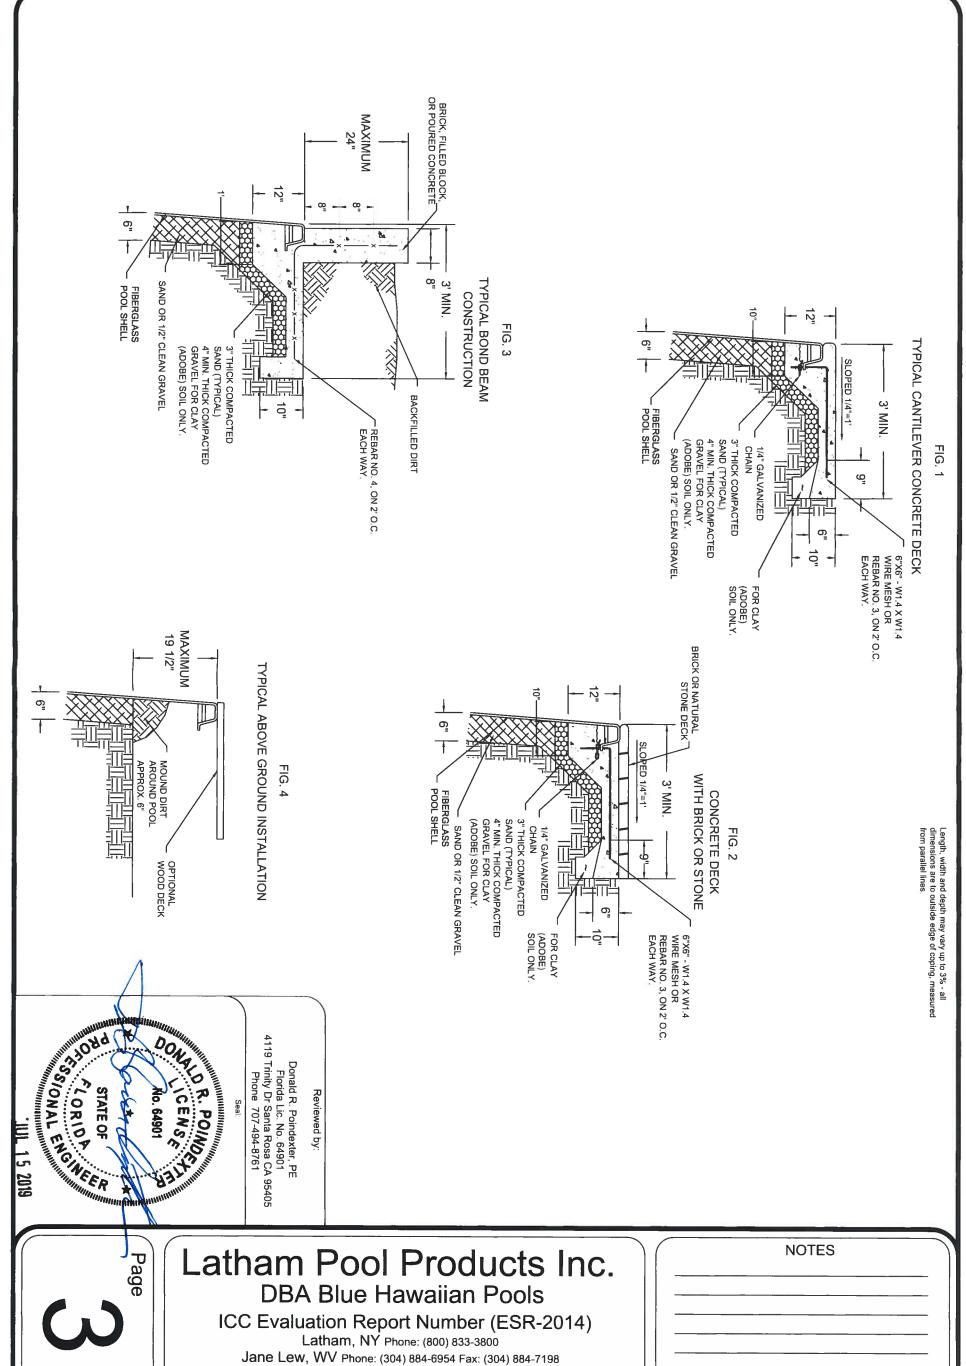



Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934 Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393 Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214


<u>o</u>


Length, width and depth may vary up to 3% - all dimensions are to outside edge of coping, measured from parallel lines.




























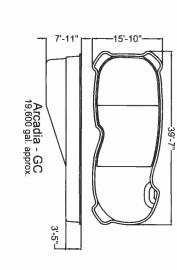















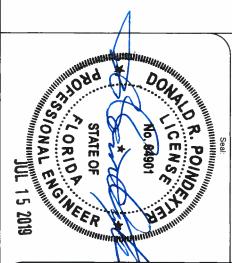


Reviewed by:

Donald R. Poindexter, PE
Florida Lic. No. 64901
4119 Trinity Dr Santa Rosa CA 95405
Phone 707-494-8761







Page

Latham Pool Products Inc.
DBA Blue Hawaiian Pools

ICC Evaluation Report Number (ESR-2014)

Latham, NY Phone: (800) 833-3800


Jane Lew, WV Phone: (304) 884-6954 Fax: (304) 884-7198 Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934 Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393 Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214


			_
_	NO	TF	S
	10		


		_			
	_		 	 _	
_				 	


Models on this page are not currently on the ICC ESR-2014 Report, but are under evaluation and will be on the report upon its renewal.


Length, width and depth may vary up to 3% - all dimensions are to outside edge of coping, measured from parallel lines.
















Pleasant Cove - BHPL 5,000 Gal. Approx.















30'
-6"
Bristol - FR14
11,200 gal. approx.





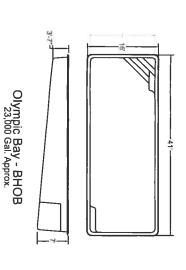







Reviewed by:

Donald R. Poindexter, PE
Florida Lic. No. 64901
4119 Trinity Dr Santa Rosa CA 95405
Phone 707-494-8761



12-44
Vista Isle - BHVI 8,000 Gal. Approx.



O

Latham Pool Products Inc.

DBA Blue Hawaiian Pools

ICC Evaluation Report Number (ESR-2014)


Latham, NY Phone: (800) 833-3800


Jane Lew, WV Phone: (304) 884-6954 Fax: (304) 884-7198 Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934 Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393 Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214


NOTES


Models on this page are not currently on the ICC ESR-2014 Report, but are under evaluation and will be on the report upon its renewal.


Length, width and depth may vary up to 3% - all dimensions are to outside edge of coping, measured from parallel lines.




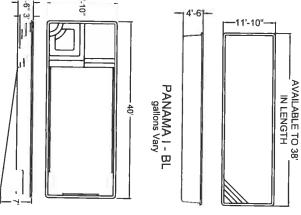

























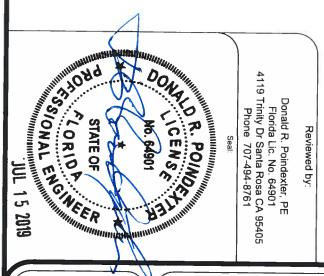





Latham Pool Products Inc. **DBA Blue Hawaiian Pools**

ICC Evaluation Report Number (ESR-2014)

Latham, NY Phone: (800) 833-3800

Jane Lew, WV Phone: (304) 884-6954 Fax: (304) 884-7198 Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934 Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393


Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214

NOTES

	_	

Length, width and depth may vary up to 3% - all dimensions are to outside edge of coping, measured Length, width and depth may vary up to 3% - all dimensions are to outside edge of coping, measured from parallel lines -8'-6" POOL - HZDXS 2,800 gal. approx. KONA FALLS
- BOSSW
475 Gal. Approx. KONA - BOS 475 Gal. Approx MANOA FALLS - MSW MANOA - M 550 Gal. Approx. HANA - LOS 450 Gal. Approx. SEMI CIRCLE TANNING LEDGE - TSCT 400 Gal. Approx. MOLOKAI FALLS
- CSSW
700 Gal. Approx. MOLOKAI - CS 700 Gal. Approx RECTANGLE TANNING LEDGE - RTL 400 Gal. Approx. HILO FALLS- RSW 600 Gal. Approx. HILO - RY 600 Gal. Approx. THE STATE OF 4119 Trin _E Dor SSIONAL ENGINEERING onald R. Poindexter, PE Florida Lic. No. 64901 inity Dr Santa Rosa CA 95405 Phone 707-494-8761 EWA - RG 600 Gal. Approx. 1 5 2019 **NOTES** atham Pool Products Inc. **DBA Blue Hawaiian Pools** ICC Evaluation Report Number (ESR-2014) Latham, NY Phone: (800) 833-3800 Jane Lew, WV Phone: (304) 884-6954 Fax: (304) 884-7198 Midland, TX Phone: (432) 561-9933 Fax: (432) 561-9934 of 8 Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393

Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214

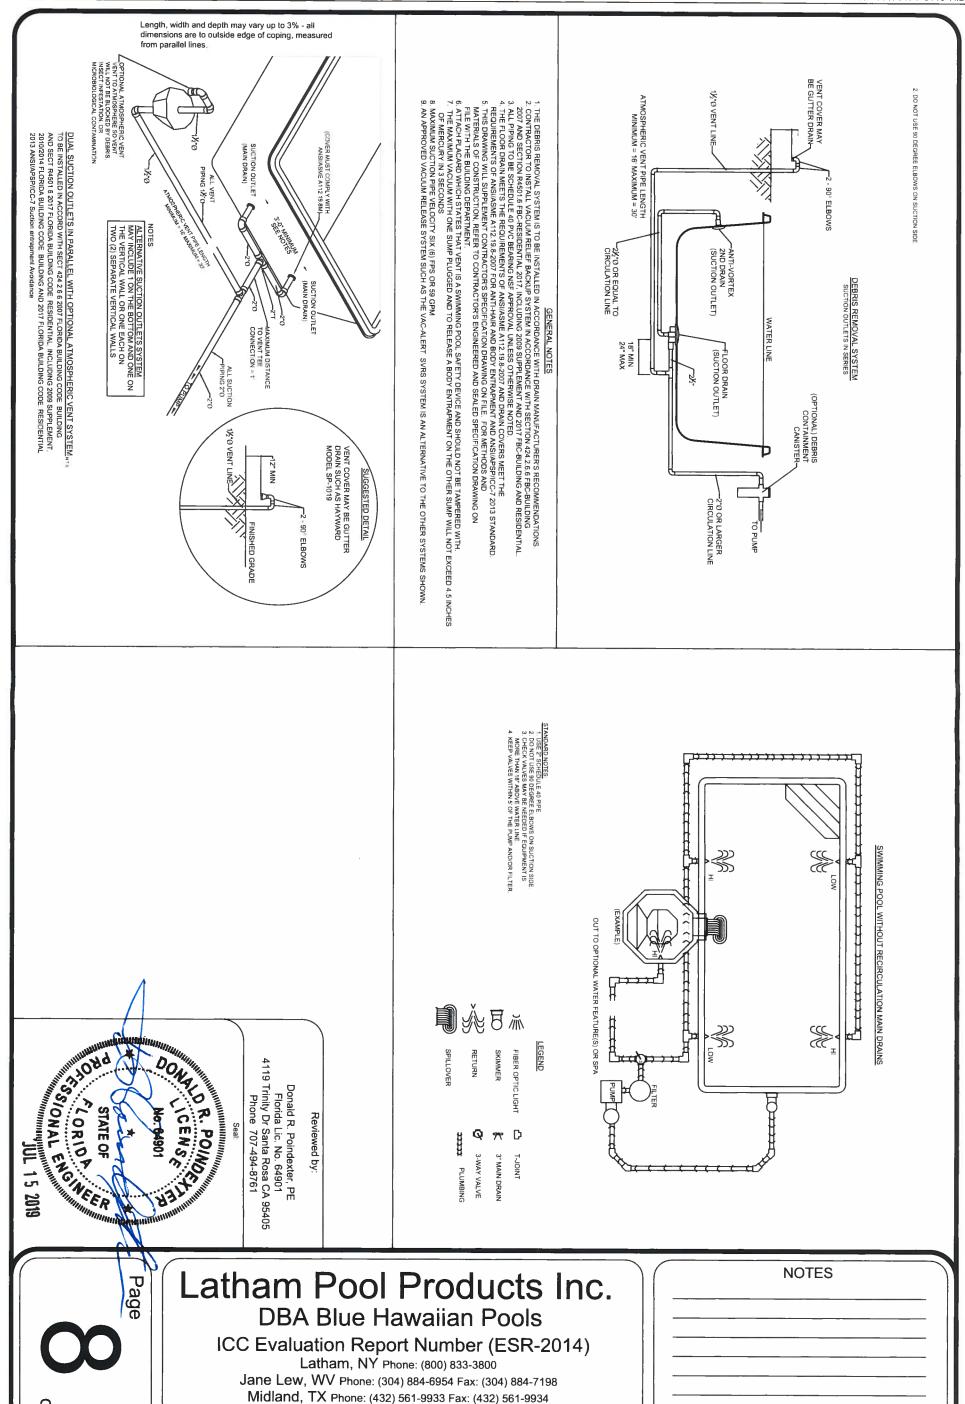

Williams, CA Phone: (530) 473-5319 Fax: (530) 473-5393 Zephyrhills, FL Phone: (813) 783-7439 Fax: (813) 783-7214