


CONTRACTOR SHALL COORDINATE THE ROOF TO THE BUILDING
STRUCTURE. THE ROOF SHALL BE DESIGNED TO SUPPORT THE
DEAD AND LIVE LOADS AS SHOWN ON THE ROOF PLAN.
THE ROOF SHALL BE DESIGNED TO SUPPORT THE DEAD AND
LIVE LOADS AS SHOWN ON THE ROOF PLAN.

HASTEN TOP PLATE 1/2" - 1/4" TYPICAL 1/2"

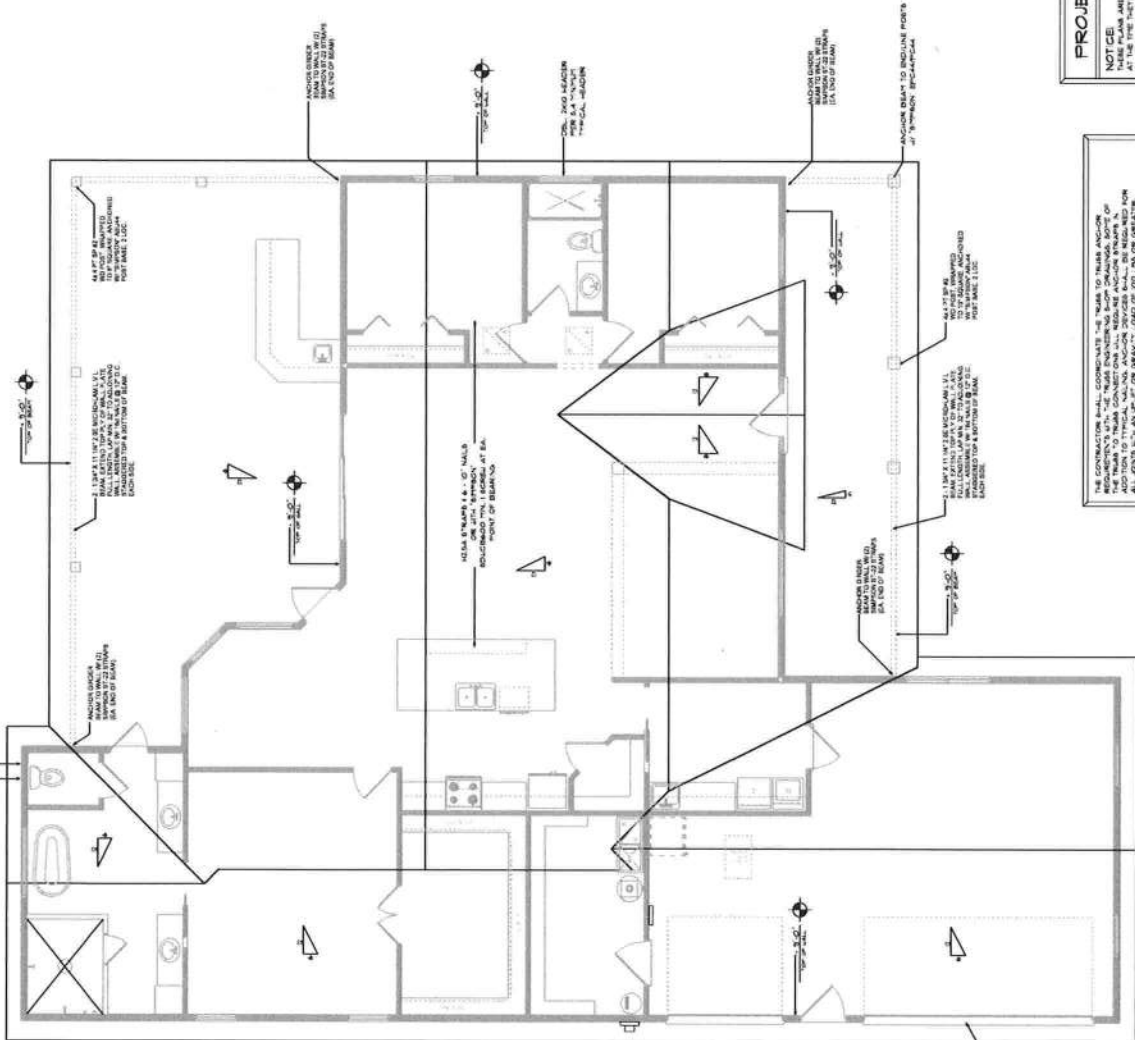

Roof Framing Plan

SCALE: 1/4" = 1'-0"

NOTE: ALL DRAWINGS NOT TO BE SCALED. WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALED DIMENSIONS

ROOF PLAN NOTES

- R-1 SEE EXTERIOR ELEVATION FOR ROOF PITCH
- R-2 PROVIDE ATTIC VENTILATION ON ALL ROOF PLACES
- R-3 PROVIDE ATTIC VENTILATION ON ALL ROOF PLACES
- R-4 PROVIDE ATTIC VENTILATION ON ALL ROOF PLACES
- R-5 PROVIDE ATTIC VENTILATION ON ALL ROOF PLACES

NOTE: THE DESIGN UNIFORM SNOW LOAD (S_f) SHALL BE 30 PSF (0.67 kN/m²) UNLESS OTHERWISE NOTED.

WOOD STRUCTURAL NOTES

- TEMPORARY BRACING OF THE STRUCTURE DURING ERECTION REQUIRED FOR SAFE AND STABLE CONSTRUCTION SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR. THE BRACING SHALL BE DESIGNED BY THE CONTRACTOR AND SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NDS (NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION).
- ALL TRUSSES SHALL BE DESIGNED BY A LICENSED PROFESSIONAL ENGINEER AND SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NDS (NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION). THE TRUSSES SHALL BE DESIGNED TO SUPPORT THE DEAD AND LIVE LOADS AS SHOWN ON THE ROOF PLAN. THE TRUSSES SHALL BE DESIGNED TO SUPPORT THE DEAD AND LIVE LOADS AS SHOWN ON THE ROOF PLAN.
- WOOD JOISTS IN EXTERIOR WALLS / INTERIOR BEARING WALLS SHALL BE NOT LESS THAN 12" DEEP OR 12" WIDE.
- CONNECTIONS FOR WOOD TRUSSES SHALL BE SALVAGED METAL OR BLACK METAL AS MANUFACTURED OR AS CALLED FOR IN THE PLAN. THE CONNECTIONS SHALL BE DESIGNED BY A LICENSED PROFESSIONAL ENGINEER AND SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE NDS (NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION).

PROJECT COORDINATION REQUIREMENTS

NOTE: THE CONTRACTOR SHALL COORDINATE THE ROOF TO THE BUILDING STRUCTURE. THE ROOF SHALL BE DESIGNED TO SUPPORT THE DEAD AND LIVE LOADS AS SHOWN ON THE ROOF PLAN. THE ROOF SHALL BE DESIGNED TO SUPPORT THE DEAD AND LIVE LOADS AS SHOWN ON THE ROOF PLAN.

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

Roofing/Flashing DET'S.

SCALE: NONE

SCALE
DETAILS SHEET
1/8" = 1'-0"

A NEW CUSTOM HOME FOR:
MEGAN HOLLOWAY
PROJECT ADDRESS: LOT 20, IVEN RISE S/D, ALACHUA COUNTY, FLORIDA
LDM CONSTRUCTION
HIGH SPRINGS, FLORIDA

**NICHOLAS
GEISLER
ARCHITECT
P.C.**
1700 NW Brown Rd.
Lake City, FL 32055
(386) 365-4355

1998

THESE SHINGLES MEET THE REQUIREMENTS OF ASTM D-3181 TYPE 1 ADAPTED TO 110 MPH WINDS & FBC TAS 100, USING NAIL-SHINGLE.

[illegible]

Fire Stopping DETAILS

SCALE: NONE

A

[illegible]

NOTE: ALL DRAWINGS NOT TO BE SCALED. WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALED DIMENSIONS

SCALE NONE

SCALE: NONE

SCALE: NTS