

"0-6"

OVERHANG

ROOF PITCH(S)

8/12

ALL TRUSSES (INCLUDING TRUSSES UNDER VALLEY FRAMING) MUST BE COMPLETELY DECKED OR REFER TO DETAIL V05 FOR ALTERNATE BRACING REQUIREMENTS.

- ALL VALLEYS ARE TO BE CONVENTIONALLY
FRAMED BY BUILDER
ALL TRUSSES ARE DESIGNED FOR 2' o.c.
MAXIMUM SPACING. UNLESS OTHERWISE NOTED
ALL WALLS SHOWING AN EMENT
PLAN ARE CONSIDERED TO BE LOAD
BEARING. UNLESS OTHERWISE NOTED
5'x4'2 TRUSSES MUST BE INSTALLED
WITH THE TOP BEING UP
ALL ROOF TRUSSES HANGERS TO BE SAMPSON
H45-26 UNLESS OTHERWISE NOTED ALL
FLOOR TRUSSES HANGERS TO BE SAMPSON
TH4-42 UNLESS OTHERWISE NOTED
BE DAMNED/REIN. INTEL. (4/8) 10 DE
UNDERSHED BY BUILDER

ROOMS AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER
FLOOR LAYOUTS REVIEW AND APPROVAL OF THIS LAYOUT MUST
BE RECEIVED BEFORE ANY ROOMS WILL BE BUILT VERIFY ALL
CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT
IN EXTRA CHARGES TO YOU.

Requested Delivery Date _____



Builders
FirstSource

Lake City
PHONE 904-755-6894 FAX 904-755-7973


PHONE 401-322-0034 FAX 401-322-3333
BUILDER: **PRUDENTIAL BUILDERS**

COLUMBIA, FL

MODEL	REVISION
-------	----------

WESTBROOK	SCALE	NTS
TE	DRAWN BY	JOB #

7/17/07 A L246430
MUNDKAGUN

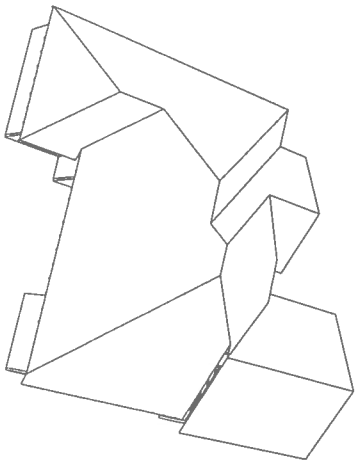

TRUSS HANGER INFORMATION
Check TRUSS ENGINEERING For gravity and uplift values if the value exceeds the capacity of a hanger.

