

ABBREVIATIONS

A/C	AIR COOLING UNIT
ADJ	ADJACENT
AFF	ABOVE FINISHED FLOOR
AHU	AIR HANDLING UNIT
ALUM	ALUMINUM
BLK	BLOCK
BOT	BOTTOM
BRG	BEARING
CJ	CONTROL JOINT
CLG	CEILING
COL	COLUMN
CONC	CONCRETE
CONT	CONTINUOUS
CPT	CARPET
DIA	DIAMETER
DN	DOWN
DWG	DRAWING
EA	EACH
ELEC	ELECTRIC
EQ	EQUAL
FF	FINISH FLOOR
FTG	FOOTING
HB	HOSE BIB
HDR	HEADER
HGT	HEIGHT
MAX	MAXIMUM
MIN	MINIMUM
NTS	NOT TO SCALE
OPNG	OPENING
SIM	SIMILAR
TYP	TYPICAL
VLT	VAULT
UNO	UNLESS NOTED OTHERWISE

area tabulation 'a'

GARAGE	403 SF
FRONT PORCH	38 SF
REAR PATIO	104 SF
FLOOR 1 LIVING	1,776 SF
TOTAL LIVING	1,776 SF

area tabulation 'b'

GARAGE	403 SF
FRONT PORCH	117 SF
REAR PATIO	104 SF
FLOOR 1 LIVING	1,776 SF
TOTAL LIVING	1,776 SF

Radford

39' - 1776 - LH

Florida Region (Frame)

BUILDING CODE COMPLIANCE

ALL CONSTRUCTION TO COMPLY WITH LOCAL CODES AND ORDINANCE CURRENTLY IN USE WITH THE LOCAL JURISDICTION.

PRODUCT: NEW SINGLE FAMILY DETACHED

OCCUPANCY CLASSIFICATION:

RESIDENTIAL R-3

CONSTRUCTION CLASS:

UNPROTECTED

CONSTRUCTION TYPE:

TYPE VB

EMERGENCY ESCAPE:

EGRESS OR RESCUE WINDOWS FROM SLEEPING ROOMS SHALL HAVE MINIMUM OF 5.7 SQUARE FEET

APPLICABLE CODES:

FOLLOW ALL APPLICABLE STATE AND LOCAL CODES.
FLORIDA STATE SUPPLEMENTS AND AMENDMENTS.

2020 Florida Building Code, Residential, 7th Edition

2017 National Electrical Code, NFPA 70





IF SEAL AND SIGNATURE ARE NOT MADE OR ONE NOT BE
IMPROPERLY DULY THE CASE FOR AUTHORIZATION.



256 Southrail Lane, Suite 200
O 321.972-2491 F 407.880-2304
Certificate Of Authorization No. 9161
☐ CARLA A. BROWN, PE - FL #58108
☐ LUIS PABLO TORRES, PE - FL #27184

Reserve at Jewel Lake
Lot 036
419 SW Jewel Lake Drive
Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written permission and consent of Century Communities.

INDEX

ARCHITECTURAL

CS	GENERAL NOTES & LEGENDS
A1	EXTERIOR ELEVATIONS
A2	SLAB PENETRATION PLAN
A3	FLOOR PLANS
A4	SECTIONS & DETAILS
A5	INTERIOR DETAILS
A6	ROOF PLAN
E1	ELECTRICAL PLANS
CD	CONSTRUCTION DETAILS

REVISIONS

NUMBER	DATE	DESCRIPTION
01	03.04.2021	Added Elevations A1 & B1
02	06.14.21	Added outlet to BR2, Relocate & noted outlets to meet 6' max from wall break & 12' max between outlet spacing at habitable rooms (E1.1)
03	07.08.21	Added floor break transition strips to plan
04	07.21.21	Added Elevations A4 & B4
05	08.02.21	labeled egress windows, labeled accessible bath, smoke/carbon alarms near appliances noted
06	08.24.21	Added stemwall options
07	09.08.21	Carbon / smoke alarm moved 3' min away from bathroom door/opening with tub/shower

PLAN NUMBER:
33911776

RELEASE DATE:
02.22.2021

MODEL:
RADFORD

DRAWING TITLE:
COVER SHEET

SHEET NO:

CS

Keynotes | Legend

1.

CORROSION RESISTANT ROOF TO WALL FLASHING AT ALL ROOF / WALL INTERSECTIONS.
2.


CORROSION RESISTANT SCREEN LOUVERED VENTS, SIZE AS NOTED.
3.

BRICK WAINSCOT WITH SLOPED BRICK ROWLOCK CAP.
4.

STONE WAINSCOT WITH SLOPED STONE CAP.
5.

3 1/2" VINYL TRIM SURROUND
6.


36" H. GUARDRAIL AS REQUIRED

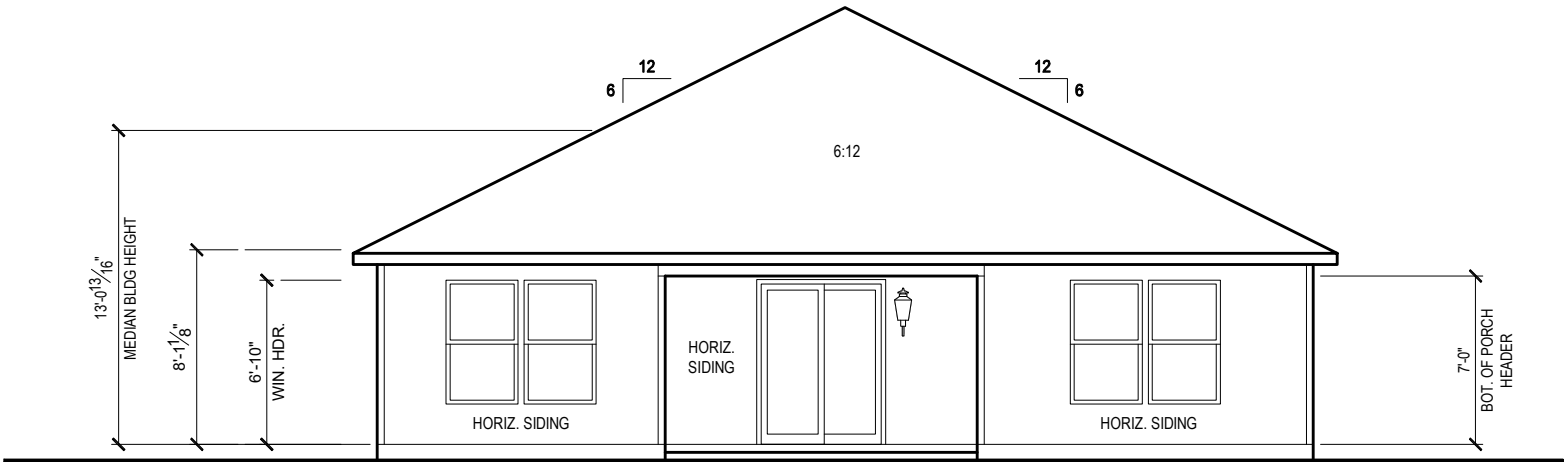

REAR ELEVATION 'A1'

1/8" = 1'-0" @ 11x17

1/4" = 1'-0" @ 22x34

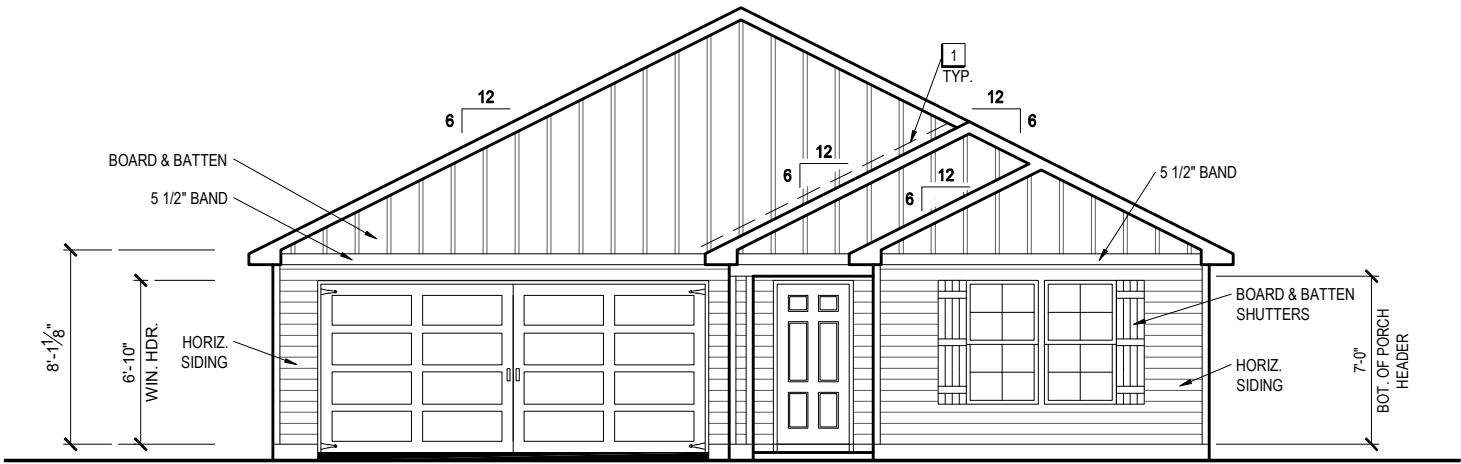

FRONT ELEVATION 'A1'

1/8" = 1'-0" @ 11x17

1/4" = 1'-0" @ 22x34



1-14-2022



256 Southrail Lane, Suite 200
O 321.972-2491 F 407.880-2304
Certificate Of Authorization No. 9161
☐ CARLA BROWN, PE - FL # 58128
☐ LUIS PABLO TORRES, PE - FL # 67184

Reserve at Jewel Lake
Lot 036
419 SW Jewel Lake Drive
Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written permission and consent of Century Communities.

PLAN NUMBER:
33911776


RELEASE DATE:
02.22.2021

MODEL:
RADFORD

DRAWING TITLE:
EXTERIOR ELEVATIONS


SHEET NO:

1.1-A1

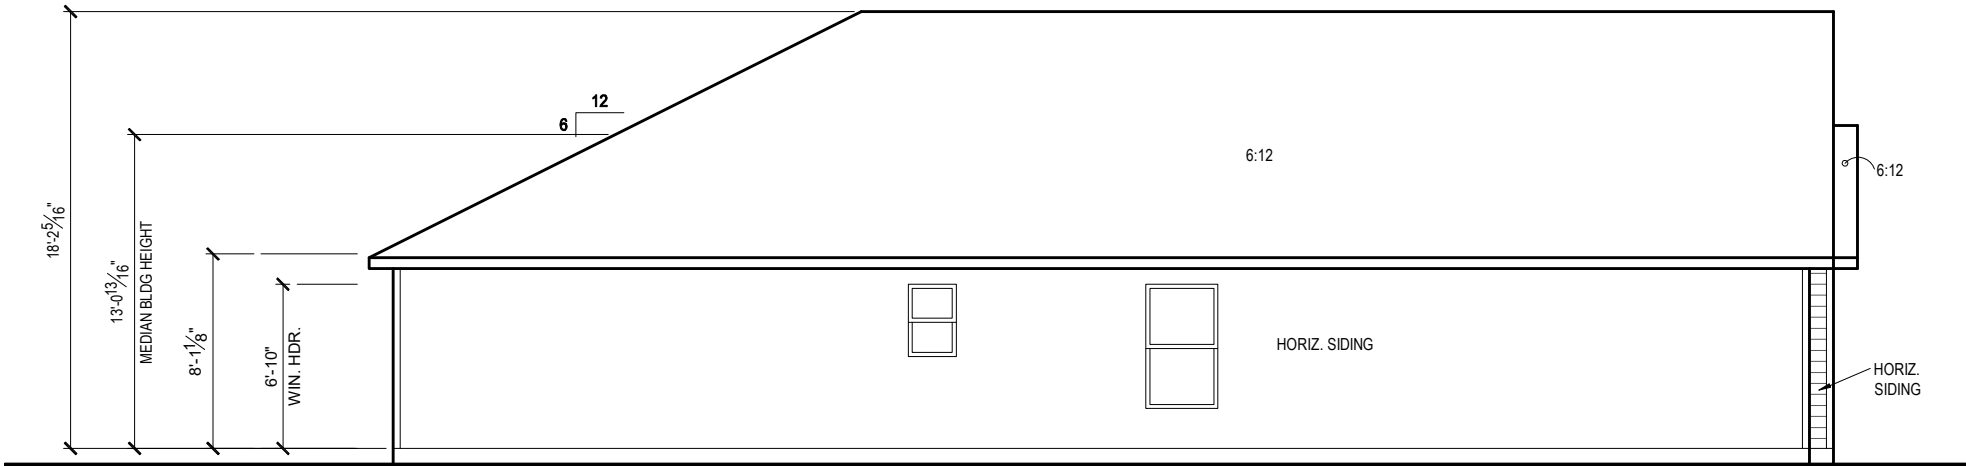

LEFT SIDE ELEVATION 'A1'

1/8" = 1'-0" @ 11x17
1/4" = 1'-0" @ 22x34

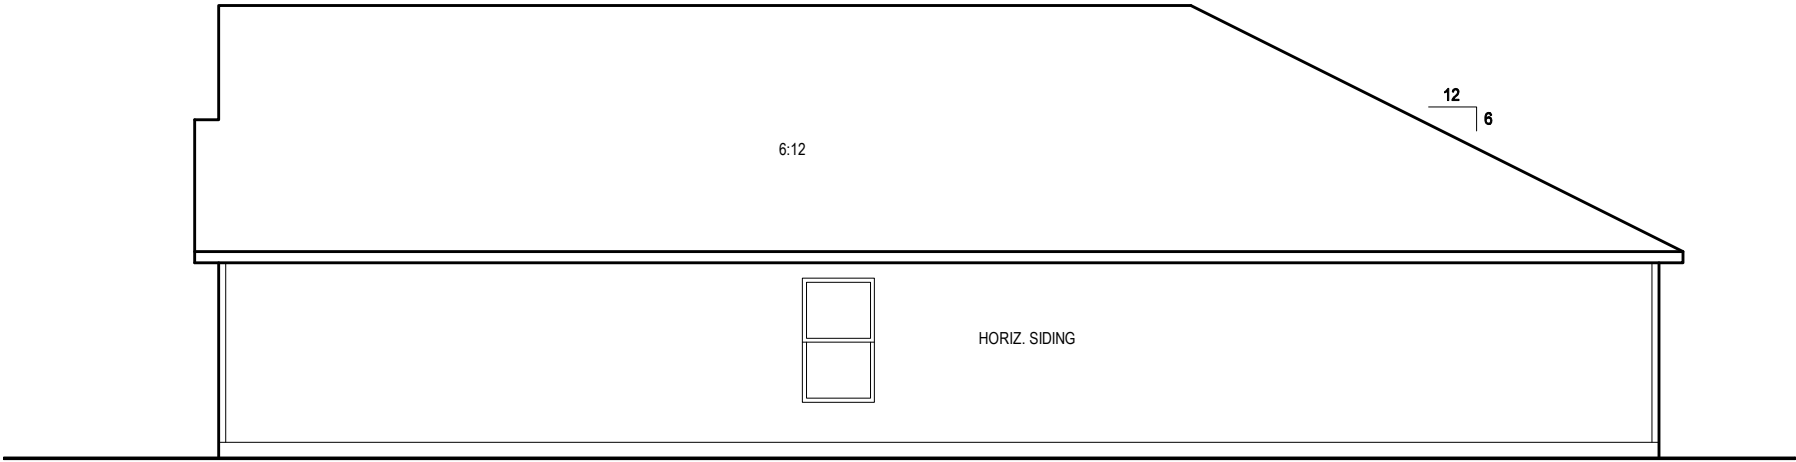

RIGHT SIDE ELEVATION 'A1'

1/8" = 1'-0" @ 11x17
1/4" = 1'-0" @ 22x34



1-14-2022



Reserve at Jewel Lake
Lot 036
419 SW Jewel Lake Drive
Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written permission and consent of Century Communities.


PLAN NUMBER:	33911776	RELEASE DATE:	02.22.2021
MODEL:	RADFORD	DRAWING TITLE:	EXTERIOR ELEVATIONS

SHEET NO:

1.2-A1

GENERAL SLAB FOUNDATION NOTES

- PLUMBING CONTRACTOR SHALL FIELD VERIFY ALL PLUMBING LOCATIONS.
- REFER TO EXTERIOR ELEVATIONS FOR BRICK/STONE LOCATIONS.
- GARAGE SLAB SHALL SLOPE TOWARD GARAGE DOOR OPENING.

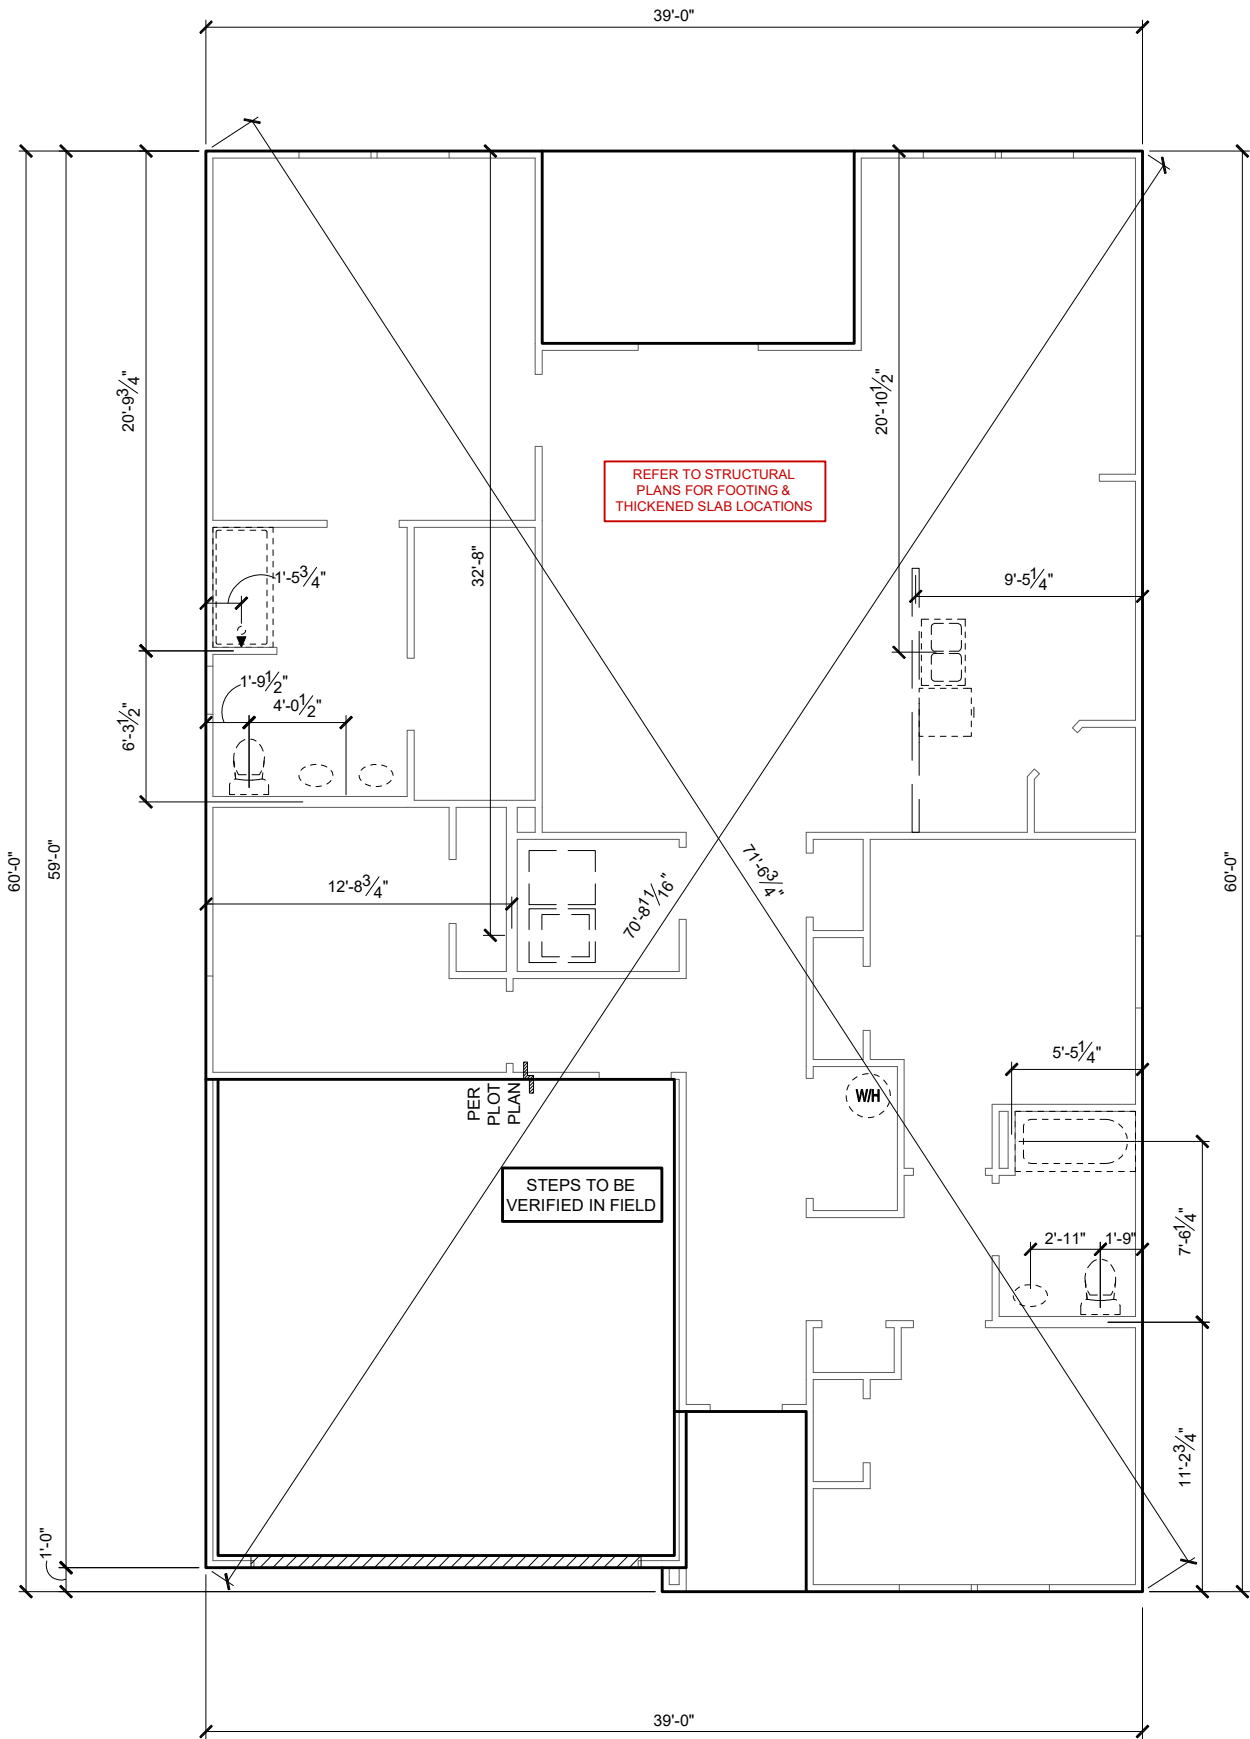

SLAB PENETRATION PLAN 'A1'

1/8" = 1'-0" @ 11x17
1/4" = 1'-0" @ 22x34



1-14-2022


FDS
ENGINEERING ASSOCIATES
256 Southrail Lane, Suite 200
O: 321.972-2451 F: 407.880-2304
Certificate Of Authorization No. 9161
☐ CARLA BROWN, PE - FL # 55128
☐ LUIS PABLO TORRES, PE - FL # 17184

Reserve at Jewel Lake
Lot 036
419 SW Jewel Lake Drive
Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written permission and consent of Century Communities.

PLAN NUMBER:	33911776	RELEASE DATE:	02.22.2021
MODEL:	RADFORD	DRAWING TITLE:	SLAB PENETRATION PLAN
SHEET NO:	2.1-A		

NOTES & LEGENDS

1. REFER TO ENGINEERING STRUCTURAL DRAWINGS (S-#) FOR BEARING WALL LOCATIONS AND FOR ALL BEAM & HEADER SIZES AND BEARING WALL LOCATIONS

2. ALL BEARING WALLS SHALL BE 16" O.C. WALL CONST. W/ DOUBLE TOP PLATE U.N.O.

3. ALL INTERIOR NON BEARING DOOR & WINDOW HEADERS SHALL BE (1) 2x4 OR (1) 2x6 W/VERTICAL CRIPPLERS @ 2'-0" O.C. TO MATCH WALL WIDTH UNLESS NOTED OTHERWISE.

4. (2) HOSE BIBS SHALL BE INSTALLED, LOCATION TO BE DETERMINED BY PLUMBING CONTRACTOR
- OPTIONAL WINDOW

2X4 FRAME WALL

2X6 FRAME WALL

BALLOON FRAME WALL
(PER STRUCTURALS)

KEYNOTES

- A1 GARAGE CEILING - 5/8" TYPE X DRYWALL, VERTICAL SURFACE WALLS - 1/2" DRYWALL

A2 22X30" ATTIC ACCESS CONSTRUCTED WITH GYP. BD. (5/8" TYPE X AT GARAGE) WITH DOOR TRIM FRAME ACCESS SUPPORT

A3 PROVIDE 6" MIN. FLAT CLG AT ANGLED CLG CONDITION

A4 PULL DOWN STAIRS 25.5" x 54"

A5 TEMPERED SAFETY GLASS PER IRC R308.4

A6 HOUSE TO GARAGE DOOR SEPARATION, PROVIDE APPROVED 20 MINUTE RATED DOOR PER IRC 302.5.1

A7 A/C CONDENSER PAD, REFER TO SITE PLAN FOR FINAL LOCATION, VERIFY CONNECTION TO CONC. PAD W/ MANUF. SPECS

A8 1/2" TYPE X DRYWALL AT ACCESSIBLE AREAS UNDER STAIRS

A9 LOUVERED DOOR w/ GAS FURNACE

D1 DRYWALL SOFFIT - 12" DROP FROM CEILING LINE

D2 DRYWALL SOFFIT - 8" DROP FROM CEILING LINE

K1 39" KNEE WALL WITH CAP PER SPECS

K2 38" KNEE WALL WITH 1x CAP

K3 46" KNEE WALL WITH CAP PER SPECS

K4 34 1/2" KNEE WALL

K5 42" KNEE WALL WITH 1x CAP

K6 KNEE WALL WITH 1x CAP 42" ABOVE STAIR NOSING OR LANDING

P1 30" X 60" SHOWER ENCLOSURE PER SPECS

P2 30"X60" TUB PER SPECS


S1 BOX STAIR WITH 38" KNEE WALL & 1X CAP

S2 1X CAPPED STRINGER, TOP AT 3" ABOVE TREAD

S3 HANDRAIL AT +36" ABV. STAIR NOSING OR LANDING

area tabulation 'a'

GARAGE	403 SF
FRONT PORCH	38 SF
REAR PATIO	104 SF
FLOOR 1 LIVING	1,776 SF
TOTAL LIVING	1,776 SF

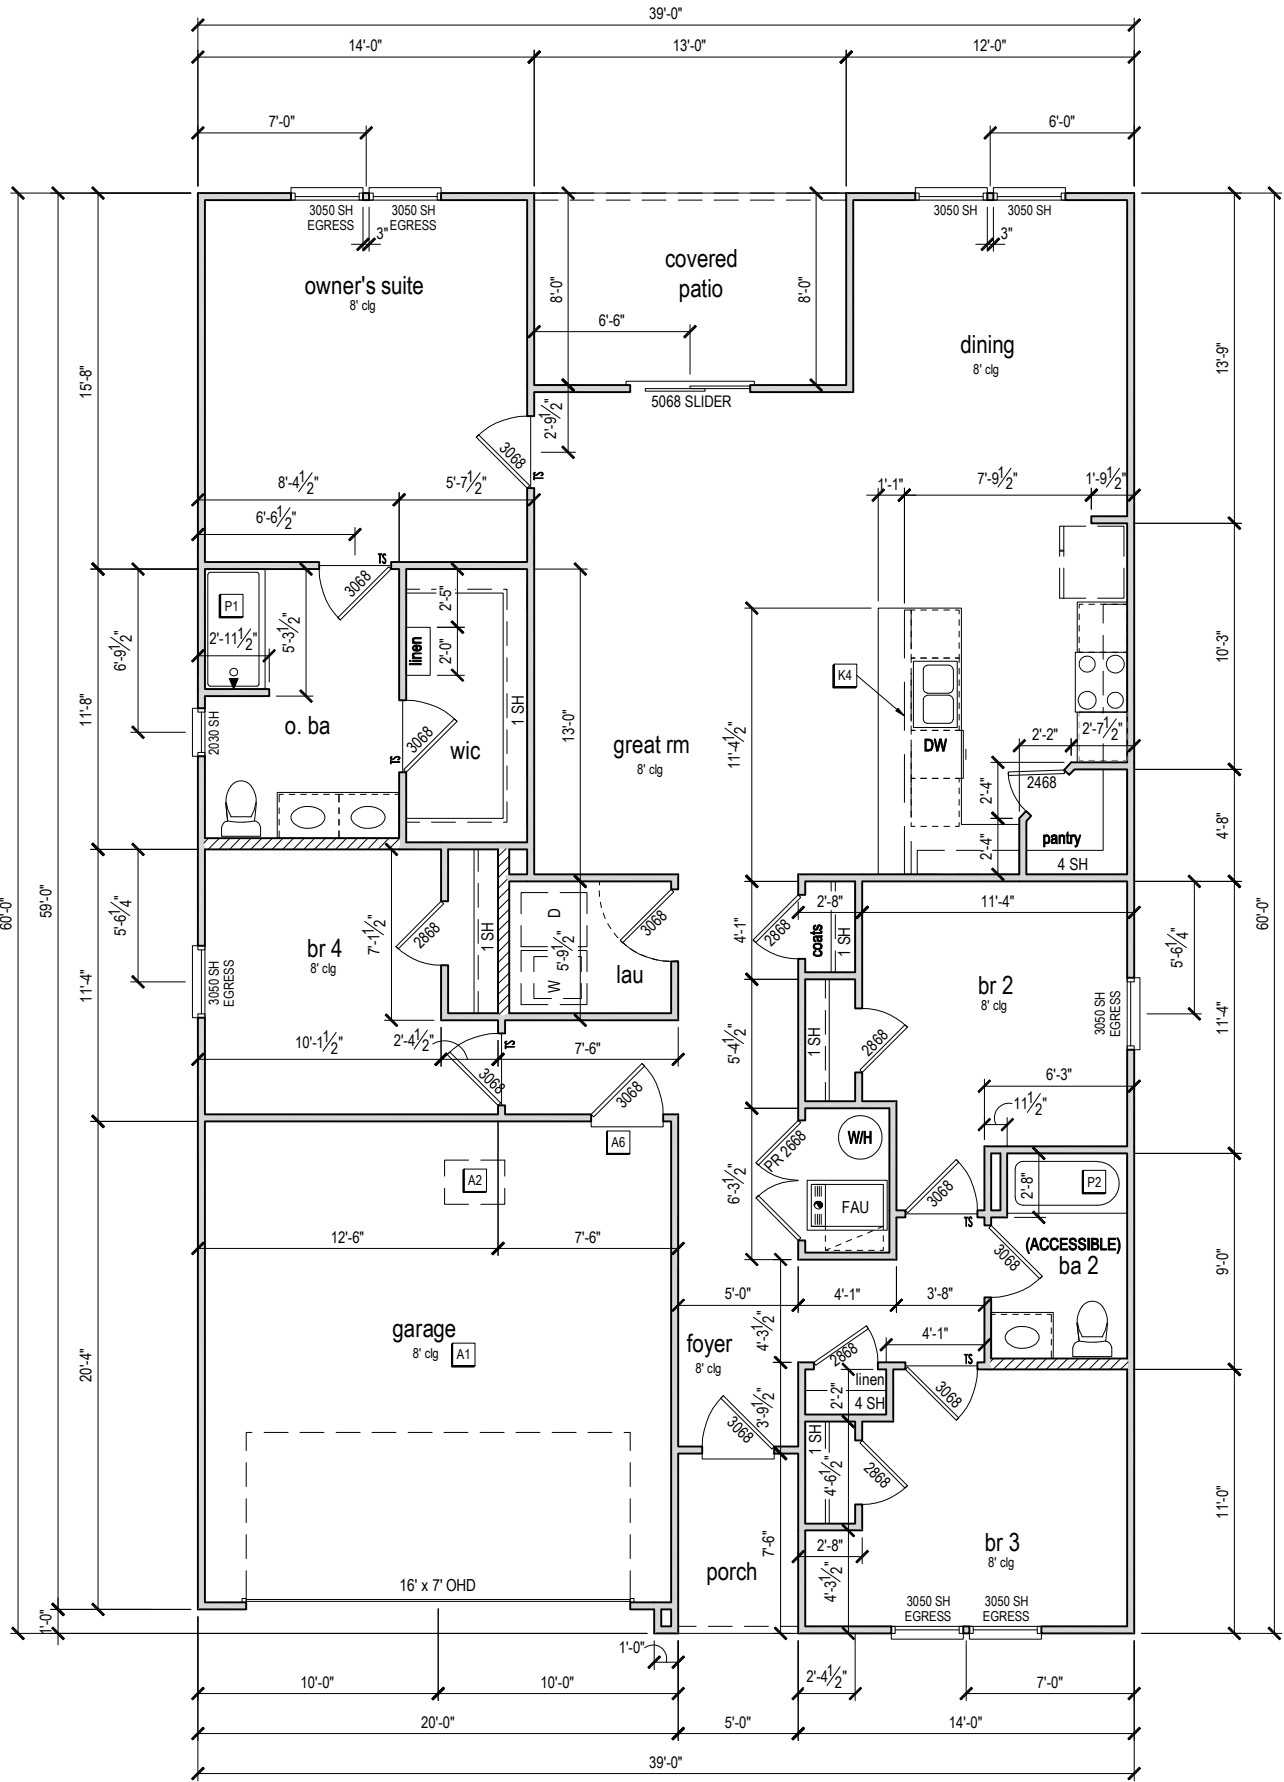

FIRST FLOOR PLAN 'A'

1/8" = 1'-0" @ 11x17

1/4" = 1'-0" @ 22x34

CENTURY
Complete

1-14-2022

FDS

ENGINEERING ASSOCIATES

258 Southrail Lane, Suite 200
O: 321.972-2491 F: 407.880-2304
Certificate Of Authorization No. 9161

CARLA A. BROWN, P.E., P.L. # 58128

URS PABLO TORRES, P.E., P.L. # 17174

Reserve at Jewel Lake
Lot 036
419 SW Jewel Lake Drive
Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written permission and consent of Century Communities.

MODEL: RADFORD

DRAWING TITLE: FIRST FLOOR PLAN

PLAN NUMBER: 33911776

RELEASE DATE: 02.22.2021

SHEET NO: 3.1-A

ATTIC VENT CALCULATION


ATTIC VENTILATION TO COMPLY w/ F.B.C RESIDENTIAL CODE. THE REQUIRED NET FREE VENTILATING AREA OF NOT LESS THAN 1/150 OF THE SPACE VENTILATED. AREA MAY BE REDUCED TO 1/300 PROVIDED THAT 40 TO 50 PERCENT OF THE REQ'D VENTILATING AREA IS PROVIDED IN THE UPPER PORTION OF THE SPACE TO BE VENTILATED AT LEAST 3 FEET ABOVE EAVE OR CORNICE WITH THE BALANCE OF THE REQ'D VENTILATION PROVIDED BY THE EAVE OR CORNICE VENTS.

MANUFACTURE SELECTED TO VERIFY THE NET FREE VENTILATION OF THE VENT PRODUCT SELECTED AND TO MAINTAIN THE REQUIRED VENTILATION.

DO NOT LOCATE VENTS ON ROOF PLANE(S) FACING STREET.

ROOF VENTILATION CALCULATIONS				
ROOF AREA	2,523 SF			
TOTAL NET FREE AREA REQ'D (1 TO 300)	1211.0 SQ. IN.			
MAIN HOUSE INLET (SOFFIT) VENTILATION	100.0 LF x	6.4 SQ. IN / LINEAR FT =	640.0 SQ. IN.	
POD VENT(S) REQUIRED WITH BASE HOUSE	9	VENTS AT 70.0 SQ. IN EA. =	630.0 SQ. IN.	
LOWER VENTING PROVIDED (605.5 SQ. IN. REQ'D)	640.0 SQ. IN	50.4%		
UPPER VENTING PROVIDED (605.5 SQ. IN. REQ'D)	630.0 SQ. IN	49.6%		

NOTE: TYPICAL VENTILATION INCLUDES:
1. SOFFIT VENTS
(AREA: 6.4 SQ. IN PER FOOT - VERIFY WITH MANUFACTURE)
2. LOMANCO 770" ATTIC VENT LOCATED 12" MIN. FROM RIDGE
(AREA: 70 SQ. IN. - VERIFY W MANUFACTURE)
*(1) LOMANCO 770D VENT AT 140 S.I. EA.CAN BE USED IN PLACE OF (2) 770 VENTS.

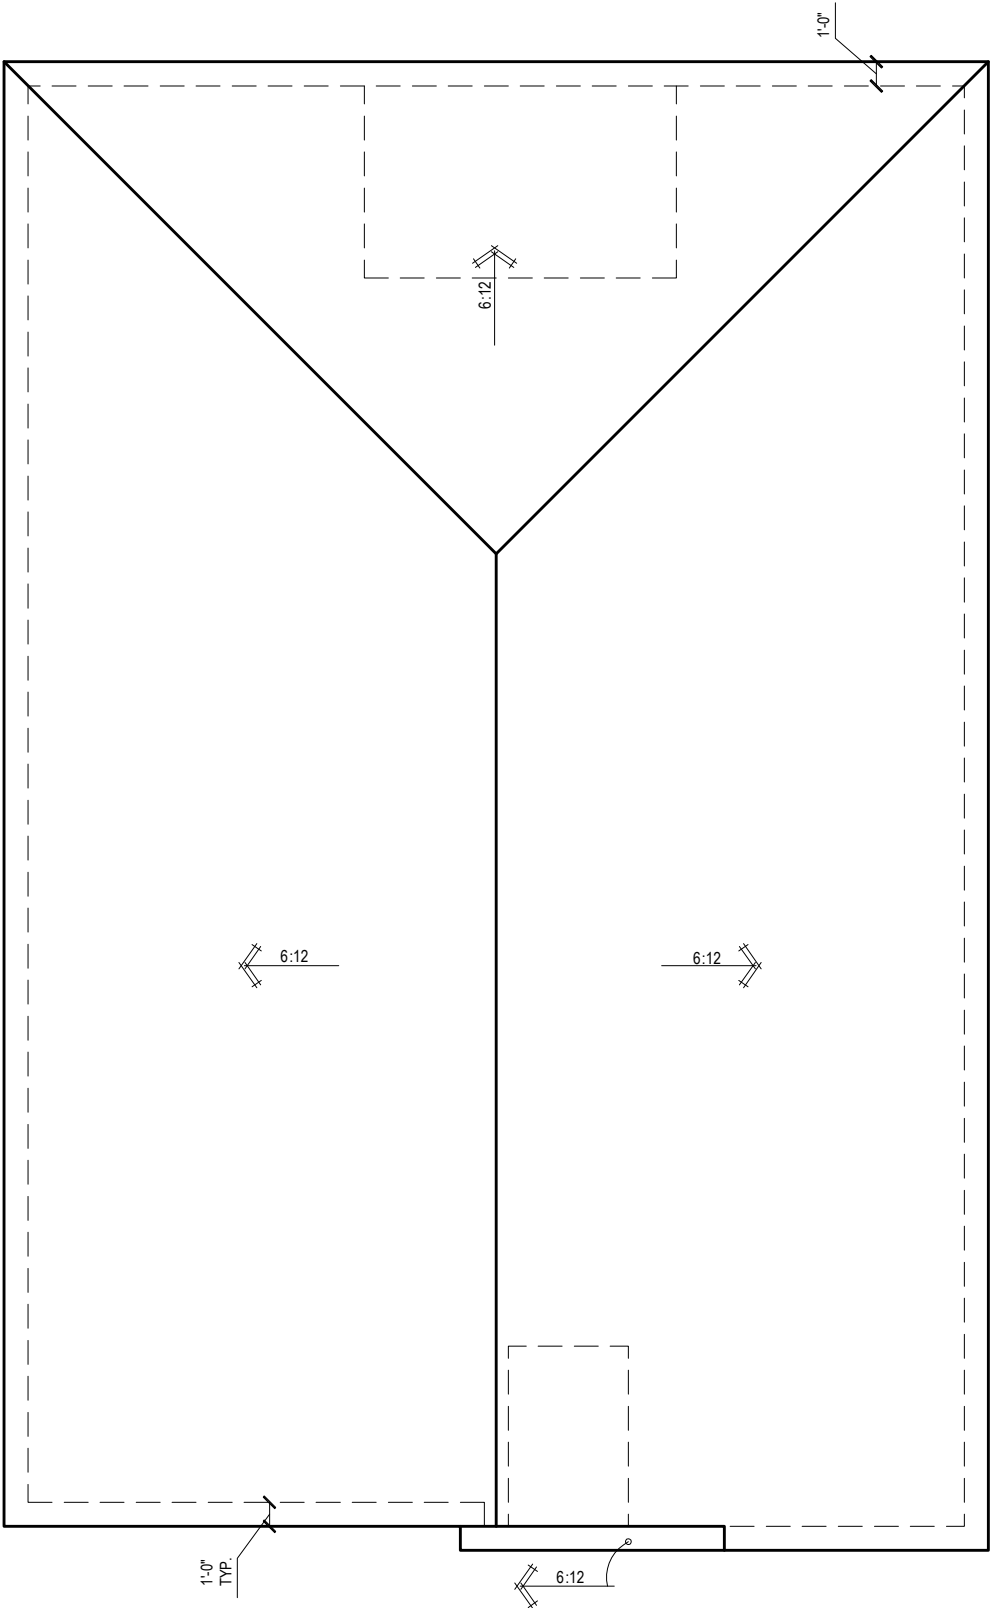

ROOF PLAN 'A'

1/8" = 1'-0" @ 11x17

1/4" = 1'-0" @ 22x34



1-14-2022



256 Southrail Lane, Suite 200
O: 322.972-2491 F: 407.880-2304
Certificate Of Authorization No. 9161
☐ CARLA A. BROWN, PE - FL # 58128
☐ LUIS PABLO TORRES, PE - FL # 107184

Reserve at Jewel Lake
Lot 036
419 SW Jewel Lake Drive
Lake City, FL 32024

Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written permission and consent of Century Communities.

PLAN NUMBER:	33911776	RELEASE DATE:	02.22.2021
MODEL:	RADFORD	DRAWING TITLE:	ROOF PLAN
SHEET NO:			
6.1-A			

	1 SWITCH		110v RECEPTACLE
	3 WAY SWITCH		110v SWITCHED RECEPTACLE
	4 WAY SWITCH		110v ABOVE COUNTER RECEPTACLE. GFI PROTECTED AT KITCHEN, BATH & LAUNDRY
	WALL MOUNTED LIGHT		110v DEDICATED RECEPTACLE FOR SECURITY/STRUCTURED WIRING PANEL
	LED DOWNLIGHT VP=VAPOR PROTECTED		GFI OUTLET
	DISCONNECT		220v RECEPTACLE
	CEILING FIXTURE OUTLET		110v FLOOR RECEPTACLE
	B = BRACE FOR FUTURE FAN H = HANGING P = OPT. PENDANT		DISPOSAL
	SMOKE DETECTOR		CHIME
	SMOKE/CARBON MONOXIDE ALARM		BATH EXHAUST FAN
			CEILING FAN PREWIRE WITH BRACING FOR FUTURE FAN
			PW

• PROVIDE ADDITIONAL EXTERIOR WEATHERPROOF RECEPTACLE WITHIN 15 FEET OF CONDENSING UNITS
 • INSTALL GFCI AND ARC FAULT CIRCUIT INTERRUPTER PROTECTION PER NEC SECTIONS 210.52G
 • ALL GARAGE OUTLETS SHALL BE ON A DEDICATED CIRCUIT
 • IONIZATION SMOKE ALARMS WITH AN ALARM-SILENCING SWITCH SHALL NOT BE INSTALLED LESS THAN 10 FEET (3048 MM) HORIZONTALLY FROM A PERMANENTLY INSTALLED COOKING APPLIANCE.
 • DWGS. ARE DIAGRAMMATICAL & INDICATE THE GENERAL ARRANGEMENT OF THE ELECTRICAL WORK. ANY DISCREPANCIES ON THE DOCUMENTS SHALL BE CALLED TO THE ARCHITECT'S ATTENTION PRIOR TO THE COMMENCEMENT OF WORK. DO NOT SCALE ELECTRICAL DRAWINGS.

E1	ELECTRICAL PANEL PER SPECS
E2	INSTALL GFI OUTLET UNDER SINK FOR FUTURE DISPOSAL
E3	DOOR CHIME TRANSFORMER LOCATION
E4	MECHANICAL ROOMS TO INCLUDE KEYLESS LIGHT, PLUG AND DISCONNECT FOR AIR HANDLER
E5	COACH LIGHT ONLY IF REQUIRED BY LOCAL MUNICIPALITY. INSTALL AT 68" AFF
E6	INSTALL COACH LIGHT AT 68" AFF



1/8" = 1'-0" @ 11x17
1/4" = 1'-0" @ 22x34




Century Communities expressly reserves its common law copyright in these plans. Plans are not to be copied, reproduced, or changed, in any manner whatsoever, nor are they to be assigned to a third party without written permission and consent of Century Communities.

02.22.2021

DRAWING TITLE:
FIRST FLOOR ELECTRICAL

SHEET NO:

E1.1

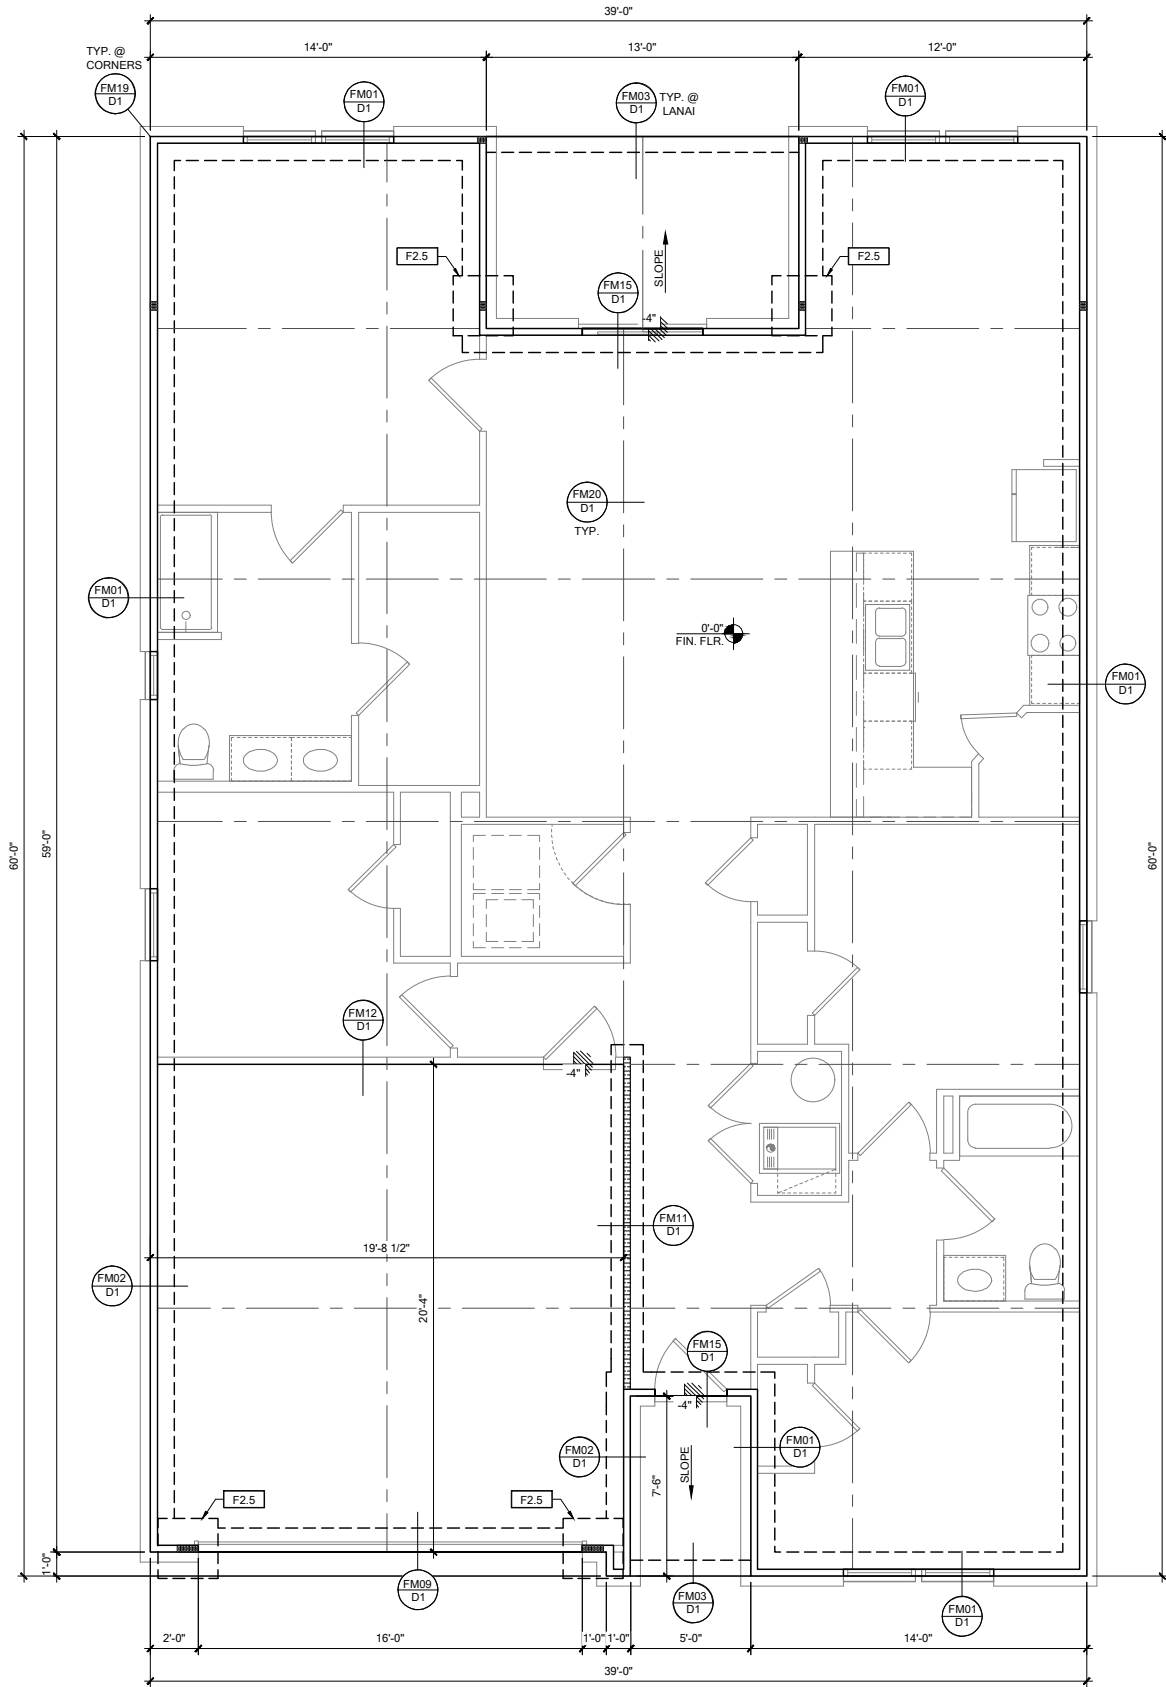

FOUNDATION PLAN A

SCALE: 1/4" = 1'-0" @ 22x34
SCALE: 1/8" = 1'-0" @ 11x17

FOUNDATION LEGEND	
SYMBOL	DESIGN DESCRIPTION
[F#]	INDICATES CONCRETE FOOTING w/ MINIMUM SOIL BEARING CAPACITY OF 2000 PSF. REINFORCE PER GENERAL FOUNDATIONS SCHEDULE ON SHEET SN FOR DESIGN SPECIFICATIONS.
---	INDICATES CONSTRUCTION JOINT (IF SHOWN) SHALL BE 1/2" x 1" SAW CUTS FILLED WITH APPROVED SLAB JOINT MATERIAL COVERING A 12x12" SQUARE MAXIMUM
4"	INDICATES STEP IN FOUNDATION, VERIFY PER ARCHITECTURAL PLANS CONSTRUCT PER PLAN SECTION CUT AND DETAIL SHEET D1
0'-0" FIN. FLR.	4" 2500 PSI CONC. SLAB W/ REINF. PER S0 w/6 MIL VISQUEEN VAPOR BARRIER & TREATED FOR TERMITES. SEE FOUNDATION SCHEDULE ON SN
[WALL]	INDICATES BUILT UP COLUMN, SEE FRAMING PLAN FOR SIZE, DETAIL WF37/SN FOR PLY ATTACHMENT, AND UPLIFT CONNECTION SCHEDULE ON SN FOR CONNECTION TO SLAB

- GENERAL NOTES:
- TYPICAL CORNER FRAMING PER DETAIL FM19/D1
 - SEE ARCHITECTURAL PLANS FOR ALL SLAB STEP DEPTHS IF SHOW SHOWN WITHIN THESE DOCUMENTS.

PLAN KEY NOTES

BUILDER NOTE:
ANY DISCREPANCY OR ERROR IN DIMENSIONS OR NOTES SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGN PROFESSIONAL FOR CLARIFICATION PRIOR TO COMMENCEMENT OF CONSTRUCTION

WALL TYPE	
SYMBOL	DESIGN DESCRIPTION
[Hatched]	2x INTERIOR BEARING SHEARWALL - SEE BEARING WALL SCHEDULE ON SHEET SN FOR REQUIREMENTS.
[Dashed]	INDICATES BEARING WALL SEE BEARING WOOD BEARING SCHEDULE ON SN
[Solid]	2x WOOD FRAME EXTERIOR WALL



DATE: January 20, 2022
DESIGN: [Signature]
PROJECT: [Signature]



LOT 36
RESERVE AT JEWEL LAKE
419 SW JEWEL LAKE DR.
LAKE CITY, FL, 32024

PLAN NUMBER:
33911776


MODEL:
RADFORD

SHEET NO:

RELEASE DATE:
02.22.2021

DRAWING TITLE:
FOUNDATION PLAN

S1

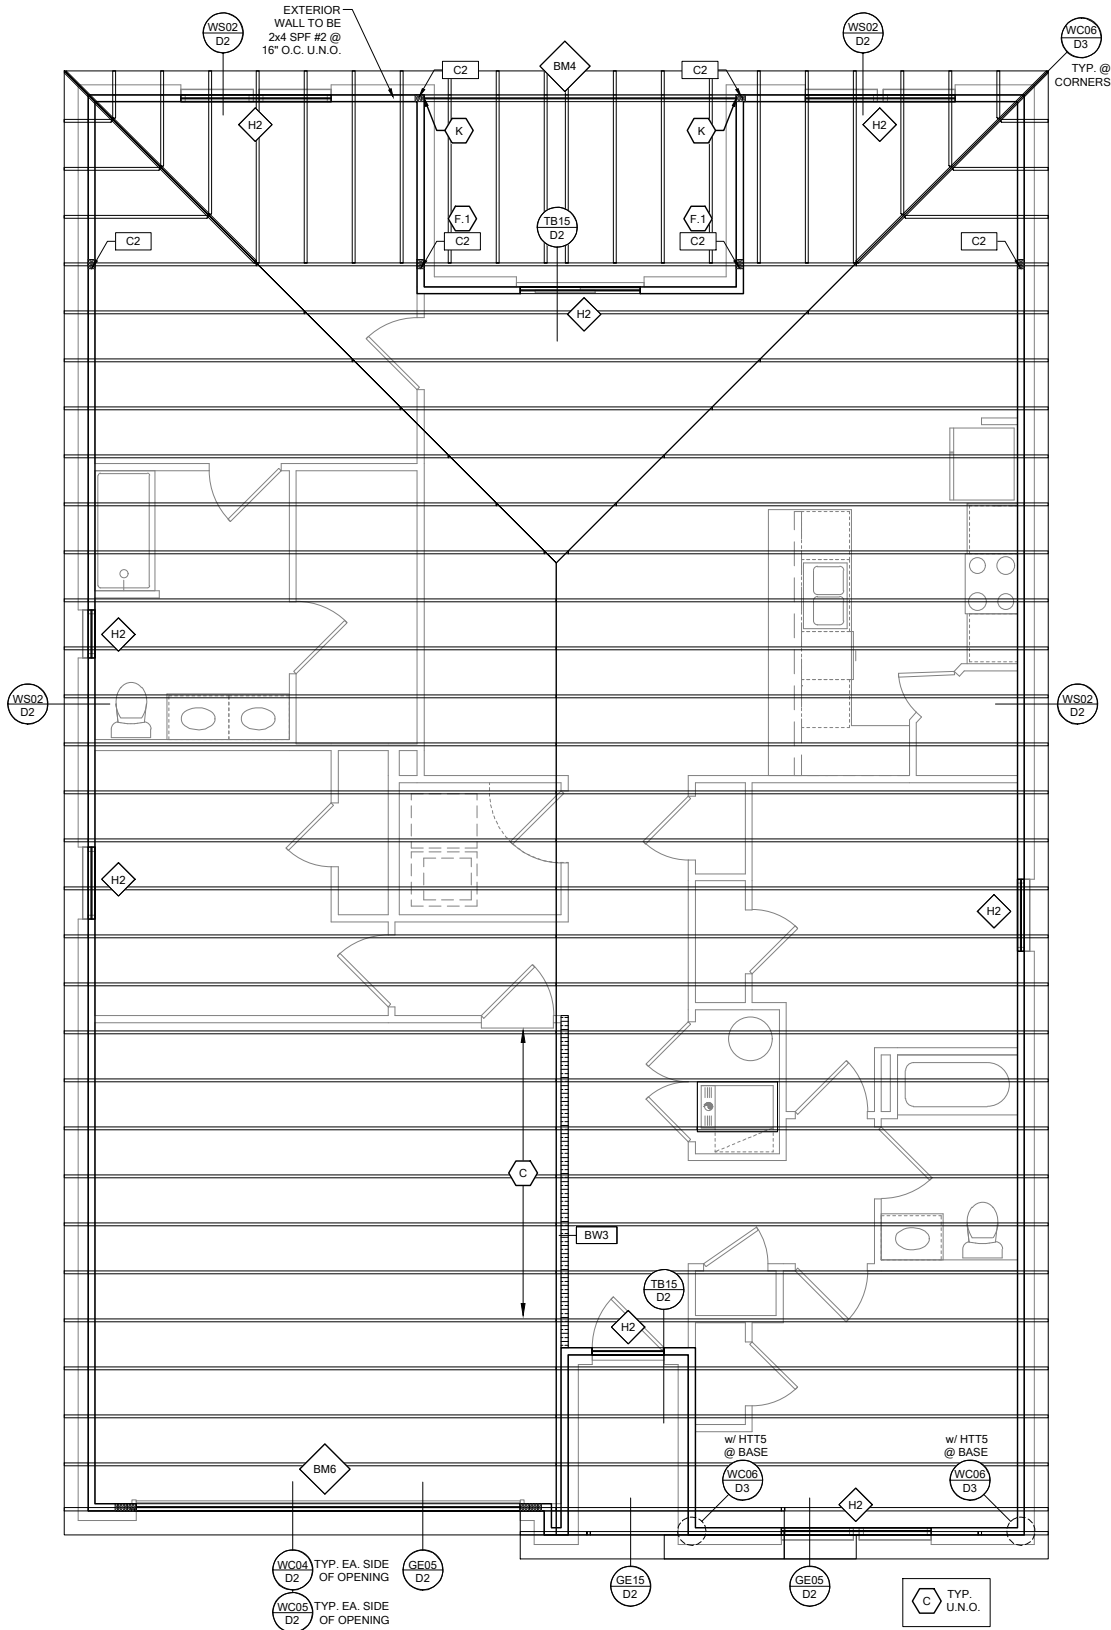

ROOF FRAMING PLAN A

SCALE: 1/4" = 1'-0" @ 22x34
SCALE: 1/8" = 1'-0" @ 11x17

RSH	ENGINEERED ROOF PER ASCE 7-16 ROOF DESIGN ALLOWABLE COMPONENTS AND CLADDING WIND PRESSURES AND SUCTIONS FOR MEAN ROOF HEIGHT ≤ 25 ft					
WIND SPEED (ULTIMATE)	130 MPH					
WIND SPEED (ALLOWABLE)	100.7 MPH					
EXPOSURE CATEGORY	C					
EFFECTIVE WIND AREA (SQ FEET)	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PSF)					
	WIND PRESSURE AND SUCTION (PS					

SYMBOL	DESIGN DESCRIPTION
BW# 2x	INDICATES BEARING WALL. SEE BEARING WOOD BEARING SCHEDULE ON SN, SEE ARCHITECTURAL PLANS FOR WALL WIDTH, 2x4 MINIMUM U.O.N.
CH	INDICATES BUILT UP COLUMN, SEE FRAMING PLAN FOR SIZE, DETAIL WF37/3N FOR PLY ATTACHMENT AND UPLIFT CONNECTION SCHEDULE ON SN FOR CONNECTION TO SLAB
C#	INDICATES NO BOTTOM CONNECTOR REQUIRED
#	INDICATES UPLIFT CONNECTION CONSTRUCTED PER DETAIL UPLIFT CONNECTOR SCHEDULE ON SHEET SN

- FRAMING NOTES:
- SEE WIND SPEED CHART ON S0 FOR WINDOW PRESSURES
 - AT SECOND FLOOR FOR TYPICAL CORNER FRAMING SEE DETAIL FB06/D4
- GENERAL NOTES:
- THE FRAMING PLAN SHOWN INDICATES THE "TRUSS SYSTEM" AND IS THE RESPONSIBILITY OF THE TRUSS SYSTEM ENGINEER (DESIGN PROFESSIONAL OF RECORD). THE TRUSS DESIGN ENGINEER (DELEGATED ENGINEER) HAS FINAL, RESONSIBILITY FOR EACH INDIVIDUAL TRUSS AND TRUSS PROFILE, AND IS TO SUBMIT A FINAL SET OF TRUSS ENGINEERING SIGNED AND SEALED TRUSS DRAWINGS TO DESIGN PROFESSIONAL OF RECORD FOR REVIEW PRIOR TO FABRICATION
 - ANY DISCREPANCY OR ERROR IN DIMENSIONS OR NOTES WITH IN THIS PLAN SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGN PROFESSIONAL FOR CLARIFICATION PRIOR TO CONSTRUCTION.
 - SEE SHEET SN FOR DESIGN SCHEDULES AND NOTES: FOUNDATION SCHEDULE / COLUMN SCHEDULE / BEARING WALL SCHEDULE / BEAM SCHEDULE / HEADER SCHEDULE / CONNECTION SCHEDULE / FLOOR AND ROOF NOTES.

PLAN KEY NOTES

BUILDER NOTE:

IF THE TRUSS LAYOUT SHOWN DOES NOT MATCH THE TRUSS MANUFACTURERS LAYOUT

-----STOP-----

AND CALL THE ENGINEER OF RECORD PRIOR TO PLACEMENT OF ANY TRUSSES.

WALL TYPE

SYMBOL	DESIGN DESCRIPTION
2x	2x INTERIOR BEARING SHEARWALL - SEE BEARING WALL SCHEDULE ON SHEET SN FOR REQUIREMENTS.
INDICATES BEARING WALL. SEE BEARING WOOD BEARING SCHEDULE ON SN	
2x WOOD FRAME EXTERIOR WALL	

DATE: January 20, 2022

DESIGNED BY: [Signature]

PROJECT: [Signature]

LOT 36

RESERVE AT JEWEL LAKE

419 SW JEWEL LAKE DR.

LAKE CITY, FL, 32024

PLAN NUMBER: 33911776

RELEASE DATE: 02.22.2021

MODEL: RADFORD

DRAWING TITLE: ROOF FRAMING PLAN

SHEET NO: S2

FOUNDATION DEPTH NOTE:

- INTERIOR PAD DEPTHS AS LISTED IN THE SCHEDULE ARE THE TOTAL DEPTH AND MEASURED FROM THE TOP OF THE SLAB.
- EXTERIOR PAD DEPTHS AS LISTED IN THE SCHEDULE ARE TOTAL DEPTH WITH THE BOTTOM OF THE FOOTING TO MATCH THE BOTTOM OF THE CONTINUOUS MONOLITHIC POUR WHICH RUNS THROUGH IT.


- _____

GENERAL COLUMN NOTES:

1. ALL STRUCTURAL LUMBER TO BE SYP#2 OR SPF#2 UNJO ON PLAN.
2. MINIMUM BOLT EMBEDMENT: 5" EMBEDMENT FOR 1/2" ATR. 6" EMBEDMENT FOR 5/8" ATR. 8" EMBEDMENT FOR 7/8" ATR.
3. P.L. COL. TO BRG DIRECTLY ON FOUNDATION. CUT BASE PLATE AS REQ'D. G.C. TO PROVIDE MOISTURE BARRIER
4. CON. IS CALLED OUT ON 2ND FLOOR. THE BASE CONNECTION IS NOT REQ'D. SEE PLANS FOR BASE CONNECTION
5. VALUES HAVE BEEN REDUCED FOR NARROW FACE APPLICATION. CONNECTIONS SHALL BE INSTALLED ON NARROW OR WIDE FACE PER SIMPSON TC-SCLCM

CROSS REFERENCE CHART

SIMPSON SP1 / USP SPT22	SIMPSON SP2 / USP SPT24
-------------------------	-------------------------

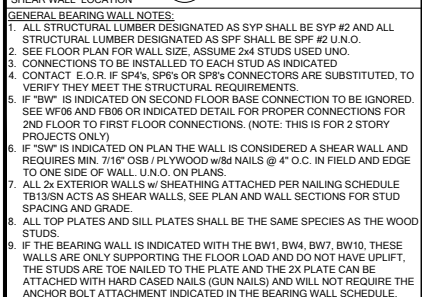

2x STUDS @ 24" O.C. MAX.

2x PT BOTTOM PLATE

WF18


NON-BRG INTERIOR WALL

SCALE: 3/4" = 1'-0" @ 22x34

SCALE: 3/8" = 1'-0" @ 11x17



HEADER SUPPORT - NUMBER OF JACKS & STUDS REQUIRED AT OPENINGS				
OPENING SIZE	2x4 WALL		2x6 OR 2x8 WALL	
	JACKS EA END	KINGS EA END	JACKS EA END	KINGS EA END
1'-0" - 3'-11"	(1)	(2)	(1)	(2)
4'-0" - 8'-11"	(2)	(3)	(2)	(2)
10'-0" - 16'-0"	(3)	(4)	(3)	(4)

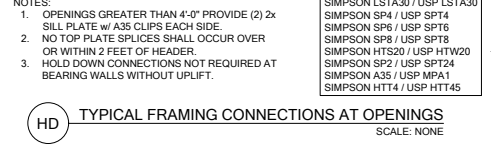

GENERAL BEAM NOTES:

1. VERIFY WITH PLAN CORRECT LENGTH OF BEAMS REQUIRED (MIN 4" BEARING EACH END)
2. SEE PLAN FOR TOP OR BOTTOM OF BEAM INDICATIONS
3. BEAMS ARE NOT TO BE DRILLED OR NOTCHED IN ANY WAY WITHOUT WRITTEN APPROVAL FROM THE E.O.R.





GENERAL CONNECTOR NOTES:

- MINIMAL CONNECTOR UNO ON FRAMING PLAN**
- CONNECTION FOR ALL ROOF / FLOOR TRUSSES TO MASONRY WALLS/ LINTELS.
PLAN
CONNECTION AT 24" OR 32" C. PENDING VERTICALS FOR ALL FLOOR TRUSSES
MASONRY WALLS SEE DETAIL FB12/D3 FOR MORE INFORMATION
CONNECTION FOR ALL HIP JACK (CORNER JACK) TO MASONRY WALLS/ICF WALLS
CONNECTION FOR ALL CONTINUOUS RIM BOARD TO TOP OF MASONRY AT 32" C.
EACH CORNER. G.C. TO VERIFY LOCATION DOES NOT CONFLICT W/ I/F (IF APPLICABLE)
CONNECT ALL FLOOR TRUSSES TO INTERIOR BEARING WALL BEAMS/WALLS/BEAMS W/

- CONNECTION FOR ALL TRUSSES TO INTERIOR/EXTERIOR BEARING WOOD WALLS AND/OR BEAMS



2x RIBBON OR BLOCKING
BETWEEN FLOOR SYSTEM




6	21
---	----

[illegible]


--	--

WORD
 & SCHE


SHEET
NO: **CNI**

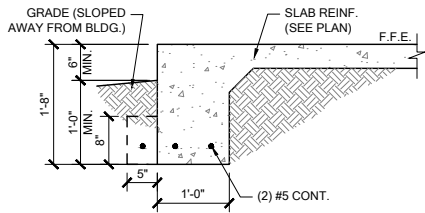


FM01 SINGLE STORY FTG
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

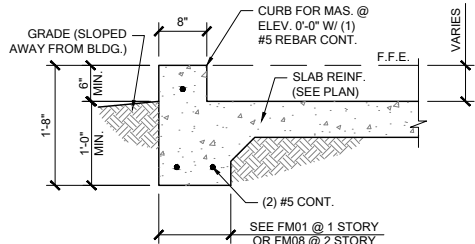


FM02 SECTION @ GARAGE
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

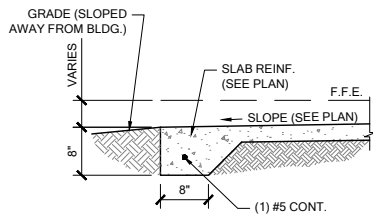


FM03 THICKENED EDGE
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

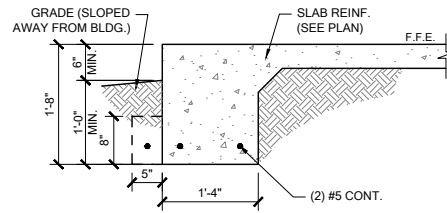


FM08 2-STORY FOOTING
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

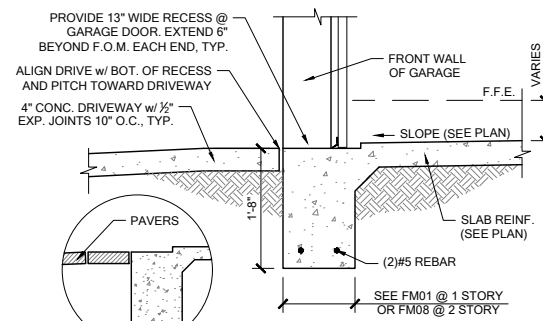


FM09 SECTION @ GARAGE DOOR
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

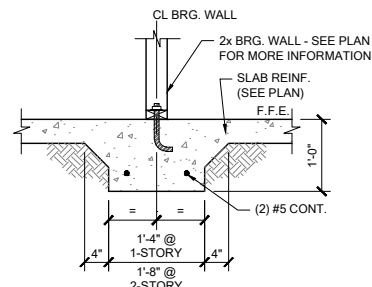


FM10 INTERIOR BEARING WALL
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

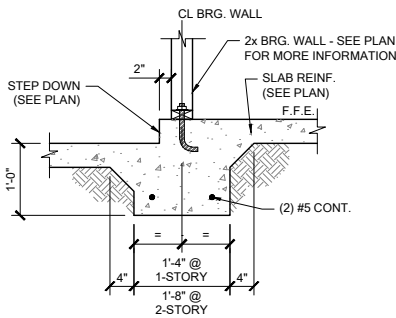


FM11 STEP DOWN BEARING
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

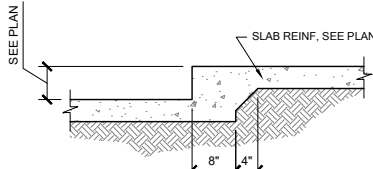


FM12 STEP DOWN @ NON BRG.
SCALE: 3/4" = 1'-0"

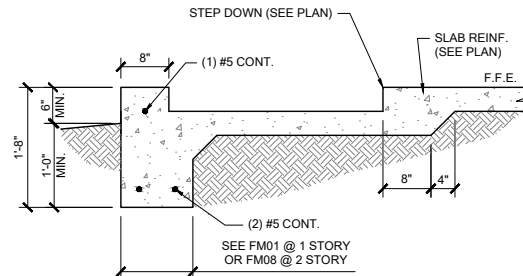


FM14 SECTION @ SHOWER
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

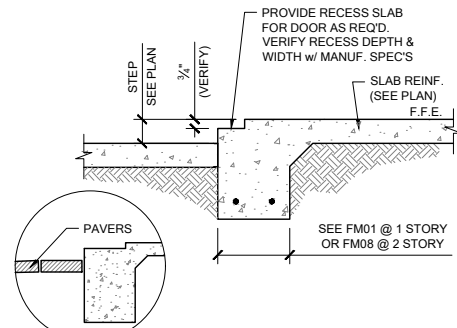


FM15 EXTERIOR BEARING @ RECESS
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

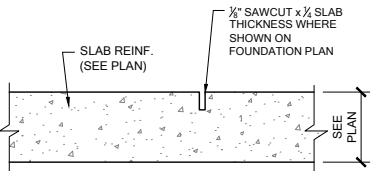


FM20 CONTROL JOINT
SCALE: N.T.S.




FM19 TYP. CORNER BAR DETAIL
SCALE: N.T.S.

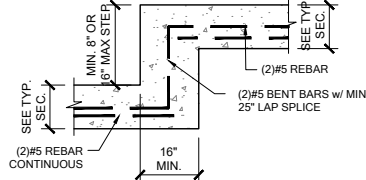


FM18 TYP. STEP FOOTING DETAIL
SCALE: N.T.S.

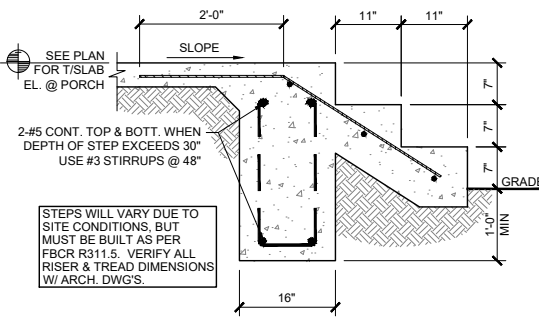

FM22 PORCH STEP
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

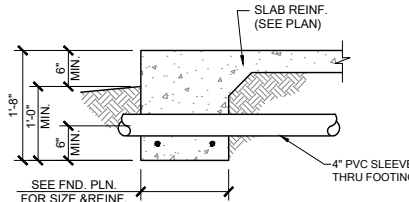


PIPE PERPENDICULAR TO EXTERIOR FOOTING

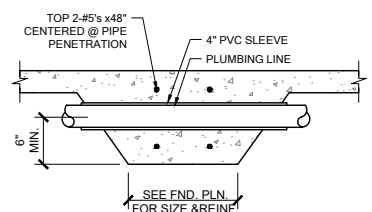


PIPE PERPENDICULAR TO INTERIOR FOOTING


FM23 FOUNDATION PENETRATIONS, TYPICAL
SCALE: N.T.S.

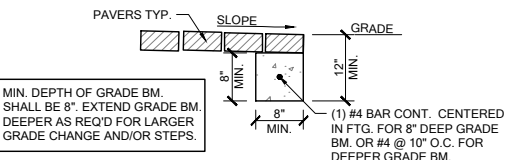


FM32 GRADE BEAM @ PAVER THRESHOLD
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

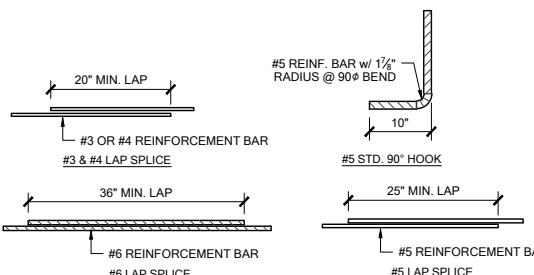

MS05 TYP. REBAR SPLICE
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

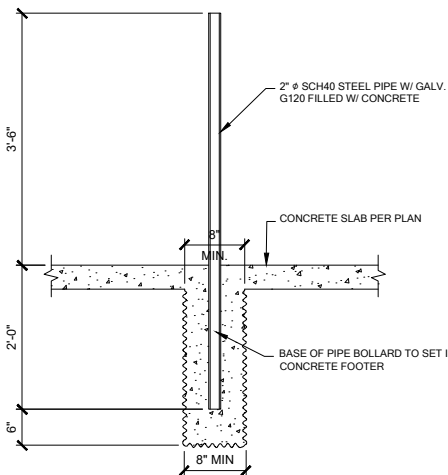

GAS WATER HEATER
1 BOLLARD DETAIL
SCALE: 3/4" = 1'-0"

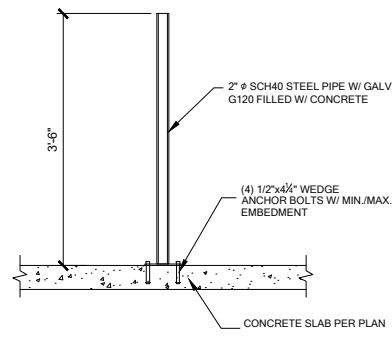

ELECTRIC WATER HEATER



DATE: January 20, 2022
DRAWN BY: J. BROWN
CHECKED BY: J. BROWN
DESIGNED BY: J. BROWN
PROJECT NO: 23024



LOT 36
RESERVE AT JEWEL LAKE
419 SW JEWEL LAKE DR.
LAKE CITY, FL, 32024

PLAN NUMBER:
33911776


RELEASE DATE:
02.22.2021

MODEL:
RADFORD


DRAWING TITLE:
FOUNDATION DETAILS

SHEET NO:


D1

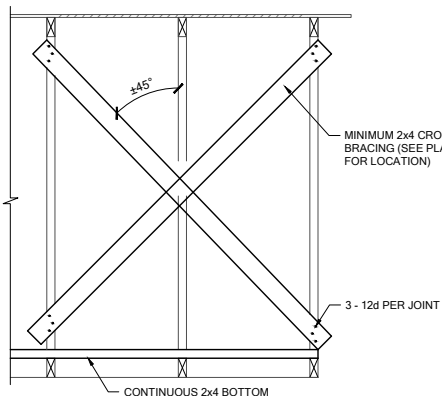


TB01 CROSS BRACING, TYP.
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

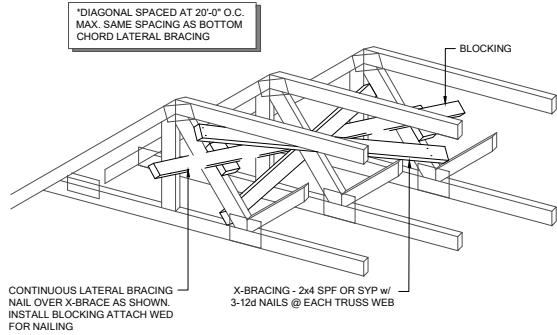


TB02 CROSS BRACING TYPICAL
SCALE: N.T.S.

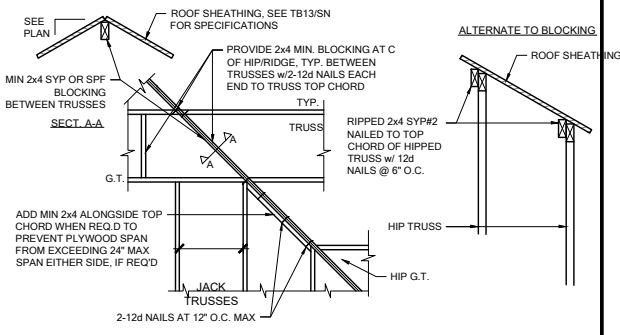


TB03 HIP/RIDGE BLOCKING
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

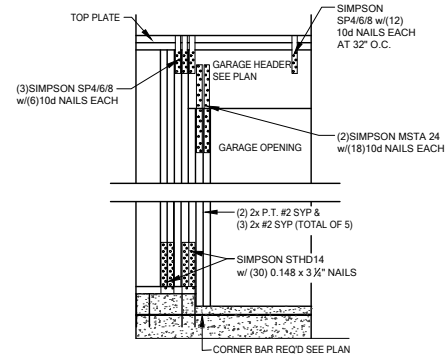


WC04 GARAGE HEADER ANCHOR
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

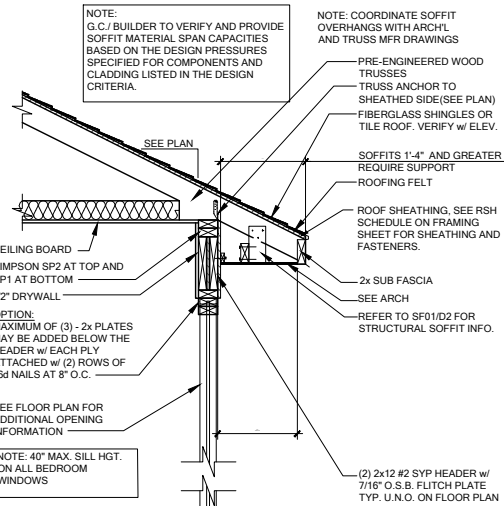


WS02 TYP. WALL SECTION
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

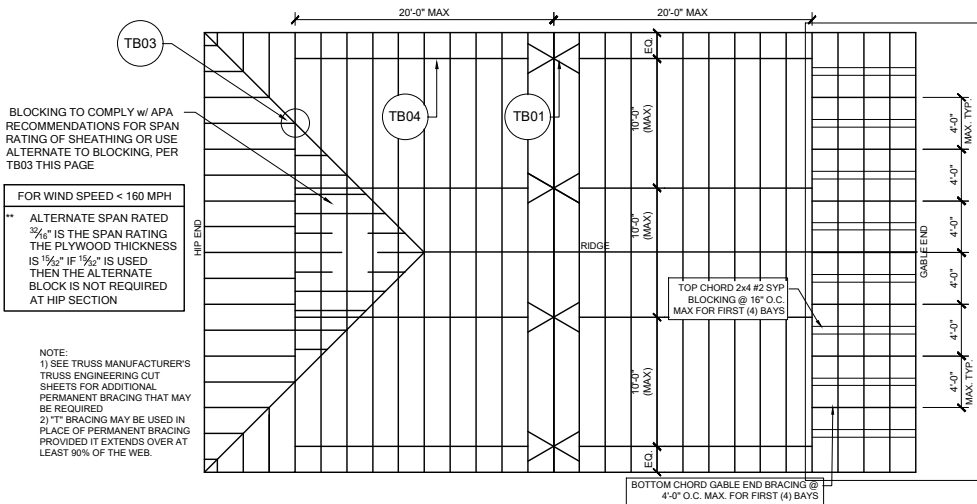


TB05 REQUIRED MIN. PERMANENT TRUSS BRACING PLAN
SCALE: N.T.S.

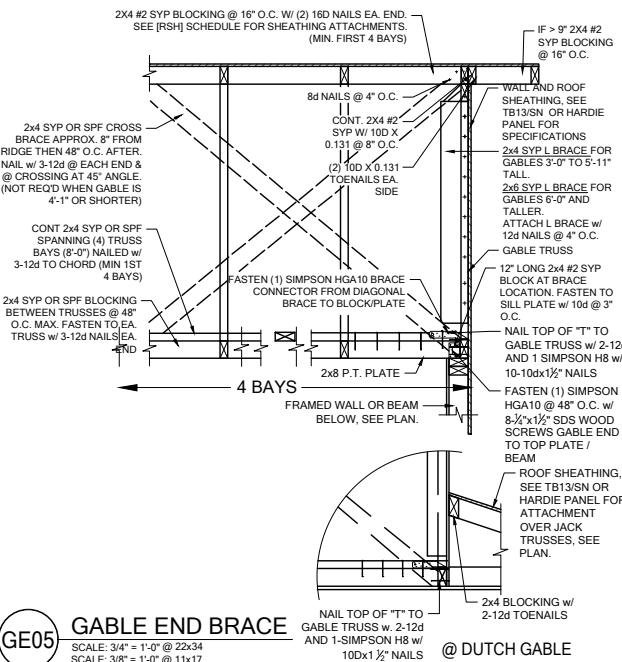


GE05 GABLE END BRACE
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

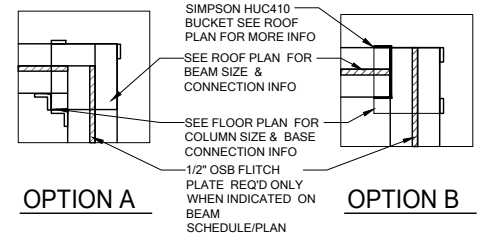


A COMMON BM. TO POST ATTACHMENT
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

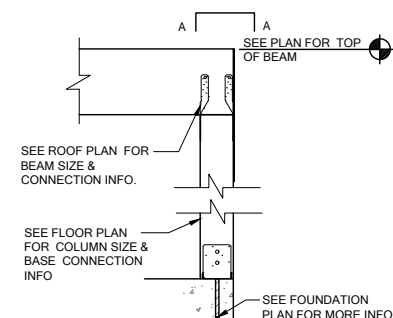


CD11 COMMON BM. ATTACHMENT
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

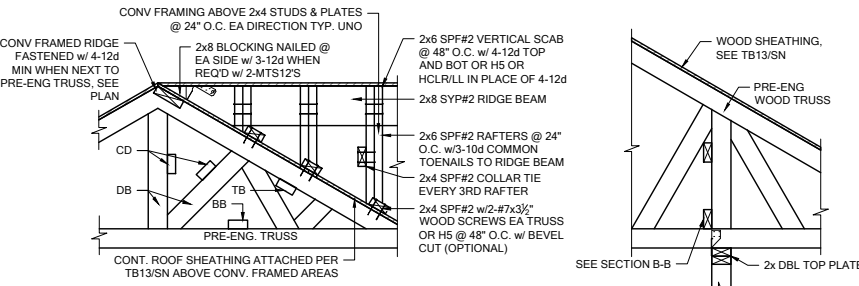


- TRUSS BRACING/BLOCKING NOTES:**
- WOOD TRUSS ERECTOR SHALL PROVIDE BRACING ACCORDING TO ANSI/TPI-14 (TRUSS PLATE INSTITUTE) NOTE THAT THE COMBINED WIND AREA IS GREATER BEFORE THE ROOF SHEATHING IS APPLIED, AND BRACING SHALL THEREFORE BE INSTALLED AS THE TRUSSES ARE ERECTED. INADEQUATE TRUSS BRACING IS THE MOST COMMON CAUSE OF ACCIDENT IN WOOD TRUSS CONSTRUCTION. FULL BUNDLES OF PLYWOOD SHALL NOT BE PLACED ON TRUSSES. THIS CONSTRUCTION LOAD SHOULD BE LIMITED TO 8 SHEETS OF PLYWOOD ON ANY PAIR OF TRUSSES & SHALL BE LOCATED ADJACENT TO THE SUPPORTS. NO EXCESS CONCENTRATION OF ANY CONSTRUCTION MATERIAL (SUCH AS GRAVEL OR SHINGLES) SHALL BE PLACED ON THE TRUSSES IN ANY ONE AREA THEY SHALL BE SPREAD OUT EVENLY OVER A LARGE SO AS TO AVOID OVERLOADING ANY ONE TRUSS. ALL BRACING (DB, CB, BB) SHOWN ABOVE SHALL BE IN ADDITION TO CONTINUOUS LATERAL BRACING SPECIFIED BY THE TRUSS MANUFACTURER. ALL LATERAL BRACING SPECIFIED BY TRUSS MANUF. SHALL HAVE ADDITIONAL DIAGONAL BRACES AT 20'-0" O.C. MAXIMUM.
 - ALL BRACES SHALL BE 2x4 NOMINAL DIMENSION LUMBER & SHALL BE ATTACHED W/ (3) 12d NAILS AT EACH TRUSS INTERSECTION.
 - ADDITIONAL BOTTOM CHORD BRACING SHALL BE INSTALLED AS REQUIRED BY TRUSS DESIGN WHEREVER ADEQUATE STRUCTURAL CEILING ARE NOT ATTACHED DIRECTLY TO THE BOTTOM CHORD OF THE TRUSS.
 - PROVIDE TRUSS BLOCKING AT ALL TRUSS BEARING SUPPORTS WHERE DEPTH EXCEEDS STANDARD HEEL HEIGHT.
 - SEE TYP. TRUSS BLOCKING DETAILS.

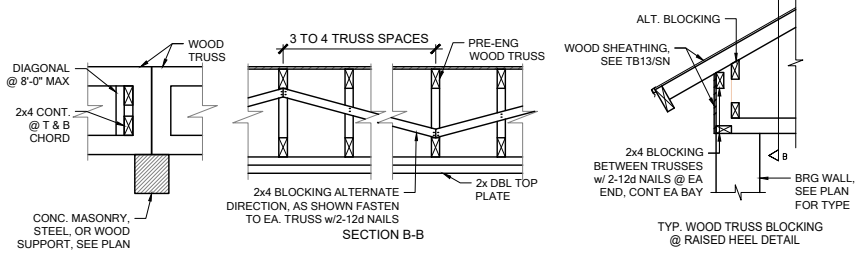


TB06 BLOCKING/CONV. FRAME DETAILS
SCALE: 1/2" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

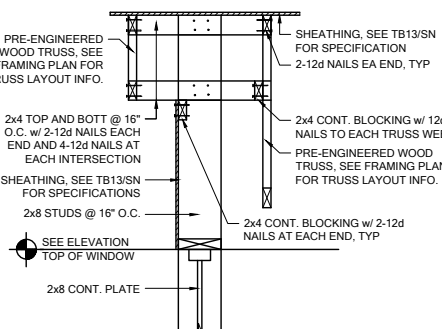


WF27 KNEEWALL @ ENTRY
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

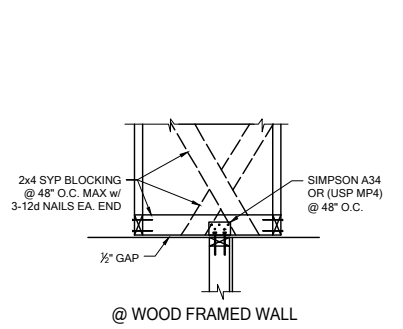


TB15 NON-BEARING EXTERIOR WALL
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

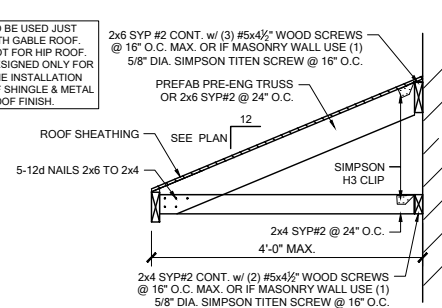


SR01 SHED ROOF CONNECTION
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

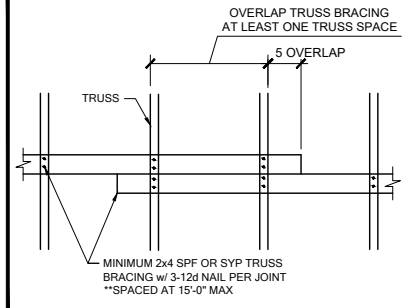


TB04 TRUSS BRACING OVER LAP
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

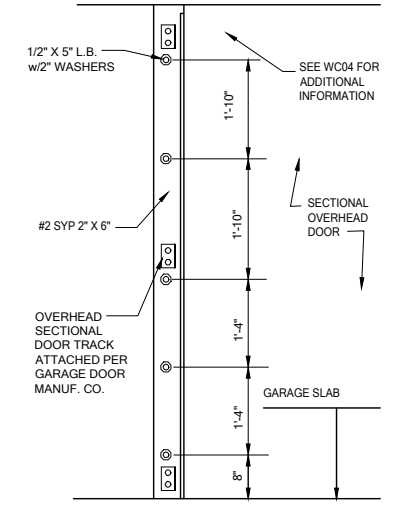

WC05 SECT. OVERHEAD GAR. DOOR INSTALL
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

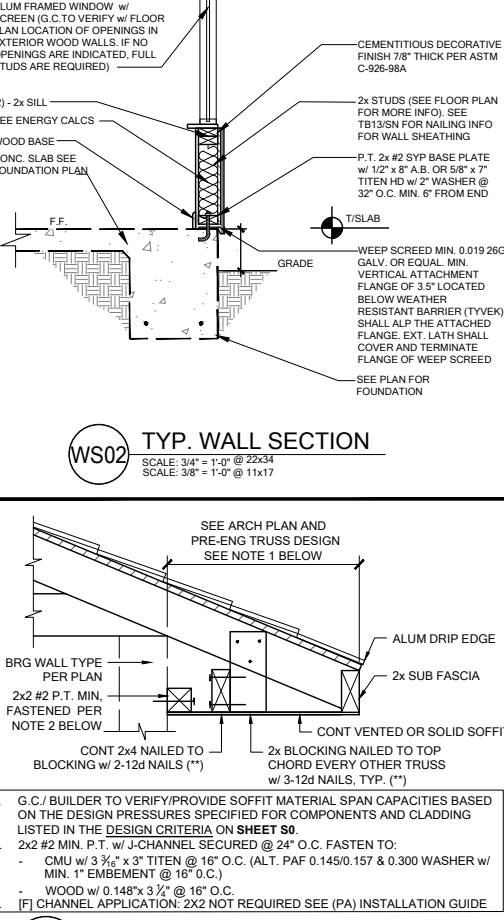

SF01 STRUCTURAL SOFFIT
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17
NOT REQUIRED, VINYL SOFFITS >1'-0" SHALL HAVE MID BLOCKING PER R704.2.1.
REFER TO THE PRODUCT APPROVAL FOR INSTALLATION DETAILS.

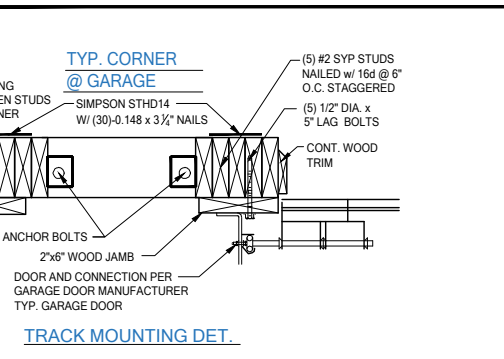












TRACK MOUNTING DET.


DATE: January 20, 2022
FLOOR FRAMING DETAILS

LOT 36
RESERVE AT JEWEL LAKE
419 SW JEWEL LAKE DR.
LAKE CITY, FL, 32024


PLAN NUMBER: 33911776
RELEASE DATE: 02.22.2021

MODEL: RADFORD
DRAWING TITLE: FLOOR FRAMING DETAILS
SHEET NO: D2

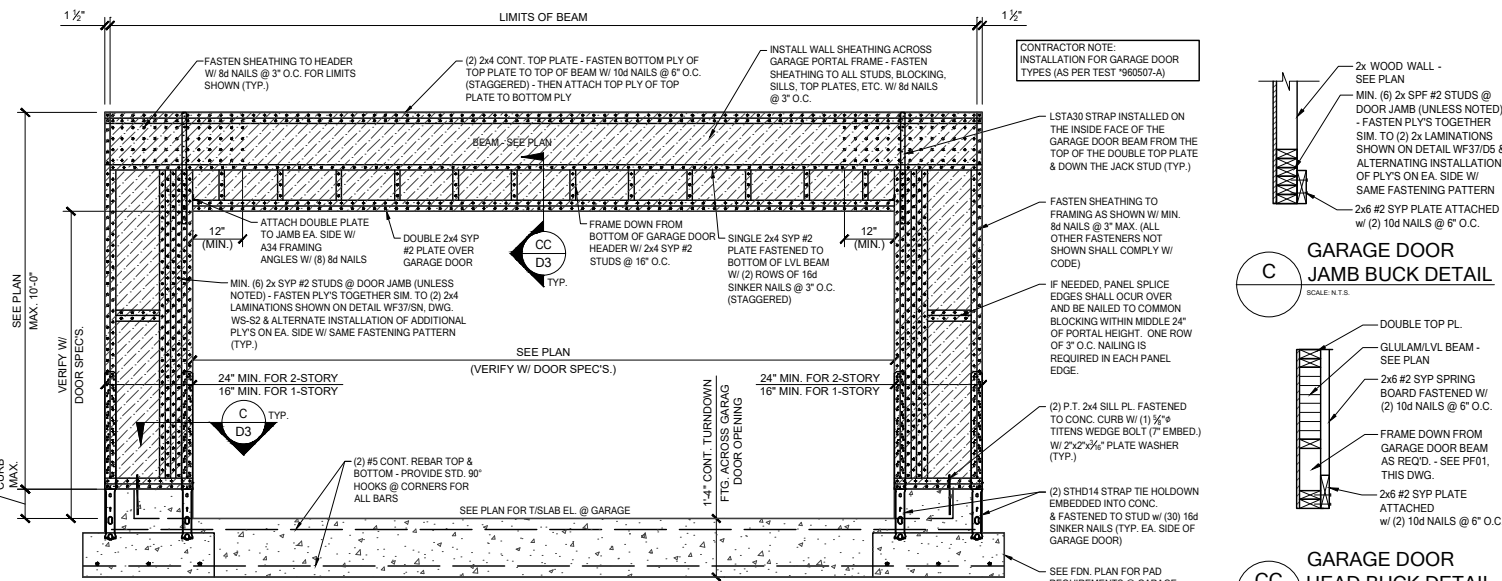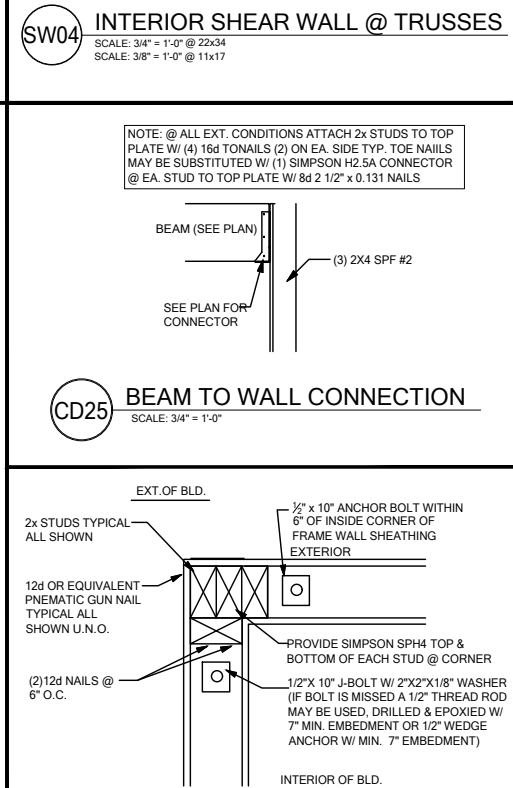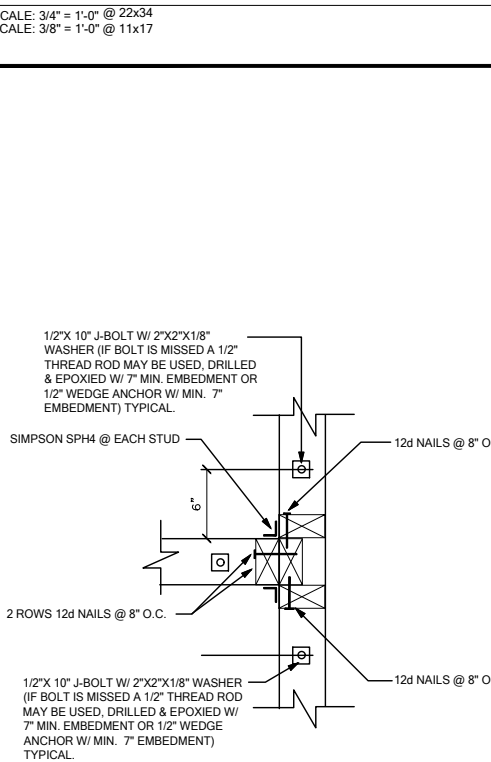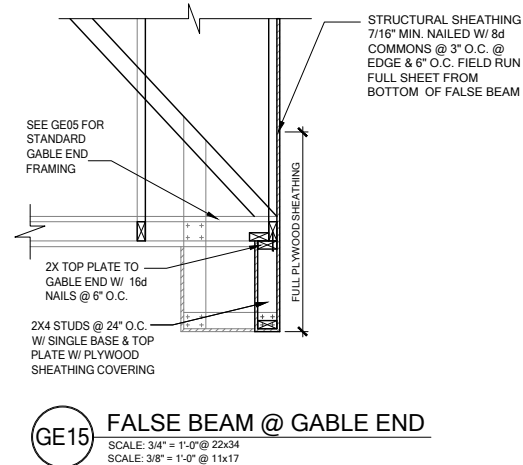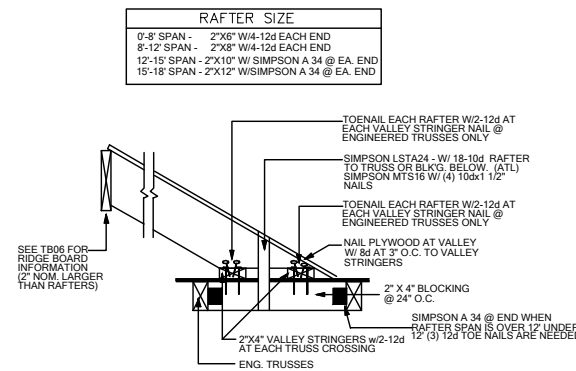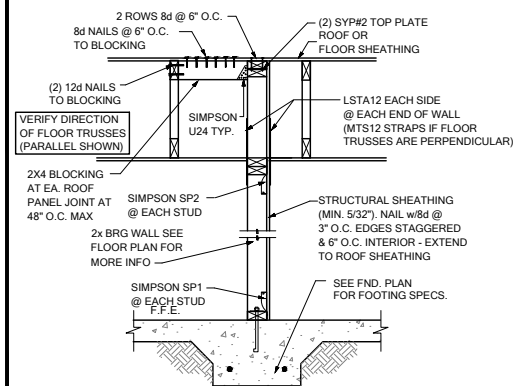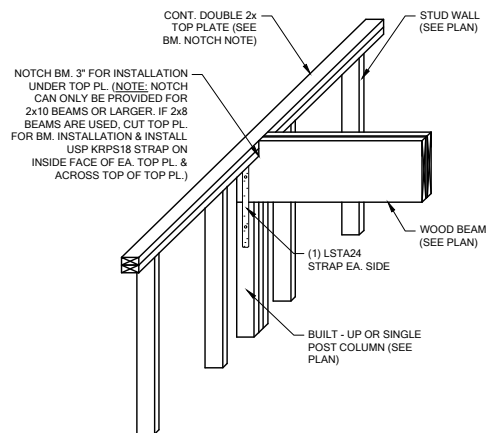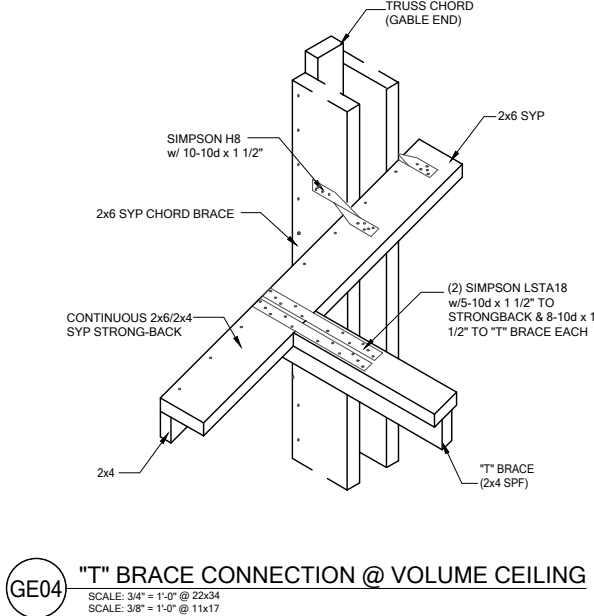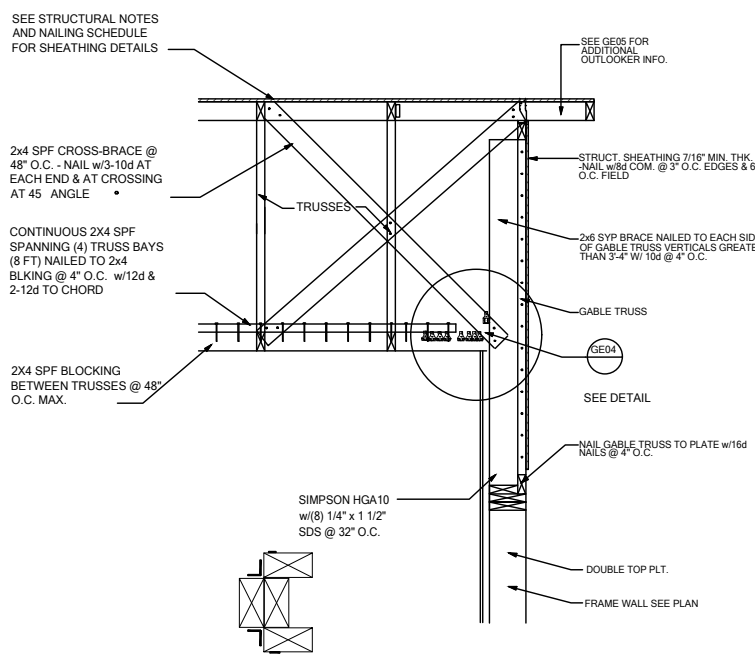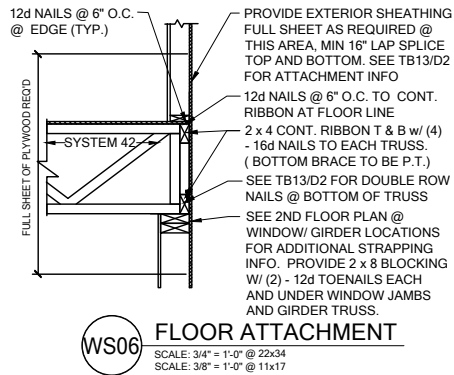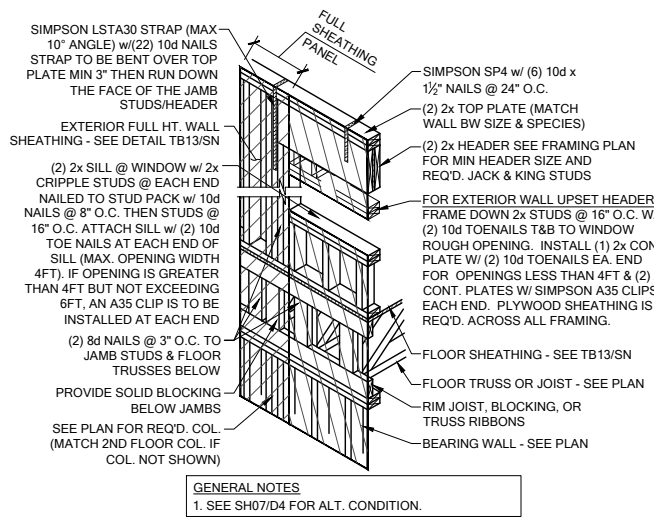


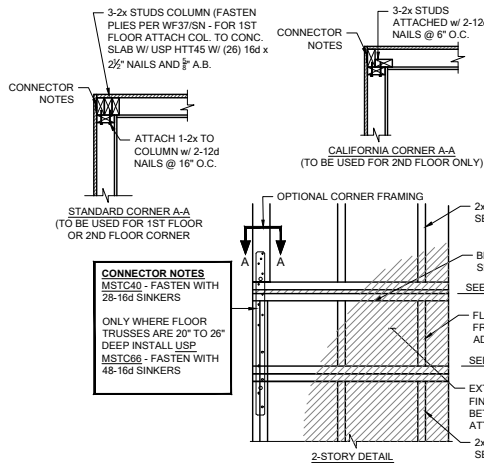


FB06 TYP. CORNER FRAMING
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

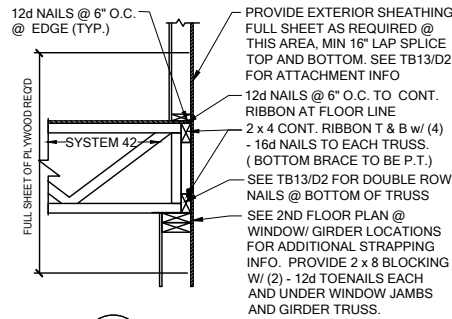


WS06 FLOOR ATTACHMENT
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

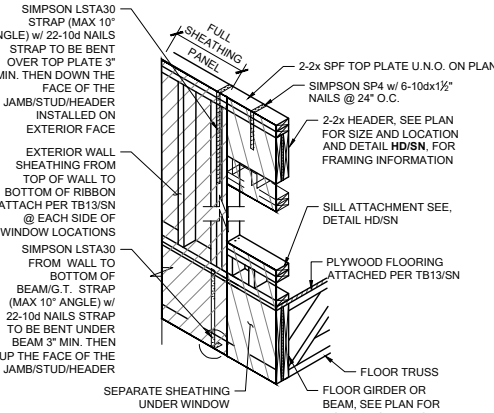


SH05 HEADER CONN. @ BEAM
SCALE: N.T.S.

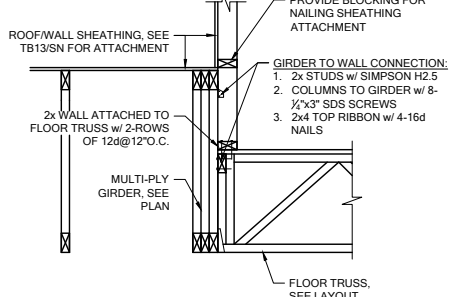


WF100 BRG. WALL OVER FLOOR SYSTEM
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

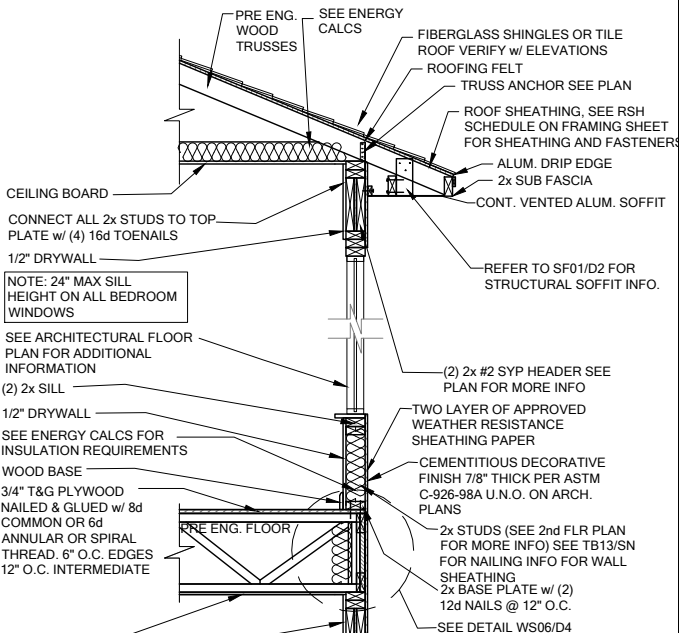


WS04 2 STORY FRAME WALL SECTION
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

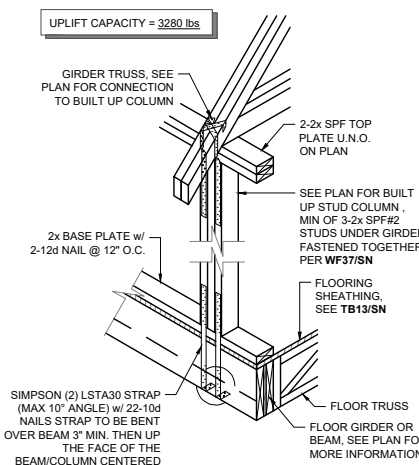


SG01 COLUMN CONN. @ BEAM
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

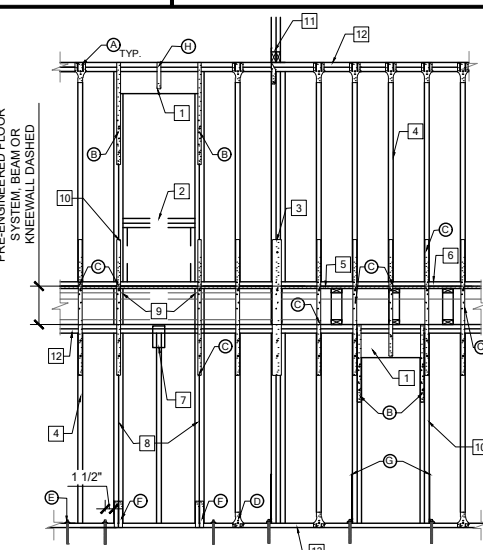


WF06 2-STORY INT. BEAR & EXT. WALL
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17




ALT. CANT. CONDITION

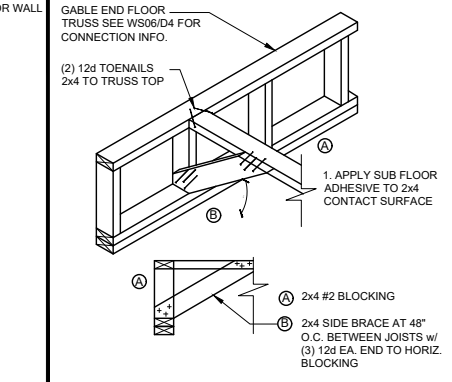


FB12 BLOCKING w/BOTTOM CHORD
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

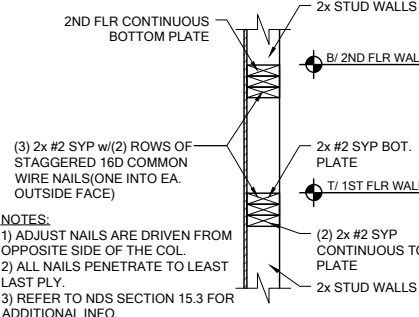


WF03 WALL SPLICE DETAILS
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

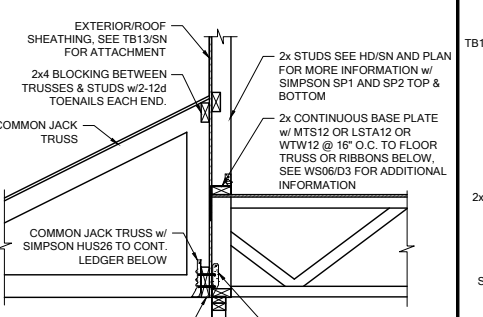


FC03 CANTILEVER FLOOR
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

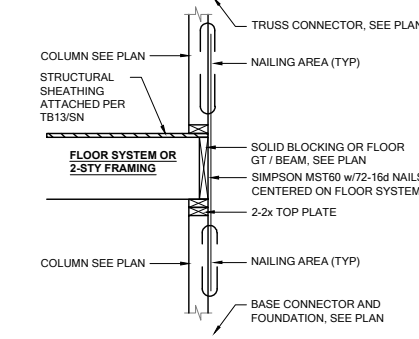


SG07 2-STORY COLUMN @ GIRDER
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17




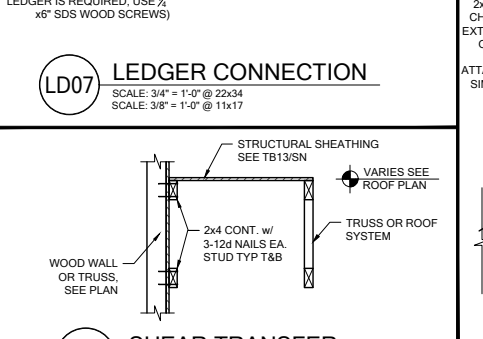


LD07 LEDGER CONNECTION
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

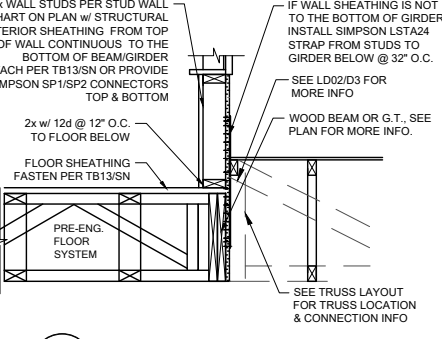

WF31 TYPICAL WALL SECTION
SCALE: 3/4" = 1'-0" @ 22x34
SCALE: 3/8" = 1'-0" @ 11x17

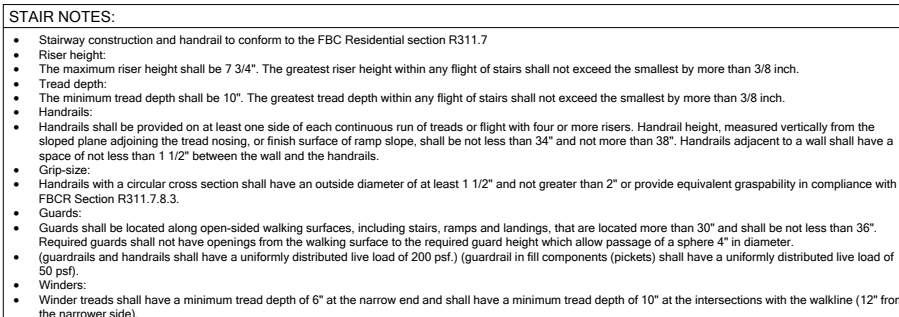



LOT 36
RESERVE AT JEWEL LAKE
419 SW JEWEL LAKE DR.
LAKE CITY, FL, 32024

PLAN NUMBER: 33911776	RELEASE DATE: 02.22.2021
-----------------------------	--------------------------------

MODEL: RADFORD

DRAWING TITLE: FLOOR FRAMING DETAILS

SHEET
NO:

D5