


FOUNDATION PROJECT
MT. CARMEL CHURCH
COLUMBIA COUNTY, FLORIDA

ENGINEER:

~~BTk~~ ENGINEERING SERVICES, INC.
3242 GARDENVIEW ROAD, COTTONDALE, FL 32431
ENGINEERING BUSINESS #0013 / BRADLEY T. KENT P.E. FLORIDA REGISTRATION #58384 / EXP. FEB. 28, 2007

AUGUST 29, 2005

AKS
8/30/05

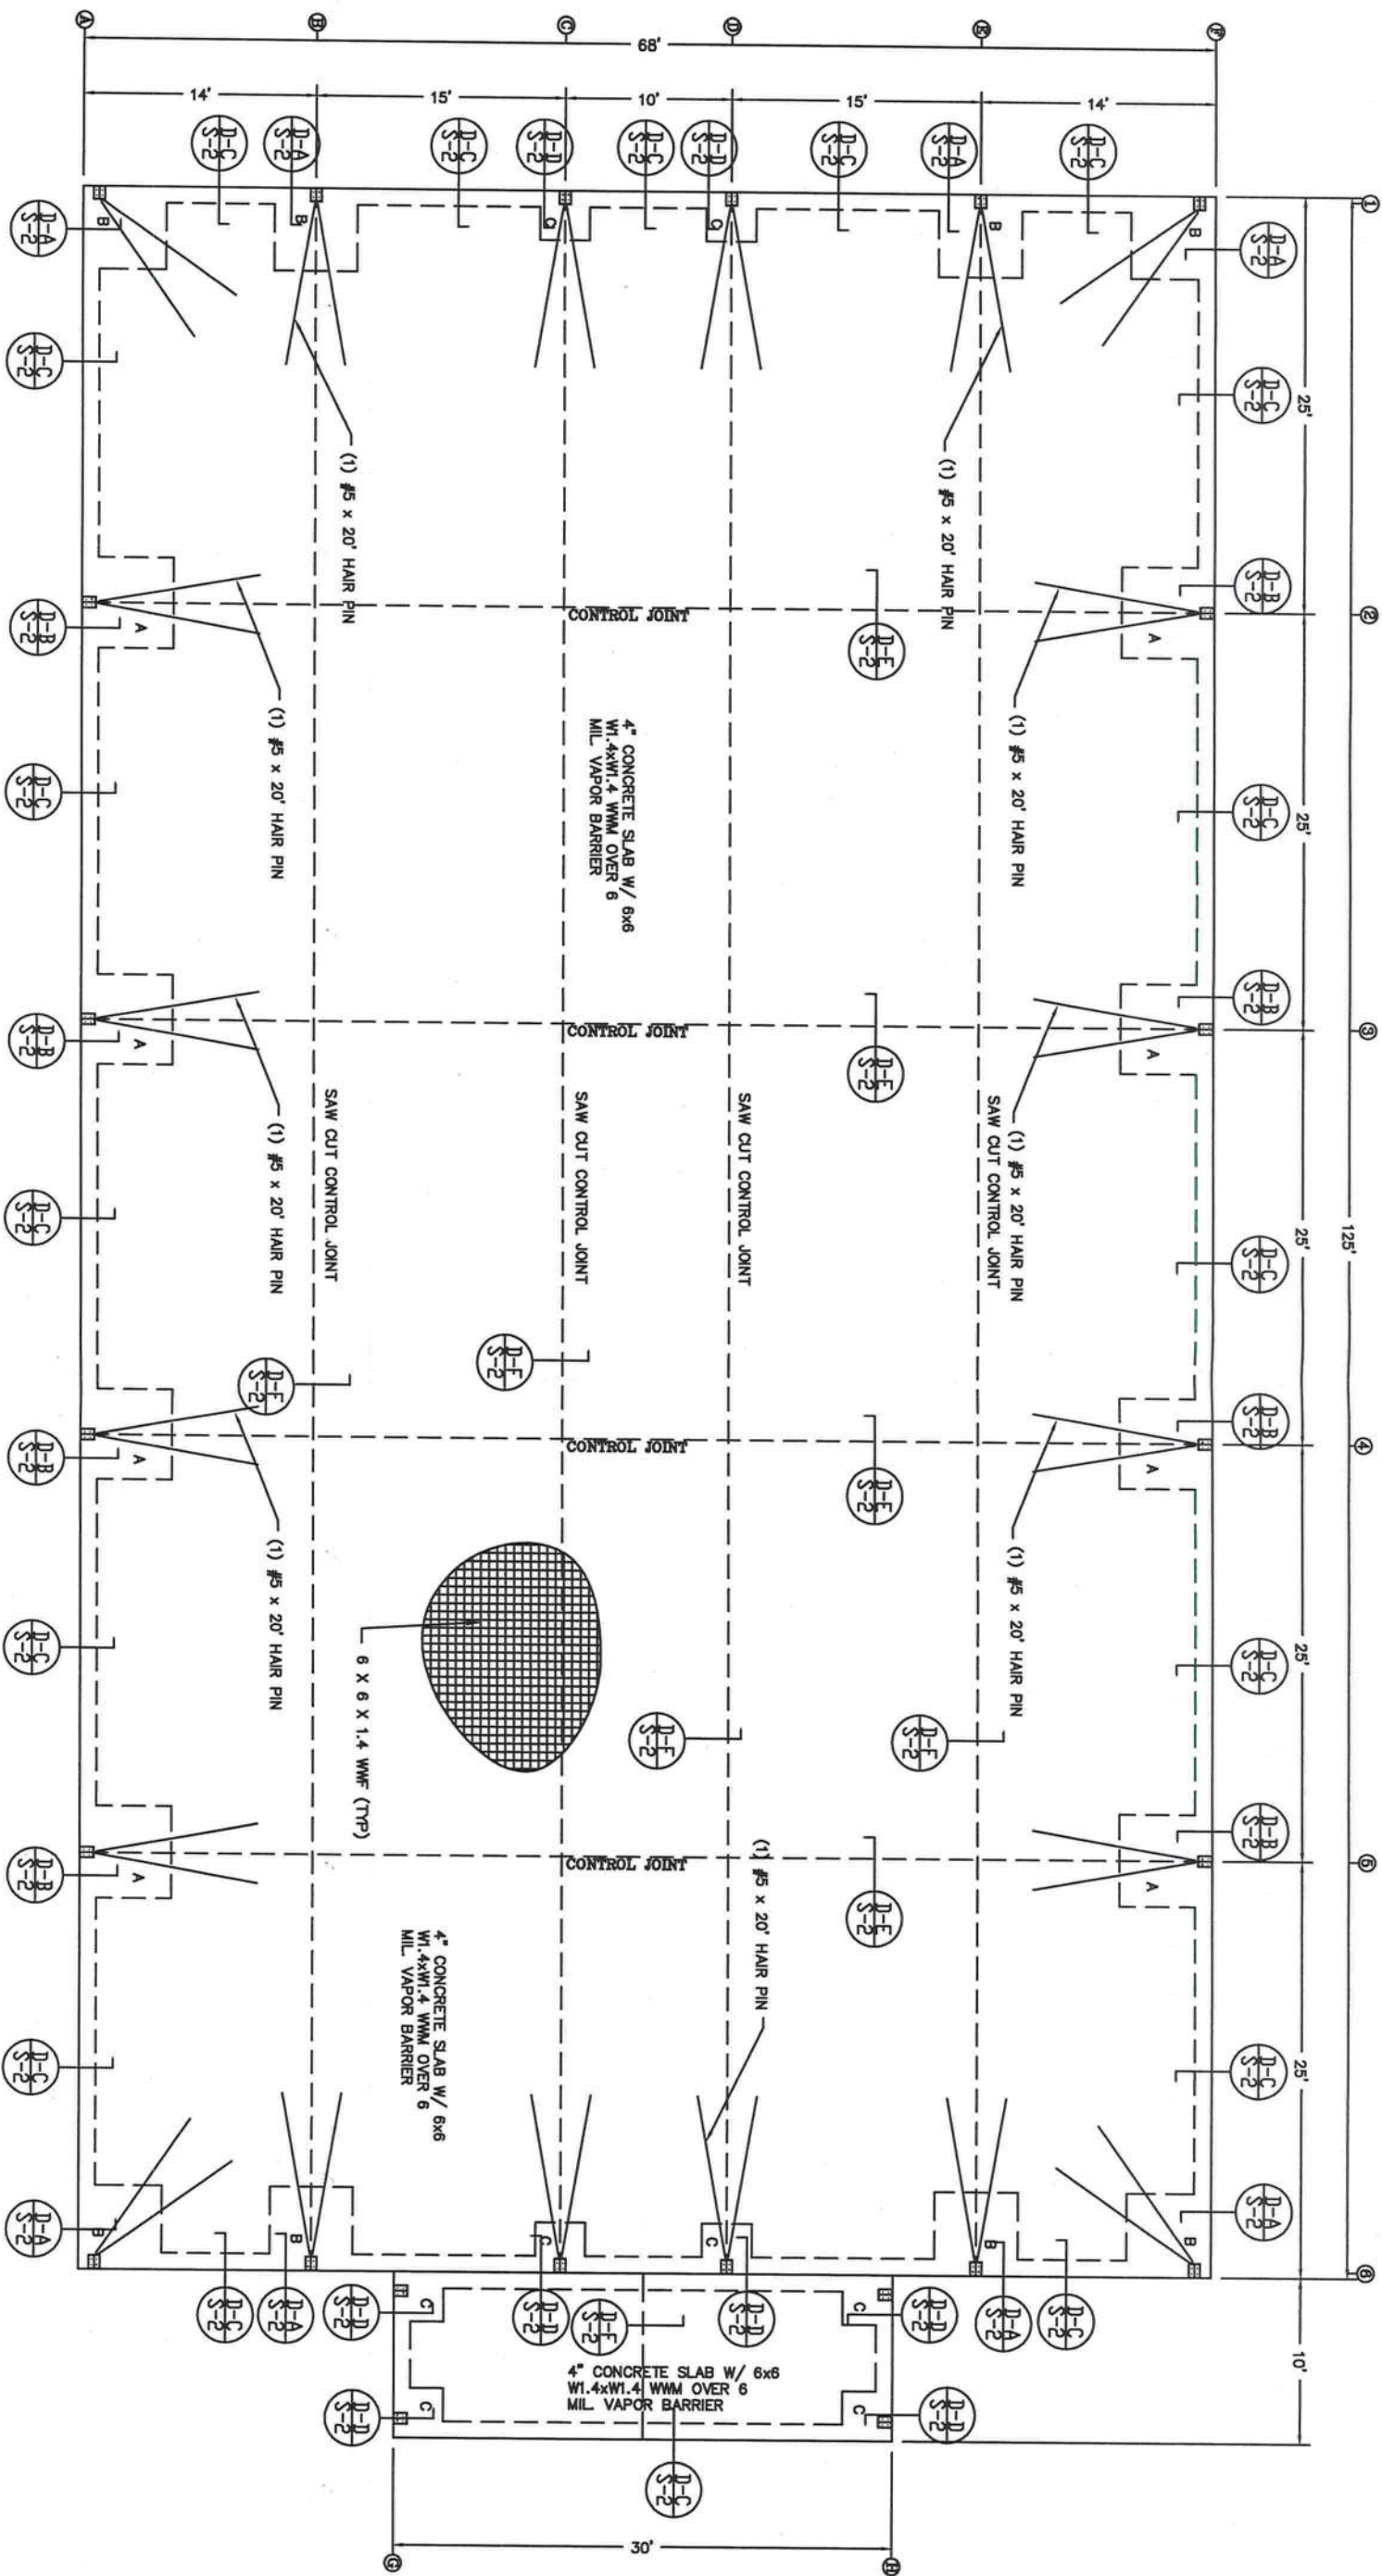

NOTE:

1. VERIFY ANCHOR BOLT SPACING WITH METAL BUILDING SUBMITTAL PRIOR TO CONSTRUCTION.
2. ALL CONCRETE SHALL BE 3000 PSI AT 28 DAYS.
3. SOIL SHALL BE COMPACTED TO 98% PROCTOR AND CAPABLE OF SUPPORTING 2000 POUNDS PER SQUARE FOOT.
4. INSTALL 6 MIL VAPOR BARRIER UNDER SLAB.
5. WVF SHALL CONFORM TO ASTM A185 AND LAP A MIN OF 12\"/>

FOOTING SCHEDULE							NOTES
MARK	LENGTH	WIDTH	DEPTH	TOP ELEV.	BOTTOM REIN.	TOP REIN.	
A	5.5	5.5	2.5	100'-0"	(6) #5 EACH WAY	N/A	
B	5	5	2.5	100'-0"	(6) #5 EACH WAY	N/A	
C	3	3	2.5	100'-0"	(4) #5 EACH WAY	N/A	

SCALE: 3/32" = 1'

MT. CARMEL CHURCH
COLUMBIA COUNTY, FLORIDA

SCALE: AS SHOWN


DATE: AUGUST 29, 2006

PAGE # S-1


CHECKED BY: *[Signature]*

DRAWN BY: *[Signature]*


BTk ENGINEERING SERVICES, INC.
3242 GARDENVIEW ROAD, COTTONDALE, FL 32431
BRADLEY T. KENT, P.E. ENGINEERING BUSINESS #0013
FLORIDA REGISTRATION #000394 EXP. FEB. 28, 2007

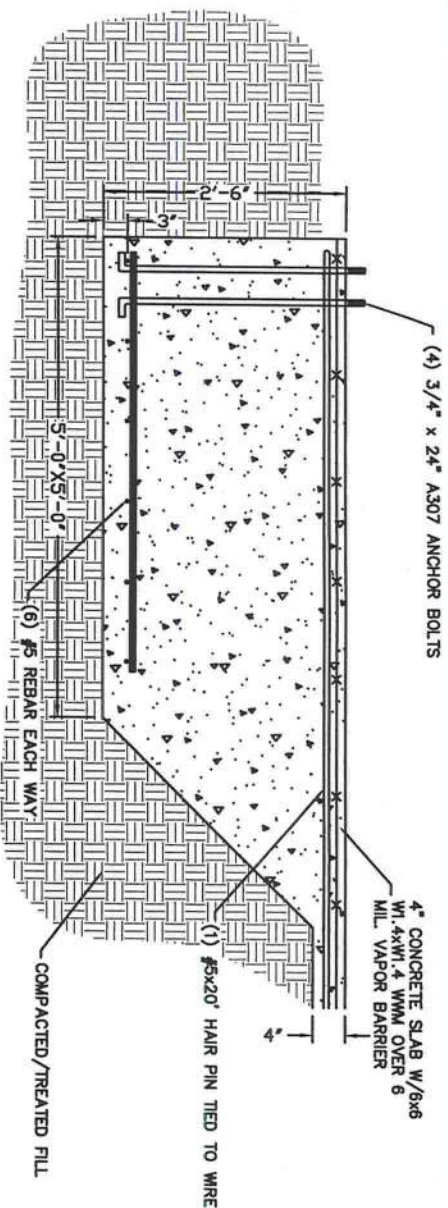


D-A DETAIL A (TYP.) (REF. A-B-E-F/1&2)
S-2 MAIN FRAME/END WALL FOOTER

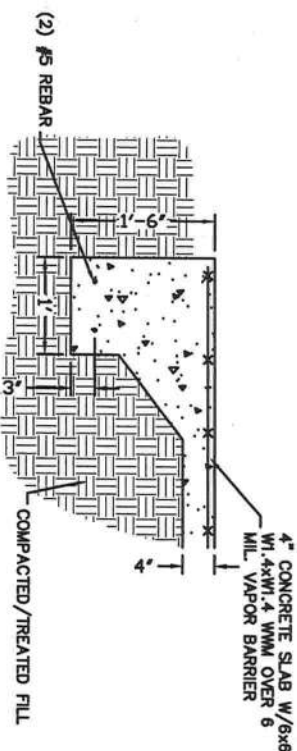


D-C DETAIL C (TYP.)
S-2 CONTINUOUS FOOTER

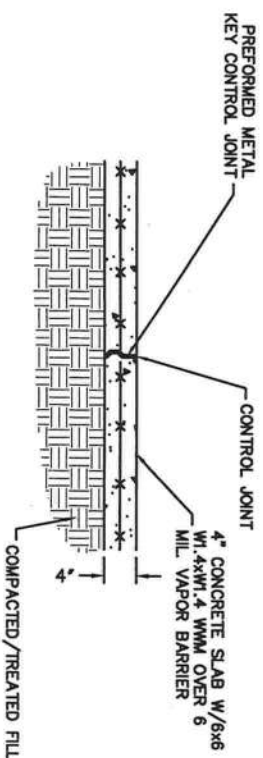


D-E DETAIL D (TYP.)
S-2 CONTROL JOINT

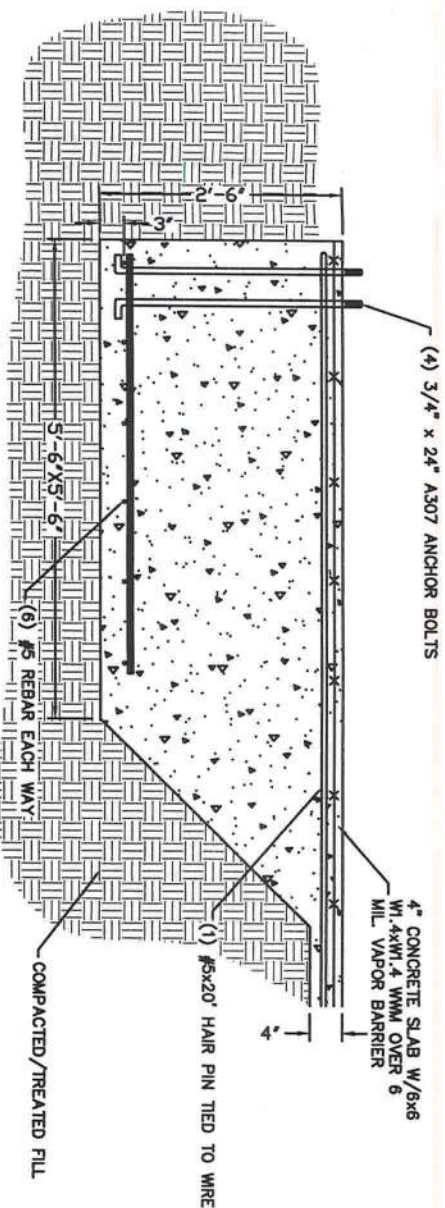

D-B DETAIL B (TYP.) (REF. A&B/2-3-4-5)
S-2 MAIN FRAME FOOTER

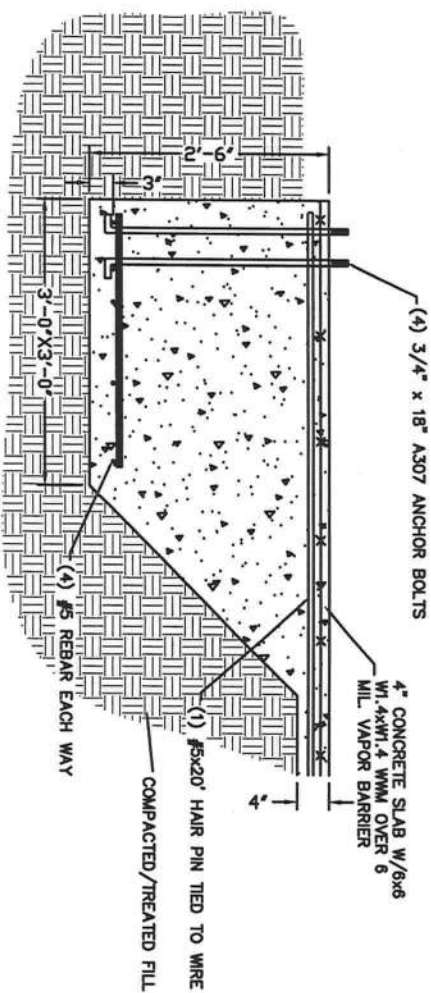

D-D DETAIL D (TYP.) (REF. G&H/6.1&6.2)
S-2 MAIN FRAME/END WALL FOOTER

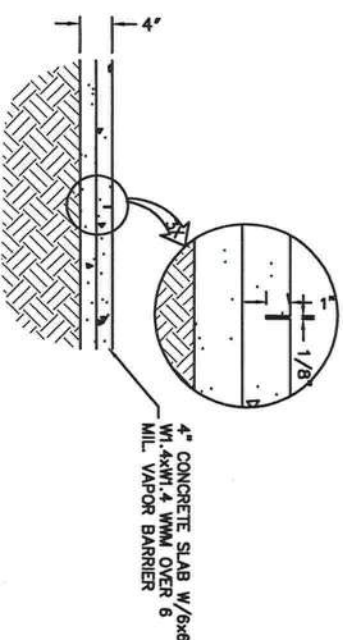

D-F DETAIL E (TYP.)
S-2 SAW CUT CONTROL JOINT

12/11/15