

Residential System Sizing Calculation

Summary

Aaron Simque Homes
Lot 144 The Preserves
Lake City, FL

Project Title:
210663 2281 Model


2021-05-10

Location for weather data: Gainesville, FL - Defaults: Latitude(29.7) Altitude(152 ft.) Temp Range(M)			
Humidity data: Interior RH (50%) Outdoor wet bulb (77F) Humidity difference(51gr.)			
Winter design temperature(TMY3 99%)	30 F	Summer design temperature(TMY3 99%)	94 F
Winter setpoint	70 F	Summer setpoint	75 F
Winter temperature difference	40 F	Summer temperature difference	19 F
Total heating load calculation	31892 Btuh	Total cooling load calculation	29043 Btuh
Submitted heating capacity	% of calc Btuh	Submitted cooling capacity	% of calc Btuh
Total (Electric Heat Pump)	109.7 35000	Sensible (SHR = 0.75)	108.1 26250
Heat Pump + Auxiliary(0.0kW)	109.7 35000	Latent	184.1 8750
		Total (Electric Heat Pump)	120.5 35000

WINTER CALCULATIONS

Winter Heating Load (for 2281 sqft)


Load component		Load	
Window total	211 sqft	2547	Btuh
Wall total	1875 sqft	6656	Btuh
Door total	74 sqft	1180	Btuh
Ceiling total	2387 sqft	2423	Btuh
Floor total	2281 sqft	11139	Btuh
Infiltration	79 cfm	3447	Btuh
Duct loss		4499	Btuh
Subtotal		31892	Btuh
Ventilation	0 cfm	0	Btuh
TOTAL HEAT LOSS		31892	Btuh

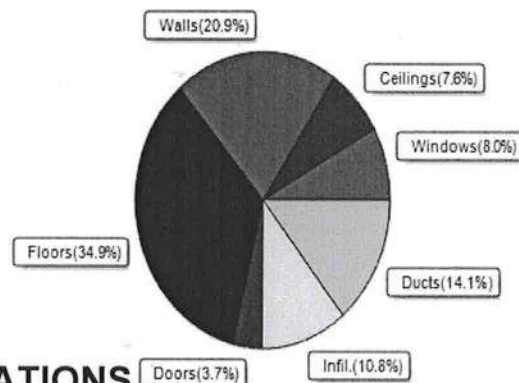

SUMMER CALCULATIONS

Summer Cooling Load (for 2281 sqft)

Load component		Load	
Window total	211 sqft	4156	Btuh
Wall total	1875 sqft	4075	Btuh
Door total	74 sqft	885	Btuh
Ceiling total	2387 sqft	3272	Btuh
Floor total		0	Btuh
Infiltration	59 cfm	1228	Btuh
Internal gain		5240	Btuh
Duct gain		5433	Btuh
Sens. Ventilation	0 cfm	0	Btuh
Blower Load		0	Btuh
Total sensible gain		24289	Btuh
Latent gain(ducts)		1116	Btuh
Latent gain(infiltration)		2038	Btuh
Latent gain(ventilation)		0	Btuh
Latent gain(internal/occupants/other)		1600	Btuh
Total latent gain		4753	Btuh
TOTAL HEAT GAIN		29043	Btuh

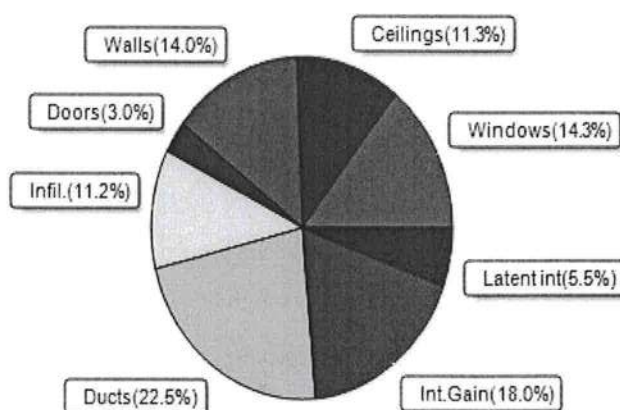

8th Edition

EnergyGauge® System Sizing
PREPARED BY: Evan Beamsley
DATE: 2021-05-10

System Sizing Calculations - Winter

Residential Load - Whole House Component Details

Aaron Simque Homes
Lot 144 The Preserves
Lake City, FL

Project Title:
210663 2281 Model
Building Type: User

2021-05-10

Reference City: Gainesville, FL (Defaults) Winter Temperature Difference: 40.0 F (TMY3 99%)

Component Loads for Whole House							
Window	Panes/Type	Frame	U	Orientation	Area(sqft)	X	Load
1	2, NFRC 0.20	Metal	0.30	N	30.0	12.0	360 Btuh
2	2, NFRC 0.20	Metal	0.30	N	53.3	12.0	640 Btuh
3	2, NFRC 0.20	Metal	0.30	E	30.0	12.0	360 Btuh
4	2, NFRC 0.20	Metal	0.30	E	8.0	12.0	96 Btuh
5	2, NFRC 0.20	Metal	0.30	E	10.0	12.0	120 Btuh
6	2, NFRC 0.20	Metal	0.30	E	15.0	12.0	180 Btuh
7	2, NFRC 0.20	Metal	0.30	S	15.0	12.0	180 Btuh
8	2, NFRC 0.20	Metal	0.30	W	15.0	12.0	180 Btuh
9	2, NFRC 0.20	Metal	0.30	W	8.3	12.0	100 Btuh
10	2, NFRC 0.20	Metal	0.30	W	5.3	12.0	64 Btuh
11	2, NFRC 0.20	Metal	0.30	W	16.0	12.0	192 Btuh
12	2, NFRC 0.25	Metal	0.35	E	5.3	14.0	75 Btuh
Window Total					211.3(sqft)		2547 Btuh
Walls	Type	Omt.	Ueff.	R-Value (Cav/Sh)	Area	X	Load
1	Frame - Wood	- Ext	(0.089)	13.0/0.0	123	3.55	437 Btuh
2	Frame - Wood	- Ext	(0.089)	13.0/0.0	129	3.55	458 Btuh
3	Frame - Wood	- Ext	(0.089)	13.0/0.0	143	3.55	507 Btuh
4	Frame - Wood	- Ext	(0.089)	13.0/0.0	502	3.55	1781 Btuh
5	Frame - Wood	- Ext	(0.089)	13.0/0.0	123	3.55	437 Btuh
6	Frame - Wood	- Ext	(0.089)	13.0/0.0	117	3.55	415 Btuh
7	Frame - Wood	- Ext	(0.089)	13.0/0.0	39	3.55	138 Btuh
8	Frame - Wood	- Adj	(0.089)	13.0/0.0	129	3.55	458 Btuh
9	Frame - Wood	- Adj	(0.089)	13.0/0.0	162	3.55	576 Btuh
10	Frame - Wood	- Ext	(0.089)	13.0/0.0	408	3.55	1450 Btuh
Wall Total					1875(sqft)		6656 Btuh
Doors	Type	Storm	Ueff.		Area	X	Load
1	Insulated - Exterior,	n	(0.400)		16	16.0	256 Btuh
2	Insulated - Exterior,	n	(0.400)		16	16.0	256 Btuh
3	Insulated - Exterior,	n	(0.400)		24	16.0	384 Btuh
4	Insulated - Garage,	n	(0.400)		18	16.0	284 Btuh
Door Total					74(sqft)		1180Btuh
Ceilings	Type/Color/Surface		Ueff.	R-Value	Area	X	Load
1	Vented Attic/D/Shing		(0.025)	38.0/0.0	2387	1.0	2423 Btuh
Ceiling Total					2387(sqft)		2423Btuh
Floors	Type		Ueff.	R-Value	Size	X	Load
1	Slab On Grade		(1.180)	0.0	236.0 ft(perim.)	47.2	11139 Btuh
Floor Total					2281 sqft		11139 Btuh
Envelope Subtotal:							23946 Btuh

Manual J Winter Calculations

Residential Load - Component Details (continued)

Aaron Simque Homes
Lot 144 The Preserves
Lake City, FL

Project Title:
210663 2281 Model
Building Type: User

2021-05-10

Infiltration	Type Natural	Wholehouse ACH 0.23	Volume(cuft) 20529	Wall Ratio 1.00	CFM= 78.7	3447 Btuh
Duct load	Average sealed, R6.0, Supply(Att), Return(Att) (DLM of 0.164)					4499 Btuh
All Zones	Sensible Subtotal All Zones					31892 Btuh

WHOLE HOUSE TOTALS

Totals for Heating	Subtotal Sensible Heat Loss Ventilation Sensible Heat Loss Total Heat Loss	31892 Btuh 0 Btuh 31892 Btuh
---------------------------	--	------------------------------------

EQUIPMENT

1. Electric Heat Pump	#	35000 Btuh
-----------------------	---	------------

Key: Window types - NFRC (Requires U-Factor and Shading coefficient(SHGC) of glass as numerical values)
or - Glass as 'Clear' or 'Tint' (Uses U-Factor and SHGC defaults)
U - (Window U-Factor)
HTM - (ManualJ Heat Transfer Multiplier)



Version 8

System Sizing Calculations - Summer

Residential Load - Whole House Component Details

Aaron Simque Homes
Lot 144 The Preserves
Lake City, FL

Project Title:
210663 2281 Model

2021-05-10

Reference City: Gainesville, FL

Temperature Difference: 19.0F(TMY3 99%)

Humidity difference: 51gr.

Component Loads for Whole House

Window	Type*						Overhang		Window Area(sqft)			HTM		Load	
	Panes	SHGC	U	InSh	IS	Ornt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded		
1	2 NFRC	0.20, 0.30	No	No	N		1.5ft	1.5ft	30.0	0.0	30.0	10	19	574	Btuh
2	2 NFRC	0.20, 0.30	No	No	N		15.8f	1.0ft	53.3	0.0	53.3	10	19	1021	Btuh
3	2 NFRC	0.20, 0.30	No	No	E		1.5ft	1.5ft	30.0	0.0	30.0	10	19	574	Btuh
4	2 NFRC	0.20, 0.30	No	No	E		1.5ft	4.8ft	8.0	0.0	8.0	10	19	153	Btuh
5	2 NFRC	0.20, 0.30	No	No	E		1.5ft	1.5ft	10.0	0.0	10.0	10	19	191	Btuh
6	2 NFRC	0.20, 0.30	No	No	E		1.5ft	1.5ft	15.0	0.0	15.0	10	19	287	Btuh
7	2 NFRC	0.20, 0.30	No	No	S		1.5ft	1.5ft	15.0	2.9	12.1	10	20	271	Btuh
8	2 NFRC	0.20, 0.30	No	No	W		1.5ft	1.5ft	15.0	2.9	12.1	10	20	271	Btuh
9	2 NFRC	0.20, 0.30	No	No	W		1.5ft	0.5ft	8.3	8.3	0.0	10	20	83	Btuh
10	2 NFRC	0.20, 0.30	No	No	W		1.5ft	1.5ft	5.3	3.9	1.5	10	20	68	Btuh
11	2 NFRC	0.20, 0.30	No	No	W		1.5ft	1.5ft	16.0	3.9	12.1	10	20	281	Btuh
12	2 NFRC	0.25, 0.35	No	No	E		1.5ft	1.5ft	5.3	0.0	5.3	12	23	125	Btuh
	Excursion													257	Btuh
	Window Total								211 (sqft)					4156 Btuh	
Walls	Type					U-Value	R-Value	Area(sqft)			HTM		Load		
							Cav/Sheath								
1	Frame - Wood - Ext					0.09	13.0/0.0	123.0			2.3		278 Btuh		
2	Frame - Wood - Ext					0.09	13.0/0.0	129.0			2.3		292 Btuh		
3	Frame - Wood - Ext					0.09	13.0/0.0	142.7			2.3		323 Btuh		
4	Frame - Wood - Ext					0.09	13.0/0.0	501.7			2.3		1135 Btuh		
5	Frame - Wood - Ext					0.09	13.0/0.0	123.0			2.3		278 Btuh		
6	Frame - Wood - Ext					0.09	13.0/0.0	117.0			2.3		265 Btuh		
7	Frame - Wood - Ext					0.09	13.0/0.0	39.0			2.3		88 Btuh		
8	Frame - Wood - Adj					0.09	13.0/0.0	129.0			1.7		218 Btuh		
9	Frame - Wood - Adj					0.09	13.0/0.0	162.2			1.7		274 Btuh		
10	Frame - Wood - Ext					0.09	13.0/0.0	408.3			2.3		924 Btuh		
	Wall Total								1875 (sqft)					4075 Btuh	
Doors	Type							Area (sqft)			HTM		Load		
1	Insulated - Exterior							16.0			12.0		192 Btuh		
2	Insulated - Exterior							16.0			12.0		192 Btuh		
3	Insulated - Exterior							24.0			12.0		288 Btuh		
4	Insulated - Garage							17.8			12.0		213 Btuh		
	Door Total								74 (sqft)					885 Btuh	
Ceilings	Type/Color/Surface					U-Value	R-Value	Area(sqft)			HTM		Load		
1	Vented Attic/DarkShingle					0.025	38.0/0.0	2387.0			1.37		3272 Btuh		
	Ceiling Total								2387 (sqft)					3272 Btuh	
Floors	Type						R-Value	Size			HTM		Load		
1	Slab On Grade						0.0	2281 (ft-perimeter)			0.0		0 Btuh		
	Floor Total								2281.0 (sqft)					0 Btuh	
	Envelope Subtotal:													12388 Btuh	

Manual J Summer Calculations

Residential Load - Component Details (continued)

Aaron Simque Homes
Lot 144 The Preserves
Lake City, FL

Project Title: Climate:FL_GAINESVILLE_REGIONAL_A
210663 2281 Model

2021-05-10

Infiltration	Type Natural	Average ACH 0.17	Volume(cuft) 20529	Wall Ratio 1	CFM= 59.0	Load 1228 Btuh
Internal gain		Occupants 8	Btuh/occupant X 230	Appliance +	3400	Load 5240 Btuh
					Sensible Envelope Load:	18856 Btuh
Duct load	Average sealed, Supply(R6.0-Attic), Return(R6.0-Attic)				(DGM of 0.288)	5433 Btuh
					Sensible Load All Zones	24289 Btuh

Manual J Summer Calculations

Residential Load - Component Details (continued)

Aaron Simque Homes
Lot 144 The Preserves
Lake City, FL

Project Title:
210663 2281 Model

Climate: FL_GAINESVILLE_REGIONAL_A

2021-05-10

WHOLE HOUSE TOTALS

Whole House Totals for Cooling	Sensible Envelope Load All Zones	18856 Btuh
	Sensible Duct Load	5433 Btuh
	Total Sensible Zone Loads	24289 Btuh
	Sensible ventilation	0 Btuh
	Blower	0 Btuh
	Total sensible gain	24289 Btuh
	Latent infiltration gain (for 51 gr. humidity difference)	2038 Btuh
	Latent ventilation gain	0 Btuh
	Latent duct gain	1116 Btuh
	Latent occupant gain (8.0 people @ 200 Btuh per person)	1600 Btuh
	Latent other gain	0 Btuh
	Latent total gain	4753 Btuh
	TOTAL GAIN	29043 Btuh

EQUIPMENT

1. Central Unit	#	35000 Btuh
-----------------	---	------------

*Key: Window types (Panels - Number and type of panes of glass)
(SHGC - Shading coefficient of glass as SHGC numerical value)
(U - Window U-Factor)
(InSh - Interior shading device: none(No), Blinds(B), Draperies(D) or Roller Shades(R))
- For Blinds: Assume medium color, half closed
For Draperies: Assume medium weave, half closed
For Roller shades: Assume translucent, half closed
(IS - Insect screen: none(N), Full(F) or Half(½))
(Ornt - compass orientation)



Version 8