



STATE OF FLORIDA
DEPARTMENT OF HEALTH
ONSITE SEWAGE TREATMENT AND DISPOSAL
SYSTEM
APPLICATION FOR CONSTRUCTION PERMIT

PERMIT NO. 19-0684
DATE PAID: 9/10/19
FEE PAID: 310.00
RECEIPT #: 432737
9/14/20 Re-inspect \$50.00 fee

APPLICATION FOR:

☒ New System ☐ Existing System ☐ Holding Tank ☐ Innovative
☐ Repair ☐ Abandonment ☐ Temporary ☐

APPLICANT: Janet Johnston

AGENT: ROCKY FORD, A & B CONSTRUCTION

TELEPHONE: 386-497-2311

MAILING ADDRESS: 546 SW Dortch Street, FT. WHITE, FL, 32038

TO BE COMPLETED BY APPLICANT OR APPLICANT'S AUTHORIZED AGENT. SYSTEMS MUST BE CONSTRUCTED BY A PERSON LICENSED PURSUANT TO 489.105(3)(m) OR 489.552, FLORIDA STATUTES. IT IS THE APPLICANT'S RESPONSIBILITY TO PROVIDE DOCUMENTATION OF THE DATE THE LOT WAS CREATED OR PLATTED (MM/DD/YY) IF REQUESTING CONSIDERATION OF STATUTORY GRANDFATHER PROVISIONS.

PROPERTY INFORMATION

LOT: 2 BLOCK: E SUB: Suwannee Valley Estates PLATTED: _____

PROPERTY ID #: 22-2S-16-01720-002 ZONING: _____ I/M OR EQUIVALENT: ☒ Y / ☐ N

PROPERTY SIZE: .625 ACRES WATER SUPPLY: ☒ PRIVATE PUBLIC ☐ <=2000GPD ☐ >2000GPD

IS SEWER AVAILABLE AS PER 381.0065, FS? ☒ Y / ☐ N DISTANCE TO SEWER: NA FT

PROPERTY ADDRESS: 204 NW Sparr Lane Lake City FL

DIRECTIONS TO PROPERTY: 41 North Left on NW Sparr Lane 4th lot on Left

BUILDING INFORMATION

☒ RESIDENTIAL ☐ COMMERCIAL

Unit No	Type of Establishment	No. of Bedrooms	Building Area Sqft	Commercial/Institutional System Design Table 1, Chapter 64E-6, FAC
---------	-----------------------	-----------------	--------------------	--

1	SF Residential	3	1227	
---	----------------	---	------	--

2				
---	--	--	--	--

3				
---	--	--	--	--


☐ Floor/Equipment Drains ☐ Other (Specify) _____

SIGNATURE: Rocky D7 DATE: 9/5/2019

10/10/10

10/10/10

LOT 2 Block E
3450 SW Valley Es

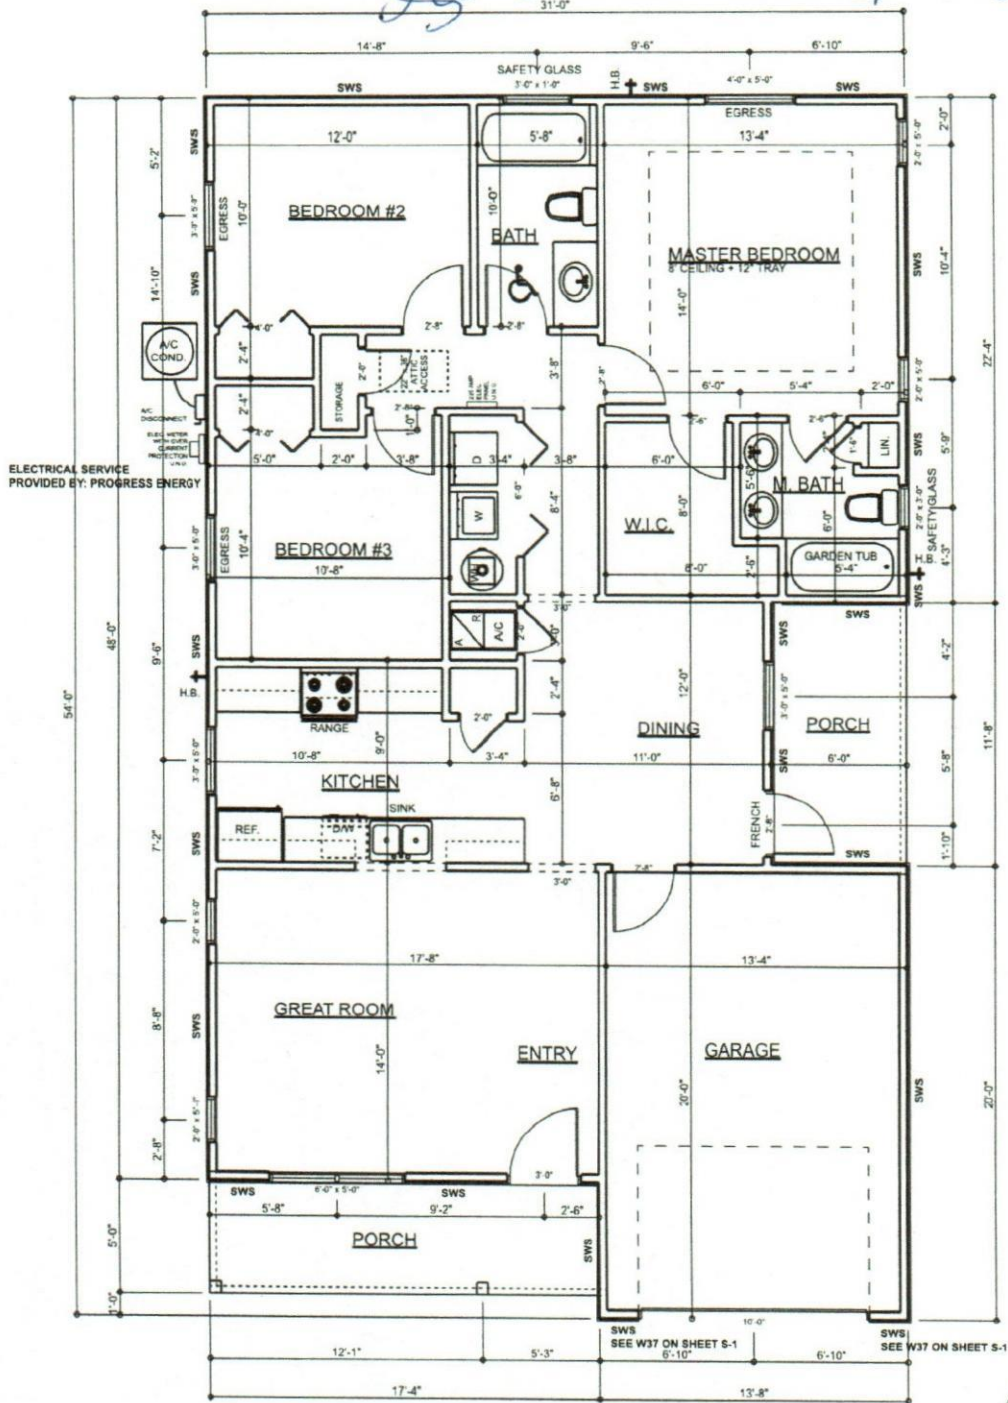

FLOOR PLAN

SCALE: 1/4" = 1'-0"

NOTE: ALL CEILING HEIGHTS TO BE 8'-0" UNLESS OTHERWISE NOTED
SWS = SHEARWALL SEGMENTS

1. The private garage shall be separated from the dwelling unit and its attic area by means of a minimum 1/2" (12.7 mm) gypsum board applied to the garage side. Garages between habitable rooms shall be separated from all habitable rooms above by not less than 5/8" thick Type X gypsum board or equivalent. Door openings between a private garage and the dwelling unit shall be equipped with either solid wood doors, or solid or honeycomb core steel doors not less than 1 3/8" (36 mm) thick, or doors in compliance with Section F15.2.3. Openings from a private garage directly into a room used for sleeping purposes shall not be permitted.
2. Ducts in a private garage and ducts penetrating the walls or ceilings separating the dwelling unit from the garage shall be constructed of a minimum 0.019-inch (0.48 mm) sheet steel and shall have no openings into the garage.
3. A separation is not required between a Group R-3 and U-1 airport provided the airport is entirely open on two or more sides and there are not enclosed areas above.

AREA SUMMARY

LIVING AREA	1227	S. F.
GARAGE AREA	273	S. F.
PORCH AREA	157	S. F.
TOTAL AREA	1657	S. F.

Roddy D 7
9-11-19
J. Johnston

STATE OF FLORIDA
DEPARTMENT OF HEALTH
APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT


Permit Application Number _____

J. Johnston

PART II - SITEPLAN

Revised

Scale: 1 inch = 40 feet.

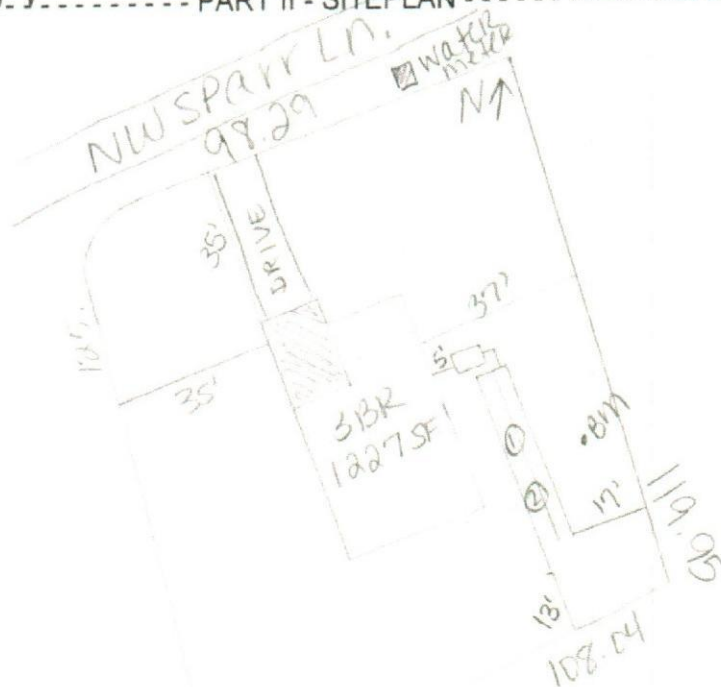

Notes: _____

Site Plan submitted by: Randy D7-D

Plan Approved X Not Approved _____

By [Signature] **Columbia CHD**

MASTER CONTRACTOR

Date 9/11/20

County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT

