

Congratulations on designing your building! Our goal is to exceed your expectations of our service and product. If you have immediate questions or concerns, please contact us.

All frame work is constructed with galvanized steel metal

64



**Viking Steel Structures**  
37830  
(877)261-3287  
sales@vikingsteelstructures.com


Customer Order - **Oct 7, 2022**

Ship To			
Name Pastor Donathan Shaw		Order #	
Install Address 308 SW Callaway dr			
City Lake City		State FL	Zip Code 32055
Email d25shaw266@gmail.com		Phone # 3866232963	Mobile #
Building Info	Size	Color	Anchoring & Site Preparation
Style: Commercial (32' to 60' Wide)	$\frac{40'}{\text{Width}} \times \frac{100'}{\text{Length}} \times \frac{14'}{\text{Leg Height}}$	Roof King Blue	Installation Surface: Concrete
Roof Style: Vertical Style		Trim: King Blue	Engineer Default 170 MPH
Gauge: 14-Gauge Framing		Gable End Wall P Beige	Certified: Certified
Leg Style: Ladder Legs		Side Wall P Beige	
Brace: Standard Brace			





**Design Link & Notes**  
Contact me I'm ready to buy. Contact me about next steps.

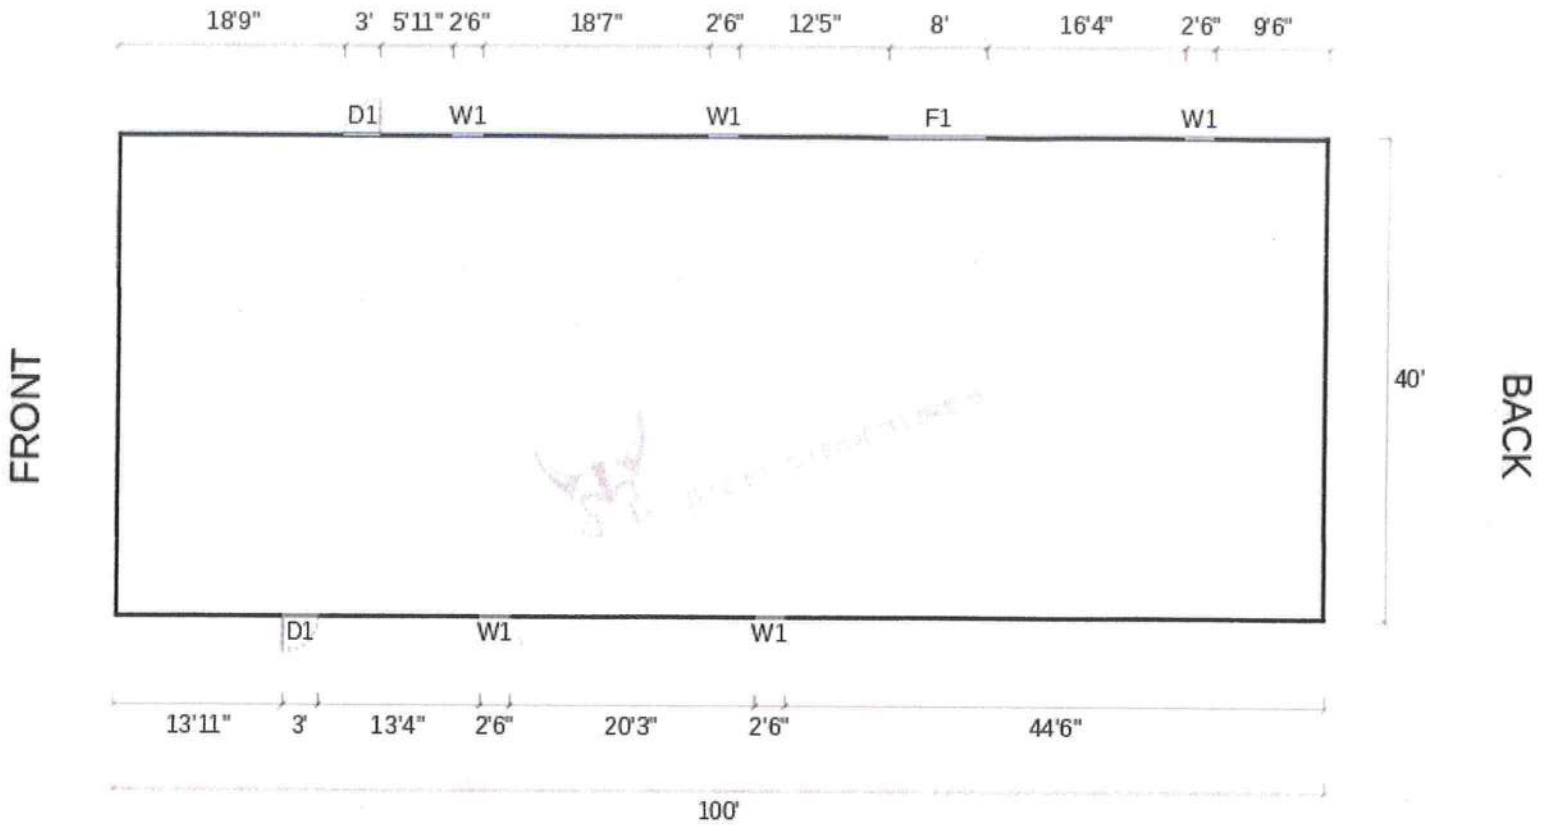Building Images		
Perspective View	Front	Left Side
Right Side	Back	

# LEFT SIDE



# RIGHT SIDE

SYMBOL LEGEND			
	Walk-In Door (36x80)		30W x 30H Windows
	Frameout - Custom Size		Closed Wall

The information below is an estimate only. Final pricing - including pricing adjustments, discounts, delivery, and taxes - will be provided with final quote prior to purchase.

Section	Description	Quantity
<b>Structure Details</b>		
	Style: Commercial (32' to 60' Wide)	1
	Base Price: 40'x100'	1
	Installation Surface: Concrete	1
	Roof: King Blue	1
	Trim: King Blue	1
	Gable End Wall: P Beige	1
	Side Wall: P Beige	1
	Roof Style: Vertical Style	1
	Roof Pitch: 3 / 12	1
	Trusses: Certified 140mph	1
	Leg Style: Ladder Legs	1
	Gauge: 14-Gauge Framing	1
	Brace: Standard Brace	1
	Engineer Certified: Default 170 MPH Certified	1
	Leg Height: 14'	1
	Left Side: Fully Enclosed	1
	Left Side Siding: Vertical	1
	Right Side: Fully Enclosed	1
	Right Side Siding: Vertical	1
	Front End: Fully Enclosed	1
	Front End Siding: Vertical	1
	Back End: Fully Enclosed	1
	Back End Siding: Vertical	1
<b>Doors &amp; Ramps</b>		
	Walk-In Door (36x80)	2
<b>Windows &amp; Accessories</b>		
	30W x 30H Windows	5
<b>Frameouts</b>		
	Frameout - Custom Size (8'x8')	1
	Corner Style: Square (Traditional)	1
<b>Additions and Adjustments</b>		
	*Customer Required to Provide 7k Lull Telescopic Lift	1
<b>Additional Fees</b>		
All	Double Anchoring Included with Certified Buildings	1

#### Signature

Customer Signature:	
Date:	
Delivery Date (may vary depending on weather):	
Delivery Notes:	

Dealer or Manufacturer Signature:	
Date:	



# Concrete Info

## Concrete Notch Design

### IMPORTANT INFO

-The minimum requirement for the concrete slab would be the base size of your building, so a 30'W x 40'L unit will need a 30'W x 40'L pad that's at least 4" thick, any thicker would be up to you or your County. We also recommend an additional 6" lip on all sides that's at least 2" thinner than the main pad. This is to seal the bottom base rail to keep any debris/water from entering the unit.

- The slab must be no more than 3" Off Level.

-Always check with local permitting about foundation requirements. Local codes MUST be followed if permits are needed.

- If you are needing as Built Engineered Drawings, or Site Specifics, let the County know if you are planning to do a 6" Lip (also known as Notch or Rats Ledge). The Engineered Drawings will show foundation plans.




- If you are using Engineered Drawings, share the foundation requirements with the Concrete Contractor.

- Do NOT pour your pad until you get approval from the County if you are pulling a permit. There have been some cases where the County does not approve of the structure or the size of it.


### Benefits of Concrete Notch

This is the most effective way of keeping water out of the building.

The rats ledge design allows for the panels of the metal building to be between the concrete slab.

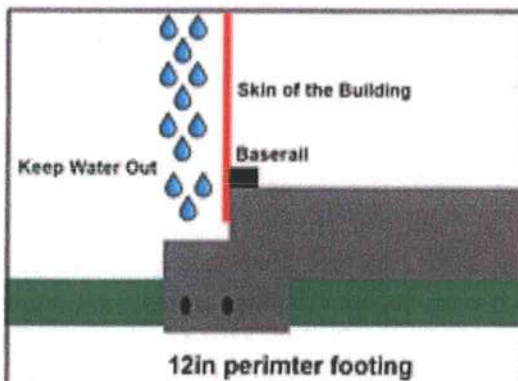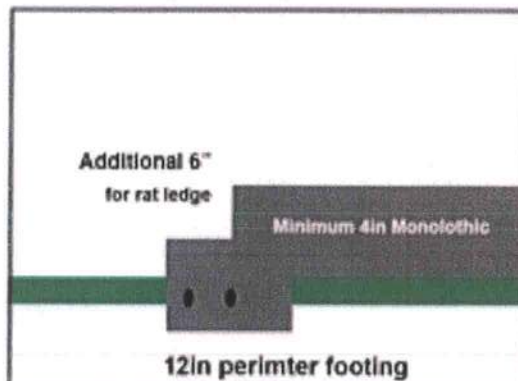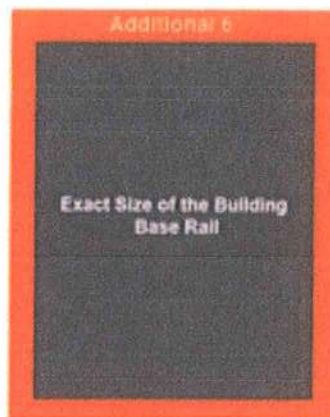

If footers are needed, we recommend a minimum size of 1' x 1'

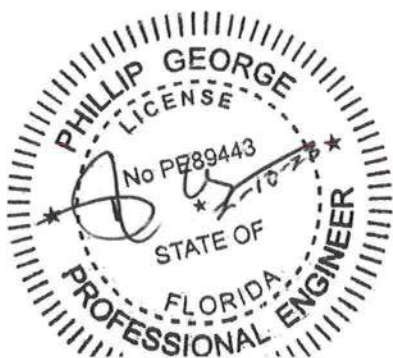

You can avoid the 6" Lip altogether if you buy some silicone/caulk and ask the installers to seal the bottom base rail for you (additional charges may apply).



37830  
(877)261-3287  
sales@vikingsteelstructures.com

Customer Order - Oct 7, 2022

Name Pastor Donathan Shaw		Order #	
Install Address 308 SW Callaway dr			
City Lake City	State FL	Zip Code 32055	
Email d25shaw266@gmail.com	Phone # 3866232963	Mobile #	


Style: Commercial (32' to 60' Wide)	Roof King Blue <input checked="" type="checkbox"/>	Installation Surface: Concrete
Roof Style: Vertical Style	Trim: King Blue <input checked="" type="checkbox"/>	Engineer Certified: Default 170 MPH Certified
Gauge: 14-Gauge Framing	Gable End Wall P Beige <input type="checkbox"/>	
Leg Style: Ladder Legs	Side Wall P Beige <input type="checkbox"/>	
Brace: Standard Brace		

40' X 100' X 14'  
Width Length Leg Height

Contact me I'm ready to buy. Contact me about next steps.



Perspective View

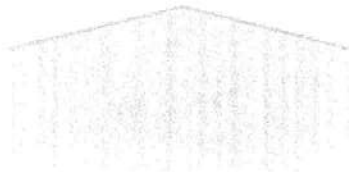

Front




Left Side



Right Side



Back

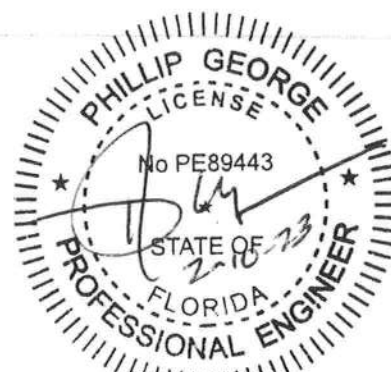

18'9" 3' 5'11" 2'6" 18'7" 2'6" 12'5" 8' 16'4" 2'6" 9'6"

D1 W1 W1 F1 W1

FRONT

40'

BACK

D1 W1 W1  
13'11" 3' 13'4" 2'6" 20'3" 2'6" 44'6"

100'

RIGHT SIDE

#### SYMBOL LEGEND

 <b>D1</b>	<b>Walk-In Door (36x80)</b>	 <b>W1</b>	<b>30W x 30H Windows</b>
 <b>F1</b>	<b>Frameout - Custom Size</b>		<b>Closed Wall</b>

The information below is an estimate only. Final pricing - including pricing adjustments, discounts, delivery, and taxes - will be provided with final quote prior to purchase.



**Roof: King Blue**

Trim: King Blue  
Gable End Wall: P Beige  
Side Wall: P Beige  
Roof Style: Vertical Style  
Roof Pitch: 3 / 12  
Trusses: Certified 140mph  
Leg Style: Ladder Legs  
Gauge: 14-Gauge Framing  
Brace: Standard Brace  
Engineer Certified: Default 170 MPH Certified  
Leg Height: 14'  
Left Side: Fully Enclosed  
Left Side Siding: Vertical  
Right Side: Fully Enclosed  
Right Side Siding: Vertical  
Front End: Fully Enclosed  
Front End Siding: Vertical  
Back End: Fully Enclosed  
Back End Siding: Vertical

1  
1  
1  
1  
1  
1  
1  
1  
1  
1  
1  
1  
1  
1  
1  
1  
1  
1  
1

**Doors & Ramps**

Walk-In Door (36x80)

2

**Windows & Accessories**

30W x 30H Windows

5

**Frameouts**

Frameout - Custom Size (8'x8')  
Corner Style: Square (Traditional)

1  
1

**Additions and Adjustments**

\*Customer Required to Provide 7k Lull Telescopic Lift

1

**Additional Fees**

Double Anchoring Included with Certified Buildings

1

All

Customer Signature:


Date:

Delivery Date (may vary depending on weather):

Delivery Notes:

Dealer or Manufacturer Signature:

Date:

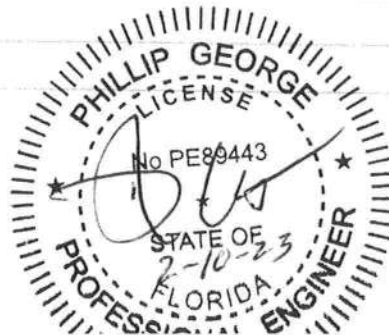



# CONCRETE INFO

## Concrete Notch Design

### IMPORTANT INFO

-The minimum requirement for the concrete slab would be the base size of your building, so a 30'W x 40'L unit will need a 30'W x 40'L pad that's at least 4" thick, any thicker would be up to you or your County. We also recommend an additional 6" lip on all sides that's at least 2" thinner than the main pad. This is to seal the bottom base rail to keep any debris/water from entering the unit.




- The slab must be no more than 3" Off Level.

-Always check with local permitting about foundation requirements. Local codes **MUST** be followed if permits are needed.

- If you are needing as Built Engineered Drawings, or Site Specifics, let the County know if you are planning to do a 6" Lip (also known as Notch or Rats Ledge). The Engineered Drawings will show foundation plans.

- If you are using Engineered Drawings, share the foundation requirements with the Concrete Contractor.

- Do NOT pour your pad until you get approval from the County if you are pulling a permit. There have been some cases where the County does not approve of the structure or the size of it.

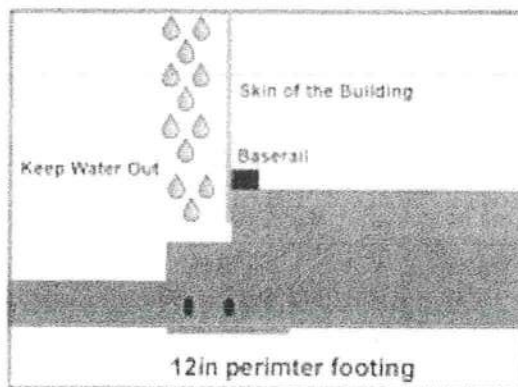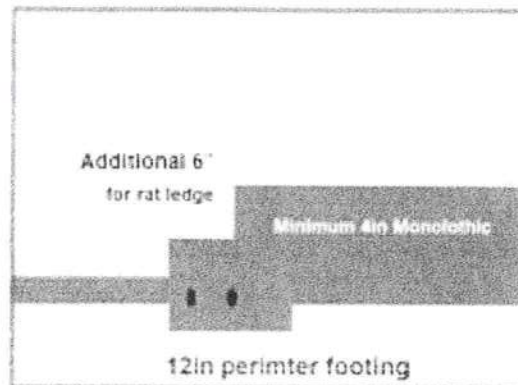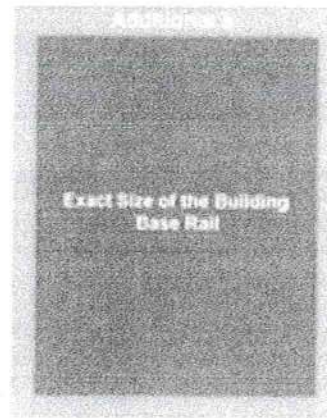


If footers are needed, we recommend a minimum size of 1' x 1'

### Benefits of Concrete Notch

This is the most effective way of keeping water out of the building

The rats ledge design allows for the panels of the metal building to be between the concrete slab.

You can avoid the 6" Lip altogether if you buy some silicone/caulk and ask the installers to seal the bottom base rail for you (additional charges may apply).

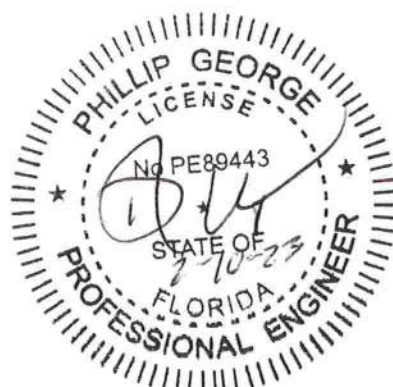



# Concrete Info

## Concrete Notch Design

### IMPORTANT INFO

-The minimum requirement for the concrete slab would be the base size of your building, so a 30'W x 40'L unit will need a 30'W x 40'L pad that's at least 4" thick, any thicker would be up to you or your County. We also recommend an additional 6" lip on all sides that's at least 2" thinner than the main pad. This is to seal the bottom base rail to keep any debris/water from entering the unit.

- The slab must be no more than 3" Off Level.

-Always check with local permitting about foundation requirements. Local codes **MUST** be followed if permits are needed.

- If you are needing as Built Engineered Drawings, or Site Specifics, let the County know if you are planning to do a 6" Lip (also known as Notch or Rats Ledge). The Engineered Drawings will show foundation plans.




- If you are using Engineered Drawings, share the foundation requirements with the Concrete Contractor.

- Do **NOT** pour your pad until you get approval from the County if you are pulling a permit. There have been some cases where the County does not approve of the structure or the size of it.

### Benefits of Concrete Notch

This is the most effective way of keeping water out of the building.

The rats ledge design allows for the panels of the metal building to be between the concrete slab.

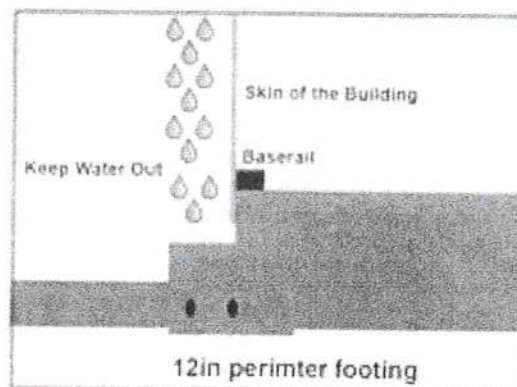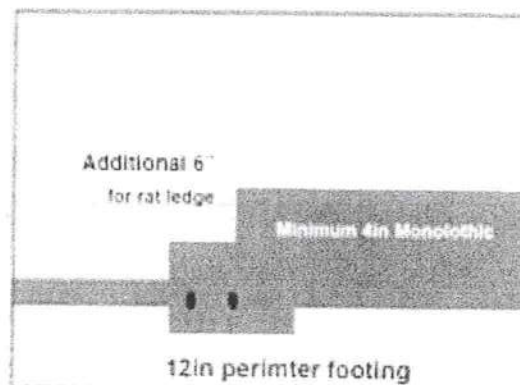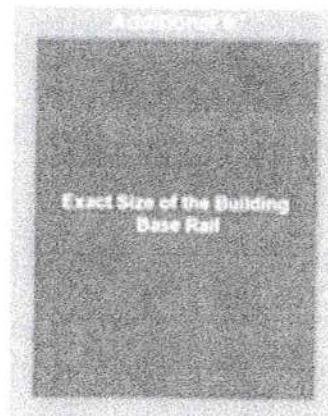

If footers are needed, we recommend a minimum size of 1' x 1'

You can avoid the 6" Lip altogether if you buy some silicone/caulk and ask the