

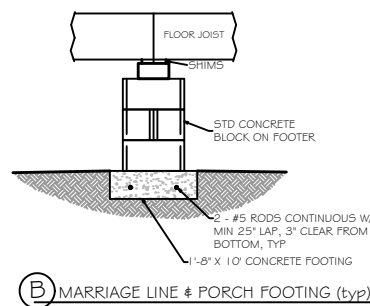


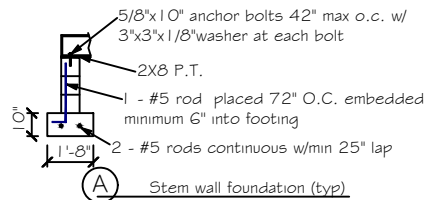

FOUNDATION NOTES

1. REFER TO MANUFACTURER'S PLANS FOR ACTUAL DIMENSIONS, RECESSES IN SLAB, STEP DOWNS, ETC.
2. TERMITE-TREAT SOILS UNDER FOOTINGS
3. BOTTOM OF EXTERIOR FOOTINGS SHALL BE A MINIMUM OF 12" BELOW UNDISTURBED SOIL OR ENGINEERED FILL

NOTE:
SOIL UNDER FOOTING SHALL BE COMPRESSED TO 2000 PSF AT 95% DENSITY. CONCRETE STRENGTH SHALL BE 2500 PSI

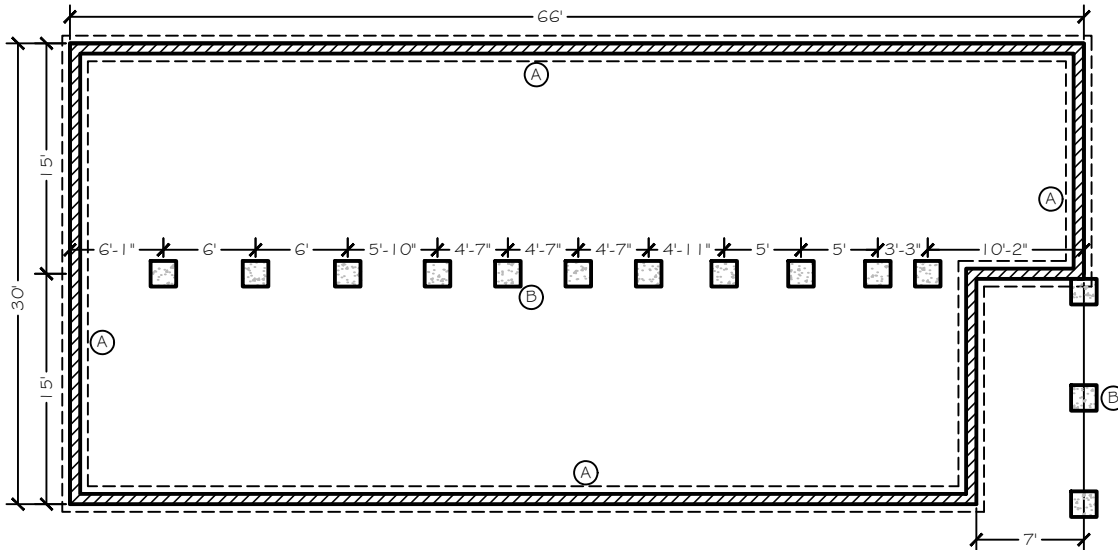

Digitally signed
by Carol
Chadwick
DN: c=US,
o=Florida,
dnQualifier=A01
410D0000017EB6
D924CE0005954
C, cn=Carol
Chadwick
Date: 2022.04.27
07:52:12 -04'00'

PREPARED FOR JOHN DeWEES 449 SW COYOTE CIRCLE FORT WHITE, FL 407.957.3472 BUILDER ROYALS MOBILE HOME SALES CONTACT: BO ROYAL 386.754.6737	
MODULAR HOME FOUNDATION PLAN 449 SW COYOTE CIRCLE FORT WHITE, FL	
PROJECT NO. FL22075	DATE APRIL 27, 2022
REVISION DATE	SHEETS 1 OF 1
REVISION DESCRIPTION DATE	