



Lumber design values are in accordance with ANSI/TPI 1 section 6.3  
These truss designs rely on lumber values established by others.

RE: 2718981 - DETAILS

**MiTek USA, Inc.**

6904 Parke East Blvd.  
Tampa, FL 33610-4115

**Site Information:**

Customer Info: DETAILS Project Name: N/A Model: N/A  
Lot/Block: N/A Subdivision: N/A  
Address: N/A, N/A  
City: N/A State: N/A

**Name Address and License # of Structural Engineer of Record, If there is one, for the building.**

Name: License #:  
Address: State:  
City:

**General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):**

Design Code: FBC2020/TPI2014 Design Program: MiTek 20/20 8.4  
Wind Code: ASCE 7-16 Wind Speed: 130 mph  
Roof Load: 37.0 psf Floor Load: N/A psf

This package includes 20 individual, General Truss Details and 0 Additional Drawings.

With my seal affixed to this sheet, I hereby certify that I am the Truss Design Engineer and this index sheet conforms to 61G15-31.003, section 5 of the Florida Board of Professional Engineers Rules.

| No. | Seal#     | Detail Name           | Date   | No. | Seal#     | Detail Name           | Date   |
|-----|-----------|-----------------------|--------|-----|-----------|-----------------------|--------|
| 1   | T23399806 | MII-REP10             | 4/2/21 | 15  | T23399820 | MII-VALLEY HIGH WIND2 | 4/2/21 |
| 2   | T23399807 | MII-T-BRACE 2         | 4/2/21 | 16  | T23399821 | MII-VALLEY SP         | 4/2/21 |
| 3   | T23399808 | MII-SCAB-BRACE        | 4/2/21 | 17  | T23399822 | MII-VALLEY SP         | 4/2/21 |
| 4   | T23399809 | MII-REP05             | 4/2/21 | 18  | T23399823 | MII-GE146-001         | 4/2/21 |
| 5   | T23399810 | MII-GE130-D-SP        | 4/2/21 | 19  | T23399824 | MII-REP13B            | 4/2/21 |
| 6   | T23399811 | MII-GE130-SP          | 4/2/21 | 20  | T23399825 | MII-STRGBCK           | 4/2/21 |
| 7   | T23399812 | MII-GE140-001         | 4/2/21 |     |           |                       |        |
| 8   | T23399813 | MII-GE170-D-SP        | 4/2/21 |     |           |                       |        |
| 9   | T23399814 | MII-GE180-D-SP        | 4/2/21 |     |           |                       |        |
| 10  | T23399815 | MII-GE180-D-SP        | 4/2/21 |     |           |                       |        |
| 11  | T23399816 | MII-PIGGY-ALT-7-16    | 4/2/21 |     |           |                       |        |
| 12  | T23399817 | MII-REP01A1           | 4/2/21 |     |           |                       |        |
| 13  | T23399818 | MII-TOENAIL SP        | 4/2/21 |     |           |                       |        |
| 14  | T23399819 | MII-VALLEY HIGH WIND1 | 4/2/21 |     |           |                       |        |



This item has been electronically signed and sealed by ORegan, Philip, PE using a Digital Signature.


Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

The truss drawing(s) referenced above have been prepared by  
MiTek USA, Inc. under my direct supervision based on the parameters  
provided by Builders FirstSource-Jacksonville.

Truss Design Engineer's Name: ORegan, Philip

My license renewal date for the state of Florida is February 28, 2023.

**IMPORTANT NOTE:** The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

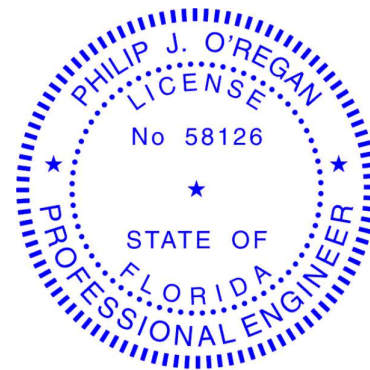

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2,2021

ORegan, Philip

1 of 1



RE: \$JOBNAME - \$JOBDESC


---

**MiTek USA, Inc.**

6904 Parke East Blvd.  
Tampa, FL 33610-4115

**Site Information:**


Customer Info: \$SI\_CUSTOMER   Project Name: \$SI\_JOBNAME   Model: \$SI\_MODEL  
Lot/Block: \$SI\_LOTNUM   Subdivision: \$SI\_SUBDIV  
Address: \$SI\_SITEADDR  
City: \$SI\_SITECITY   State: \$SI\_SITESTATE

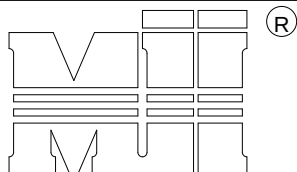

MiTek USA, Inc.

MAIN TRUSS MANUFACTURED WITHOUT  
FALSE BOTTOM CHORD.

MAIN TRUSS (SPACING = 24" O.C.)

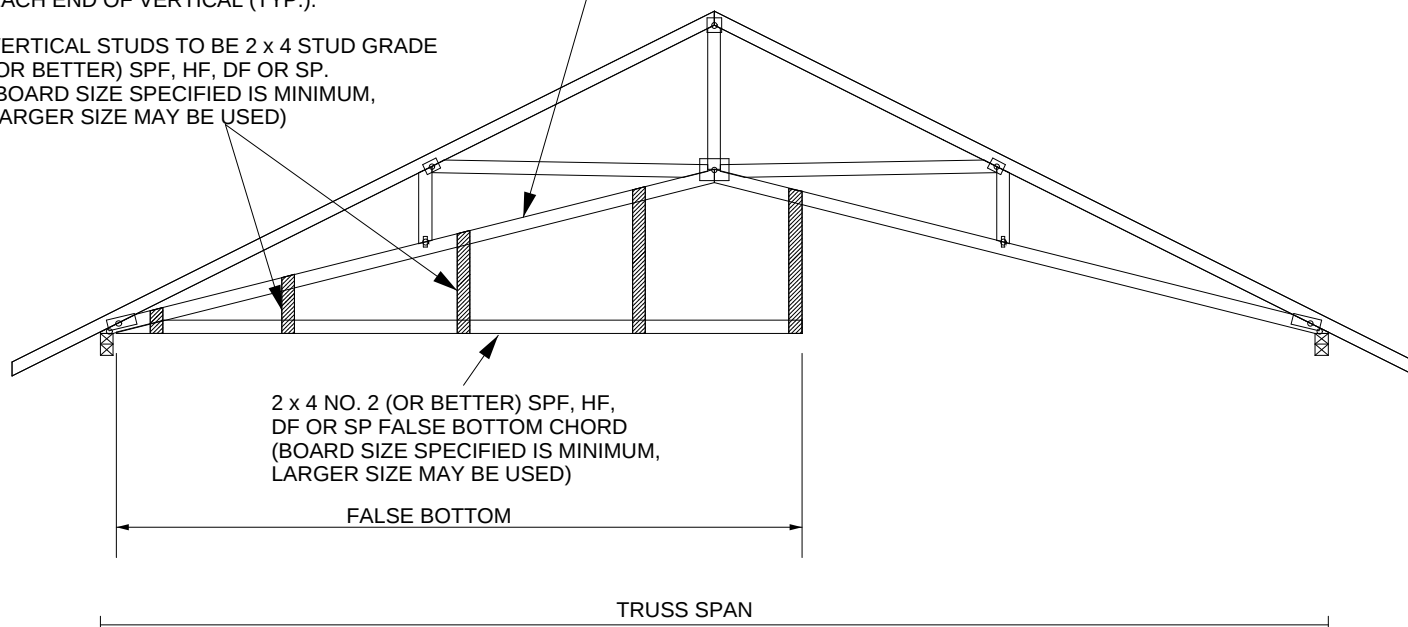VERTICAL STUDS @ 48" O.C.. ATTACHED  
WITH (3) - 10d (0.131" X 3") NAILS AT  
EACH END OF VERTICAL (TYP.).VERTICAL STUDS TO BE 2 x 4 STUD GRADE  
(OR BETTER) SPF, HF, DF OR SP.  
(BOARD SIZE SPECIFIED IS MINIMUM,  
LARGER SIZE MAY BE USED)REFER TO THE BOTTOM CHORD BRACING SECTION OF  
THE INDIVIDUAL TRUSS DESIGN FOR MAXIMUM SPACING  
OF CONTINUOUS LATERAL BRACING WHENEVER RIGID  
CEILING MATERIAL IS NOT DIRECTLY ATTACHED TO THE  
BOTTOM CHORD.

## NOTES:

1. LOADING: TOP CHORD: (REFER TO THE MAIN TRUSS DESIGN FOR TOP CHORD LOADING).  
BOTTOM CHORD: LL = 0 PSF, DL = 10 PSF.
2. REFER TO THE MAIN TRUSS DESIGN FOR LUMBER AND PLATING REQUIREMENTS.
3. MAXIMUM BOTTOM CHORD PITCH = 6/12.
4. THE END DISTANCE, EDGE DISTANCE, AND SPACING OF NAILS SHALL BE SUCH AS TO AVOID SPLITTING OF THE WOOD.
5. FALSE BOTTOM CHORD ONLY DESIGNED TO CARRY VERTICAL LOAD. NO LATERAL (SHEAR) LOAD ALLOWED.
6. FILLER MAY EXTEND FOR FULL LENGTH OF TRUSS.

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021


**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601  
**ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**



6904 Parke East Blvd.  
Tampa, FL 33610

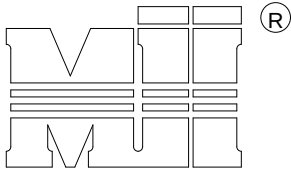

MiTek USA, Inc.

Note: T-Bracing / I-Bracing to be used when continuous lateral bracing is impractical. T-Brace / I-Brace must cover 90% of web length.

Note: This detail NOT to be used to convert T-Brace / I-Brace webs to continuous lateral braced webs.

## Nailing Pattern

| T-Brace size                                                                             | Nail Size         | Nail Spacing |
|------------------------------------------------------------------------------------------|-------------------|--------------|
| 2x4 or 2x6 or 2x8                                                                        | 10d (0.131" X 3") | 6" o.c.      |
| Note: Nail along entire length of T-Brace / I-Brace<br>(On Two-Ply's Nail to Both Plies) |                   |              |




Brace Size  
for One-Ply TrussSpecified Continuous  
Rows of Lateral Bracing

| Web Size   | 1           | 2           |
|------------|-------------|-------------|
| 2x3 or 2x4 | 2x4 T-Brace | 2x4 I-Brace |
| 2x6        | 2x6 T-Brace | 2x6 I-Brace |
| 2x8        | 2x8 T-Brace | 2x8 I-Brace |

Brace Size  
for Two-Ply TrussSpecified Continuous  
Rows of Lateral Bracing

| Web Size   | 1           | 2           |
|------------|-------------|-------------|
| 2x3 or 2x4 | 2x4 T-Brace | 2x4 I-Brace |
| 2x6        | 2x6 T-Brace | 2x6 I-Brace |
| 2x8        | 2x8 T-Brace | 2x8 I-Brace |

T-Brace / I-Brace must be same species and grade (or better) as web member.

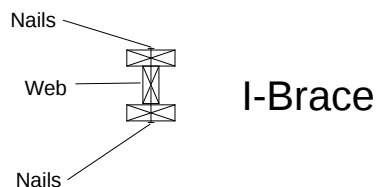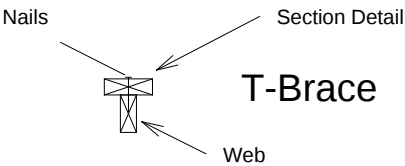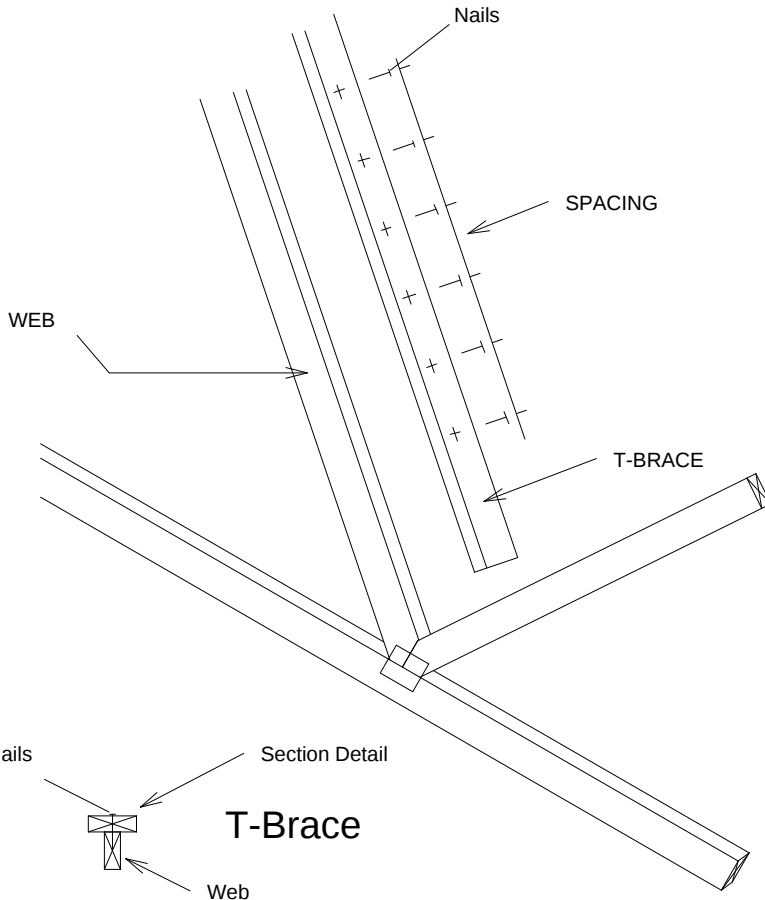

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No. 58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 33610

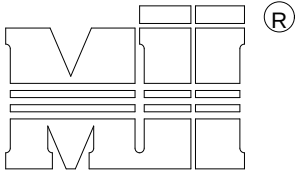

MiTek USA, Inc.


MiTek USA, Inc.

Page 1 of 1

Note: Scab-Bracing to be used when continuous lateral bracing at midpoint (or T-Brace) is impractical.  
Scab must cover full length of web +/- 6".

\*\*\* THIS DETAIL IS NOT APPLICABLE WHEN BRACING IS \*\*\*  
REQUIRED AT 1/3 POINTS OR I-BRACE IS SPECIFIED.

APPLY 2x\_\_\_ SCAB TO ONE FACE OF WEB WITH  
2 ROWS OF 10d (0.131" X 3") NAILS SPACED 6" O.C.  
SCAB MUST BE THE SAME GRADE, SIZE AND  
SPECIES (OR BETTER) AS THE WEB.

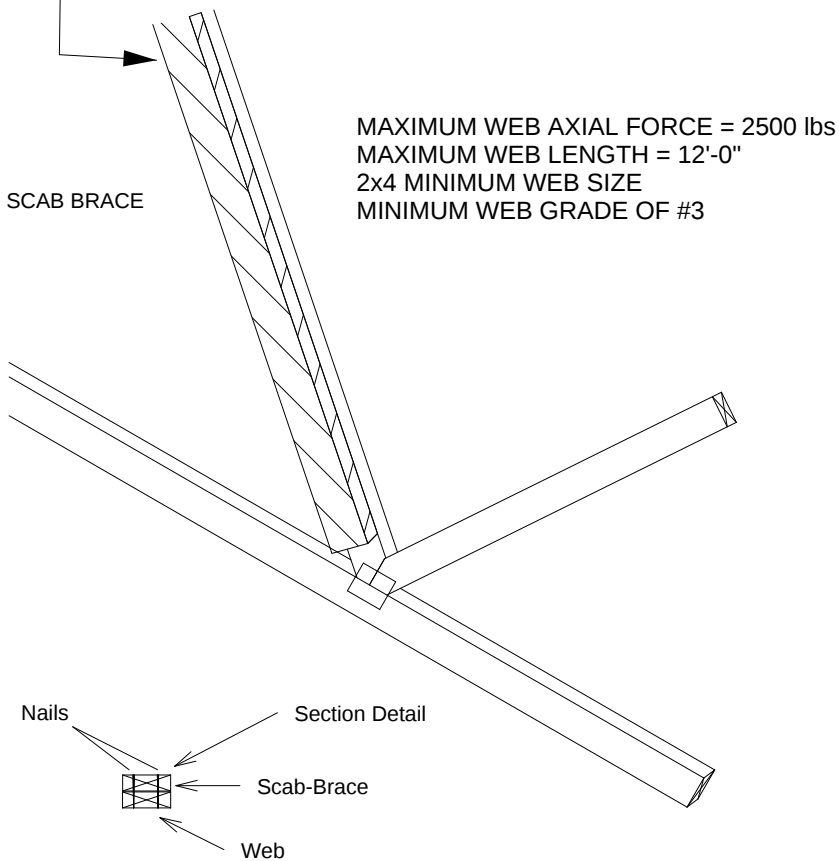

Scab-Brace must be same species grade (or better) as web member.

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No. 58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 33610

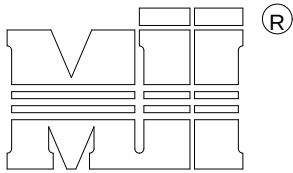


MiTek USA, Inc.


1. THIS IS A SPECIFIC REPAIR DETAIL TO BE USED ONLY FOR ITS ORIGINAL INTENTION. THIS REPAIR DOES NOT IMPLY THAT THE REMAINING PORTION OF THE TRUSS IS UNDAMAGED. THE ENTIRE TRUSS SHALL BE INSPECTED TO VERIFY THAT NO FURTHER REPAIRS ARE REQUIRED. WHEN THE REQUIRED REPAIRS ARE PROPERLY APPLIED, THE TRUSS WILL BE CAPABLE OF SUPPORTING THE LOADS INDICATED.
2. ALL MEMBERS MUST BE RETURNED TO THEIR ORIGINAL POSITIONS BEFORE APPLYING REPAIR AND HELD IN PLACE DURING APPLICATION OF REPAIR.
3. THE END DISTANCE, EDGE DISTANCE, AND SPACING OF NAILS SHALL BE SUCH AS TO AVOID SPLITTING OF THE WOOD.
4. LUMBER MUST BE CUT CLEANLY AND ACCURATELY AND THE REMAINING WOOD MUST BE UNDAMAGED.
5. THIS REPAIR IS TO BE USED FOR SINGLE PLY TRUSSES IN THE 4X\_ ORIENTATION ONLY.
6. CONNECTOR PLATES MUST BE FULLY IMBEDDED AND UNDISTURBED.

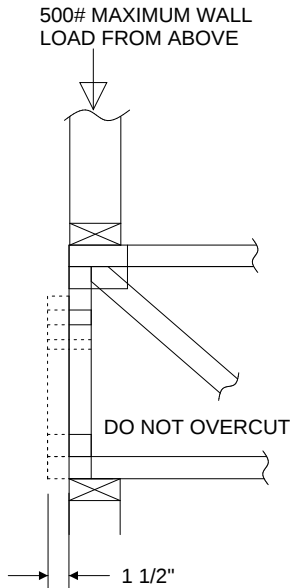


REFER TO INDIVIDUAL  
TRUSS DESIGN FOR  
PLATE SIZES AND  
LUMBER GRADES

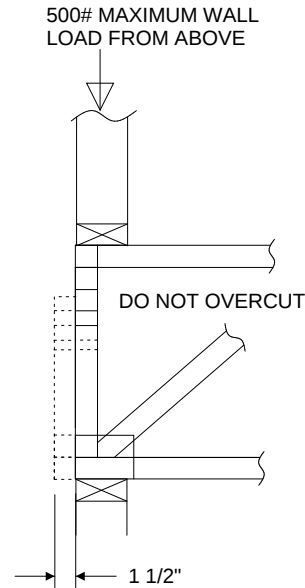

TRUSSES BUILT  
WITH 4x2 MEMBERS

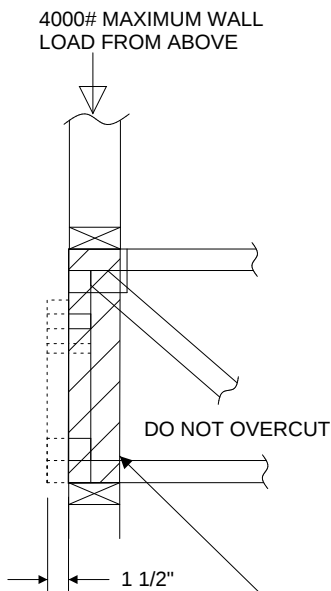

REFER TO INDIVIDUAL  
TRUSS DESIGN FOR  
PLATE SIZES AND  
LUMBER GRADES

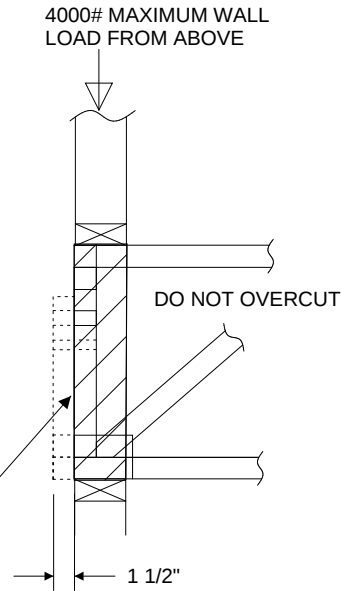

TRUSSES BUILT  
WITH 4x2 MEMBERS

ATTACH 2x4 SQUASH BLOCK (CUT TO FIT TIGHTLY)  
TO BOTH SIDES OF THE TRUSS AS SHOWN WITH  
10d (0.131" X 3") NAILS SPACED 3" O.C.

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No. 58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCS1 Building Component



6904 Parke East Blvd.  
Tampa, FL 33610

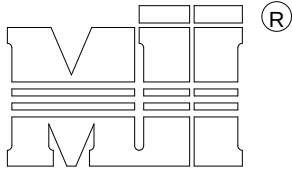

MiTek USA, Inc.

Typical 1x4 L-Brace Nailed To  
2x Verticals w/10d Nails spaced 6" o.c.

Vertical Stud

SECTION B-B

TRUSS GEOMETRY AND CONDITIONS  
SHOWN ARE FOR ILLUSTRATION ONLY.

DIAGONAL BRACE  
4'-0" O.C. MAX

12  
Varies to Common Truss

SEE INDIVIDUAL MITEK ENGINEERING  
DRAWINGS FOR DESIGN CRITERIA

3x4 =


24" Max

\* - Diagonal Bracing  
Refer to Section A-A

\*\* - L-Bracing Refer  
to Section B-B

## NOTE:

1. MINIMUM GRADE OF #2 MATERIAL IN THE TOP AND BOTTOM CHORDS.
2. CONNECTION BETWEEN BOTTOM CHORD OF GABLE END TRUSS AND WALL TO BE PROVIDED BY PROJECT ENGINEER OR ARCHITECT.
3. BRACING SHOWN IS FOR INDIVIDUAL TRUSS ONLY. CONSULT BLDG. ARCHITECT OR ENGINEER FOR TEMPORARY AND PERMANENT BRACING OF ROOF SYSTEM.
4. "L" BRACES SPECIFIED ARE TO BE FULL LENGTH. GRADES: 1x4 SRB OR 2x4 STUD OR BETTER WITH ONE ROW OF 10d NAILS SPACED 6" O.C.
5. DIAGONAL BRACE TO BE APPROXIMATELY 45 DEGREES TO ROOF DIAPHRAM AT 4'-0" O.C.
6. CONSTRUCT HORIZONTAL BRACE CONNECTING A 2x6 STUD AND A 2x4 STUD AS SHOWN WITH 16d NAILS SPACED 6" O.C. HORIZONTAL BRACE TO BE LOCATED AT THE MIDSPAN OF THE LONGEST STUD. ATTACH TO VERTICAL STUDS WITH (4) 10d NAILS THROUGH 2x4. (REFER TO SECTION A-A)
7. GABLE STUD DEFLECTION MEETS OR EXCEEDS L/240.
8. THIS DETAIL DOES NOT APPLY TO STRUCTURAL GABLES.
9. DO NOT USE FLAT BOTTOM CHORD GABLES NEXT TO SCISSOR TYPE TRUSSES.
10. SOUTHERN PINE LUMBER DESIGN VALUES ARE THOSE EFFECTIVE 06-01-13 BY SPIB/ALSC.
11. NAILS DESIGNATED 10d ARE (0.131" X 3") AND NAILS DESIGNATED 16d ARE (0.131" X 3.5")

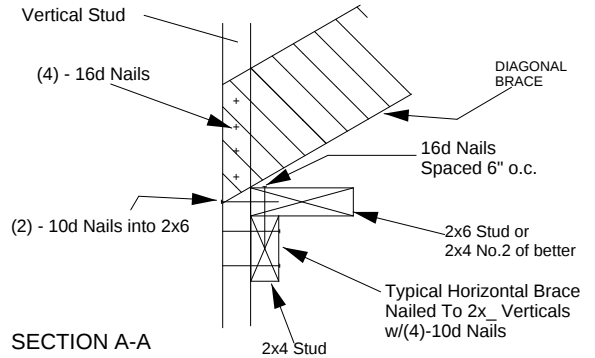

PROVIDE 2x4 BLOCKING BETWEEN THE FIRST TWO TRUSSES AS NOTED. TOENAIL BLOCKING TO TRUSSES WITH (2) - 10d NAILS AT EACH END. ATTACH DIAGONAL BRACE TO BLOCKING WITH (5) - 10d NAILS.

(4) - 8d (0.131" X 2.5") NAILS MINIMUM, PLYWOOD SHEATHING TO 2x4 STD SPF BLOCK

Roof Sheathing

Diag. Brace  
at 1/3 points  
if needed

End Wall

1'-3" Max.

(2) - 10d NAILS

(2) - 10d NAILS

Trusses @ 24" o.c.

2x6 DIAGONAL BRACE SPACED 48" O.C. ATTACHED TO VERTICAL WITH (4) - 16d NAILS AND ATTACHED TO BLOCKING WITH (5) - 10d NAILS.

HORIZONTAL BRACE  
(SEE SECTION A-A)

| Minimum Stud Size Species and Grade | Stud Spacing | Without Brace | 1x4 L-Brace | 2x4 L-Brace | DIAGONAL BRACE | 2 DIAGONAL BRACES AT 1/3 POINTS |
|-------------------------------------|--------------|---------------|-------------|-------------|----------------|---------------------------------|
|                                     |              |               |             |             |                |                                 |
| 2x4 SP No. 3 / Stud                 | 12" O.C.     | 3-9-13        | 4-1-1       | 5-9-6       | 7-1-3          | 11-5-7                          |
| 2x4 SP No. 3 / Stud                 | 16" O.C.     | 3-5-4         | 3-6-8       | 5-0-2       | 6-10-8         | 10-3-13                         |
| 2x4 SP No. 3 / Stud                 | 24" O.C.     | 2-9-11        | 2-10-11     | 4-1-1       | 5-7-6          | 8-5-1                           |



Diagonal braces over 6'-3" require a 2x4 T-Brace attached to one edge. Diagonal braces over 12'-6" require 2x4 I-braces attached to both edges. Fasten T and I braces to narrow edge of diagonal brace with 10d nails 8" o.c., with 3" minimum end distance. Brace must cover 90% of diagonal length.

MAX MEAN ROOF HEIGHT = 30 FEET  
CATEGORY II BUILDING  
EXPOSURE D  
ASCE 7-98, ASCE 7-02, ASCE 7-05 130 MPH  
ASCE 7-10, ASCE 7-16 160 MPH  
DURATION OF LOAD INCREASE 1.60

STUD DESIGN IS BASED ON COMPONENTS AND CLADDING.  
CONNECTION OF BRACING IS BASED ON MWFRS.

Design valid for use only with MiTek connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021




6904 Parke East Blvd.  
Tampa, FL 36610

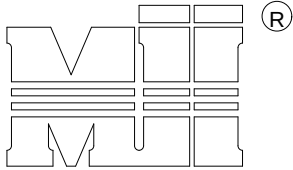

MiTek USA, Inc.

## ALTERNATE DIAGONAL BRACING TO THE BOTTOM CHORD

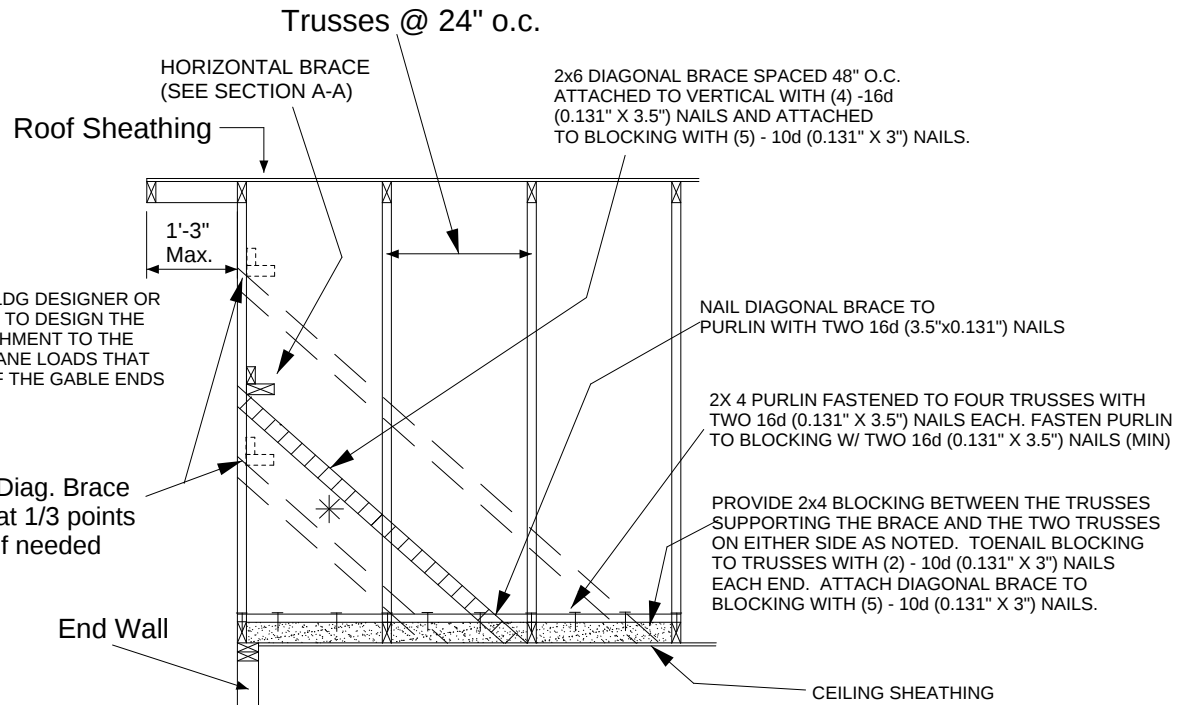

## BRACING REQUIREMENTS FOR STRUCTURAL GABLE TRUSSES


STRUCTURAL GABLE TRUSSES MAY BE BRACED AS NOTED:

METHOD 1 : ATTACH A MATCHING GABLE TRUSS TO THE INSIDE FACE OF THE STRUCTURAL GABLE AND FASTEN PER THE FOLLOWING NAILING SCHEDULE.

METHOD 2 : ATTACH 2X SCABS TO THE FACE OF EACH VERTICAL MEMBER ON THE STRUCTURAL GABLE PER THE FOLLOWING NAILING SCHEDULE. SCABS ARE TO BE OF THE SAME SIZE, GRADE AND SPECIES AS THE TRUSS VERTICALS

NAILING SCHEDULE:


- FOR WIND SPEEDS 120 MPH (ASCE 7-98, 02, 05), 150 MPH (ASCE 7-10, 16) OR LESS, NAIL ALL MEMBERS WITH ONE ROW OF 10d (0.131" X 3") NAILS SPACED 6" O.C.
- FOR WIND SPEEDS 120-150 MPH (ASCE 7-98, 02, 05), 150-190 MPH (ASCE 7-10, 16) NAIL ALL MEMBERS WITH TWO ROWS OF 10d (0.131" X 3") NAILS SPACED 6" O.C. (2X 4 STUDS MINIMUM)

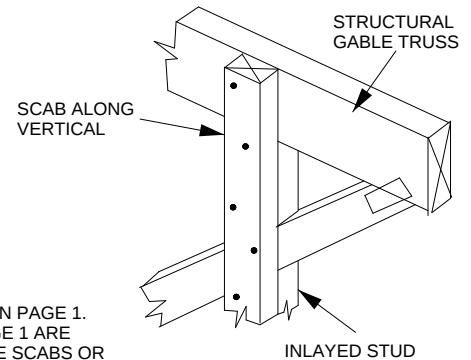

MAXIMUM STUD LENGTHS ARE LISTED ON PAGE 1. ALL BRACING METHODS SHOWN ON PAGE 1 ARE VALID AND ARE TO BE FASTENED TO THE SCABS OR VERTICAL STUDS OF THE STANDARD GABLE TRUSS ON THE INTERIOR SIDE OF THE STRUCTURE.

STRUCTURAL GABLE TRUSS

AN ADEQUATE DIAPHRAGM OR OTHER METHOD OF BRACING MUST BE PRESENT TO PROVIDE FULL LATERAL SUPPORT OF THE BOTTOM CHORD TO RESIST ALL OUT OF PLANE LOADS. THE BRACING SHOWN IN THIS DETAIL IS FOR THE VERTICAL/STUDS ONLY.

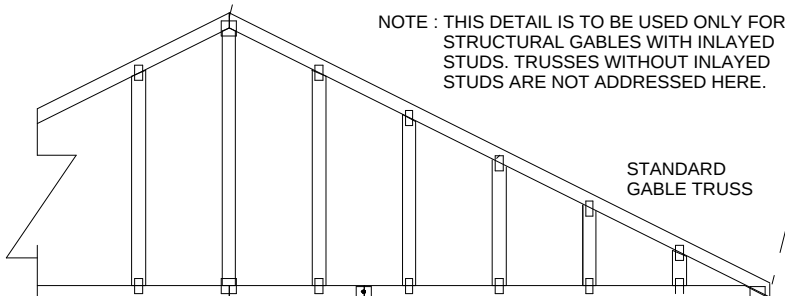

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610

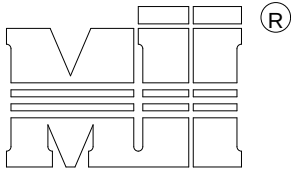

MiTek USA, Inc.

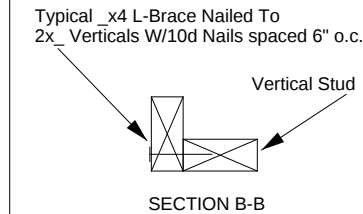


SECTION B-B

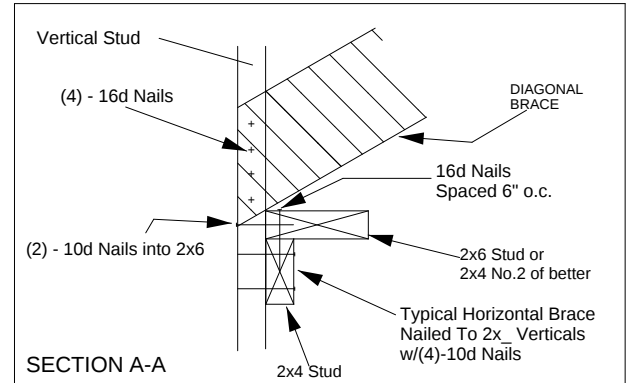

SECTION A-A

PROVIDE 2x4 BLOCKING BETWEEN THE FIRST TWO TRUSSES AS NOTED. TOENAIL BLOCKING TO TRUSSES WITH (2) - 10d NAILS AT EACH END. ATTACH DIAGONAL BRACE TO BLOCKING WITH (5) - 10d NAILS.

(4) - 8d (0.131" X 2.5") NAILS MINIMUM, PLYWOOD SHEATHING TO 2x4 STD SPF BLOCK

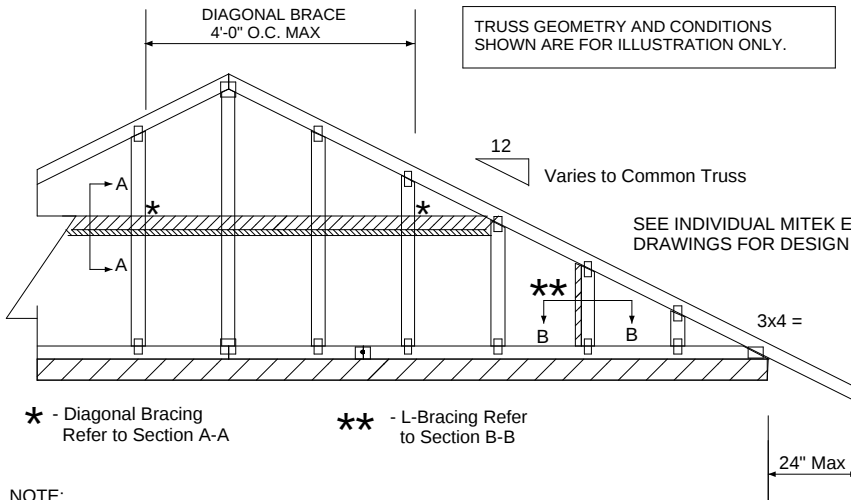


\* - Diagonal Bracing  
Refer to Section A-A

\*\* - L-Bracing Refer  
to Section B-B

## NOTE:

1. MINIMUM GRADE OF #2 MATERIAL IN THE TOP AND BOTTOM CHORDS.
2. CONNECTION BETWEEN BOTTOM CHORD OF GABLE END TRUSS AND WALL TO BE PROVIDED BY PROJECT ENGINEER OR ARCHITECT.
3. BRACING SHOWN IS FOR INDIVIDUAL TRUSS ONLY. CONSULT BLDG. ARCHITECT OR ENGINEER FOR TEMPORARY AND PERMANENT BRACING OF ROOF SYSTEM.
4. "L" BRACES SPECIFIED ARE TO BE FULL LENGTH. GRADES: 1x4 SRB OR 2x4 STUD OR BETTER WITH ONE ROW OF 10d NAILS SPACED 6" O.C.
5. DIAGONAL BRACE TO BE APPROXIMATELY 45 DEGREES TO ROOF DIAPHRAM AT 4'-0" O.C.
6. CONSTRUCT HORIZONTAL BRACE CONNECTING A 2x6 STUD AND A 2x4 STUD AS SHOWN WITH 16d NAILS SPACED 6" O.C. HORIZONTAL BRACE TO BE LOCATED AT THE MIDSPAN OF THE LONGEST STUD. ATTACH TO VERTICAL STUDS WITH (4) 10d NAILS THROUGH 2x4. (REFER TO SECTION A-A)
7. GABLE STUD DEFLECTION MEETS OR EXCEEDS L/240.
8. THIS DETAIL DOES NOT APPLY TO STRUCTURAL GABLES.
9. DO NOT USE FLAT BOTTOM CHORD GABLES NEXT TO SCISSOR TYPE TRUSSES.
10. SOUTHERN PINE LUMBER DESIGN VALUES ARE THOSE EFFECTIVE 06-01-13 BY SPIB/ALSC.
11. NAILS DESIGNATED 10d ARE (0.131" X 3") AND NAILS DESIGNATED 16d ARE (0.131" X 3.5")

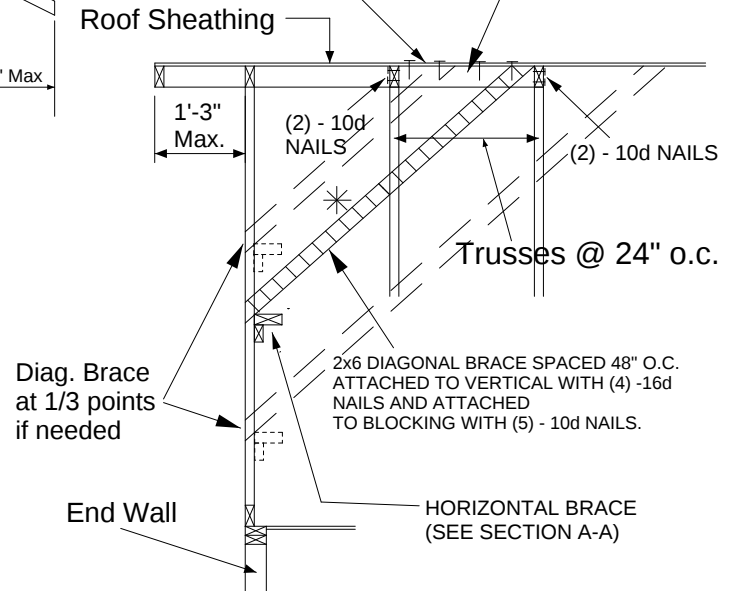

| Minimum Stud Size Species and Grade | Stud Spacing | Without Brace       | 1x4 L-Brace | 2x4 L-Brace | DIAGONAL BRACE | 2 DIAGONAL BRACES AT 1/3 POINTS |
|-------------------------------------|--------------|---------------------|-------------|-------------|----------------|---------------------------------|
|                                     |              | Maximum Stud Length |             |             |                |                                 |
| 2x4 SP No. 3 / Stud                 | 12" O.C.     | 4-0-7               | 4-5-6       | 6-3-8       | 8-0-15         | 12-1-6                          |
| 2x4 SP No. 3 / Stud                 | 16" O.C.     | 3-8-0               | 3-10-4      | 5-5-6       | 7-4-1          | 11-0-1                          |
| 2x4 SP No. 3 / Stud                 | 24" O.C.     | 3-0-10              | 3-1-12      | 4-5-6       | 6-1-5          | 9-1-15                          |

- \* Diagonal braces over 6'-3" require a 2x4 T-Brace attached to one edge. Diagonal braces over 12'-6" require 2x4 I-braces attached to both edges. Fasten T and I braces to narrow edge of diagonal brace with 10d nails 8" o.c., with 3" minimum end distance. Brace must cover 90% of diagonal length.

MAX MEAN ROOF HEIGHT = 30 FEET  
CATEGORY II BUILDING  
EXPOSURE B or C  
ASCE 7-98, ASCE 7-02, ASCE 7-05 130 MPH  
ASCE 7-10, ASCE 7-16 160 MPH  
DURATION OF LOAD INCREASE = 1.60

STUD DESIGN IS BASED ON COMPONENTS AND CLADDING.  
CONNECTION OF BRACING IS BASED ON MWPRS.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021




6904 Parke East Blvd.  
Tampa, FL 36610

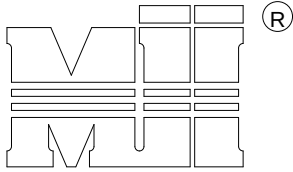

MiTek USA, Inc.

## ALTERNATE DIAGONAL BRACING TO THE BOTTOM CHORD

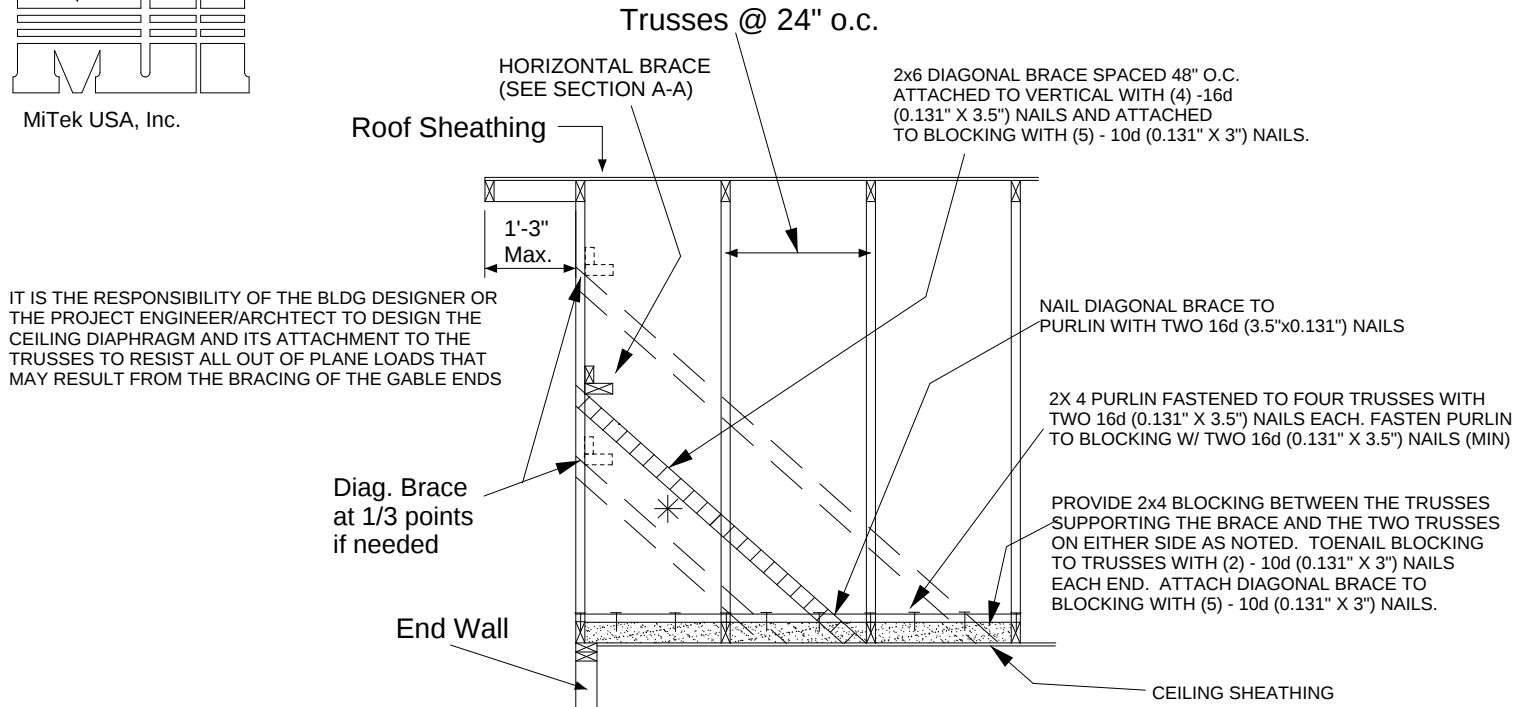

## BRACING REQUIREMENTS FOR STRUCTURAL GABLE TRUSSES


STRUCTURAL GABLE TRUSSES MAY BE BRACED AS NOTED:

METHOD 1 : ATTACH A MATCHING GABLE TRUSS TO THE INSIDE FACE OF THE STRUCTURAL GABLE AND FASTEN PER THE FOLLOWING NAILING SCHEDULE.


METHOD 2 : ATTACH 2X SCABS TO THE FACE OF EACH VERTICAL MEMBER ON THE STRUCTURAL GABLE PER THE FOLLOWING NAILING SCHEDULE. SCABS ARE TO BE OF THE SAME SIZE, GRADE AND SPECIES AS THE TRUSS VERTICALS

NAILING SCHEDULE:

- FOR WIND SPEEDS 120 MPH (ASCE 7-98, 02, 05), 150 MPH (ASCE 7-10, 16) OR LESS, NAIL ALL MEMBERS WITH ONE ROW OF 10d (0.131" X 3") NAILS SPACED 6" O.C.
- FOR WIND SPEEDS 120-150 MPH (ASCE 7-98, 02, 05), 150-190 MPH (ASCE 7-10, 16) NAIL ALL MEMBERS WITH TWO ROWS OF 10d (0.131" X 3") NAILS SPACED 6" O.C. (2X 4 STUDS MINIMUM)

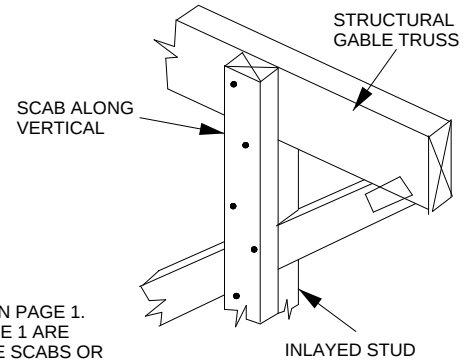

MAXIMUM STUD LENGTHS ARE LISTED ON PAGE 1. ALL BRACING METHODS SHOWN ON PAGE 1 ARE VALID AND ARE TO BE FASTENED TO THE SCABS OR VERTICAL STUDS OF THE STANDARD GABLE TRUSS ON THE INTERIOR SIDE OF THE STRUCTURE.

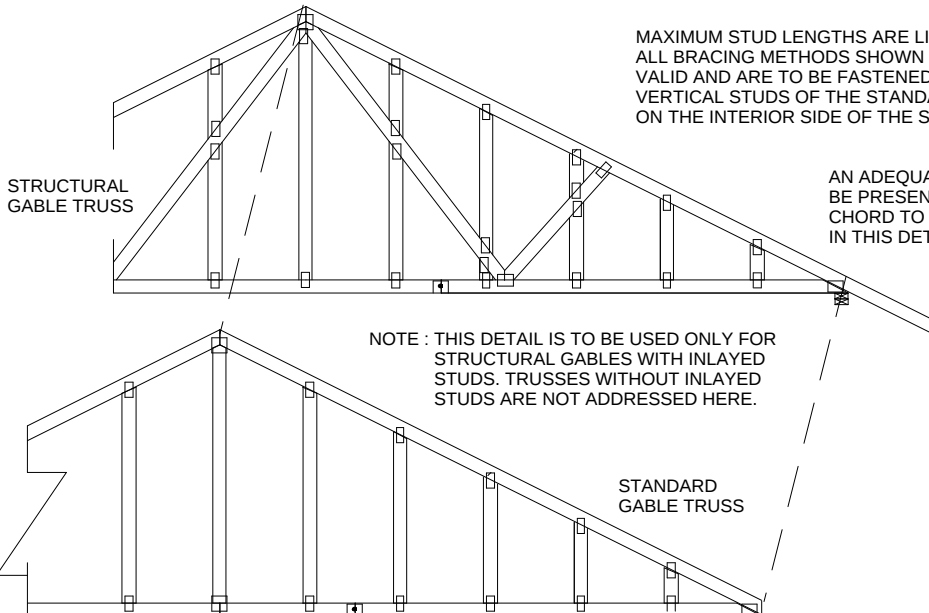

AN ADEQUATE DIAPHRAGM OR OTHER METHOD OF BRACING MUST BE PRESENT TO PROVIDE FULL LATERAL SUPPORT OF THE BOTTOM CHORD TO RESIST ALL OUT OF PLANE LOADS. THE BRACING SHOWN IN THIS DETAIL IS FOR THE VERTICAL/STUDS ONLY.

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No. 58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 36610


JANUARY 6, 2017

## Standard Gable End Detail

MII-GE140-001  
T23399812

MiTek USA, Inc.

Page 1 of 2



MiTek USA, Inc.

Typical 1x4 L-Brace Nailed To  
2x Verticals W/10d Nails spaced 6" o.c.

Vertical Stud

SECTION B-B

TRUSS GEOMETRY AND CONDITIONS  
SHOWN ARE FOR ILLUSTRATION ONLY.DIAGONAL BRACE  
4'-0" O.C. MAX


Varies to Common Truss

SEE INDIVIDUAL MITTEK ENGINEERING  
DRAWINGS FOR DESIGN CRITERIA\* - Diagonal Bracing  
Refer to Section A-A\*\* - L-Bracing Refer  
to Section B-B

24" Max

## NOTE:


1. MINIMUM GRADE OF #2 MATERIAL IN THE TOP AND BOTTOM CHORDS.
2. CONNECTION BETWEEN BOTTOM CHORD OF GABLE END TRUSS AND WALL TO BE PROVIDED BY PROJECT ENGINEER OR ARCHITECT.
3. BRACING SHOWN IS FOR INDIVIDUAL TRUSS ONLY. CONSULT BLDG. ARCHITECT OR ENGINEER FOR TEMPORARY AND PERMANENT BRACING OF ROOF SYSTEM.
4. "L" BRACES SPECIFIED ARE TO BE FULL LENGTH. GRADES: 1x4 SRB OR 2x4 STUD OR BETTER WITH ONE ROW OF 10d NAILS SPACED 6" O.C.
5. DIAGONAL BRACE TO BE APPROXIMATELY 45 DEGREES TO ROOF DIAPHRAM AT 4'-0" O.C.
6. CONSTRUCT HORIZONTAL BRACE CONNECTING A 2x6 STUD AND A 2x4 STUD AS SHOWN WITH 16d NAILS SPACED 6" O.C. HORIZONTAL BRACE TO BE LOCATED AT THE MIDSPAN OF THE LONGEST STUD. ATTACH TO VERTICAL STUDS WITH (4) 10d NAILS THROUGH 2x4. (REFER TO SECTION A-A)
7. GABLE STUD DEFLECTION MEETS OR EXCEEDS L/240.
8. THIS DETAIL DOES NOT APPLY TO STRUCTURAL GABLES.
9. DO NOT USE FLAT BOTTOM CHORD GABLES NEXT TO SCISSOR TYPE TRUSSES.
10. NAILS DESIGNATED 10d ARE (0.131" X 3") AND NAILS DESIGNATED 16d ARE (0.131" X 3.5")

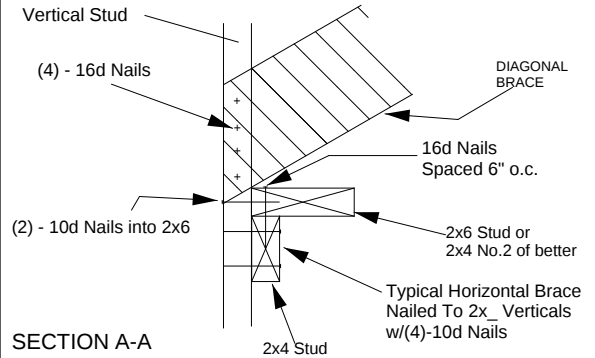

PROVIDE 2x4 BLOCKING BETWEEN THE FIRST TWO TRUSSES AS NOTED. TOENAIL BLOCKING TO TRUSSES WITH (2) - 10d NAILS AT EACH END. ATTACH DIAGONAL BRACE TO BLOCKING WITH (5) - 10d NAILS.

(4) - 8d (0.131" X 2.5") NAILS MINIMUM, PLYWOOD SHEATHING TO 2x4 STD DF/SPF BLOCK

Roof Sheathing

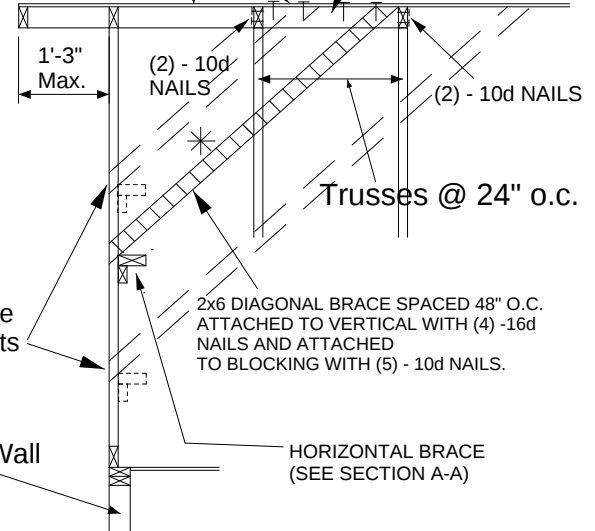

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

| Minimum Stud Size Species and Grade | Stud Spacing | Without Brace       | 1x4 L-Brace | 2x4 L-Brace | DIAGONAL BRACE | 2 DIAGONAL BRACES AT 1/3 POINTS |
|-------------------------------------|--------------|---------------------|-------------|-------------|----------------|---------------------------------|
|                                     |              | Maximum Stud Length |             |             |                |                                 |
| 2x4 DF/SPF Std/Stud                 | 12" O.C.     | 3-10-1              | 3-11-7      | 5-7-2       | 7-8-2          | 11-6-4                          |
| 2x4 DF/SPF Std/Stud                 | 16" O.C.     | 3-3-14              | 3-5-1       | 4-10-2      | 6-7-13         | 9-11-11                         |
| 2x4 DF/SPF Std/Stud                 | 24" O.C.     | 2-8-9               | 2-9-8       | 3-11-7      | 5-5-2          | 8-1-12                          |

- \* Diagonal braces over 6'-3" require a 2x4 T-Brace attached to one edge. Diagonal braces over 12'-6" require 2x4 I-braces attached to both edges. Fasten T and I braces to narrow edge of web with 10d nails 8" o.c., with 3" minimum end distance. Brace must cover 90% of diagonal length.

MAXIMUM WIND SPEED = 140 MPH  
MAX MEAN ROOF HEIGHT = 30 FEET  
CATEGORY II BUILDING  
EXPOSURE B or C

ASCE 7-98, ASCE 7-02, ASCE 7-05

DURATION OF LOAD INCREASE = 1.60

STUD DESIGN IS BASED ON COMPONENTS AND CLADDING.

CONNECTION OF BRACING IS BASED ON MWPRS 473 rev. 5/19/2020 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.  
Tampa, FL 36610

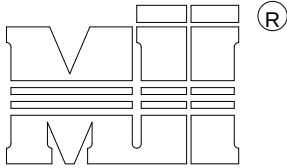

MiTek USA, Inc.

## ALTERNATE DIAGONAL BRACING TO THE BOTTOM CHORD

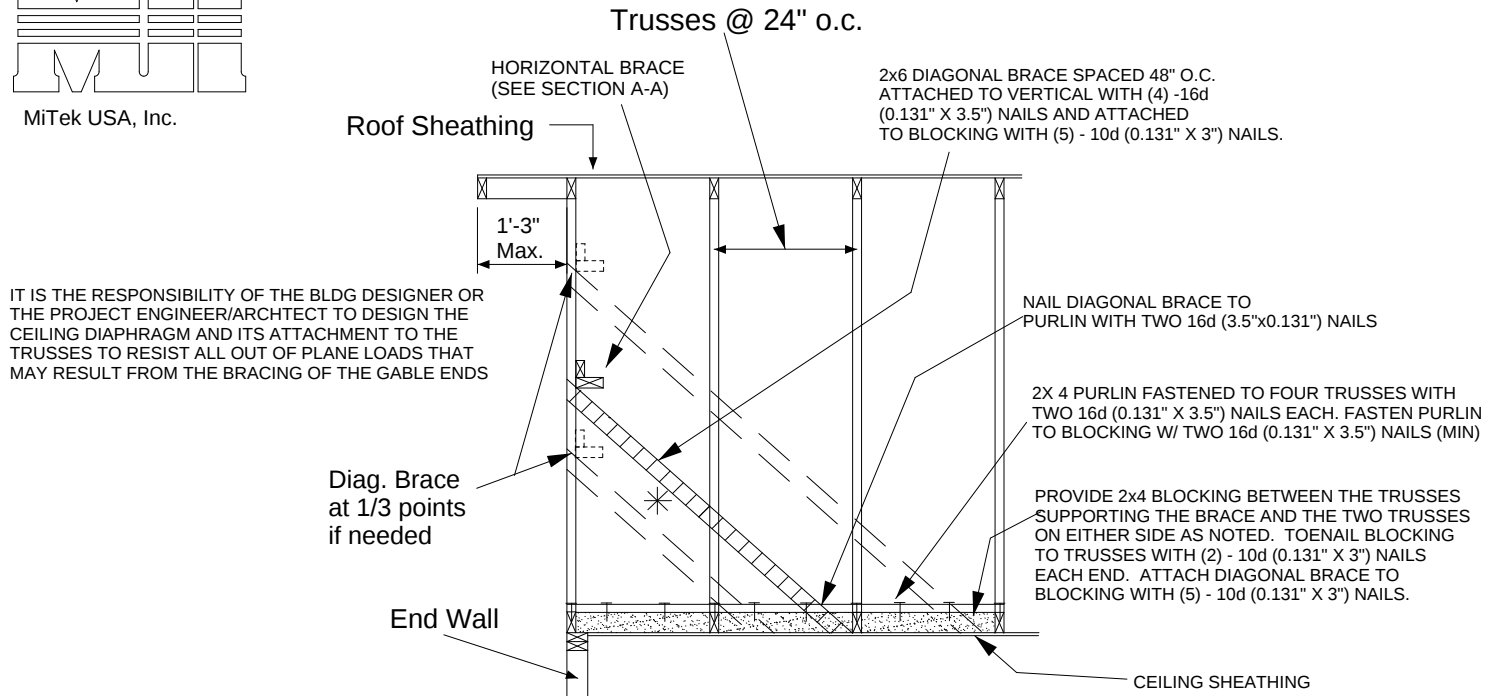

## BRACING REQUIREMENTS FOR STRUCTURAL GABLE TRUSSES

STRUCTURAL GABLE TRUSSES MAY BE BRACED AS NOTED:


METHOD 1 : ATTACH A MATCHING GABLE TRUSS TO THE INSIDE FACE OF THE STRUCTURAL GABLE AND FASTEN PER THE FOLLOWING NAILING SCHEDULE.

METHOD 2 : ATTACH 2X 4 SCABS TO THE FACE OF EACH VERTICAL MEMBER ON THE STRUCTURAL GABLE PER THE FOLLOWING NAILING SCHEDULE. SCABS ARE TO BE OF THE SAME SIZE, GRADE AND SPECIES AS THE TRUSS VERTICALS

NAILING SCHEDULE:

- FOR WIND SPEEDS 120 MPH (ASCE 7-98, 02, 05), 150 MPH (ASCE 7-10, 16) OR LESS, NAIL ALL MEMBERS WITH ONE ROW OF 10d (0.131" X 3") NAILS SPACED 6" O.C.
- FOR WIND SPEEDS 120-150 MPH (ASCE 7-98, 02, 05), 150-190 MPH (ASCE 7-10, 16) NAIL ALL MEMBERS WITH TWO ROWS OF 10d (0.131" X 3") NAILS SPACED 6" O.C. (2X 4 STUDS MINIMUM)

MAXIMUM STUD LENGTHS ARE LISTED ON PAGE 1. ALL BRACING METHODS SHOWN ON PAGE 1 ARE VALID AND ARE TO BE FASTENED TO THE SCABS OR VERTICAL STUDS OF THE STANDARD GABLE TRUSS ON THE INTERIOR SIDE OF THE STRUCTURE.

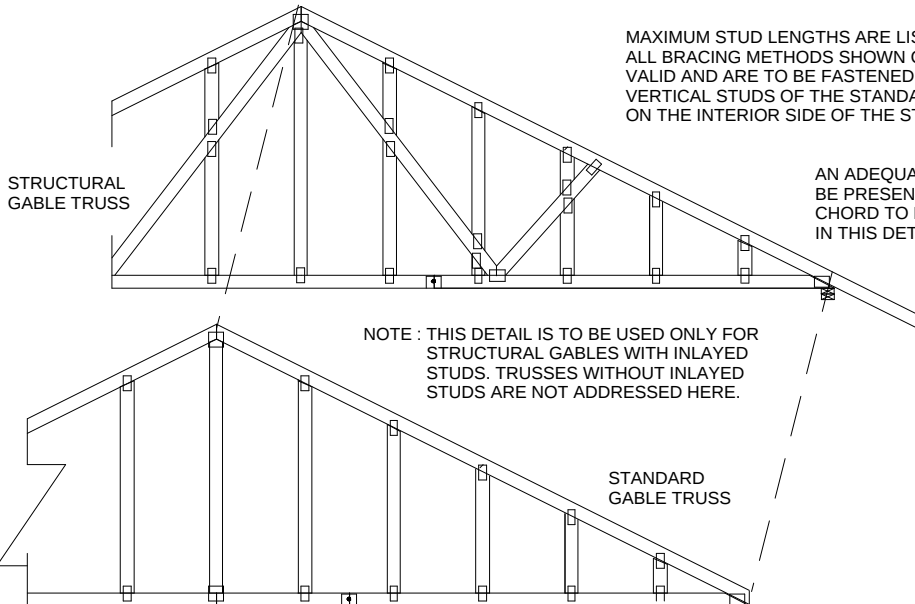

AN ADEQUATE DIAPHRAGM OR OTHER METHOD OF BRACING MUST BE PRESENT TO PROVIDE FULL LATERAL SUPPORT OF THE BOTTOM CHORD TO RESIST ALL OUT OF PLANE LOADS. THE BRACING SHOWN IN THIS DETAIL IS FOR THE VERTICAL/STUDS ONLY.

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No. 58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610

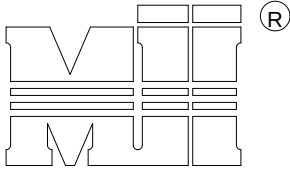

MiTek USA, Inc.

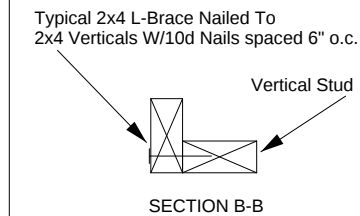


SECTION B-B

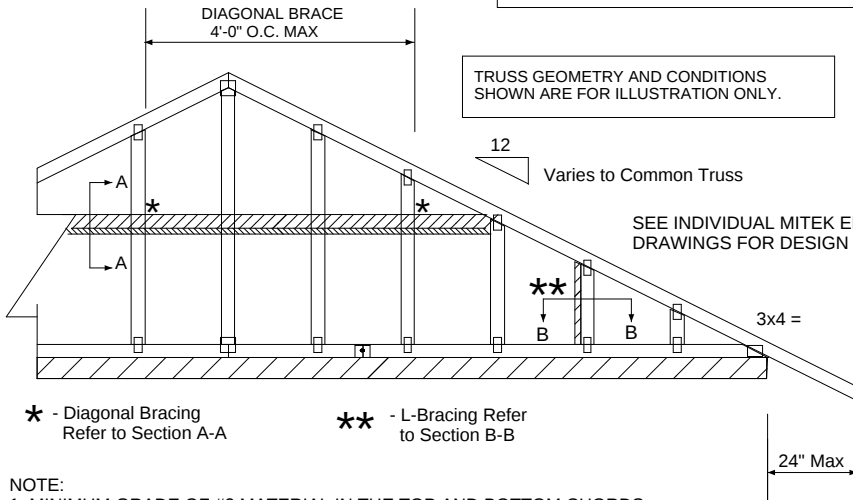TRUSS GEOMETRY AND CONDITIONS  
SHOWN ARE FOR ILLUSTRATION ONLY.12  
Varies to Common TrussSEE INDIVIDUAL MITEK ENGINEERING  
DRAWINGS FOR DESIGN CRITERIA\* - Diagonal Bracing  
Refer to Section A-A\*\* - L-Bracing Refer  
to Section B-B

## NOTE:

1. MINIMUM GRADE OF #2 MATERIAL IN THE TOP AND BOTTOM CHORDS.
2. CONNECTION BETWEEN BOTTOM CHORD OF GABLE END TRUSS AND WALL TO BE PROVIDED BY PROJECT ENGINEER OR ARCHITECT.
3. BRACING SHOWN IS FOR INDIVIDUAL TRUSS ONLY. CONSULT BLDG. ARCHITECT OR ENGINEER FOR TEMPORARY AND PERMANENT BRACING OF ROOF SYSTEM.
4. "L" BRACES SPECIFIED ARE TO BE FULL LENGTH, SPF or SP No.3 OR BETTER WITH ONE ROW OF 10d NAILS SPACED 6" O.C.
5. DIAGONAL BRACE TO BE APPROXIMATELY 45 DEGREES TO ROOF DIAPHRAM AT 4'-0" O.C.
6. CONSTRUCT HORIZONTAL BRACE CONNECTING A 2x6 AND A 2x4 AS SHOWN WITH 16d NAILS SPACED 6" O.C. HORIZONTAL BRACE TO BE LOCATED AT THE MIDSPAN OF THE LONGEST GABLE STUD. ATTACH TO VERTICAL GABLE STUDS WITH (4) 10d NAILS THROUGH 2x4. (REFER TO SECTION A-A)
7. GABLE STUD DEFLECTION MEETS OR EXCEEDS L/240.
8. THIS DETAIL DOES NOT APPLY TO STRUCTURAL GABLES.
9. DO NOT USE FLAT BOTTOM CHORD GABLES NEXT TO SCISSOR TYPE TRUSSES.
10. SOUTHERN PINE LUMBER DESIGN VALUES ARE THOSE EFFECTIVE 06-01-13 BY SPIB/ALSC.
11. NAILS DESIGNATED 10d ARE (0.131" X 3") AND NAILS DESIGNATED 16d ARE (0.131" X 3.5")

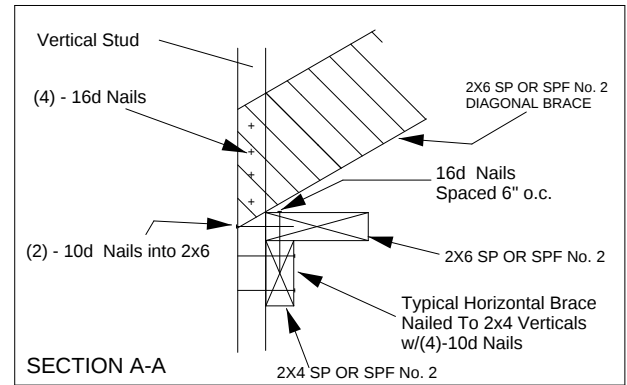

SECTION A-A


PROVIDE 2x4 BLOCKING BETWEEN THE FIRST TWO TRUSSES AS NOTED. TOENAIL BLOCKING TO TRUSSES WITH (2) - 10d NAILS AT EACH END. ATTACH DIAGONAL BRACE TO BLOCKING WITH (5) - 10d NAILS.

(4) - 8d (0.131" X 2.5") NAILS MINIMUM, PLYWOOD SHEATHING TO 2x4 STD SPF BLOCK

Roof Sheathing

Diag. Brace  
at 1/3 points  
if needed

End Wall

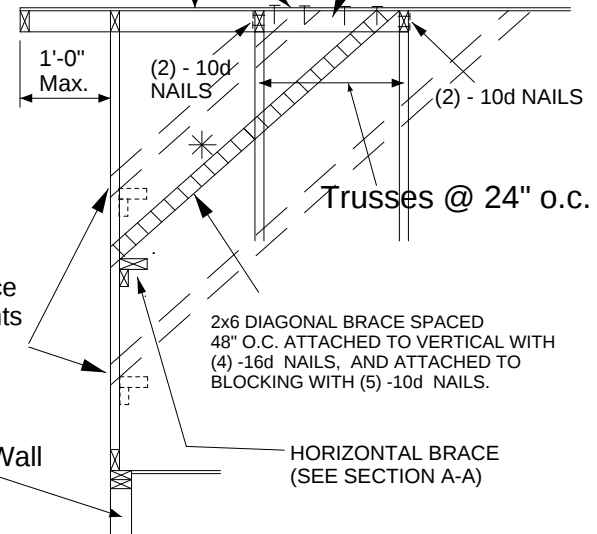

| Minimum Stud Size Species and Grade | Stud Spacing | Without Brace       | 2x4 L-Brace | DIAGONAL BRACE | 2 DIAGONAL BRACES AT 1/3 POINTS |
|-------------------------------------|--------------|---------------------|-------------|----------------|---------------------------------|
|                                     |              | Maximum Stud Length |             |                |                                 |
| 2x4 SP No. 3 / Stud                 | 12" O.C.     | 3-9-7               | 5-8-8       | 6-11-1         | 11-4-4                          |
| 2x4 SP No. 3 / Stud                 | 16" O.C.     | 3-4-12              | 4-11-15     | 6-9-8          | 10-2-3                          |
| 2x4 SP No. 3 / Stud                 | 24" O.C.     | 2-9-4               | 4-0-7       | 5-6-8          | 8-3-13                          |
| 2x4 SP No. 2                        | 12" O.C.     | 3-11-13             | 5-8-8       | 6-11-1         | 11-11-7                         |
| 2x4 SP No. 2                        | 16" O.C.     | 3-7-7               | 4-11-5      | 6-11-1         | 10-10-5                         |
| 2x4 SP No. 2                        | 24" O.C.     | 3-1-15              | 4-0-7       | 6-3-14         | 9-5-14                          |

- \* Diagonal braces over 6'-3" require a 2x4 T-Brace attached to one edge. Diagonal braces over 12'-6" require 2x4 I-braces attached to both edges. Fasten T and I braces to narrow edge of diagonal brace with 10d nails 6" o.c., with 3" minimum end distance. Brace must cover 90% of diagonal length. T or I braces must be 2x4 SPF No. 2 or SP No. 2.

MAX MEAN ROOF HEIGHT = 30 FEET  
EXPOSURE DASCE 7-10, ASCE 7-16 170 MPH  
DURATION OF LOAD INCREASE : 1.60STUD DESIGN IS BASED ON COMPONENTS AND CLADDING.  
CONNECTION OF BRACING IS BASED ON MWFRS.

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MIP-743 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021




6904 Parke East Blvd.  
Tampa, FL 36610

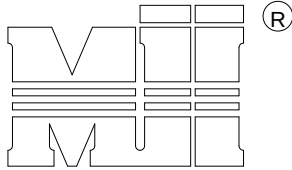

MiTek USA, Inc.

## ALTERNATE DIAGONAL BRACING TO THE BOTTOM CHORD

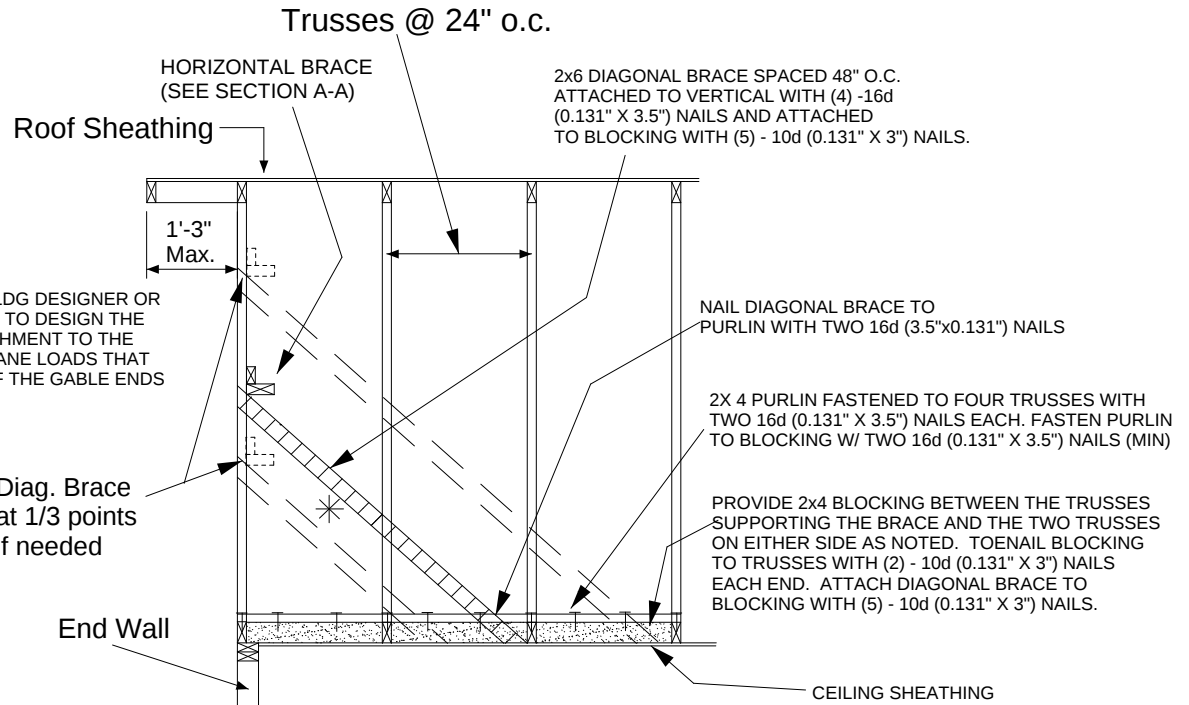

IT IS THE RESPONSIBILITY OF THE BLDG DESIGNER OR THE PROJECT ENGINEER/ARCHTCT TO DESIGN THE CEILING DIAPHRAGM AND ITS ATTACHMENT TO THE TRUSSES TO RESIST ALL OUT OF PLANE LOADS THAT MAY RESULT FROM THE BRACING OF THE GABLE ENDS

## BRACING REQUIREMENTS FOR STRUCTURAL GABLE TRUSSES


STRUCTURAL GABLE TRUSSES MAY BE BRACED AS NOTED:

METHOD 1 : ATTACH A MATCHING GABLE TRUSS TO THE INSIDE FACE OF THE STRUCTURAL GABLE AND FASTEN PER THE FOLLOWING NAILING SCHEDULE.

METHOD 2 : ATTACH 2X SCABS TO THE FACE OF EACH VERTICAL MEMBER ON THE STRUCTURAL GABLE PER THE FOLLOWING NAILING SCHEDULE. SCABS ARE TO BE OF THE SAME SIZE, GRADE AND SPECIES AS THE TRUSS VERTICALS

NAILING SCHEDULE:

- FOR WIND SPEEDS 120 MPH (ASCE 7-98, 02, 05), 150 MPH (ASCE 7-10, 16) OR LESS, NAIL ALL MEMBERS WITH ONE ROW OF 10d (0.131" X 3") NAILS SPACED 6" O.C.
- FOR WIND SPEEDS 120-150 MPH (ASCE 7-98, 02, 05), 150-190 MPH (ASCE 7-10, 16) NAIL ALL MEMBERS WITH TWO ROWS OF 10d (0.131" X 3") NAILS SPACED 6" O.C. (2X 4 STUDS MINIMUM)

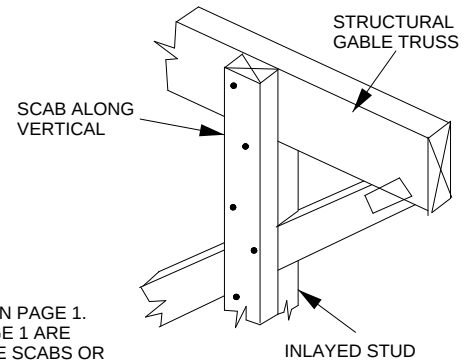

MAXIMUM STUD LENGTHS ARE LISTED ON PAGE 1. ALL BRACING METHODS SHOWN ON PAGE 1 ARE VALID AND ARE TO BE FASTENED TO THE SCABS OR VERTICAL STUDS OF THE STANDARD GABLE TRUSS ON THE INTERIOR SIDE OF THE STRUCTURE.

STRUCTURAL GABLE TRUSS

AN ADEQUATE DIAPHRAGM OR OTHER METHOD OF BRACING MUST BE PRESENT TO PROVIDE FULL LATERAL SUPPORT OF THE BOTTOM CHORD TO RESIST ALL OUT OF PLANE LOADS. THE BRACING SHOWN IN THIS DETAIL IS FOR THE VERTICAL/STUDS ONLY.

NOTE : THIS DETAIL IS TO BE USED ONLY FOR STRUCTURAL GABLES WITH INLAVED STUDS. TRUSSES WITHOUT INLAVED STUDS ARE NOT ADDRESSED HERE.

STANDARD GABLE TRUSS

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 36610

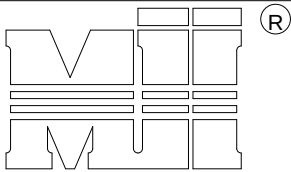

MiTek USA, Inc.


Typical 2x4 L-Brace Nailed To  
2x4 Verticals w/10d Nails spaced 6" o.c.

Vertical Stud

SECTION B-B


TRUSS GEOMETRY AND CONDITIONS  
SHOWN ARE FOR ILLUSTRATION ONLY.

Varies to Common Truss

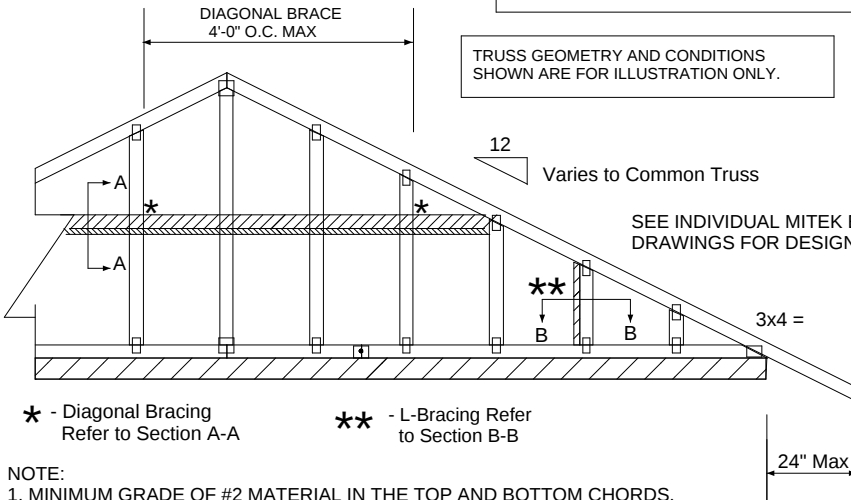SEE INDIVIDUAL MITEK ENGINEERING  
DRAWINGS FOR DESIGN CRITERIA\* - Diagonal Bracing  
Refer to Section A-A\*\* - L-Bracing Refer  
to Section B-B

## NOTE:

1. MINIMUM GRADE OF #2 MATERIAL IN THE TOP AND BOTTOM CHORDS.
2. CONNECTION BETWEEN BOTTOM CHORD OF GABLE END TRUSS AND WALL TO BE PROVIDED BY PROJECT ENGINEER OR ARCHITECT.
3. BRACING SHOWN IS FOR INDIVIDUAL TRUSS ONLY. CONSULT BLDG. ARCHITECT OR ENGINEER FOR TEMPORARY AND PERMANENT BRACING OF ROOF SYSTEM.
4. "L" BRACES SPECIFIED ARE TO BE FULL LENGTH, SPF or SP No.3 OR BETTER WITH ONE ROW OF 10d NAILS SPACED 6" O.C.
5. DIAGONAL BRACE TO BE APPROXIMATELY 45 DEGREES TO ROOF DIAPHRAM AT 4'-0" O.C.
6. CONSTRUCT HORIZONTAL BRACE CONNECTING A 2x6 AND A 2x4 AS SHOWN WITH 16d NAILS SPACED 6" O.C. HORIZONTAL BRACE TO BE LOCATED AT THE MIDSPAN OF THE LONGEST GABLE STUD. ATTACH TO VERTICAL GABLE STUDS WITH (4) 10d NAILS THROUGH 2x4. (REFER TO SECTION A-A)
7. GABLE STUD DEFLECTION MEETS OR EXCEEDS L/240.
8. THIS DETAIL DOES NOT APPLY TO STRUCTURAL GABLES.
9. DO NOT USE FLAT BOTTOM CHORD GABLES NEXT TO SCISSOR TYPE TRUSSES.
10. SOUTHERN PINE LUMBER DESIGN VALUES ARE THOSE EFFECTIVE 06-01-13 BY SPIB/ALSC.
11. NAILS DESIGNATED 10d ARE (0.131" X 3") AND NAILS DESIGNATED 16d ARE (0.131" X 3.5")

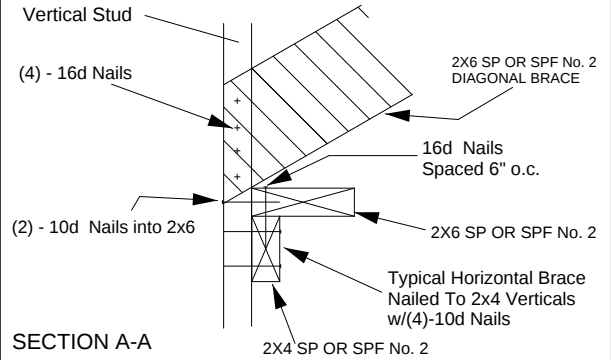


PROVIDE 2x4 BLOCKING BETWEEN THE FIRST TWO TRUSSES AS NOTED. TOENAIL BLOCKING TO TRUSSES WITH (2) - 10d NAILS AT EACH END. ATTACH DIAGONAL BRACE TO BLOCKING WITH (5) - 10d NAILS.

(4) - 8d (0.131" X 2.5") NAILS MINIMUM, PLYWOOD SHEATHING TO 2x4 STD SPF BLOCK

Roof Sheathing

Diag. Brace  
at 1/3 points  
if needed

End Wall

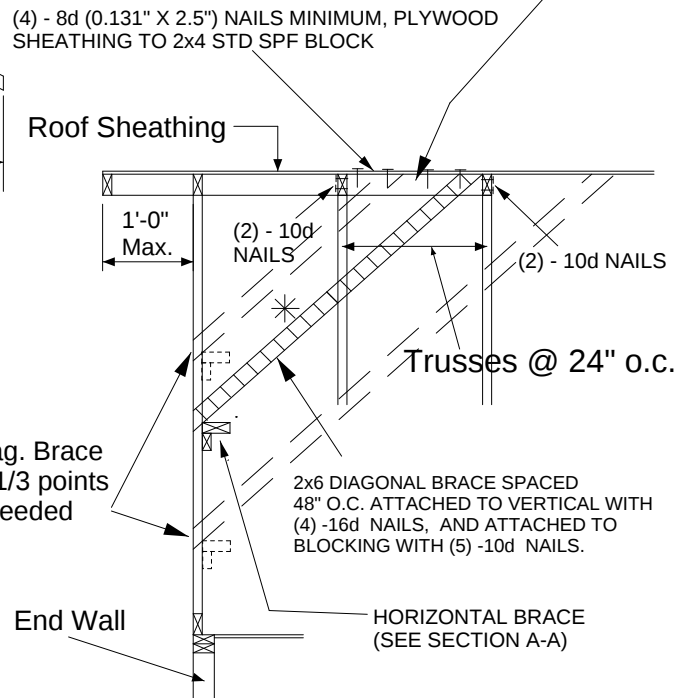

| Minimum Stud Size Species and Grade | Stud Spacing | Without Brace       | 2x4 L-Brace | DIAGONAL BRACE | 2 DIAGONAL BRACES AT 1/3 POINTS |
|-------------------------------------|--------------|---------------------|-------------|----------------|---------------------------------|
|                                     |              | Maximum Stud Length |             |                |                                 |
| 2x4 SP No. 3 / Stud                 | 12" O.C.     | 3-7-12              | 5-4-11      | 6-2-1          | 10-11-3                         |
| 2x4 SP No. 3 / Stud                 | 16" O.C.     | 3-2-8               | 4-8-1       | 6-2-1          | 9-7-7                           |
| 2x4 SP No. 3 / Stud                 | 24" O.C.     | 2-7-7               | 3-9-12      | 5-2-13         | 7-10-4                          |
| 2x4 SP No. 2                        | 12" O.C.     | 3-10-0              | 5-4-11      | 6-2-1          | 11-6-1                          |
| 2x4 SP No. 2                        | 16" O.C.     | 3-5-13              | 4-8-1       | 6-2-1          | 10-5-7                          |
| 2x4 SP No. 2                        | 24" O.C.     | 3-0-8               | 3-9-12      | 6-1-1          | 9-1-9                           |



Diagonal braces over 6'-3" require a 2x4 T-Brace attached to one edge. Diagonal braces over 12'-6" require 2x4 I-braces attached to both edges. Fasten T and I braces to narrow edge of diagonal brace with 10d nails 6in o.c., with 3in minimum end distance. Brace must cover 90% of diagonal length. T or I braces must be 2x4 SPF No. 2 or SP No. 2.

MAX MEAN ROOF HEIGHT = 30 FEET  
EXPOSURE DASCE 7-10, ASCE 7-16 180 MPH  
DURATION OF LOAD INCREASE = 1.60STUD DESIGN IS BASED ON COMPONENTS AND CLADDING.  
CONNECTION OF BRACING IS BASED ON MWFRS.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component


This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021




6904 Parke East Blvd.  
Tampa, FL 36610

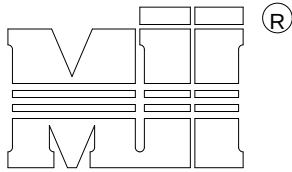

MiTek USA, Inc.

## ALTERNATE DIAGONAL BRACING TO THE BOTTOM CHORD

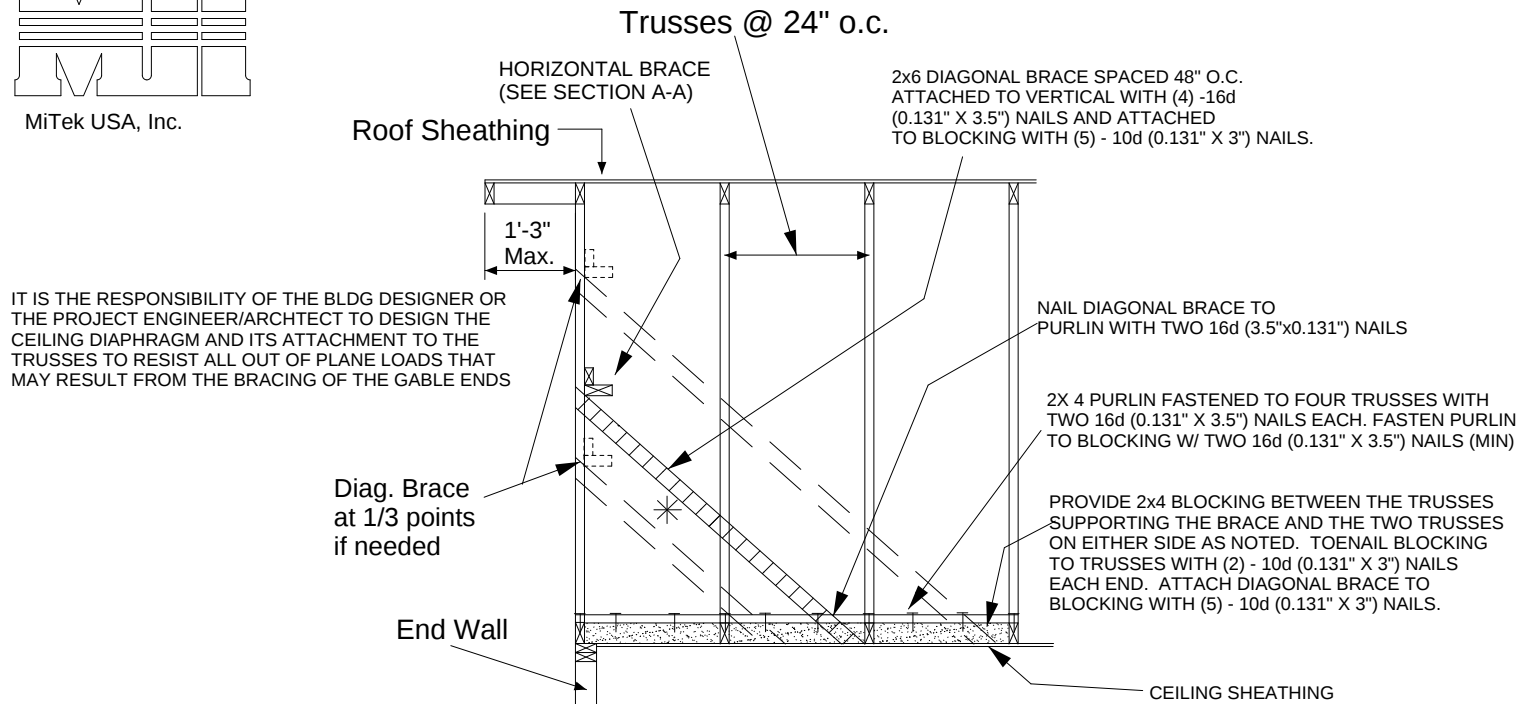

## BRACING REQUIREMENTS FOR STRUCTURAL GABLE TRUSSES


STRUCTURAL GABLE TRUSSES MAY BE BRACED AS NOTED:

METHOD 1 : ATTACH A MATCHING GABLE TRUSS TO THE INSIDE FACE OF THE STRUCTURAL GABLE AND FASTEN PER THE FOLLOWING NAILING SCHEDULE.

METHOD 2 : ATTACH 2X \_ SCABS TO THE FACE OF EACH VERTICAL MEMBER ON THE STRUCTURAL GABLE PER THE FOLLOWING NAILING SCHEDULE. SCABS ARE TO BE OF THE SAME SIZE, GRADE AND SPECIES AS THE TRUSS VERTICALS

NAILING SCHEDULE:

- FOR WIND SPEEDS 120 MPH (ASCE 7-98, 02, 05), 150 MPH (ASCE 7-10, 16) OR LESS, NAIL ALL MEMBERS WITH ONE ROW OF 10d (0.131" X 3") NAILS SPACED 6" O.C.
- FOR WIND SPEEDS 120-150 MPH (ASCE 7-98, 02, 05), 150-190 MPH (ASCE 7-10, 16) NAIL ALL MEMBERS WITH TWO ROWS OF 10d (0.131" X 3") NAILS SPACED 6" O.C. (2X 4 STUDS MINIMUM)

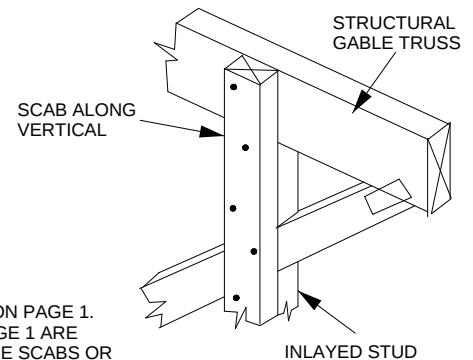

MAXIMUM STUD LENGTHS ARE LISTED ON PAGE 1. ALL BRACING METHODS SHOWN ON PAGE 1 ARE VALID AND ARE TO BE FASTENED TO THE SCABS OR VERTICAL STUDS OF THE STANDARD GABLE TRUSS ON THE INTERIOR SIDE OF THE STRUCTURE.

STRUCTURAL GABLE TRUSS

AN ADEQUATE DIAPHRAGM OR OTHER METHOD OF BRACING MUST BE PRESENT TO PROVIDE FULL LATERAL SUPPORT OF THE BOTTOM CHORD TO RESIST ALL OUT OF PLANE LOADS. THE BRACING SHOWN IN THIS DETAIL IS FOR THE VERTICAL/STUDS ONLY.

NOTE : THIS DETAIL IS TO BE USED ONLY FOR STRUCTURAL GABLES WITH INLAVED STUDS. TRUSSES WITHOUT INLAVED STUDS ARE NOT ADDRESSED HERE.

STANDARD GABLE TRUSS

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 36610

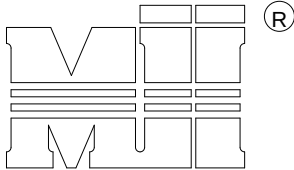


MiTek USA, Inc.

MAXIMUM WIND SPEED = REFER TO NOTES D AND OR E  
 MAX MEAN ROOF HEIGHT = 30 FEET  
 MAX TRUSS SPACING = 24" O.C.  
 CATEGORY II BUILDING  
 EXPOSURE B or C  
 ENCLOSED BUILDING  
 LOADING = 5 PSF TCDL  
 ASCE 7-10, ASCE 7-16  
 DURATION OF LOAD INCREASE : 1.60

DETAIL IS NOT APPLICABLE FOR TRUSSES  
 TRANSFERRING DRAG LOADS (SHEAR TRUSSES).  
 ADDITIONAL CONSIDERATIONS BY BUILDING  
 ENGINEER/DESIGNER ARE REQUIRED.


- A - PIGGYBACK TRUSS, REFER TO MITEK TRUSS DESIGN DRAWING. SHALL BE CONNECTED TO EACH PURLIN WITH (2) (0.131" X 3.5") TOE-NAILED.
- B - BASE TRUSS, REFER TO MITEK TRUSS DESIGN DRAWING.
- C - PURLINS AT EACH BASE TRUSS JOINT AND A MAXIMUM 24" O.C. UNLESS SPECIFIED CLOSER ON MITEK TRUSS DESIGN DRAWING. CONNECT TO BASE TRUSS WITH (2) (0.131" X 3.5") NAILS EACH.
- D - 2 X \_\_\_\_ X 4'-0" SCAB, SIZE TO MATCH TOP CHORD OF PIGGYBACK TRUSS, MIN GRADE #2, ATTACHED TO ONE FACE, CENTERED ON INTERSECTION, WITH (2) ROWS OF (0.131" X 3") NAILS @ 4" O.C. SCAB MAY BE OMITTED PROVIDED THE TOP CHORD SHEATHING IS CONTINUOUS OVER INTERSECTION AT LEAST 1 FT. IN BOTH DIRECTIONS AND:
1. WIND SPEED OF 115 MPH OR LESS FOR ANY PIGGYBACK SPAN, OR
  2. WIND SPEED OF 116 MPH TO 180 MPH WITH A MAXIMUM PIGGYBACK SPAN OF 12 ft.
- E - FOR WIND SPEEDS BETWEEN 116 AND 180 MPH, ATTACH MITEK NP37 20 GA Nail-On PLATES TO EACH FACE OF TRUSSES AT 72" O.C. W/ (4) (0.131" X 1.5") NAILS PER MEMBER. STAGGER NAILS FROM OPPOSING FACES. ENSURE 0.5" NAIL EDGE DISTANCE. (MIN. 2 PAIRS OF PLATES REQ. REGARDLESS OF SPAN)

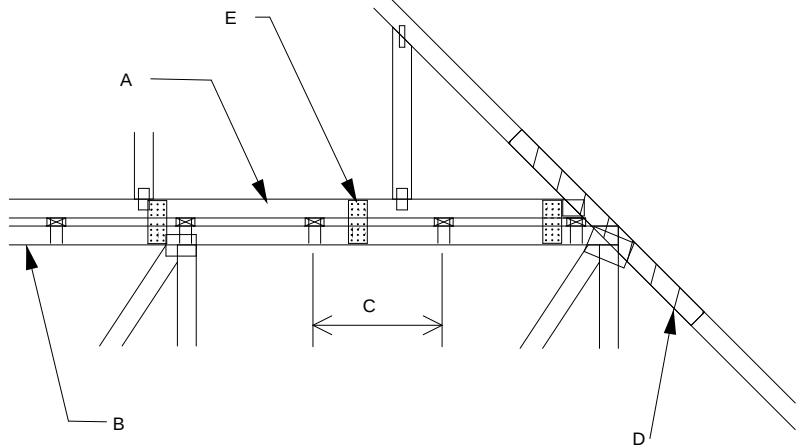


WHEN NO GAP BETWEEN PIGGYBACK AND BASE TRUSS EXISTS:

REPLACE TOE NAILING OF PIGGYBACK TRUSS TO PURLINS WITH Nail-On PLATES AS SHOWN, AND INSTALL PURLINS TO BOTTOM EDGE OF BASE TRUSS TOP CHORD AT SPECIFIED SPACING SHOWN ON BASE TRUSS MITEK DESIGN DRAWING.

SCAB CONNECTION PER  
NOTE D ABOVE

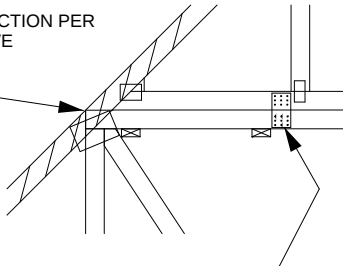


FOR ALL WIND SPEEDS, ATTACH MITEK NP37 20 GA Nail-On PLATES TO EACH FACE OF TRUSSES AT 48" O.C. W/ (4) (0.131" X 1.5") PER MEMBER. STAGGER NAILS FROM OPPOSING FACES ENSURE 0.5" NAIL EDGE DISTANCE.

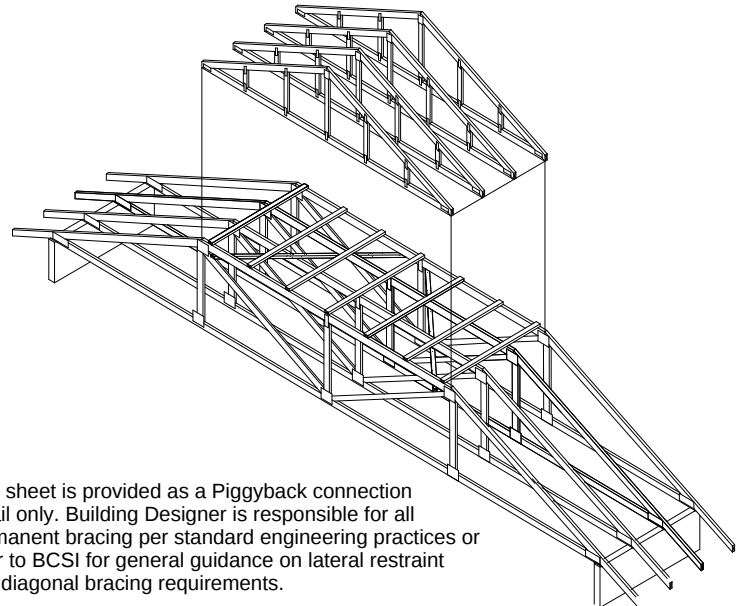

This sheet is provided as a Piggyback connection detail only. Building Designer is responsible for all permanent bracing per standard engineering practices or refer to BCSI for general guidance on lateral restraint and diagonal bracing requirements.

VERTICAL WEB TO  
EXTEND THROUGH  
BOTTOM CHORD  
OF PIGGYBACK

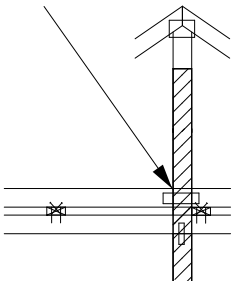

FOR LARGE CONCENTRATED LOADS APPLIED  
TO CAP TRUSS REQUIRING A VERTICAL WEB:

- 1) VERTICAL WEBS OF PIGGYBACK AND BASE TRUSS MUST MATCH IN SIZE, GRADE, AND MUST LINE UP AS SHOWN IN DETAIL.
- 2) ATTACH 2 x \_\_\_\_ x 4'-0" SCAB TO EACH FACE OF TRUSS ASSEMBLY WITH 2 ROWS OF 10d (0.131" X 3") NAILS SPACED 4" O.C. FROM EACH FACE. (SIZE AND GRADE TO MATCH VERTICAL WEBS OF PIGGYBACK AND BASE TRUSS.) (MINIMUM 2X4)
- 3) THIS CONNECTION IS ONLY VALID FOR A MAXIMUM CONCENTRATED LOAD OF 4000 LBS (@1.15). REVIEW BY A QUALIFIED ENGINEER IS REQUIRED FOR LOADS GREATER THAN 4000 LBS.
- 4) FOR PIGGYBACK TRUSSES CARRYING GIRDER LOADS, NUMBER OF PLYS OF PIGGYBACK TRUSS TO MATCH BASE TRUSS.
- 5) CONCENTRATED LOAD MUST BE APPLIED TO BOTH THE PIGGYBACK AND THE BASE TRUSS DESIGN.

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
 MiTek USA, Inc. FL Cert 6634  
 6904 Parke East Blvd. Tampa FL 33610  
 Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.  
 Tampa, FL 36610

JANUARY 8, 2019

# STANDARD PIGGYBACK TRUSS CONNECTION DETAIL

MII-PIGGY-ALT-7-16  
T23399816

MiTek USA, Inc. Page 1 of 1

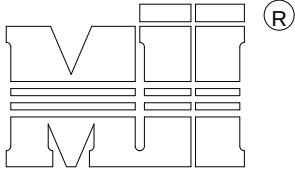


MiTek USA, Inc.

MAXIMUM WIND SPEED = REFER TO NOTES D AND OR E  
MAX MEAN ROOF HEIGHT = 30 FEET  
MAX TRUSS SPACING = 24" O.C.  
CATEGORY II BUILDING  
EXPOSURE B or C  
ENCLOSED BUILDING  
LOADING = 5 PSF TCDL MINIMUM  
ASCE 7-10, ASCE 7-16  
DURATION OF LOAD INCREASE : 1.60

DETAIL IS NOT APPLICABLE FOR TRUSSES  
TRANSFERING DRAG LOADS (SHEAR TRUSSES).  
ADDITIONAL CONSIDERATIONS BY BUILDING  
ENGINEER/DESIGNER ARE REQUIRED.


- A - PIGGYBACK TRUSS, REFER TO MITEK TRUSS DESIGN DRAWING. SHALL BE CONNECTED TO EACH PURLIN WITH (2) 0(0.131" X 3.5") TOE-NAILED.
- B - BASE TRUSS, REFER TO MITEK TRUSS DESIGN DRAWING.
- C - PURLINS AT EACH BASE TRUSS JOINT AND A MAXIMUM 24" O.C. UNLESS SPECIFIED CLOSER ON MITEK TRUSS DESIGN DRAWING. CONNECT TO BASE TRUSS WITH (2) (0.131" X 3.5") NAILS EACH.
- D - 2 X \_\_\_\_ X 4'-0" SCAB, SIZE TO MATCH TOP CHORD OF PIGGYBACK TRUSS, MIN GRADE #2, ATTACHED TO ONE FACE, CENTERED ON INTERSECTION, WITH (2) ROWS OF (0.131" X 3") NAILS @ 4" O.C. SCAB MAY BE OMITTED PROVIDED THE TOP CHORD SHEATHING IS CONTINUOUS OVER INTERSECTION AT LEAST 1 FT. IN BOTH DIRECTIONS AND:
1. WIND SPEED OF 115 MPH OR LESS FOR ANY PIGGYBACK SPAN, OR
  2. WIND SPEED OF 116 MPH TO 180 MPH WITH A MAXIMUM PIGGYBACK SPAN OF 12 ft.
- E - FOR WIND SPEED IN THE RANGE 116 MPH - 180 MPH ADD 9' x 9' x 1/2" PLYWOOD (or 7/16" OSB) GUSSET EACH SIDE AT 48" O.C. OR LESS. ATTACH WITH 3 - 6d (0.113" X 2") NAILS INTO EACH CHORD FROM EACH SIDE (TOTAL - 12 NAILS)

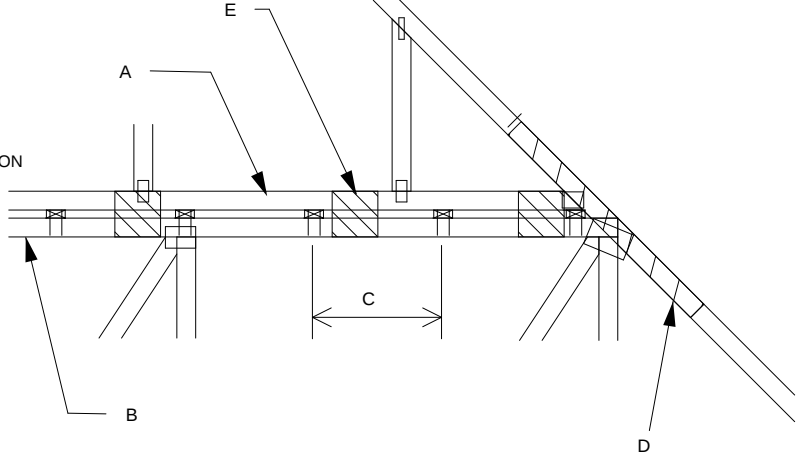


WHEN NO GAP BETWEEN PIGGYBACK AND BASE TRUSS EXISTS:

REPLACE TOE NAILING OF PIGGYBACK TRUSS TO PURLINS WITH PLYWOOD GUSSETS AS SHOWN, AND INSTALL PURLINS TO BOTTOM EDGE OF BASE TRUSS TOP CHORD AT SPECIFIED SPACING SHOWN ON BASE TRUSS MITEK DESIGN DRAWING.

SCAB CONNECTION PER  
NOTE D ABOVE

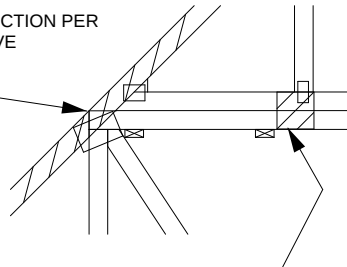


7" x 7" x 1/2" PLYWOOD (or 7/16" OSB) GUSSET EACH SIDE AT 24" O.C. ATTACH WITH 3 - 6d (0.113" X 2") NAILS INTO EACH CHORD FROM EACH SIDE (TOTAL - 12 NAILS)

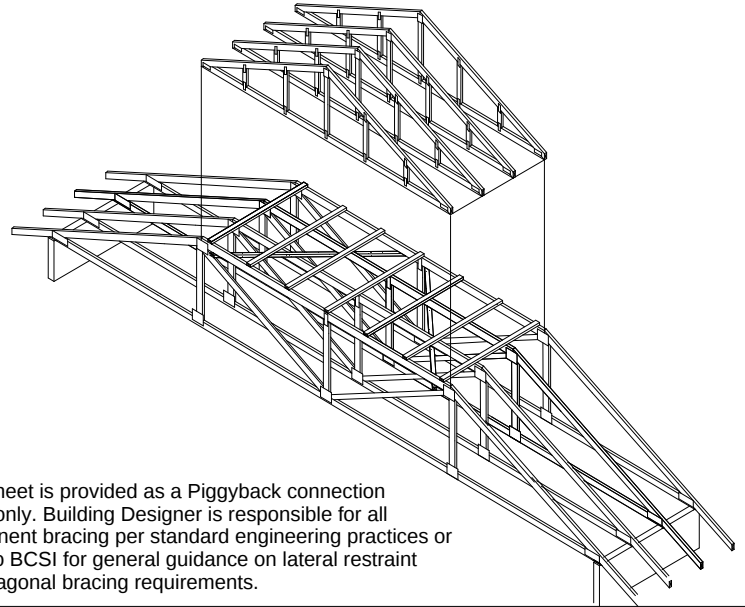

This sheet is provided as a Piggyback connection detail only. Building Designer is responsible for all permanent bracing per standard engineering practices or refer to BCSI for general guidance on lateral restraint and diagonal bracing requirements.

VERTICAL WEB TO  
EXTEND THROUGH  
BOTTOM CHORD  
OF PIGGYBACK

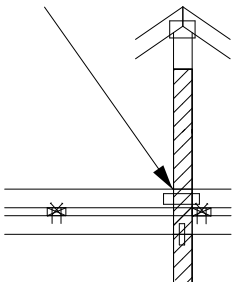

FOR LARGE CONCENTRATED LOADS APPLIED  
TO CAP TRUSS REQUIRING A VERTICAL WEB:

- 1) VERTICAL WEBS OF PIGGYBACK AND BASE TRUSS MUST MATCH IN SIZE, GRADE, AND MUST LINE UP AS SHOWN IN DETAIL.
- 2) ATTACH 2 x \_\_\_\_ x 4'-0" SCAB TO EACH FACE OF TRUSS ASSEMBLY WITH 2 ROWS OF 10d (0.131" X 3") NAILS SPACED 4" O.C. FROM EACH FACE. (SIZE AND GRADE TO MATCH VERTICAL WEBS OF PIGGYBACK AND BASE TRUSS.) (MINIMUM 2X4)
- 3) THIS CONNECTION IS ONLY VALID FOR A MAXIMUM CONCENTRATED LOAD OF 4000 LBS (@1.15). REVIEW BY A QUALIFIED ENGINEER IS REQUIRED FOR LOADS GREATER THAN 4000 LBS.
- 4) FOR PIGGYBACK TRUSSES CARRYING GIRDER LOADS, NUMBER OF PLYS OF PIGGYBACK TRUSS TO MATCH BASE TRUSS.
- 5) CONCENTRATED LOAD MUST BE APPLIED TO BOTH THE PIGGYBACK AND THE BASE TRUSS DESIGN.

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
Tampa, FL 36610




MiTek USA, Inc.

| TOTAL NUMBER OF<br>NAILS EACH SIDE<br>OF BREAK * |     | X<br>INCHES | MAXIMUM FORCE (lbs) 15% LOAD DURATION |      |      |      |      |      |      |      |
|--------------------------------------------------|-----|-------------|---------------------------------------|------|------|------|------|------|------|------|
|                                                  |     |             | SP                                    |      | DF   |      | SPF  |      | HF   |      |
| 2x4                                              | 2x6 |             | 2x4                                   | 2x6  | 2x4  | 2x6  | 2x4  | 2x6  | 2x4  | 2x6  |
| 20                                               | 30  | 24"         | 1706                                  | 2559 | 1561 | 2342 | 1320 | 1980 | 1352 | 2028 |
| 26                                               | 39  | 30"         | 2194                                  | 3291 | 2007 | 3011 | 1697 | 2546 | 1738 | 2608 |
| 32                                               | 48  | 36"         | 2681                                  | 4022 | 2454 | 3681 | 2074 | 3111 | 2125 | 3187 |
| 38                                               | 57  | 42"         | 3169                                  | 4754 | 2900 | 4350 | 2451 | 3677 | 2511 | 3767 |
| 44                                               | 66  | 48"         | 3657                                  | 5485 | 3346 | 5019 | 2829 | 4243 | 2898 | 4347 |

\* DIVIDE EQUALLY FRONT AND BACK

ATTACH 2x SCAB OF THE SAME SIZE AND GRADE AS THE BROKEN MEMBER TO EACH FACE OF THE TRUSS (CENTER ON BREAK OR SPLICE) WITH 10d (0.131" X 3") NAILS (TWO ROWS FOR 2x4, THREE ROWS FOR 2x6) SPACED 4" O.C. AS SHOWN. STAGGER NAIL SPACING FROM FRONT FACE AND BACK FACE FOR A NET 0-2-0 O.C. SPACING IN THE MAIN MEMBER. USE A MIN. 0-3-0 MEMBER END DISTANCE.

THE LENGTH OF THE BREAK (C) SHALL NOT EXCEED 12". (C=PLATE LENGTH FOR SPLICE REPAIRS)  
THE MINIMUM OVERALL SCAB LENGTH REQUIRED (L) IS CALCULATED AS FOLLOWS:  
 $L = (2) X + C$

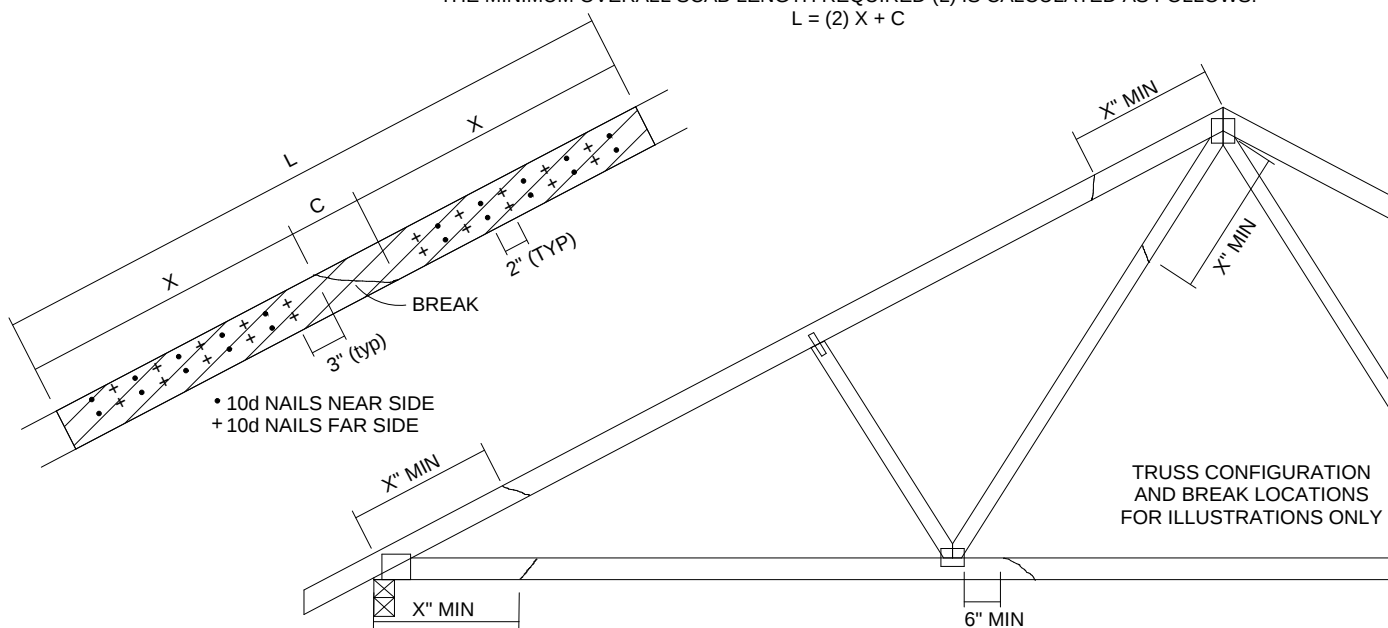

THE LOCATION OF THE BREAK MUST BE GREATER THAN OR EQUAL TO THE REQUIRED X DIMENSION FROM ANY PERIMETER BREAK OR HEEL JOINT AND A MINIMUM OF 6" FROM ANY INTERIOR JOINT (SEE SKETCH ABOVE)

DO NOT USE REPAIR FOR JOINT SPLICES

## NOTES:

1. THIS REPAIR DETAIL IS TO BE USED ONLY FOR THE APPLICATION SHOWN. THIS REPAIR DOES NOT IMPLY THAT THE REMAINING PORTION OF THE TRUSS IS UNDAMAGED. THE ENTIRE TRUSS SHALL BE INSPECTED TO VERIFY THAT NO FURTHER REPAIRS ARE REQUIRED. WHEN THE REQUIRED REPAIRS ARE PROPERLY APPLIED, THE TRUSS WILL BE CAPABLE OF SUPPORTING THE LOADS INDICATED.
2. ALL MEMBERS MUST BE RETURNED TO THEIR ORIGINAL POSITIONS BEFORE APPLYING REPAIR AND HELD IN PLACE DURING APPLICATION OF REPAIR.
3. THE END DISTANCE, EDGE DISTANCE AND SPACING OF NAILS SHALL BE SUCH AS TO AVOID UNUSUAL SPLITTING OF THE WOOD.
4. WHEN NAILING THE SCABS, THE USE OF A BACKUP WEIGHT IS RECOMMENDED TO AVOID LOOSENING OF THE CONNECTOR PLATES AT THE JOINTS OR SPLICES.
5. THIS REPAIR IS TO BE USED FOR SINGLE PLY TRUSSES IN THE 2x ORIENTATION ONLY.
6. THIS REPAIR IS LIMITED TO TRUSSES WITH NO MORE THAN THREE BROKEN MEMBERS.

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No. 58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
Tampa, FL 33610

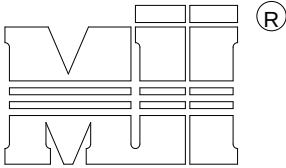

MiTek USA, Inc.

## NOTES:

- TOE-NAILS SHALL BE DRIVEN AT AN ANGLE OF 45 DEGREES WITH THE MEMBER AND MUST HAVE FULL WOOD SUPPORT. (NAIL MUST BE DRIVEN THROUGH AND EXIT AT THE BACK CORNER OF THE MEMBER END AS SHOWN.)
- THE END DISTANCE, EDGE DISTANCE, AND SPACING OF NAILS SHALL BE SUCH AS TO AVOID UNUSUAL SPLITTING OF THE WOOD.
- ALLOWABLE VALUE SHALL BE THE LESSER VALUE OF THE TWO SPECIES FOR MEMBERS OF DIFFERENT SPECIES.

THIS DETAIL APPLICABLE TO THE  
THREE END DETAILS SHOWN BELOWVIEWS SHOWN ARE FOR  
ILLUSTRATION PURPOSES ONLY

| TOE-NAIL SINGLE SHEAR VALUES PER NDS 2018 (lb/nail) |       |       |      |      |      |       |
|-----------------------------------------------------|-------|-------|------|------|------|-------|
|                                                     | DIAM. | SP    | DF   | HF   | SPF  | SPF-S |
| 3.5" LONG                                           | .131  | 88.0  | 80.6 | 69.9 | 68.4 | 59.7  |
|                                                     | .135  | 93.5  | 85.6 | 74.2 | 72.6 | 63.4  |
|                                                     | .162  | 108.8 | 99.6 | 86.4 | 84.5 | 73.8  |
| 3.25" LONG                                          | .128  | 74.2  | 67.9 | 58.9 | 57.6 | 50.3  |
|                                                     | .131  | 75.9  | 69.5 | 60.3 | 59.0 | 51.1  |
|                                                     | .148  | 81.4  | 74.5 | 64.6 | 63.2 | 52.5  |







VALUES SHOWN ARE CAPACITY PER TOE-NAIL.  
APPLICABLE DURATION OF LOAD INCREASES MAY BE APPLIED.

## EXAMPLE:

(3) - 16d (0.162" X 3.5") NAILS WITH SPF SPECIES BOTTOM CHORD

For load duration increase of 1.15:

3 (nails) X 84.5 (lb/nail) X 1.15 (DOL) = 291.5 lb Maximum Capacity

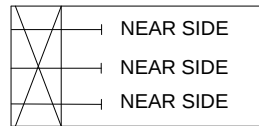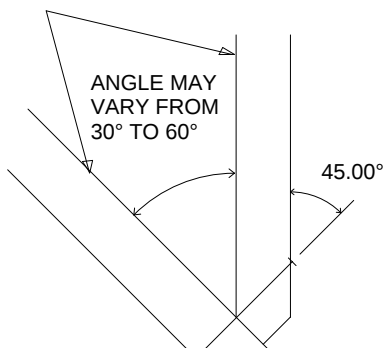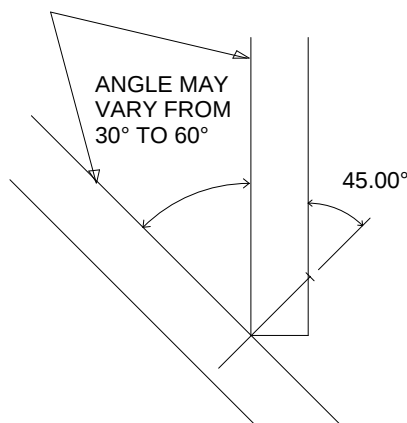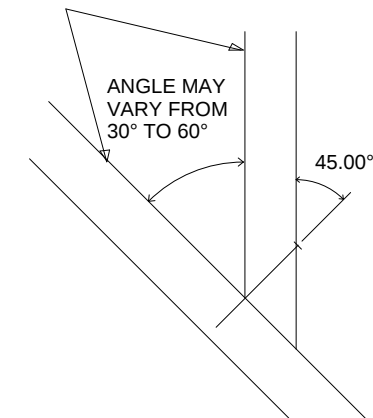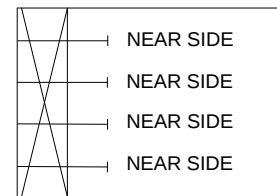SIDE VIEW  
(2x3)  
2 NAILSSIDE VIEW  
(2x4)  
3 NAILSSIDE VIEW  
(2x6)  
4 NAILS

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 33610

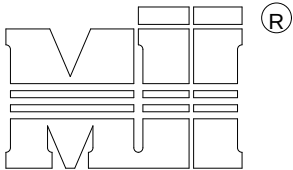


MiTek USA, Inc.

## GENERAL SPECIFICATIONS

1. NAIL SIZE 10d (0.131" X 3")
2. WOOD SCREW = 3" WS3 USP OR EQUIVALENT  
DO NOT USE DRYWALL OR DECKING TYPE SCREW
3. INSTALL VALLEY TRUSSES (24" O.C. MAXIMUM) AND SECURE PER DETAIL A
4. BRACE VALLEY WEBS IN ACCORDANCE WITH THE INDIVIDUAL DESIGN DRAWINGS.
5. BASE TRUSS SHALL BE DESIGNED WITH A PURLIN SPACING EQUIVANT TO THE RAKE DIMENSION OF THE VALLEY TRUSS SPACING.
6. NAILING DONE PER NDS - 01
7. VALLEY STUD SPACING NOT TO EXCEED 48" O.C.

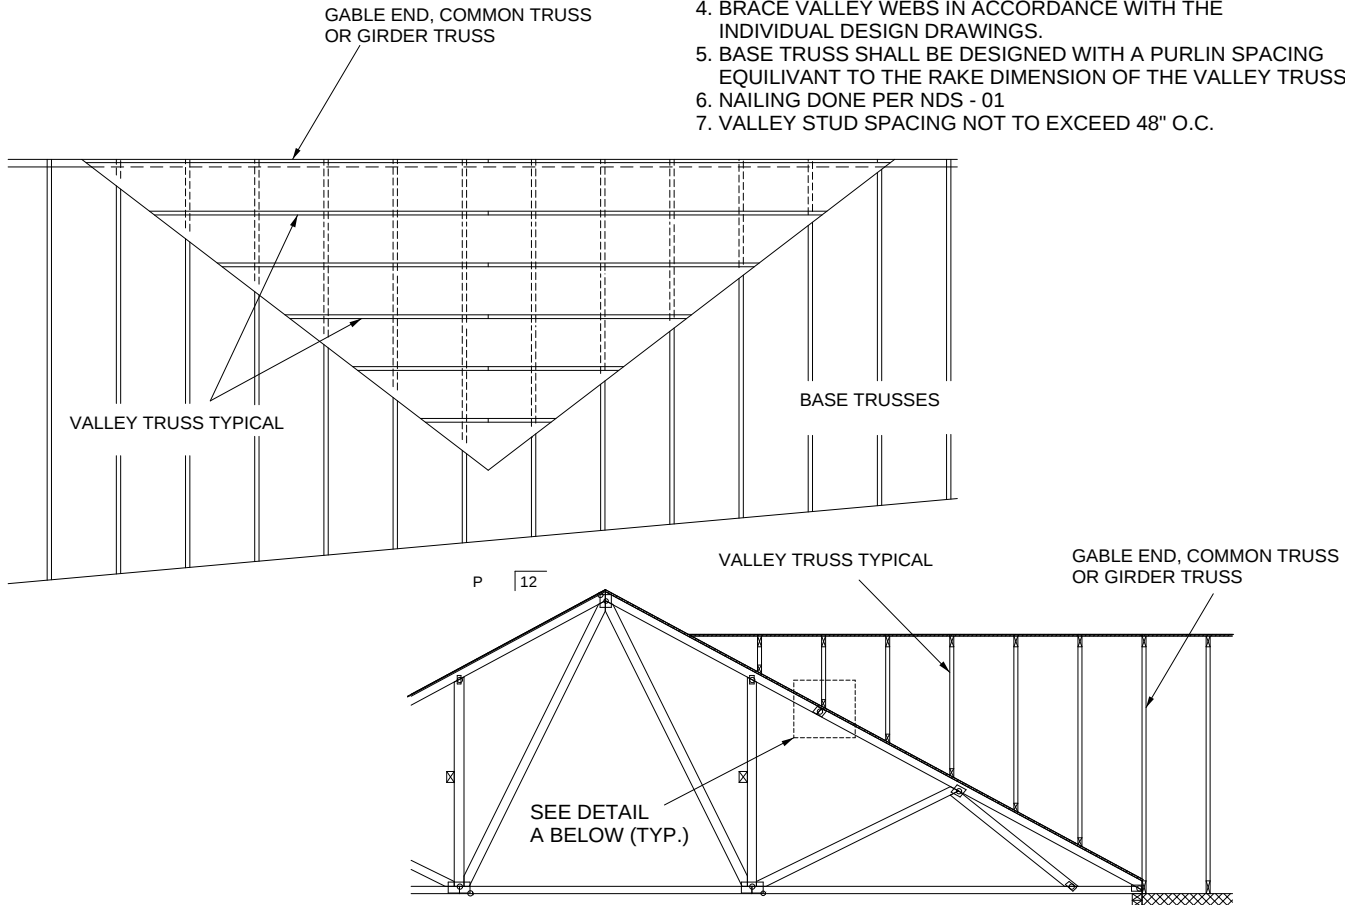

SECURE VALLEY TRUSS  
W/ ONE ROW OF 10d  
NAILS 6" O.C.

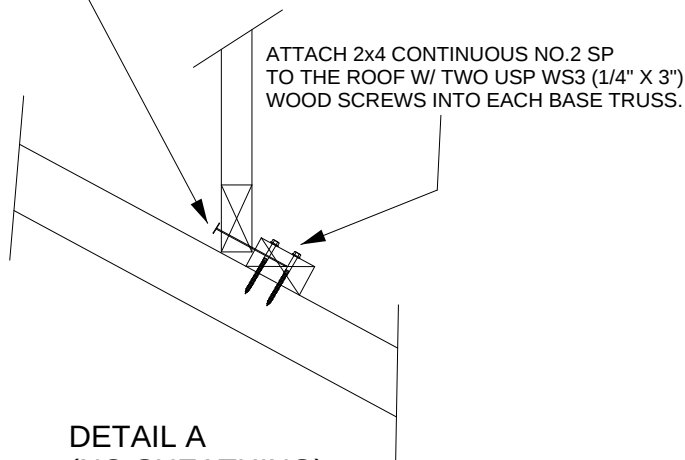

DETAIL A  
(NO SHEATHING)  
N.T.S.

WIND DESIGN PER ASCE 7-98, ASCE 7-02, ASCE 7-05 146 MPH  
WIND DESIGN PER ASCE 7-10, ASCE 7-16 160 MPH  
MAX MEAN ROOF HEIGHT = 30 FEET  
ROOF PITCH = MINIMUM 3/12 MAXIMUM 6/12  
CATEGORY II BUILDING  
EXPOSURE C  
WIND DURATION OF LOAD INCREASE : 1.60  
MAX TOP CHORD TOTAL LOAD = 50 PSF  
MAX SPACING = 24" O.C. (BASE AND VALLEY)  
MINIMUM REDUCED DEAD LOAD OF 6 PSF  
ON THE TRUSSES

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING** - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610

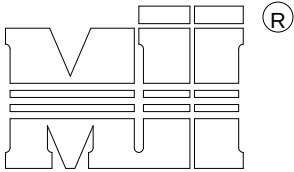


MiTek USA, Inc.

## GENERAL SPECIFICATIONS

1. NAIL SIZE 10d (0.131" X 3")
2. WOOD SCREW = 4.5" WS45 USP OR EQUIVANT
3. INSTALL SHEATHING TO TOP CHORD OF BASE TRUSSES.
4. INSTALL VALLEY TRUSSES (24" O.C. MAXIMUM) AND SECURE TO BASE TRUSSES AS PER DETAIL A
5. BRACE VALLEY WEBS IN ACCORDANCE WITH THE INDIVIDUAL DESIGN DRAWINGS.
6. NAILING DONE PER NDS-01
7. VALLEY STUD SPACING NOT TO EXCEED 48" O.C.

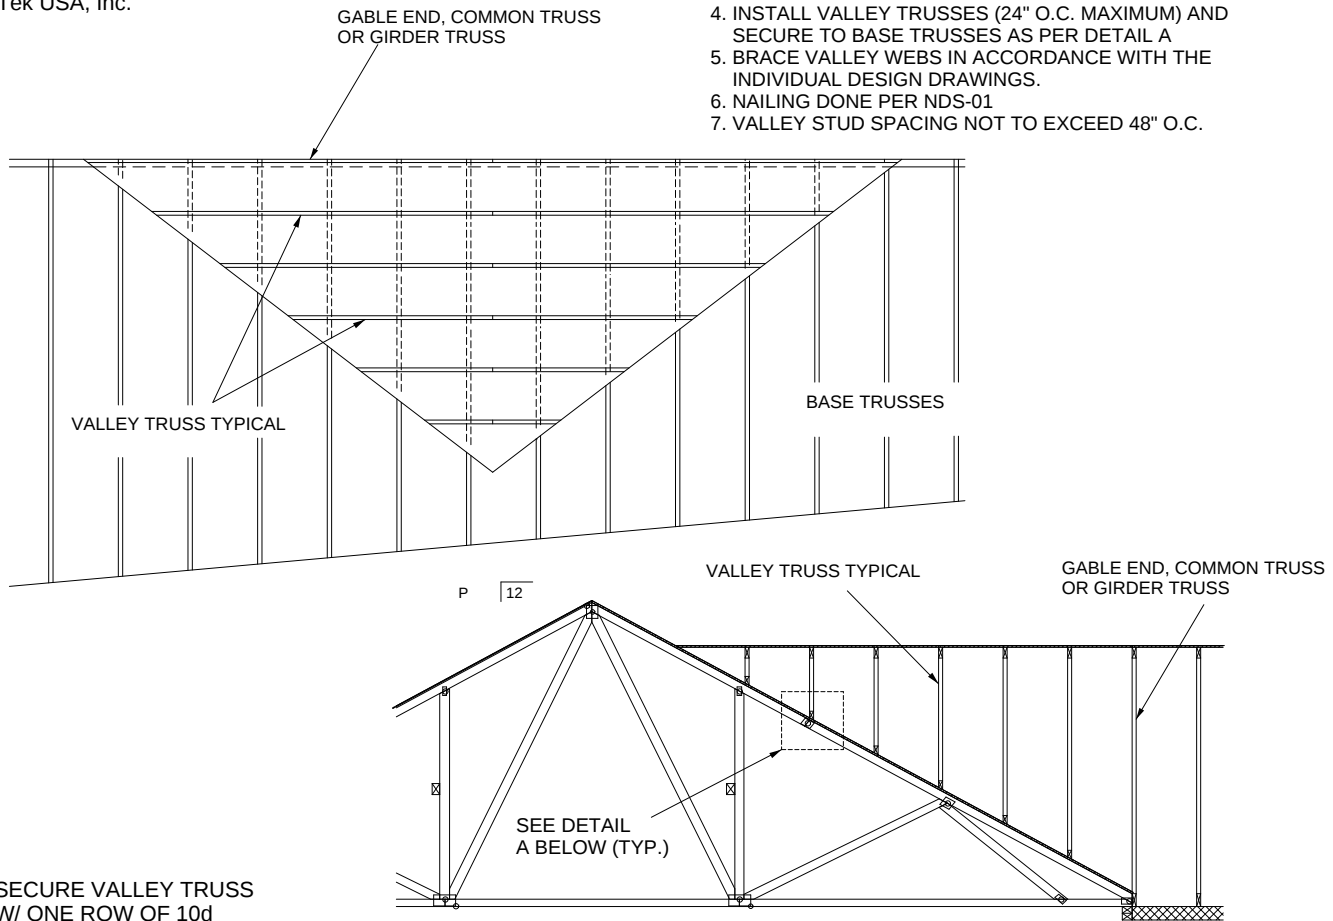

SECURE VALLEY TRUSS  
W/ ONE ROW OF 10d  
NAILS 6" O.C.

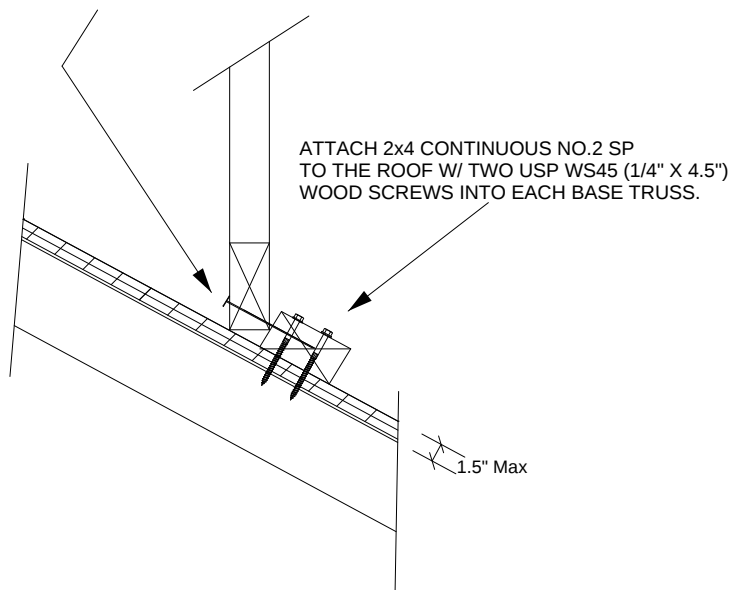

WIND DESIGN PER ASCE 7-98, ASCE 7-02, ASCE 7-05 146 MPH  
WIND DESIGN PER ASCE 7-10, ASCE 7-16 160 MPH  
MAX MEAN ROOF HEIGHT = 30 FEET  
ROOF PITCH = MINIMUM 3/12 MAXIMUM 6/12  
CATEGORY II BUILDING  
EXPOSURE C  
WIND DURATION OF LOAD INCREASE : 1.60  
MAX TOP CHORD TOTAL LOAD = 50 PSF  
MAX SPACING = 24" O.C. (BASE AND VALLEY)  
MINIMUM REDUCED DEAD LOAD OF 6 PSF  
ON THE TRUSSES

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610

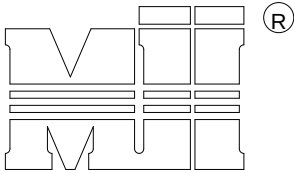

MiTek USA, Inc.

## GENERAL SPECIFICATIONS

1. NAIL SIZE 16d (0.131" X 3.5")
2. INSTALL VALLEY TRUSSES (24" O.C. MAXIMUM) AND SECURE PER DETAIL A
3. BRACE VALLEY WEBS IN ACCORDANCE WITH THE INDIVIDUAL DESIGN DRAWINGS.
4. BASE TRUSS SHALL BE DESIGNED WITH A PURLIN SPACING EQUIVARIANT TO THE RAKE DIMENSION OF THE VALLEY TRUSS SPACING.
5. NAILING DONE PER NDS - 01
6. VALLEY STUD SPACING NOT TO EXCEED 48" O.C.
7. ALL LUMBER SPECIES TO BE SP.

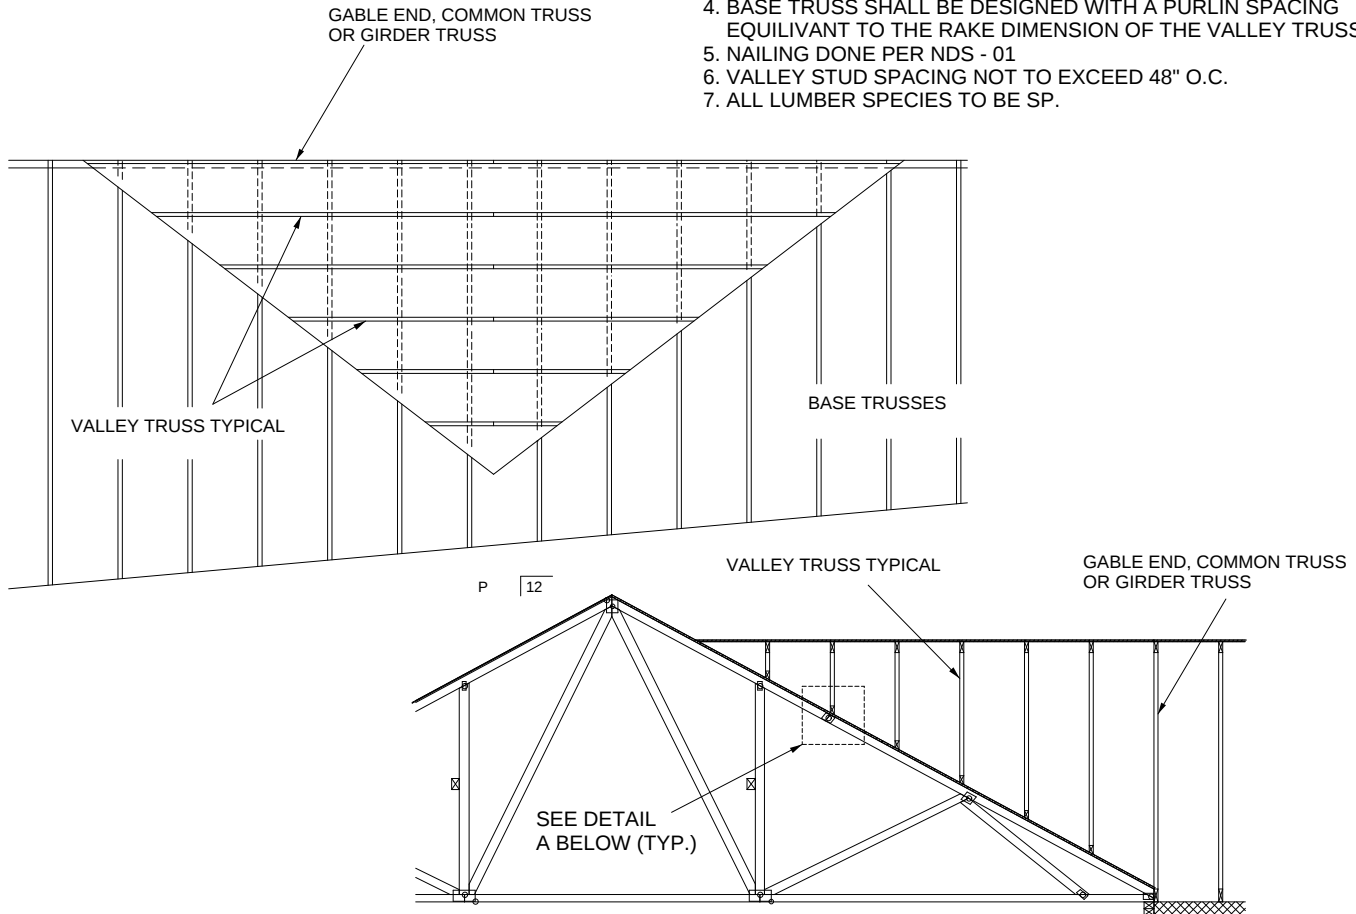

SECURE VALLEY TRUSS  
W/ ONE ROW OF 16d  
NAILS 6" O.C.

ATTACH 2x4 CONTINUOUS NO.2 SP  
TO THE ROOF W/ TWO 16d NAILS  
INTO EACH BASE TRUSS.

WIND DESIGN PER ASCE 7-98, ASCE 7-02, ASCE 7-05 120 MPH  
WIND DESIGN PER ASCE 7-10, ASCE 7-16 150 MPH  
MAX MEAN ROOF HEIGHT = 30 FEET  
ROOF PITCH = MINIMUM 3/12 MAXIMUM 10/12  
CATEGORY II BUILDING  
EXPOSURE C OR B  
WIND DURATION OF LOAD INCREASE : 1.60  
MAX TOP CHORD TOTAL LOAD = 60 PSF  
MAX SPACING = 24" O.C. (BASE AND VALLEY)  
MINIMUM REDUCED DEAD LOAD OF 4.2 PSF  
ON THE TRUSSES

This item has been  
electronically signed and  
sealed by O'Regan, Philip, PE  
using a Digital Signature.  
Printed copies of this  
document are not considered  
signed and sealed and the  
signature must be verified  
on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

DETAIL A  
(MAXIMUM 1" SHEATHING)  
N.T.S.

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 33610

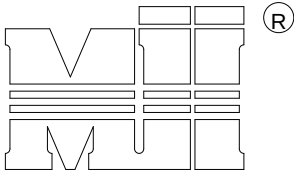

MiTek USA, Inc.

## GENERAL SPECIFICATIONS

1. NAIL SIZE 16d (0.131" X 3.5")
2. INSTALL VALLEY TRUSSES (24" O.C. MAXIMUM) AND SECURE PER DETAIL A
3. BRACE VALLEY WEBS IN ACCORDANCE WITH THE INDIVIDUAL DESIGN DRAWINGS.
4. BASE TRUSS SHALL BE DESIGNED WITH A PURLIN SPACING EQUIVARIANT TO THE RAKE DIMENSION OF THE VALLEY TRUSS SPACING.
5. NAILING DONE PER NDS - 01
6. VALLEY STUD SPACING NOT TO EXCEED 48" O.C.
7. ALL LUMBER SPECIES TO BE SP.

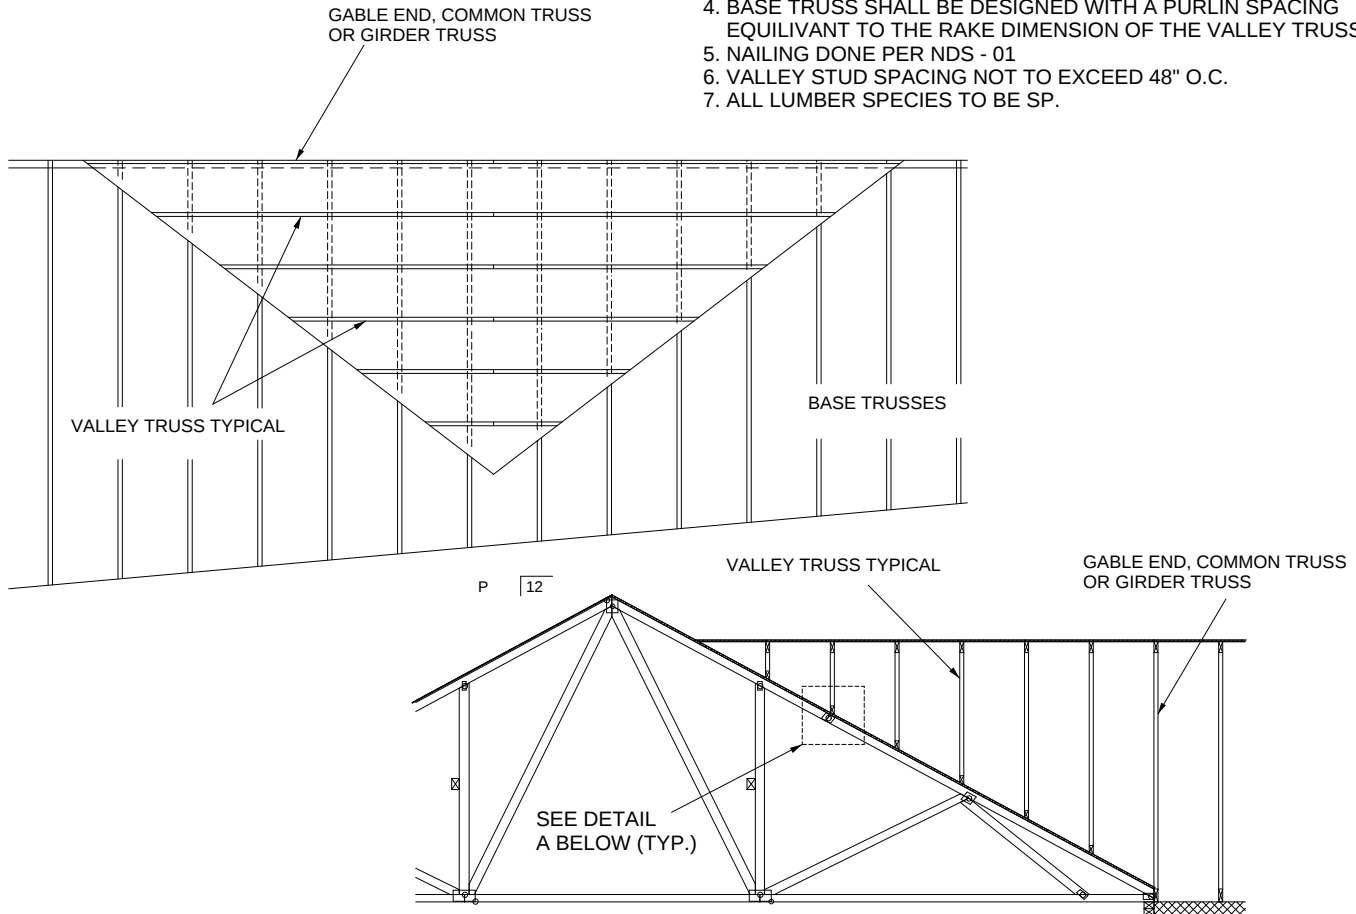

SECURE VALLEY TRUSS  
W/ ONE ROW OF 16d  
NAILS 6" O.C.

ATTACH 2x4 CONTINUOUS NO.2 SP  
TO THE ROOF W/ TWO 16d NAILS  
INTO EACH BASE TRUSS.

WIND DESIGN PER ASCE 7-98, ASCE 7-02, ASCE 7-05 120 MPH  
WIND DESIGN PER ASCE 7-10, ASCE 7-16 150 MPH  
MAX MEAN ROOF HEIGHT = 30 FEET  
ROOF PITCH = MINIMUM 3/12 MAXIMUM 10/12  
CATEGORY II BUILDING  
EXPOSURE C OR B  
WIND DURATION OF LOAD INCREASE : 1.60  
MAX TOP CHORD TOTAL LOAD = 60 PSF  
MAX SPACING = 24" O.C. (BASE AND VALLEY)  
MINIMUM REDUCED DEAD LOAD OF 4.2 PSF  
ON THE TRUSSES

This item has been  
electronically signed and  
sealed by O'Regan, Philip, PE  
using a Digital Signature.  
Printed copies of this  
document are not considered  
signed and sealed and the  
signature must be verified  
on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

DETAIL A  
(MAXIMUM 1" SHEATHING)  
N.T.S.

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 33610

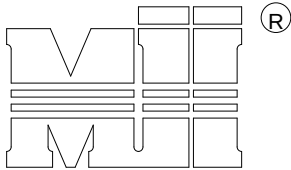


MiTek USA, Inc.

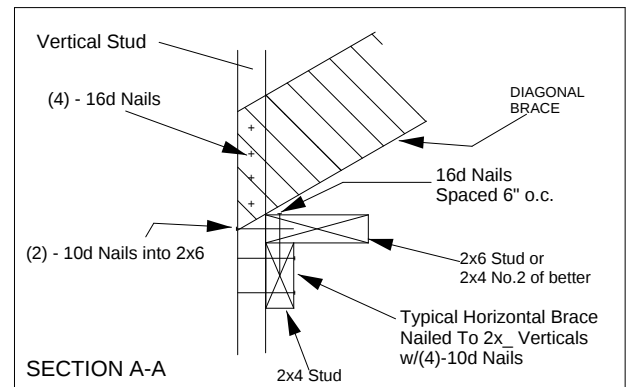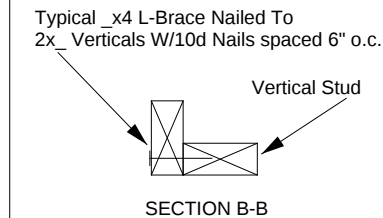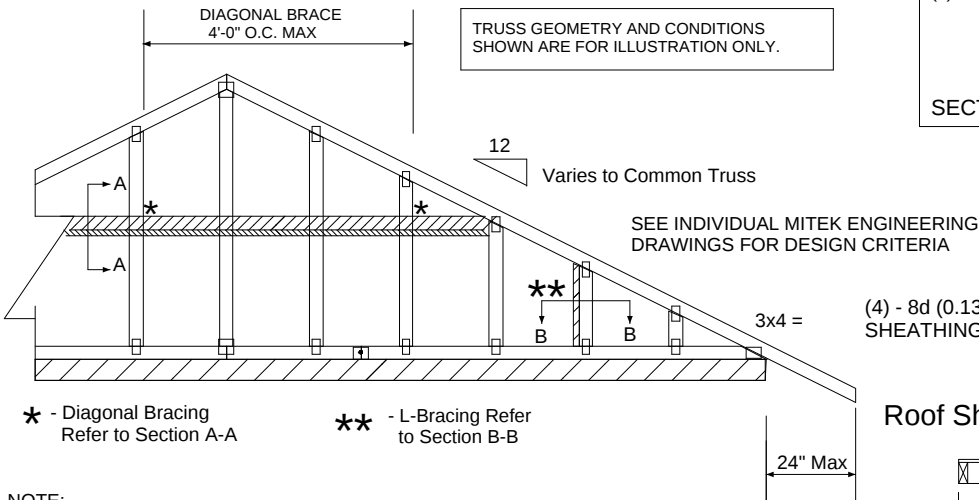TRUSS GEOMETRY AND CONDITIONS  
SHOWN ARE FOR ILLUSTRATION ONLY.

PROVIDE 2x4 BLOCKING BETWEEN THE FIRST TWO TRUSSES AS NOTED. TOENAIL BLOCKING TO TRUSSES WITH (2) - 10d NAILS AT EACH END. ATTACH DIAGONAL BRACE TO BLOCKING WITH (5) - 10d NAILS.

(4) - 8d (0.131" X 2.5") NAILS MINIMUM, PLYWOOD SHEATHING TO 2x4 STD SP BLOCK

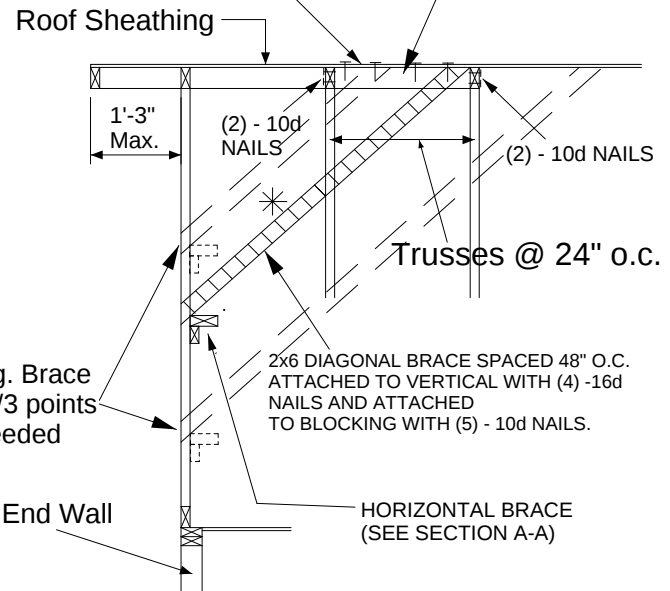

## NOTE:

1. MINIMUM GRADE OF #2 MATERIAL IN THE TOP AND BOTTOM CHORDS.
2. CONNECTION BETWEEN BOTTOM CHORD OF GABLE END TRUSS AND WALL TO BE PROVIDED BY PROJECT ENGINEER OR ARCHITECT.
3. BRACING SHOWN IS FOR INDIVIDUAL TRUSS ONLY. CONSULT BLDG. ARCHITECT OR ENGINEER FOR TEMPORARY AND PERMANENT BRACING OF ROOF SYSTEM.
4. "L" BRACES SPECIFIED ARE TO BE FULL LENGTH. GRADES:  
2x4 No 3/STUD SP OR BETTER WITH ONE ROW OF 10d NAILS SPACED 6" O.C.
5. DIAGONAL BRACE TO BE APPROXIMATELY 45 DEGREES TO ROOF DIAPHRAM AT 4'-0" O.C.
6. CONSTRUCT HORIZONTAL BRACE CONNECTING A 2x6 STUD AND A 2x4 STUD AS SHOWN WITH 16d NAILS SPACED 6" O.C. HORIZONTAL BRACE TO BE LOCATED AT THE MIDSPAN OF THE LONGEST STUD. ATTACH TO VERTICAL STUDS WITH (4) 10d NAILS THROUGH 2x4. (REFER TO SECTION A-A)
7. GABLE STUD DEFLECTION MEETS OR EXCEEDS L/240.
8. THIS DETAIL DOES NOT APPLY TO STRUCTURAL GABLES.
9. DO NOT USE FLAT BOTTOM CHORD GABLES NEXT TO SCISSOR TYPE TRUSSES.
10. NAILS DESIGNATED 10d ARE (0.131" X 3") AND NAILS DESIGNATED 16d ARE (0.131" X 3.5")

| Minimum Stud Size Species and Grade | Stud Spacing | Without Brace       | 2x4 L-Brace | DIAGONAL BRACE | 2 DIAGONAL BRACES AT 1/3 POINTS |
|-------------------------------------|--------------|---------------------|-------------|----------------|---------------------------------|
|                                     |              | Maximum Stud Length |             |                |                                 |
| 2x4 SP No 3/Stud                    | 12" O.C.     | 3-11-3              | 6-8-0       | 7-2-14         | 11-9-10                         |
| 2x4 SP No 3/Stud                    | 16" O.C.     | 3-6-14              | 5-9-5       | 7-1-13         | 10-8-11                         |
| 2x4 SP No 3/Stud                    | 24" O.C.     | 3-1-8               | 4-8-9       | 6-2-15         | 9-4-7                           |

- \* Diagonal braces over 6'-3" require a 2x4 T-Brace attached to one edge. Diagonal braces over 12'-6" require 2x4 I-braces attached to both edges. Fasten T and I braces to narrow edge of web with 10d nails 8" o.c., with 3" minimum end distance. Brace must cover 90% of diagonal length.

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

MAXIMUM WIND SPEED = 146 MPH  
MAX MEAN ROOF HEIGHT = 30 FEET  
CATEGORY II BUILDING  
EXPOSURE B or C

ASCE 7-98, ASCE 7-02, ASCE 7-05  
DURATION OF LOAD INCREASE = 1.60

STUD DESIGN IS BASED ON COMPONENTS AND CLADDING.

CONNECTION OF BRACING IS BASED ON MWPRS 473 rev. 5/19/2020 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.  
Tampa, FL 36610

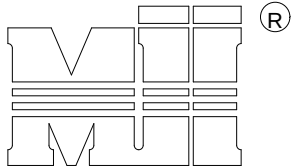

MiTek USA, Inc.

## ALTERNATE DIAGONAL BRACING TO THE BOTTOM CHORD

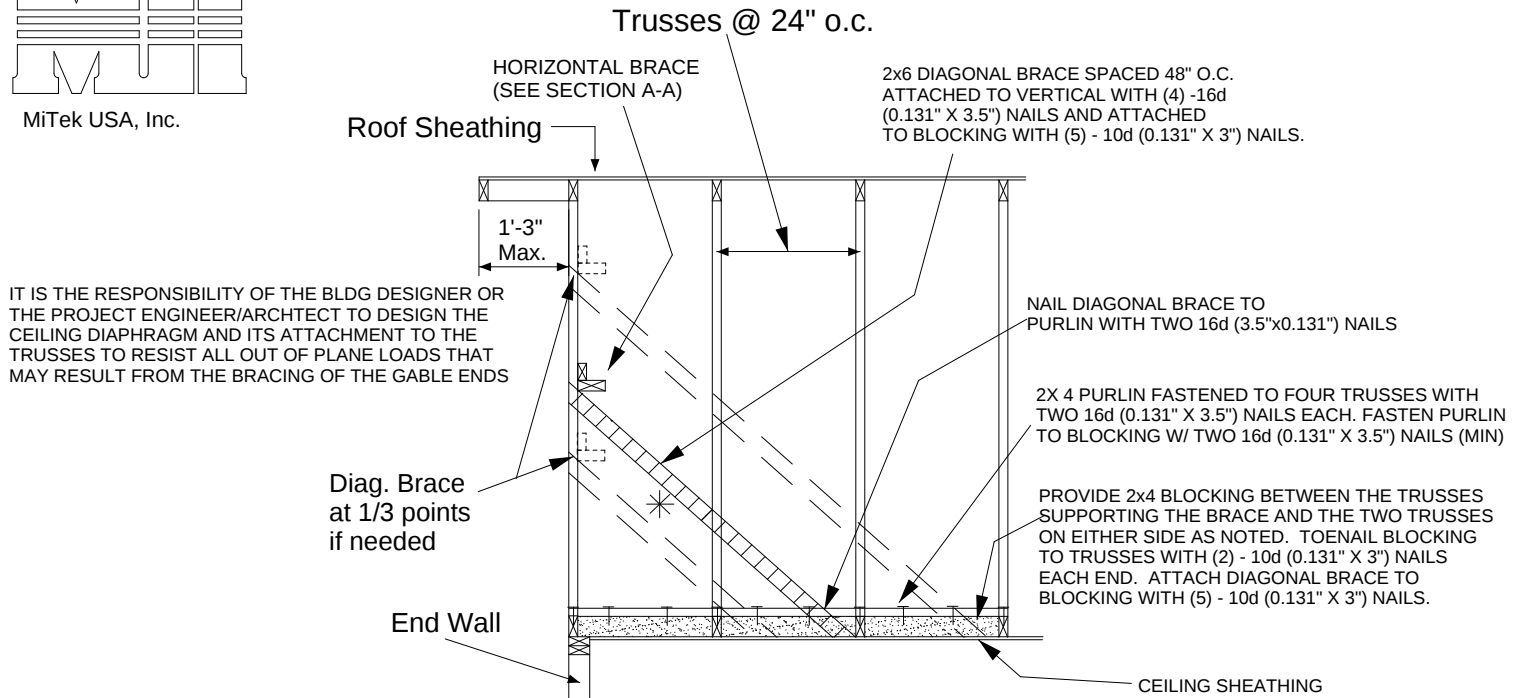

## BRACING REQUIREMENTS FOR STRUCTURAL GABLE TRUSSES


STRUCTURAL GABLE TRUSSES MAY BE BRACED AS NOTED:

METHOD 1 : ATTACH A MATCHING GABLE TRUSS TO THE INSIDE FACE OF THE STRUCTURAL GABLE AND FASTEN PER THE FOLLOWING NAILING SCHEDULE.

METHOD 2 : ATTACH 2X \_ SCABS TO THE FACE OF EACH VERTICAL MEMBER ON THE STRUCTURAL GABLE PER THE FOLLOWING NAILING SCHEDULE. SCABS ARE TO BE OF THE SAME SIZE, GRADE AND SPECIES AS THE TRUSS VERTICALS

NAILING SCHEDULE:

- FOR WIND SPEEDS 120 MPH (ASCE 7-98, 02, 05), 150 MPH (ASCE 7-10, 16) OR LESS, NAIL ALL MEMBERS WITH ONE ROW OF 10d (0.131" X 3") NAILS SPACED 6" O.C.
- FOR WIND SPEEDS 120-150 MPH (ASCE 7-98, 02, 05), 150-190 MPH (ASCE 7-10, 16) NAIL ALL MEMBERS WITH TWO ROWS OF 10d (0.131" X 3") NAILS SPACED 6" O.C. (2X 4 STUDS MINIMUM)

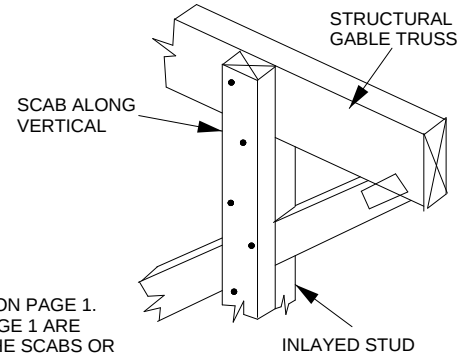

MAXIMUM STUD LENGTHS ARE LISTED ON PAGE 1. ALL BRACING METHODS SHOWN ON PAGE 1 ARE VALID AND ARE TO BE FASTENED TO THE SCABS OR VERTICAL STUDS OF THE STANDARD GABLE TRUSS ON THE INTERIOR SIDE OF THE STRUCTURE.

STRUCTURAL GABLE TRUSS

AN ADEQUATE DIAPHRAGM OR OTHER METHOD OF BRACING MUST BE PRESENT TO PROVIDE FULL LATERAL SUPPORT OF THE BOTTOM CHORD TO RESIST ALL OUT OF PLANE LOADS. THE BRACING SHOWN IN THIS DETAIL IS FOR THE VERTICAL/STUDS ONLY.

NOTE : THIS DETAIL IS TO BE USED ONLY FOR STRUCTURAL GABLES WITH INLAYED STUDS. TRUSSES WITHOUT INLAYED STUDS ARE NOT ADDRESSED HERE.

STANDARD GABLE TRUSS

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
Tampa, FL 36610

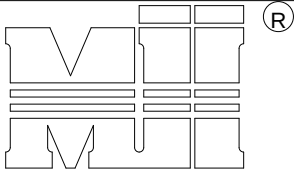


MiTek USA, Inc.

## TRUSS CRITERIA:

LOADING: 40-10-0-10  
 DURATION FACTOR: 1.15  
 SPACING: 24" O.C.  
 TOP CHORD: 2x4 OR 2x6  
 PITCH: 4/12 - 12/12  
 HEEL HEIGHT: STANDARD HEEL UP TO 12" ENERGY HEEL  
 END BEARING CONDITION

## NOTES:

1. ATTACH 2x\_ SCAB (MINIMUM NO.2 GRADE SPF, HF, SP, DF) TO ONE FACE OF TRUSS WITH TWO ROWS OF 10d (0.131" X 3") SPACED 6" O.C.
2. THE END DISTANCE, EDGE DISTANCE, AND SPACING OF NAILS SHALL BE SUCH AS TO AVOID UNUSUAL SPLITTING OF THE WOOD.
3. WHEN NAILING THE SCABS, THE USE OF A BACKUP WEIGHT IS RECOMMENDED TO AVOID LOOSENING OF THE CONNECTOR PLATES AT THE JOINTS OR SPLICES.

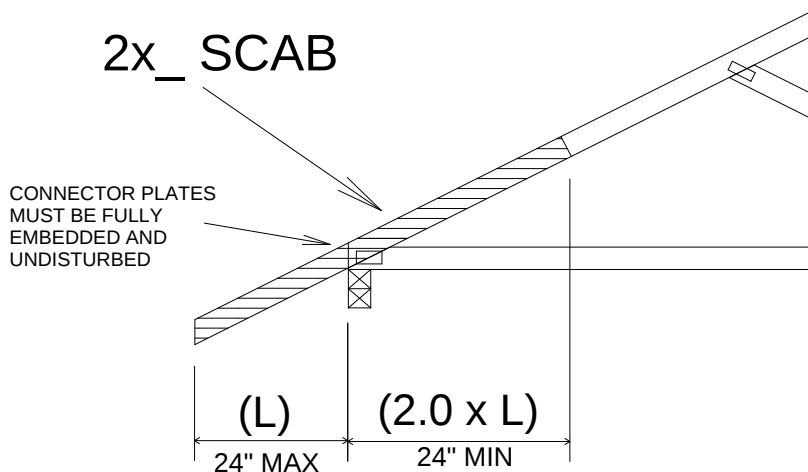

## IMPORTANT

This detail to be used only with trusses (spans less than 40') spaced 24" o.c. maximum and having pitches between 4/12 and 12/12 and total top chord loads not exceeding 50 psf. Trusses not fitting these criteria should be examined individually.

REFER TO INDIVIDUAL TRUSS DESIGN  
FOR PLATE SIZES AND LUMBER GRADES

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No.58126  
 MiTek USA, Inc. FL Cert 6634  
 6904 Parke East Blvd. Tampa FL 33610  
 Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 33610

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2,2021

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
Tampa, FL 36610


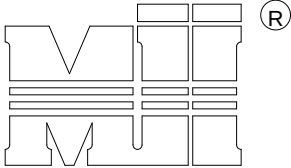


MiTek USA, Inc.

TO MINIMIZE VIBRATION COMMON TO ALL SHALLOW FRAMING SYSTEMS, 2x6 "STRONGBACK" IS RECOMMENDED, LOCATED EVERY 8 TO 10 FEET ALONG A FLOOR TRUSS.

NOTE 1: 2X6 STRONGBACK ORIENTED VERTICALLY MAY BE POSITIONED DIRECTLY UNDER THE TOP CHORD OR DIRECTLY ABOVE THE BOTTOM CHORD. SECURELY FASTENED TO THE TRUSS USING ANY OF THE METHODS ILLUSTRATED BELOW.

NOTE 2: STRONGBACK BRACING ALSO SATISFIES THE LATERAL BRACING REQUIREMENTS FOR THE BOTTOM CHORD OF THE TRUSS WHEN IT IS PLACED ON TOP OF THE BOTTOM CHORD, IS CONTINUOUS FROM END TO END, CONNECTED WITH A METHOD OTHER THAN METAL FRAMING ANCHOR, AND PROPERLY CONNECTED, BY OTHERS, AT THE ENDS.

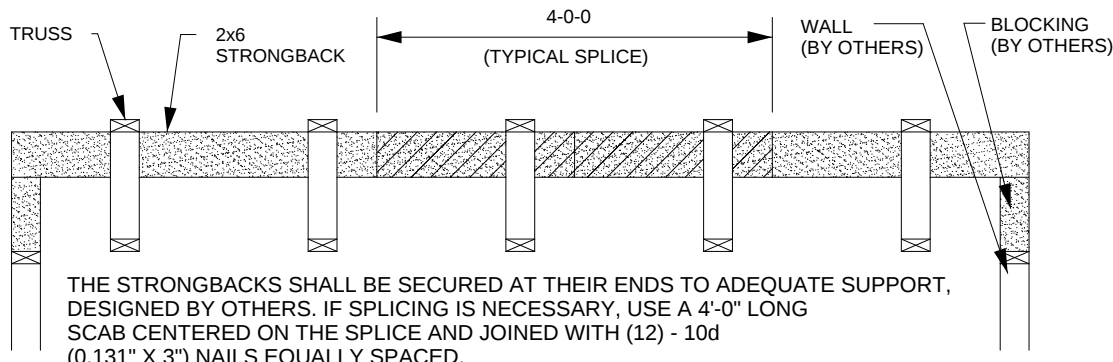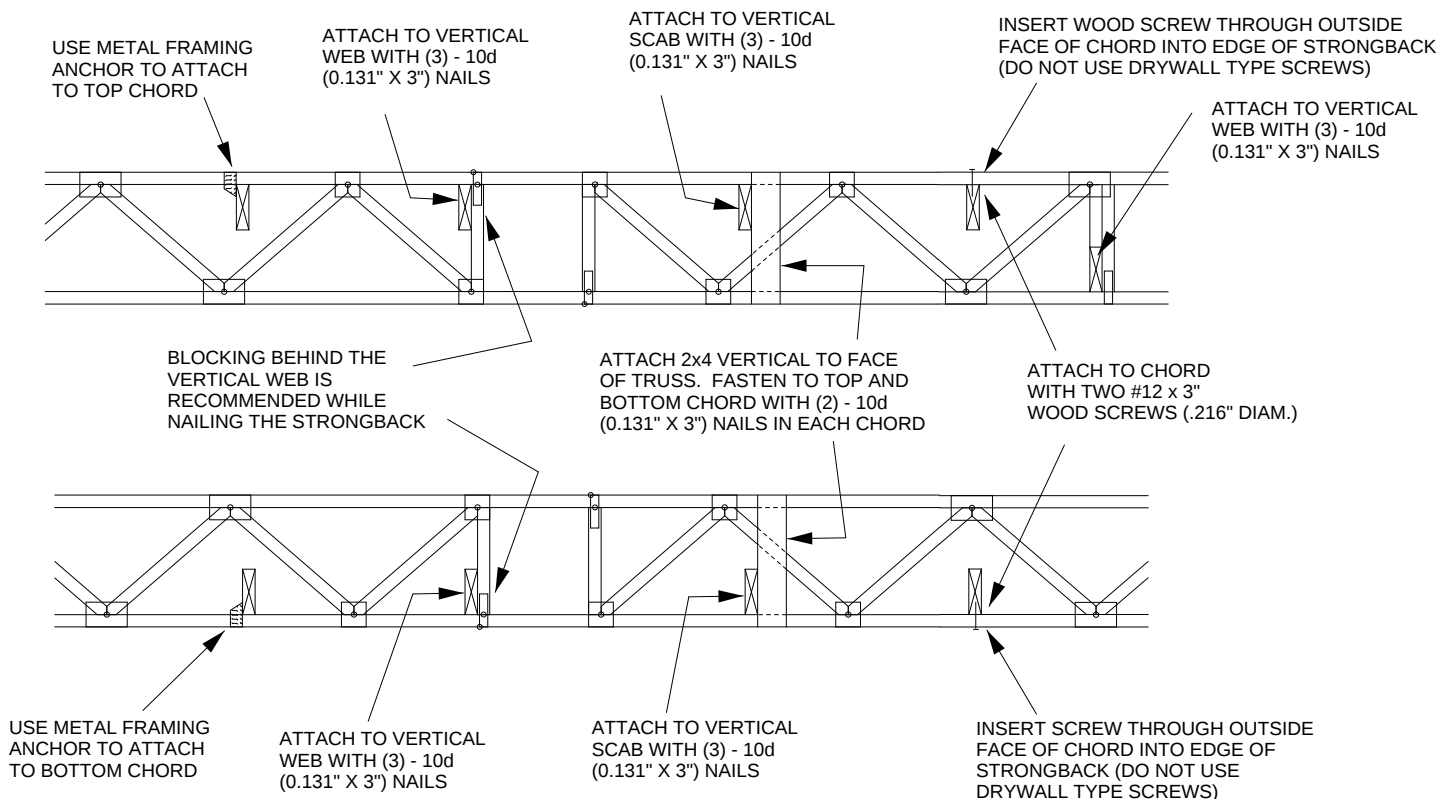

ALTERNATE METHOD OF SPLICING:  
OVERLAP STRONGBACK MEMBERS A MINIMUM OF 4'-0" AND FASTEN WITH (12) - 10d (0.131" X 3") NAILS STAGGERED AND EQUALLY SPACED.  
(TO BE USED ONLY WHEN STRONGBACK IS NOT ALIGNED WITH A VERTICAL)

This item has been electronically signed and sealed by O'Regan, Philip, PE using a Digital Signature. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Philip J. O'Regan PE No. 58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

April 2, 2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 33610

# Symbols

## PLATE LOCATION AND ORIENTATION



Center plate on joint unless X, Y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.

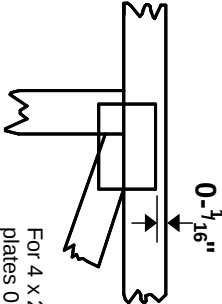

For 4 x 2 orientation, locate plates 0-  $\frac{3}{16}$ " from outside edge of truss.

— This symbol indicates the required direction of slots in connector plates.

**\* Plate location details available in MiTek 2012 software or upon request.**

## PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

## LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

## BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

## Industry Standards:

ANSI/TP1.1: National Design Specification for Metal Plate Connected Wood Truss Construction.  
DSB-89: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

# Numbering System

6-4-8 dimensions shown in ft-in-sixteenths (Drawings not to scale)

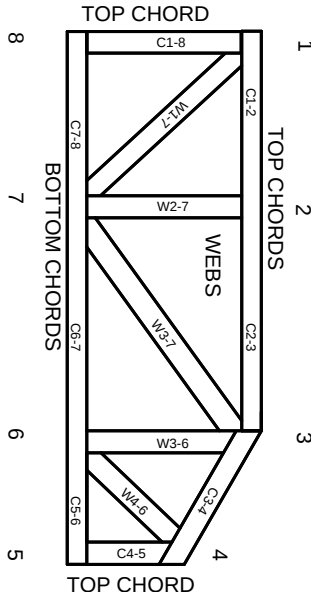

**JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.**

**CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.**

## PRODUCT CODE APPROVALS

ICC-ES Reports:

ESR-1311, ESR-1352, ESR1988  
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MiTek® All Rights Reserved



MiTek Engineering Reference Sheet: MII-7473 rev. 5/19/2020



# General Safety Notes

**Failure to Follow Could Cause Property Damage or Personal Injury**

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.



Lumber design values are in accordance with ANSI/TPI 1 section 6.3  
These truss designs rely on lumber values established by others.

RE: 2845640 - G BUZBEE - CHASTAIN RES.

**MiTek USA, Inc.**

6904 Parke East Blvd.  
Tampa, FL 33610-4115

**Site Information:**

Customer Info: G. Buzbee Inc. Project Name: Chastain Res. Model: Custom  
Lot/Block: N/A Subdivision: N/A  
Address: TBD Giles Martin Ave., N/A  
City: Columbia Cty State: FL

**Name Address and License # of Structural Engineer of Record, If there is one, for the building.**

Name: License #:  
Address:  
City: State:

**General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):**

Design Code: FBC2020/TPI2014 Design Program: MiTek 20/20 8.4  
Wind Code: ASCE 7-16 Wind Speed: 130 mph  
Roof Load: 37.0 psf Floor Load: N/A psf

This package includes 39 individual, Truss Design Drawings and 0 Additional Drawings.

With my seal affixed to this sheet, I hereby certify that I am the Truss Design Engineer and this index sheet conforms to 61G15-31.003, section 5 of the Florida Board of Professional Engineers Rules.

| No. | Seal#     | Truss Name | Date   | No. | Seal#     | Truss Name | Date   |
|-----|-----------|------------|--------|-----|-----------|------------|--------|
| 1   | T25229799 | CJ01       | 9/2/21 | 23  | T25229821 | T11        | 9/2/21 |
| 2   | T25229800 | EJ01       | 9/2/21 | 24  | T25229822 | T12        | 9/2/21 |
| 3   | T25229801 | HJ05       | 9/2/21 | 25  | T25229823 | T13        | 9/2/21 |
| 4   | T25229802 | PB01       | 9/2/21 | 26  | T25229824 | T14        | 9/2/21 |
| 5   | T25229803 | PB01G      | 9/2/21 | 27  | T25229825 | T15        | 9/2/21 |
| 6   | T25229804 | PB02       | 9/2/21 | 28  | T25229826 | T16        | 9/2/21 |
| 7   | T25229805 | PB02G      | 9/2/21 | 29  | T25229827 | T16G       | 9/2/21 |
| 8   | T25229806 | T01        | 9/2/21 | 30  | T25229828 | T17        | 9/2/21 |
| 9   | T25229807 | T01G       | 9/2/21 | 31  | T25229829 | T18        | 9/2/21 |
| 10  | T25229808 | T02        | 9/2/21 | 32  | T25229830 | V01        | 9/2/21 |
| 11  | T25229809 | T02G       | 9/2/21 | 33  | T25229831 | V02        | 9/2/21 |
| 12  | T25229810 | T03        | 9/2/21 | 34  | T25229832 | V03        | 9/2/21 |
| 13  | T25229811 | T04        | 9/2/21 | 35  | T25229833 | V04        | 9/2/21 |
| 14  | T25229812 | T05        | 9/2/21 | 36  | T25229834 | V05        | 9/2/21 |
| 15  | T25229813 | T05G       | 9/2/21 | 37  | T25229835 | V06        | 9/2/21 |
| 16  | T25229814 | T06        | 9/2/21 | 38  | T25229836 | V07        | 9/2/21 |
| 17  | T25229815 | T07        | 9/2/21 | 39  | T25229837 | V08        | 9/2/21 |
| 18  | T25229816 | T08        | 9/2/21 |     |           |            |        |
| 19  | T25229817 | T08G       | 9/2/21 |     |           |            |        |
| 20  | T25229818 | T09        | 9/2/21 |     |           |            |        |
| 21  | T25229819 | T10        | 9/2/21 |     |           |            |        |
| 22  | T25229820 | T10G       | 9/2/21 |     |           |            |        |




The truss drawing(s) referenced above have been prepared by MiTek USA, Inc. under my direct supervision based on the parameters provided by Builders FirstSource-Lake City, FL.

Truss Design Engineer's Name: O'Regan, Philip

My license renewal date for the state of Florida is February 28, 2023.

**IMPORTANT NOTE:** The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

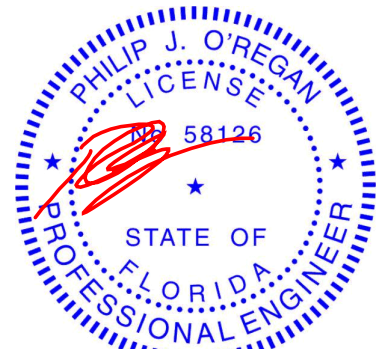

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2, 2021

|                |               |                         |          |          |                                       |
|----------------|---------------|-------------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>CJ01 | Truss Type<br>JACK-OPEN | Qty<br>4 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229799 |
|----------------|---------------|-------------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,


8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:05 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8IDX-QoTyYQQVxW3?D6?qO?pkxOr3OERmfLqXUeY1NjyhmT0

-2-0-0  
2-0-0

1-2-0  
1-2-0

Scale = 1:6.1

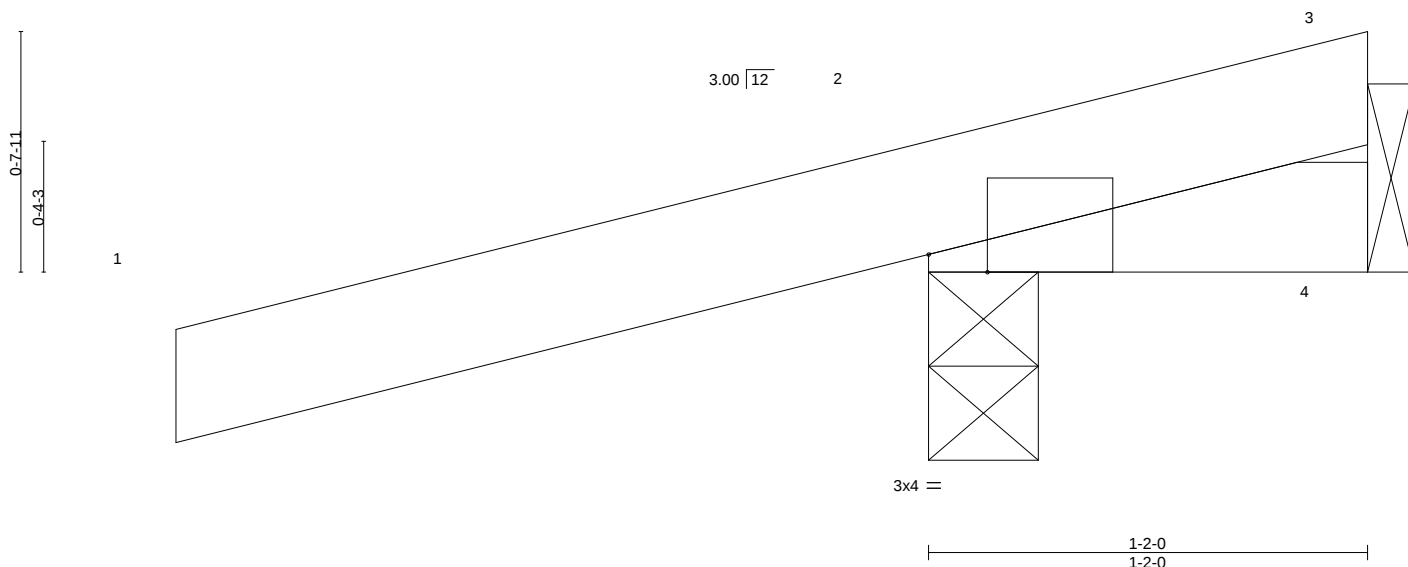

| Plate Offsets (X,Y)-- |  | [2:0-1-14,Edge]      |       |             |  |              |          |        |     |               |             |
|-----------------------|--|----------------------|-------|-------------|--|--------------|----------|--------|-----|---------------|-------------|
| <b>LOADING</b> (psf)  |  | <b>SPACING-</b>      | 2-0-0 | <b>CSI.</b> |  | <b>DEFL.</b> | in (loc) | l/defl | L/d | <b>PLATES</b> | <b>GRIP</b> |
| TCLL 20.0             |  | Plate Grip DOL       | 1.25  | TC 0.23     |  | Vert(LL)     | 0.00 5   | >999   | 240 | MT20          | 244/190     |
| TCDL 7.0              |  | Lumber DOL           | 1.25  | BC 0.03     |  | Vert(CT)     | 0.00 5   | >999   | 180 |               |             |
| BCLL 0.0 *            |  | Rep Stress Incr      | YES   | WB 0.00     |  | Horz(CT)     | -0.00 4  | n/a    | n/a |               |             |
| BCDL 10.0             |  | Code FBC2020/TPI2014 |       | Matrix-MP   |  |              |          |        |     | Weight: 7 lb  | FT = 20%    |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-2-0 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


#### REACTIONS.

(size) 2=0-3-8, 4=Mechanical  
Max Horz 2=33(LC 8)  
Max Uplift 2=-163(LC 8), 4=-57(LC 1)  
Max Grav 2=244(LC 1), 4=47(LC 8)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- 1) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone; porch left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 163 lb uplift at joint 2 and 57 lb uplift at joint 4.

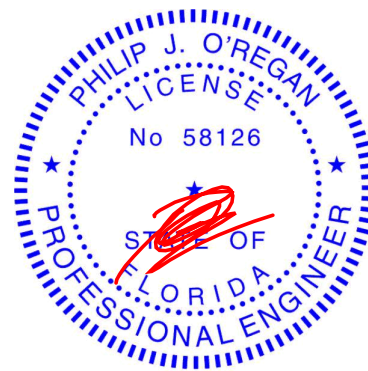

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610

|                |               |                         |          |          |                                       |
|----------------|---------------|-------------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>EJ01 | Truss Type<br>Jack-Open | Qty<br>6 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229800 |
|----------------|---------------|-------------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:05 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8lDX-QoTyYQQVxW3?D6?QO?pkxOr3eERRfLVXUeY1NjyhmT0

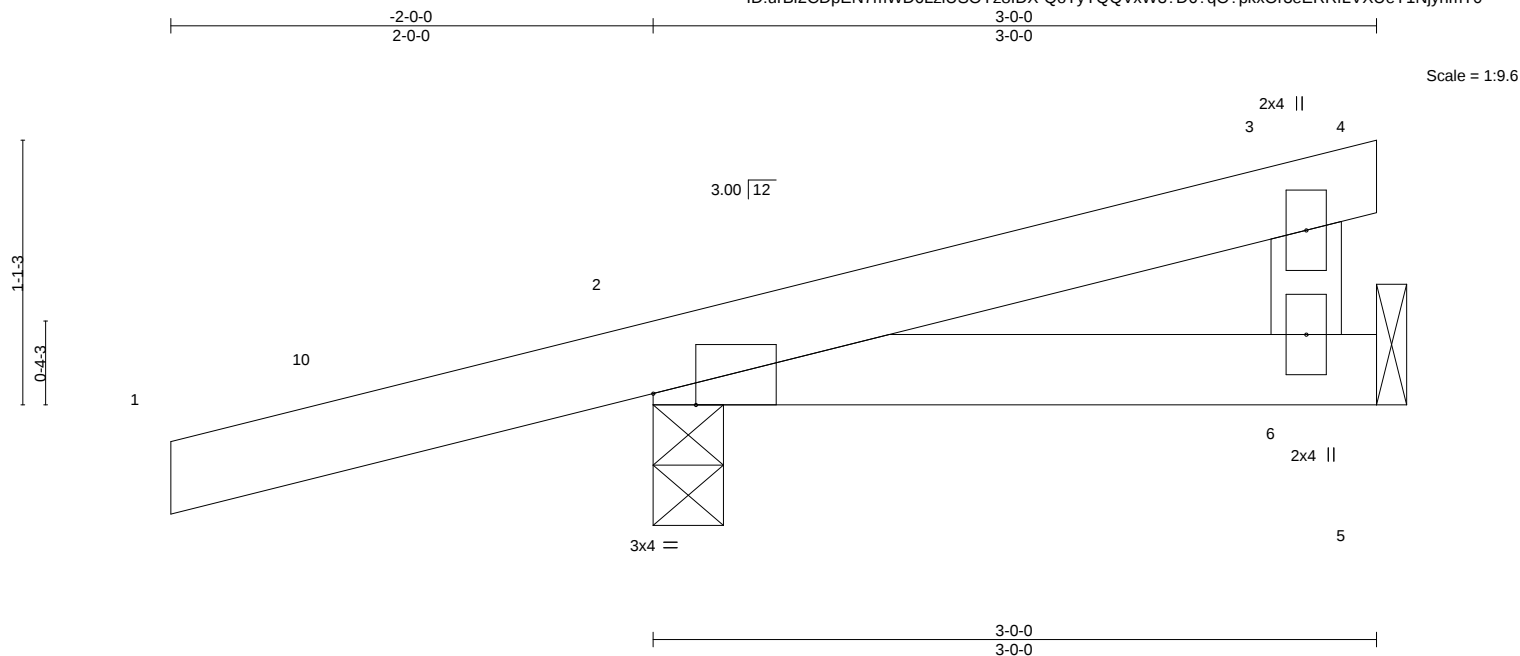

| Plate Offsets (X,Y)-- |  | [2:0-2-2,Edge]       |       |             |  |              |          |        |     |               |             |
|-----------------------|--|----------------------|-------|-------------|--|--------------|----------|--------|-----|---------------|-------------|
| <b>LOADING</b> (psf)  |  | <b>SPACING-</b>      | 2-0-0 | <b>CSI.</b> |  | <b>DEFL.</b> | in (loc) | I/defl | L/d | <b>PLATES</b> | <b>GRIP</b> |
| TCLL 20.0             |  | Plate Grip DOL       | 1.25  | TC 0.21     |  | Vert(LL)     | -0.00 9  | >999   | 240 | MT20          | 244/190     |
| TCDL 7.0              |  | Lumber DOL           | 1.25  | BC 0.05     |  | Vert(CT)     | -0.00 9  | >999   | 180 |               |             |
| BCLL 0.0 *            |  | Rep Stress Incr      | YES   | WB 0.02     |  | Horz(CT)     | 0.00 2   | n/a    | n/a |               |             |
| BCDL 10.0             |  | Code FBC2020/TPI2014 |       | Matrix-MP   |  |              |          |        |     | Weight: 13 lb | FT = 20%    |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-0-0 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


#### REACTIONS.

(size) 2=0-3-8, 6=Mechanical  
Max Horz 2=48(LC 8)  
Max Uplift 2=-127(LC 8), 6=-19(LC 12)  
Max Grav 2=248(LC 1), 6=79(LC 3)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -2-0-0 to 0-11-12, Interior(1) 0-11-12 to 3-0-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 127 lb uplift at joint 2 and 19 lb uplift at joint 6.

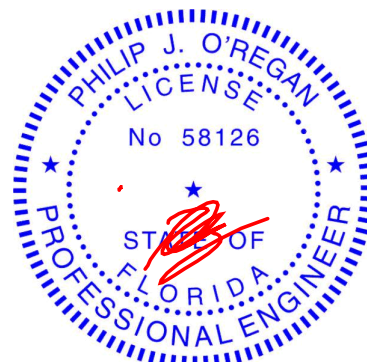

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 36610


|                                                             |               |                                   |          |          |                                       |
|-------------------------------------------------------------|---------------|-----------------------------------|----------|----------|---------------------------------------|
| Job<br>2845640                                              | Truss<br>HJ05 | Truss Type<br>Diagonal Hip Girder | Qty<br>2 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229801 |
| Builders FirstSource (Lake City,FL), Lake City, FL - 32055, |               |                                   |          |          | Job Reference (optional)              |

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:06 2021 Page 1  
ID:urBi2CDpEN7mWD6LziUSOYz8IDX-u\_1KImR7ipBrqGa0yjKzTbN9AeldOo4gillbv9yhmT?

-2-9-15  
2-9-15

4-2-3  
4-2-3

Scale = 1:13.3

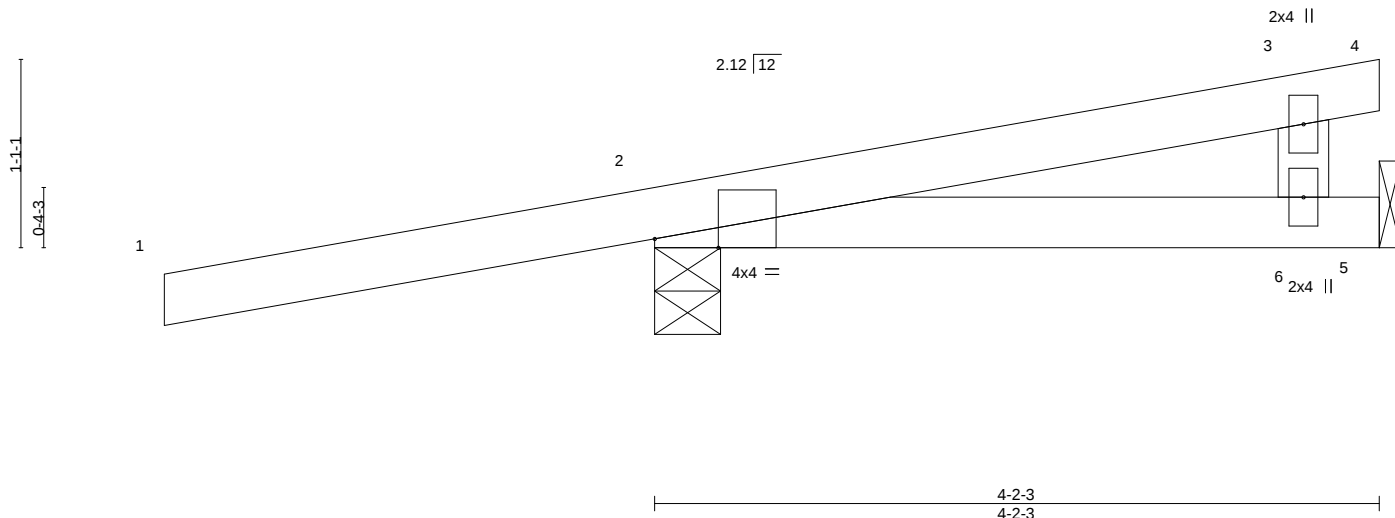

| Plate Offsets (X,Y)-- |  | [2:0-4-7,Edge]       |       |             |  |              |           |        |     |               |             |
|-----------------------|--|----------------------|-------|-------------|--|--------------|-----------|--------|-----|---------------|-------------|
| <b>LOADING</b> (psf)  |  | <b>SPACING-</b>      | 2-0-0 | <b>CSI.</b> |  | <b>DEFL.</b> | in (loc)  | l/defl | L/d | <b>PLATES</b> | <b>GRIP</b> |
| TCLL 20.0             |  | Plate Grip DOL       | 1.25  | TC 0.55     |  | Vert(LL)     | -0.02 6-9 | >999   | 240 | MT20          | 244/190     |
| TCDL 7.0              |  | Lumber DOL           | 1.25  | BC 0.19     |  | Vert(CT)     | -0.02 6-9 | >999   | 180 |               |             |
| BCLL 0.0 *            |  | Rep Stress Incr      | NO    | WB 0.00     |  | Horz(CT)     | 0.00 2    | n/a    | n/a |               |             |
| BCDL 10.0             |  | Code FBC2020/TPI2014 |       | Matrix-MP   |  |              |           |        |     | Weight: 18 lb | FT = 20%    |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-2-3 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

#### REACTIONS.

(size) 2=0-4-9, 5=Mechanical  
Max Horz 2=48(LC 4)  
Max Uplift 2=-191(LC 4), 5=-35(LC 5)  
Max Grav 2=314(LC 1), 5=96(LC 35)


**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; porch left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 191 lb uplift at joint 2 and 35 lb uplift at joint 5.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 68 lb down and 85 lb up at 1-6-1, and 68 lb down and 85 lb up at 1-6-1 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

#### LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25  
Uniform Loads (plf)  
Vert: 1-3=-54, 3-4=-54, 5-7=-20  
Concentrated Loads (lb)  
Vert: 9=65(F=33, B=33)

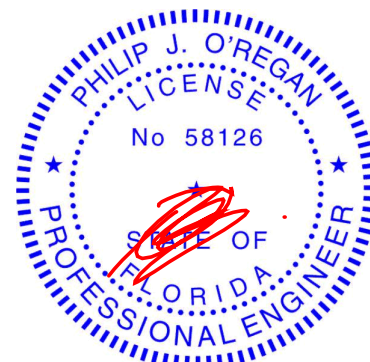

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601  
**ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**




6904 Parke East Blvd.  
Tampa, FL 36610

|                |               |                         |          |          |                                       |
|----------------|---------------|-------------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>PB01 | Truss Type<br>Piggyback | Qty<br>6 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229802 |
|----------------|---------------|-------------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:07 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8lDX-MAbiz6SIT7JiSQ9CVQrC0pws?2707FKqxy18ScyhmT\_

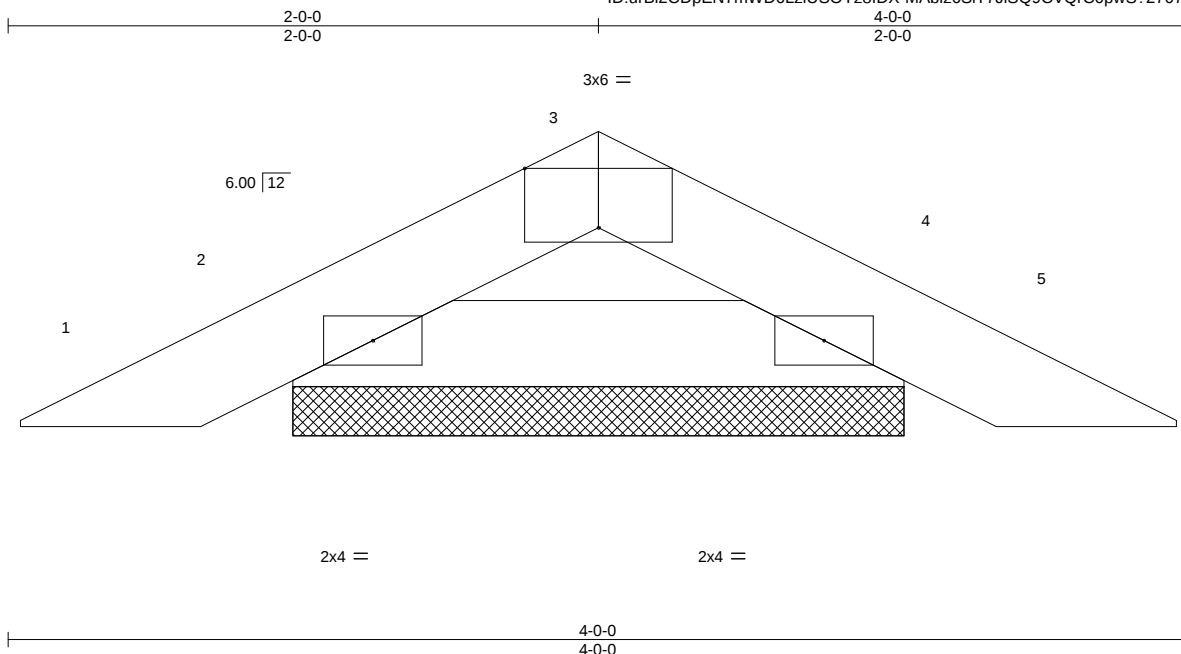

Scale = 1:7.8

| Plate Offsets (X,Y)-- |  | [3:0-3-0,Edge]       |       | 4-0-0       |  | 4-0-0         |                     |
|-----------------------|--|----------------------|-------|-------------|--|---------------|---------------------|
| <b>LOADING</b> (psf)  |  | <b>SPACING-</b>      | 2-0-0 | <b>CSI.</b> |  | <b>DEFL.</b>  | in (loc) l/defl L/d |
| TCLL 20.0             |  | Plate Grip DOL       | 1.25  | TC 0.03     |  | Vert(LL)      | -0.00 4 n/r 120     |
| TCDL 7.0              |  | Lumber DOL           | 1.25  | BC 0.05     |  | Vert(CT)      | -0.00 4 n/r 120     |
| BCLL 0.0 *            |  | Rep Stress Incr      | YES   | WB 0.00     |  | Horz(CT)      | 0.00 4 n/a n/a      |
| BCDL 10.0             |  | Code FBC2020/TPI2014 |       | Matrix-P    |  |               |                     |
|                       |  |                      |       |             |  | <b>PLATES</b> | <b>GRIP</b>         |
|                       |  |                      |       |             |  | MT20          | 244/190             |
|                       |  |                      |       |             |  | Weight: 10 lb | FT = 20%            |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-0-0 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


#### REACTIONS.

(size) 2=2-0-14, 4=2-0-14  
Max Horz 2=-12(LC 13)  
Max Uplift 2=-30(LC 12), 4=-30(LC 13)  
Max Grav 2=110(LC 1), 4=110(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 4) Gable requires continuous bottom chord bearing.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 30 lb uplift at joint 2 and 30 lb uplift at joint 4.
- 8) See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.

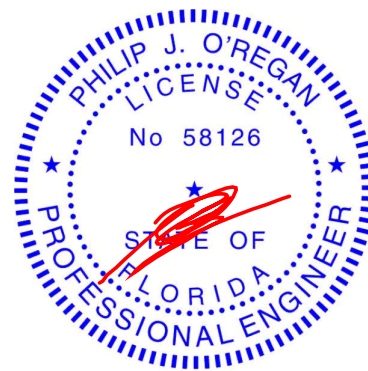

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610

|                |                |                         |          |          |                                       |
|----------------|----------------|-------------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>PB01G | Truss Type<br>PIGGYBACK | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229803 |
|----------------|----------------|-------------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:08 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8IDX-qN85ASSNERRZ4ZJP38NRY0TdNSS\_siazAcnhz2yhmSz

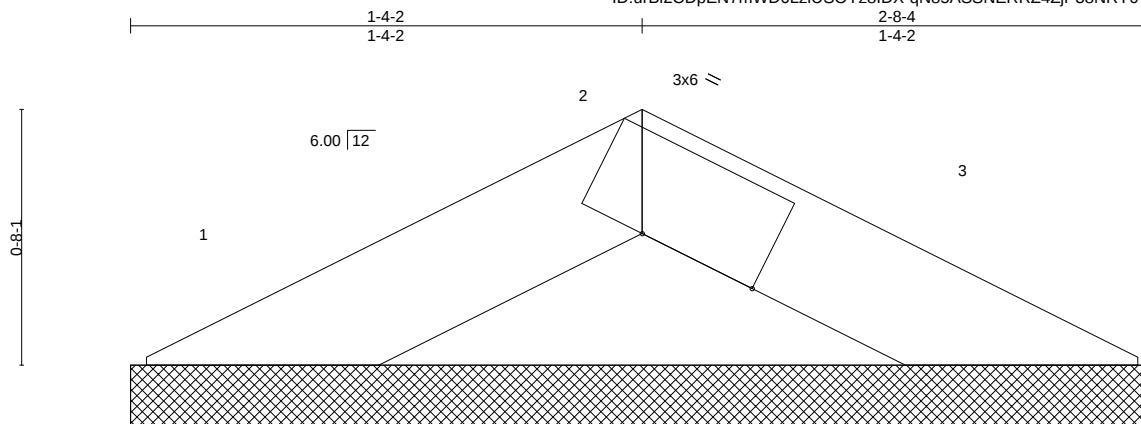

Scale = 1:6.1

|                       |       |                      |  |       |  |          |      |  |  |                 |      |          |     |        |  |     |  |              |      |          |  |  |  |  |  |  |  |  |  |
|-----------------------|-------|----------------------|--|-------|--|----------|------|--|--|-----------------|------|----------|-----|--------|--|-----|--|--------------|------|----------|--|--|--|--|--|--|--|--|--|
|                       |       |                      |  |       |  |          |      |  |  | 2-8-4           |      |          |     |        |  |     |  |              |      |          |  |  |  |  |  |  |  |  |  |
| Plate Offsets (X,Y)-- |       |                      |  |       |  |          |      |  |  | [2:0-3-14,Edge] |      |          |     |        |  |     |  |              |      | 2-8-4    |  |  |  |  |  |  |  |  |  |
| LOADING (psf)         |       | SPACING-             |  | 2-0-0 |  | CSI.     |      |  |  | DEFL.           |      | in (loc) |     | l/defl |  | L/d |  | PLATES       |      | GRIP     |  |  |  |  |  |  |  |  |  |
| TCLL                  | 20.0  | Plate Grip DOL       |  | 1.25  |  | TC       | 0.05 |  |  | Vert(LL)        | n/a  | -        | n/a | 999    |  |     |  |              | MT20 | 244/190  |  |  |  |  |  |  |  |  |  |
| TCDL                  | 7.0   | Lumber DOL           |  | 1.25  |  | BC       | 0.00 |  |  | Vert(CT)        | n/a  | -        | n/a | 999    |  |     |  |              |      |          |  |  |  |  |  |  |  |  |  |
| BCLL                  | 0.0 * | Rep Stress Incr      |  | YES   |  | WB       | 0.00 |  |  | Horz(CT)        | 0.00 | 3        | n/a | n/a    |  |     |  |              |      |          |  |  |  |  |  |  |  |  |  |
| BCDL                  | 10.0  | Code FBC2020/TPI2014 |  |       |  | Matrix-P |      |  |  |                 |      |          |     |        |  |     |  | Weight: 4 lb |      | FT = 20% |  |  |  |  |  |  |  |  |  |

#### LUMBER-

TOP CHORD 2x4 SP No.2

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-8-4 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


#### REACTIONS.

(size) 1=2-8-4, 3=2-8-4  
Max Horz 1=-7(LC 17)  
Max Uplift 1=-21(LC 12), 3=-21(LC 13)  
Max Grav 1=54(LC 1), 3=54(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Gable requires continuous bottom chord bearing.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 21 lb uplift at joint 1 and 21 lb uplift at joint 3.

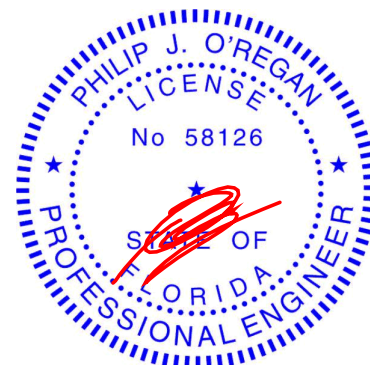

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

**ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**




6904 Parke East Blvd.  
Tampa, FL 36610

|         |       |            |     |     |                          |           |
|---------|-------|------------|-----|-----|--------------------------|-----------|
| Job     | Truss | Truss Type | Qty | Ply | G BUZBEE - CHASTAIN RES. | T25229804 |
| 2845640 | PB02  | Piggyback  | 14  | 1   | Job Reference (optional) |           |


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:09 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYZ8lDX-JZiTN0T??kZQhjlbdug5E?lVsm1b997PGWfVUyhmSy



Scale = 1:18.3

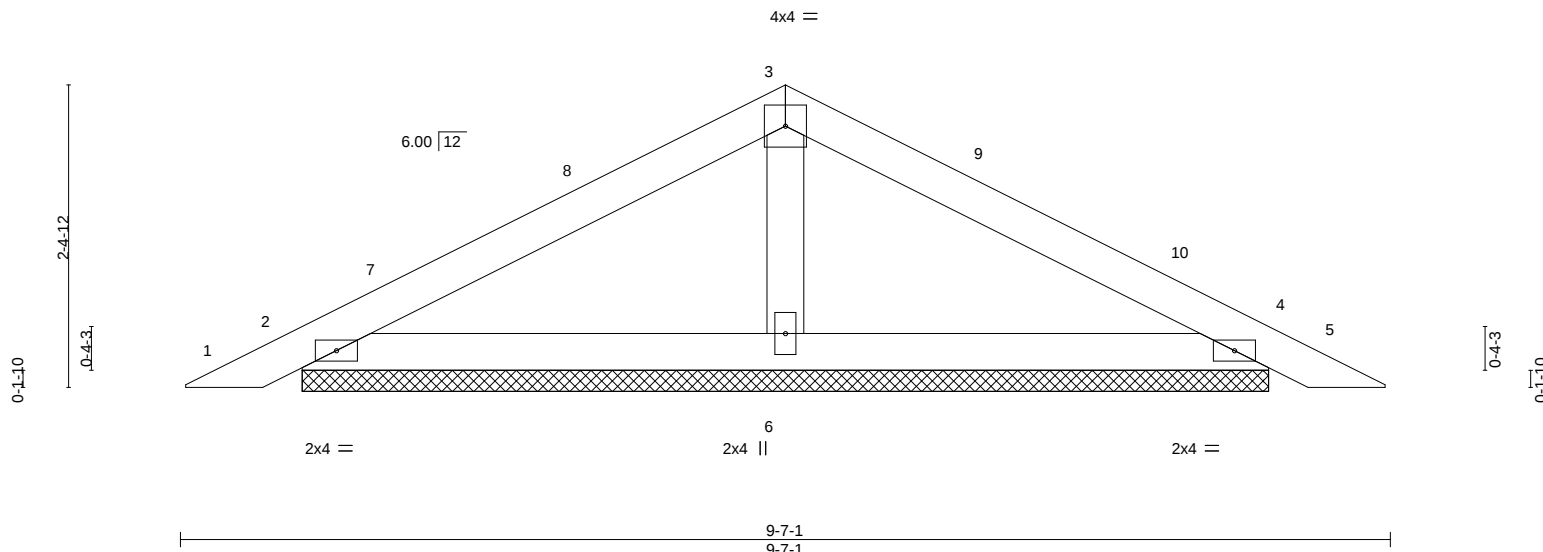

| LOADING (psf) | SPACING-             | 2-0-0 | CSI.     | DEFL.    | in (loc) | l/defl | L/d | PLATES        | GRIP     |
|---------------|----------------------|-------|----------|----------|----------|--------|-----|---------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.16  | Vert(LL) | 0.01     | 5      | n/r | MT20          | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.14  | Vert(CT) | 0.01     | 5      | n/r |               |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.04  | Horz(CT) | 0.00     | 4      | n/a |               |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-S |          |          |        |     | Weight: 30 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
OTHERS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


#### REACTIONS.

(size) 2=7-7-14, 4=7-7-14, 6=7-7-14  
Max Horz 2=-33(LC 13)  
Max Uplift 2=-51(LC 12), 4=-57(LC 13), 6=-42(LC 12)  
Max Grav 2=166(LC 23), 4=166(LC 24), 6=304(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-4-3 to 3-4-3, Interior(1) 3-4-3 to 4-9-8, Exterior(2R) 4-9-8 to 7-9-8, Interior(1) 7-9-8 to 9-2-14 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 51 lb uplift at joint 2, 57 lb uplift at joint 4 and 42 lb uplift at joint 6.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.

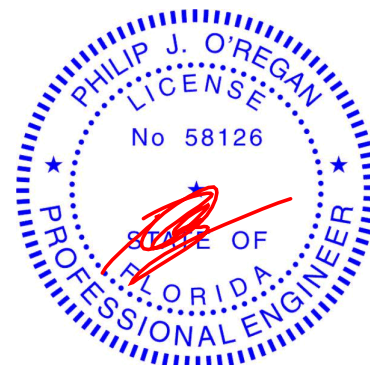

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610

|         |       |            |     |     |                          |           |
|---------|-------|------------|-----|-----|--------------------------|-----------|
| Job     | Truss | Truss Type | Qty | Ply | G BUZBEE - CHASTAIN RES. | T25229805 |
| 2845640 | PB02G | GABLE      | 2   | 1   |                          |           |


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:09 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYZ8IDX-JZiTN0T??kZQhJlbdug5E?l9sneb9F7PGWFFVUyhmSy



Scale: 3/4"=1'

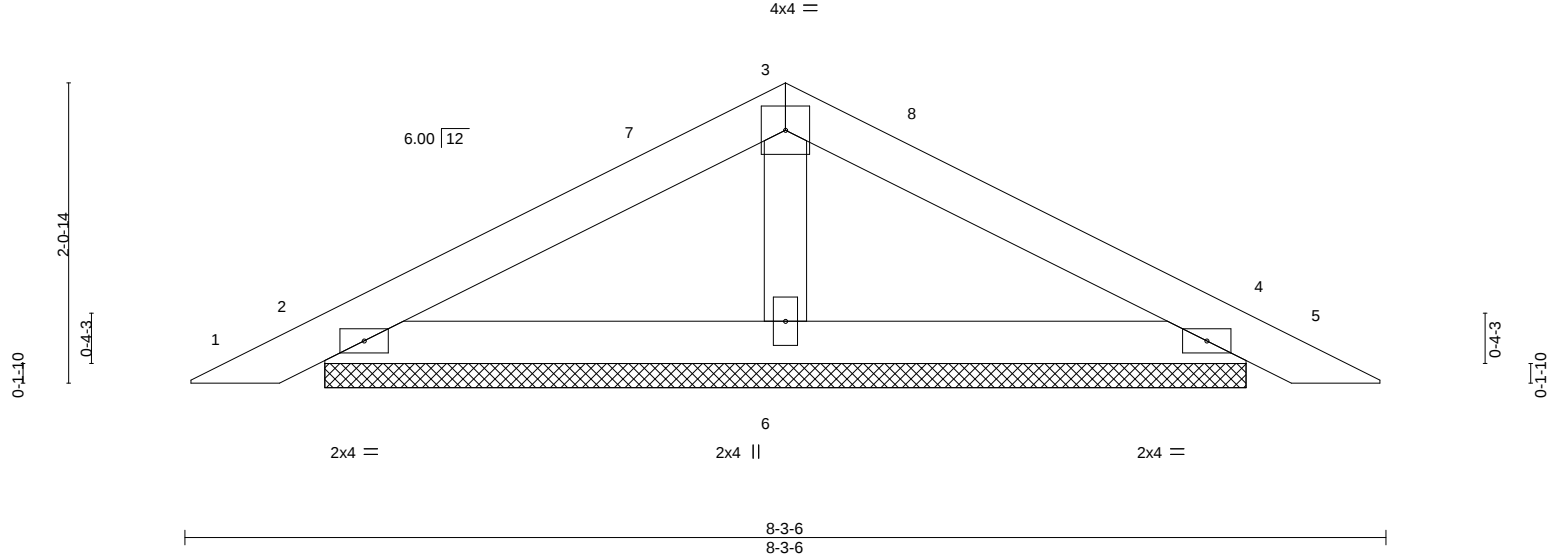

| LOADING (psf) | SPACING-             | 2-0-0 | CSI.     | DEFL.    | in (loc) | l/defl | L/d | PLATES        | GRIP     |
|---------------|----------------------|-------|----------|----------|----------|--------|-----|---------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.18  | Vert(LL) | 0.01     | 5      | n/r | MT20          | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.10  | Vert(CT) | 0.01     | 5      | n/r |               |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.04  | Horz(CT) | 0.00     | 4      | n/a |               |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-P |          |          |        |     |               |          |
|               |                      |       |          |          |          |        |     | Weight: 25 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
OTHERS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


#### REACTIONS.

(size) 2=6-4-4, 4=6-4-4, 6=6-4-4  
Max Horz 2=-28(LC 13)  
Max Uplift 2=-51(LC 12), 4=-57(LC 13), 6=-22(LC 12)  
Max Grav 2=155(LC 1), 4=155(LC 1), 6=227(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-4-3 to 3-4-3, Interior(1) 3-4-3 to 4-1-11, Exterior(2R) 4-1-11 to 7-3-13, Interior(1) 7-3-13 to 7-11-3 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Gable requires continuous bottom chord bearing.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 51 lb uplift at joint 2, 57 lb uplift at joint 4 and 22 lb uplift at joint 6.
- See Standard Industry Piggyback Truss Connection Detail for Connection to base truss as applicable, or consult qualified building designer.

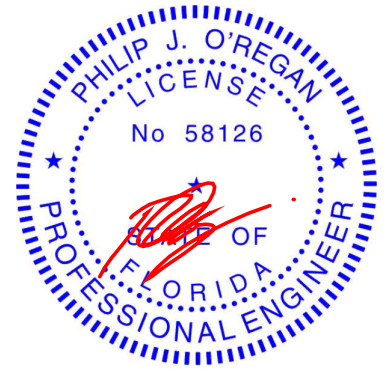

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 36610

|         |       |                |     |     |                          |
|---------|-------|----------------|-----|-----|--------------------------|
| Job     | Truss | Truss Type     | Qty | Ply | G BUZBEE - CHASTAIN RES. |
| 2845640 | T01   | Piggyback Base | 6   | 1   | T25229806                |

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:11 2021 Page 1


ID:urBi2CDpEN7mWD6LziUSOYz8IDX-FyqDoUVGXMP8x1S\_kGw8Af5wZfl\_3ynPsa?MaNyhmSw

Job Reference (optional)

|        |       |        |        |        |         |        |        |        |
|--------|-------|--------|--------|--------|---------|--------|--------|--------|
| -2-0-0 | 7-0-0 | 13-1-8 | 19-6-8 | 23-6-8 | 29-11-8 | 36-1-0 | 43-1-0 | 45-1-0 |
| 2-0-0  | 7-0-0 | 6-1-8  | 6-5-0  | 4-0-0  | 6-5-0   | 6-1-8  | 7-0-0  | 2-0-0  |

TOP CHORD UNDER PIGGYBACKS TO BE LATERALLY BRACED  
BY PURLINS AT 2-0-0 OC. MAX. (TYPICAL)

Scale = 1:78.7

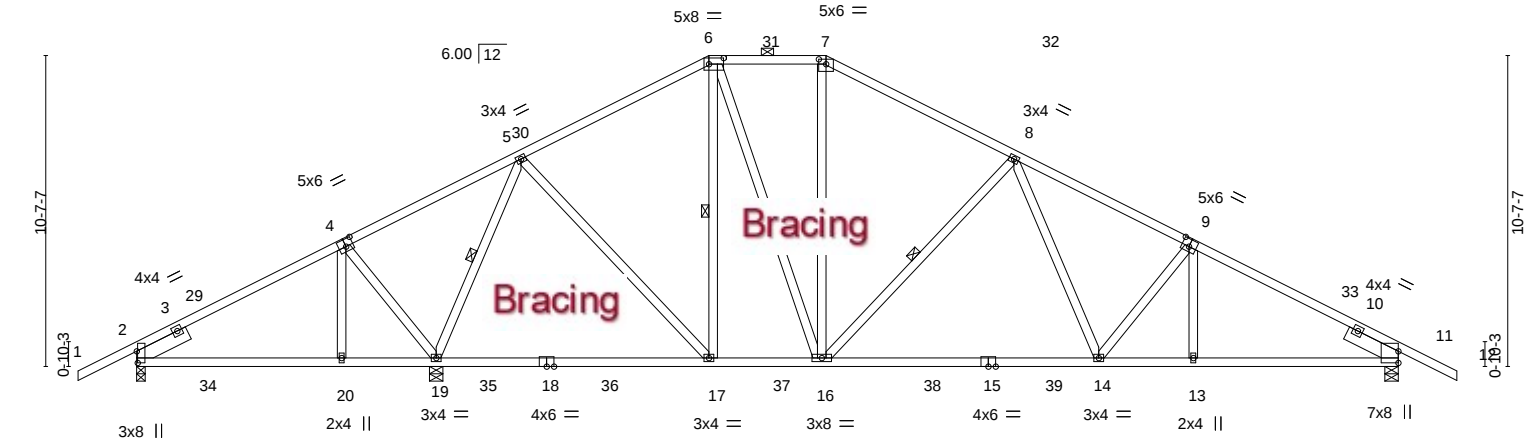

|  |       |         |        |        |         |        |        |  |
|--|-------|---------|--------|--------|---------|--------|--------|--|
|  | 7-0-0 | 10-2-12 | 19-6-8 | 23-6-8 | 32-10-4 | 36-1-0 | 43-1-0 |  |
|  | 7-0-0 | 3-2-12  | 9-3-12 | 4-0-0  | 9-3-12  | 3-2-12 | 7-0-0  |  |

Plate Offsets (X,Y)-- [2:0-4-12,0-0-6], [4:0-3-0,0-3-0], [6:0-6-0,0-2-8], [7:0-3-0,0-2-0], [9:0-3-0,0-3-0]

| LOADING (psf) | SPACING-             | 2-0-0 | CSI.      | DEFL.    | in (loc)    | l/defl | L/d | PLATES         | GRIP     |
|---------------|----------------------|-------|-----------|----------|-------------|--------|-----|----------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.89   | Vert(LL) | -0.30 14-16 | >999   | 240 | MT20           | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.81   | Vert(CT) | -0.53 14-16 | >748   | 180 |                |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.48   | Horz(CT) | 0.07 11     | n/a    | n/a |                |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-MS |          |             |        |     |                |          |
|               |                      |       |           |          |             |        |     | Weight: 272 lb | FT = 20% |


| LUMBER-                                                  | BRACING-                                                                         |
|----------------------------------------------------------|----------------------------------------------------------------------------------|
| TOP CHORD 2x4 SP No.2                                    | TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins, except |
| BOT CHORD 2x4 SP M 31 *Except*                           | 2-0-0 oc purlins (5-10-1 max.): 6-7.                                             |
| 15-18: 2x4 SP No.2                                       | BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:           |
| WEBS 2x4 SP No.3                                         | 6-0-0 oc bracing: 2-20,19-20.                                                    |
| SLIDER Left 2x6 SP No.2 1-11-8, Right 2x6 SP No.2 1-11-8 | WEBS 1 Row at midpt 5-19, 6-17, 8-16                                             |

**REACTIONS.** (size) 2=0-3-8, 19=0-5-8, 11=0-5-8  
Max Horz 2=160(LC 17)  
Max Uplift 2=150(LC 9), 19=304(LC 12), 11=324(LC 13)  
Max Grav 2=450(LC 23), 19=1972(LC 2), 11=1400(LC 2)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 2-4=244/371, 4-5=0/289, 5-6=1002/341, 6-7=1001/360, 7-8=1187/365,  
8-9=1916/451, 9-11=2039/451  
BOT CHORD 17-19=110/417, 16-17=65/833, 14-16=200/1459, 13-14=293/1760, 11-13=292/1759  
WEBS 4-20=300/153, 4-19=425/425, 5-19=1430/222, 5-17=52/733, 6-17=323/76,  
6-16=158/546, 7-16=63/301, 8-16=683/281, 8-14=88/565

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -2-0-0 to 2-3-11, Interior(1) 2-3-11 to 19-6-8, Exterior(2E) 19-6-8 to 23-6-8, Exterior(2R) 23-6-8 to 29-7-10, Interior(1) 29-7-10 to 45-1-0 zone; end vertical left and right exposed; porch left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 150 lb uplift at joint 2, 304 lb uplift at joint 19 and 324 lb uplift at joint 11.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

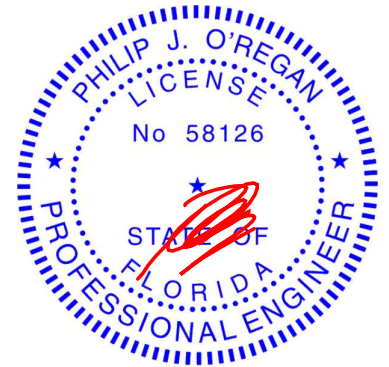

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
Tampa, FL 33610

|                |               |                     |          |          |                                       |
|----------------|---------------|---------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>T01G | Truss Type<br>GABLE | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229807 |
|----------------|---------------|---------------------|----------|----------|---------------------------------------|


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:13 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8IDX-BKy\_D9WW3z3sALcMshycF4AQNTAeXy7iJuUSeGyhmSu

|        |        |          |        |        |
|--------|--------|----------|--------|--------|
| -2-0-0 | 20-2-6 | 22-10-10 | 43-1-0 | 45-1-0 |
| 2-0-0  | 20-2-6 | 2-8-4    | 20-2-6 | 2-0-0  |

Scale = 1:82.0

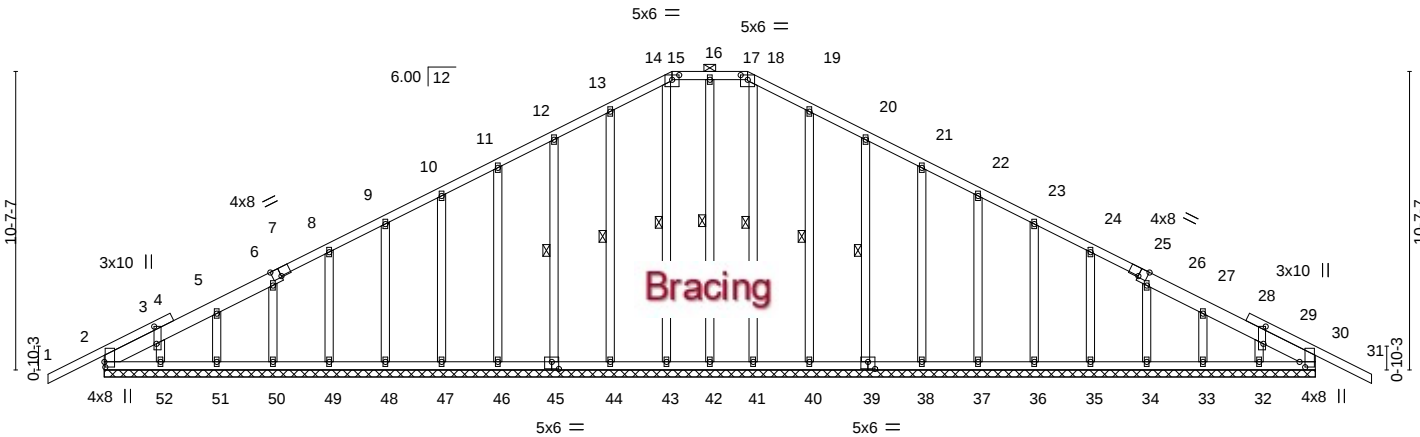

|                       |                                                                                                                                                                               |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Plate Offsets (X,Y)-- | [2:0-2-4,0-0-6], [3:0-7-6,0-1-0], [7:0-3-9,Edge], [15:0-3-0,0-2-0], [17:0-3-0,0-2-0], [25:0-3-9,Edge], [29:0-7-6,0-1-0], [30:0-2-4,0-2-6], [39:0-3-0,0-3-0], [45:0-3-0,0-3-0] |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|


| LOADING (psf) | SPACING-             | CSI.     | DEFL.          | in (loc) | I/defl | L/d | PLATES         | GRIP     |
|---------------|----------------------|----------|----------------|----------|--------|-----|----------------|----------|
| TCLL 20.0     | Plate Grip DOL 1.25  | TC 0.23  | Vert(LL) -0.02 | 31       | n/r    | 120 | MT20           | 244/190  |
| TCDL 7.0      | Lumber DOL 1.25      | BC 0.03  | Vert(CT) -0.02 | 31       | n/r    | 120 |                |          |
| BCLL 0.0 *    | Rep Stress Incr YES  | WB 0.11  | Horz(CT) 0.01  | 30       | n/a    | n/a |                |          |
| BCDL 10.0     | Code FBC2020/TPI2014 | Matrix-S |                |          |        |     | Weight: 338 lb | FT = 20% |

|                |                                                |                 |                                                                                                              |
|----------------|------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------------|
| <b>LUMBER-</b> |                                                | <b>BRACING-</b> |                                                                                                              |
| TOP CHORD      | 2x4 SP No.2 *Except*<br>2-7,25-30: 2x6 SP No.2 | TOP CHORD       | Structural wood sheathing directly applied or 6-0-0 oc purlins, except 2-0-0 oc purlins (6-0-0 max.): 15-17. |
| BOT CHORD      | 2x4 SP No.2                                    | BOT CHORD       | Rigid ceiling directly applied or 10-0-0 oc bracing.                                                         |
| OTHERS         | 2x4 SP No.3                                    | WEBS            | 1 Row at midpt<br>16-42, 20-39, 19-40, 18-41, 12-45, 13-44, 14-43                                            |

|                   |                                                                                                                                                                                                                                                                                                                                            |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>REACTIONS.</b> | All bearings 43-1-0.<br>(lb) - Max Horz 2=-160(LC 17)<br>Max Uplift All uplift 100 lb or less at joint(s) 2, 42, 32, 33, 34, 35, 36, 37, 38, 39, 40, 52, 51, 50, 49, 48, 47, 46, 45, 44, 30<br>Max Grav All reactions 250 lb or less at joint(s) 2, 42, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 52, 51, 50, 49, 48, 47, 46, 45, 44, 43, 30 |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                |                                                                                                           |
|----------------|-----------------------------------------------------------------------------------------------------------|
| <b>FORCES.</b> | (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.                              |
| TOP CHORD      | 13-14=-104/290, 14-15=-97/264, 15-16=-95/278, 16-17=-95/278, 17-18=-97/265, 18-19=-104/294, 19-20=-88/250 |

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) -2-0-0 to 2-3-11, Exterior(2N) 2-3-11 to 20-2-6, Corner(3E) 20-2-6 to 22-10-10, Corner(3R) 22-10-10 to 27-1-0, Exterior(2N) 27-1-0 to 45-1-0 zone; C/C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
  - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
  - Provide adequate drainage to prevent water ponding.
  - All plates are 2x4 MT20 unless otherwise indicated.
  - Gable requires continuous bottom chord bearing.
  - Gable studs spaced at 2-0-0 oc.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 42, 32, 33, 34, 35, 36, 37, 38, 39, 40, 52, 51, 50, 49, 48, 47, 46, 45, 44, 30.
  - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

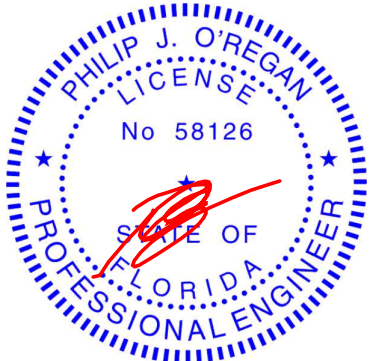


Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date: September 2,2021

|                |              |                      |          |          |                                       |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>T02 | Truss Type<br>Common | Qty<br>8 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229808 |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:14 2021 Page 1  
ID:urBi2CDpEN7mWD6LziUSOYz8IDX-fWWMRVX8pHBjoUBYQOTroHjVHtHDGFAsYYE0AiyhmSt

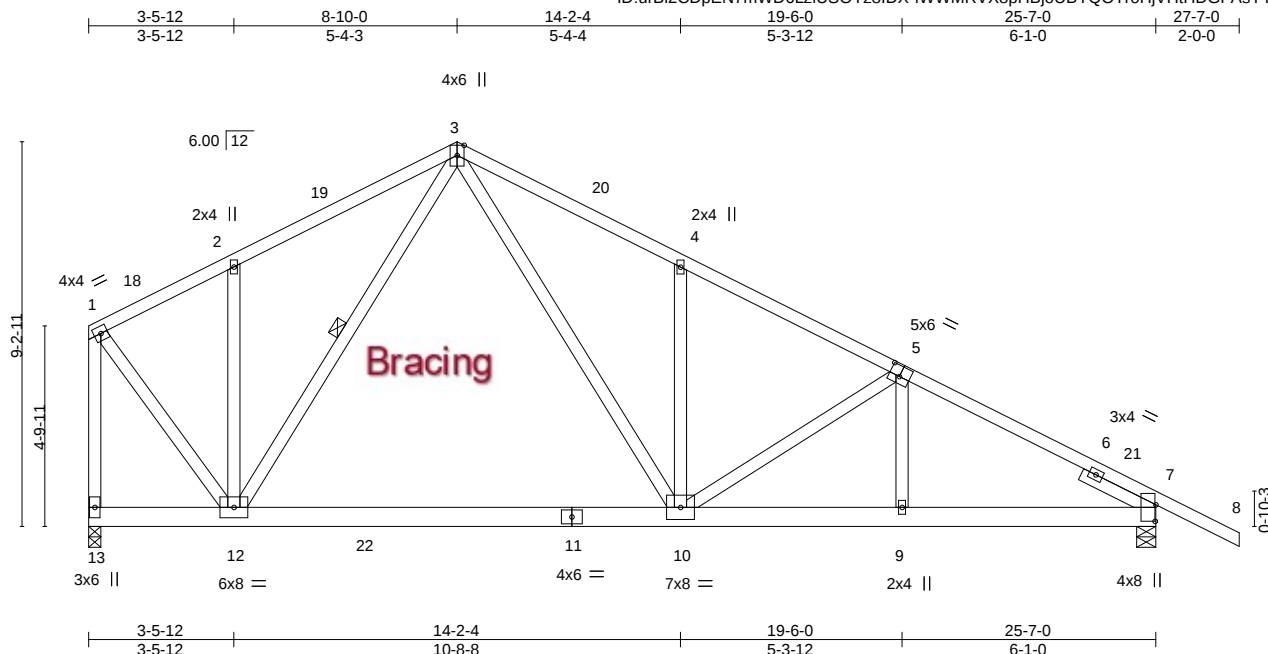

|                       |       |                                   |       |           |      |          |             |        |     |                |          |
|-----------------------|-------|-----------------------------------|-------|-----------|------|----------|-------------|--------|-----|----------------|----------|
| Plate Offsets (X,Y)-- |       | [5:0-3-0,0-3-0], [7:0-4-12,0-0-4] |       |           |      |          |             |        |     |                |          |
| LOADING (psf)         |       | SPACING-                          | 2-0-0 | CSI.      |      | DEFL.    | in (loc)    | l/defl | L/d | PLATES         | GRIP     |
| TCLL                  | 20.0  | Plate Grip DOL                    | 1.25  | TC        | 0.60 | Vert(LL) | -0.22 10-12 | >999   | 240 | MT20           | 244/190  |
| TCDL                  | 7.0   | Lumber DOL                        | 1.25  | BC        | 0.91 | Vert(CT) | -0.42 10-12 | >735   | 180 |                |          |
| BCLL                  | 0.0 * | Rep Stress Incr                   | NO    | WB        | 0.76 | Horz(CT) | 0.02 7      | n/a    | n/a |                |          |
| BCDL                  | 10.0  | Code FBC2020/TPI2014              |       | Matrix-MS |      |          |             |        |     | Weight: 183 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x6 SP No.2 \*Except\*  
7-11: 2x6 SP M 26  
WEBS 2x4 SP No.3  
SLIDER Right 2x4 SP No.3 1-11-8

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-10-9 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:  
6-0-0 oc bracing: 12-13.  
WEBS 1 Row at midpt 3-12

#### REACTIONS.

(size) 13=0-3-8, 7=0-5-8  
Max Horz 13=-233(LC 13)  
Max Uplift 13=-291(LC 13), 7=-305(LC 13)  
Max Grav 13=1416(LC 2), 7=1312(LC 2)

#### FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-942/250, 2-3=-981/336, 3-4=-1812/544, 4-5=-1805/449, 5-7=-1874/422,  
1-13=-1580/401  
BOT CHORD 10-12=-91/941, 9-10=-292/1633, 7-9=-292/1633  
WEBS 2-12=-283/181, 3-10=-378/1308, 4-10=-315/198, 1-12=-330/1392

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-1-12, Interior(1) 3-1-12 to 8-10-0, Exterior(2R) 8-10-0 to 11-10-0, Interior(1) 11-10-0 to 27-7-0 zone; end vertical right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 13=291, 7=305.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

#### LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25  
Uniform Loads (plf)  
Vert: 1-3=-54, 3-8=-54, 12-13=-20, 10-12=-80(F=-60), 10-14=-20



Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.  
Tampa, FL 33610

|                |               |                     |          |          |                                                      |           |
|----------------|---------------|---------------------|----------|----------|------------------------------------------------------|-----------|
| Job<br>2845640 | Truss<br>T02G | Truss Type<br>GABLE | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>Job Reference (optional) | T25229809 |
|----------------|---------------|---------------------|----------|----------|------------------------------------------------------|-----------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:16 2021 Page 1  
ID:urBi2CDpEN7mWD6LziUSOYz8IDX-cvd6rBZOLuRR1oLxXpWJtioxdgB7kiW90sj7FayhmSr

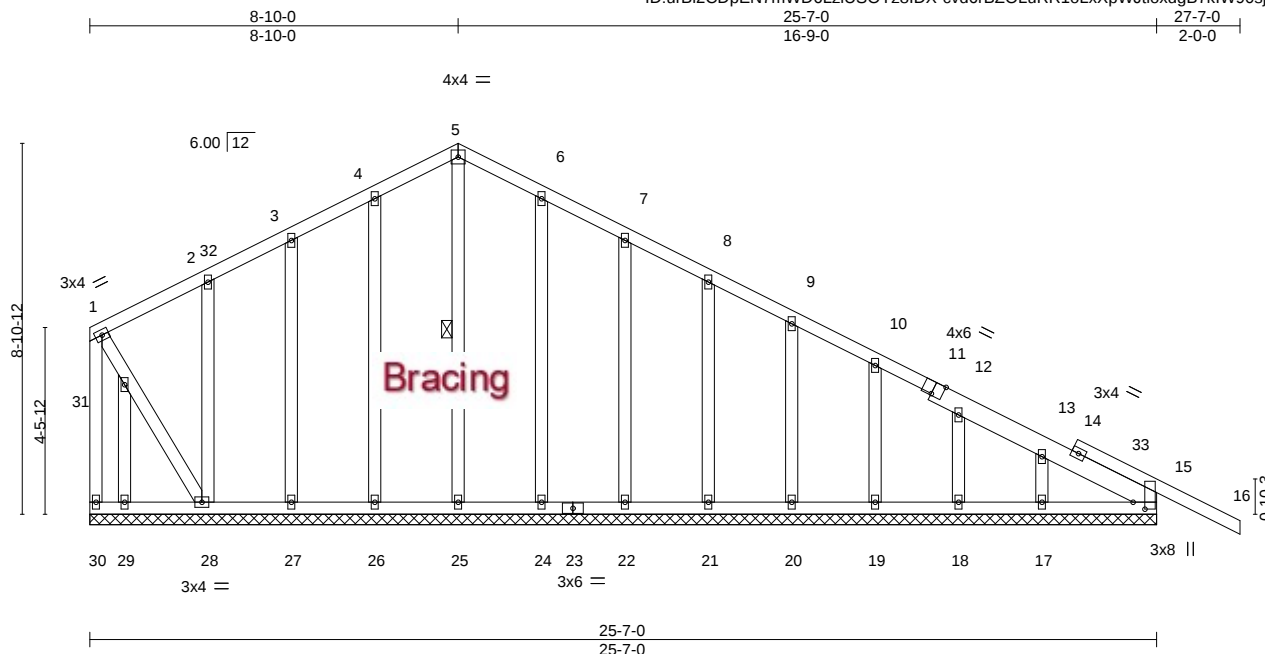

Scale = 1:55.3

|                                                         |       |                      |  |          |      |                           |       |    |     |             |                |          |
|---------------------------------------------------------|-------|----------------------|--|----------|------|---------------------------|-------|----|-----|-------------|----------------|----------|
| Plate Offsets (X,Y)-- [11:0-3-0,Edge], [15:0-2-0,0-3-6] |       |                      |  |          |      |                           |       |    |     |             |                |          |
| LOADING (psf)                                           |       | SPACING- 2-0-0       |  | CSI.     |      | DEFL. in (loc) l/defl L/d |       |    |     | PLATES GRIP |                |          |
| TCLL                                                    | 20.0  | Plate Grip DOL 1.25  |  | TC       | 0.23 | Vert(LL)                  | -0.02 | 16 | n/r | 120         | MT20           | 244/190  |
| TCDL                                                    | 7.0   | Lumber DOL 1.25      |  | BC       | 0.05 | Vert(CT)                  | -0.02 | 16 | n/r | 120         |                |          |
| BCLL                                                    | 0.0 * | Rep Stress Incr YES  |  | WB       | 0.13 | Horz(CT)                  | 0.01  | 15 | n/a | n/a         |                |          |
| BCDL                                                    | 10.0  | Code FBC2020/TPI2014 |  | Matrix-S |      |                           |       |    |     |             | Weight: 196 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2 \*Except\*  
11-15: 2x6 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3  
OTHERS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.  
WEBS 1 Row at midpt 5-25


#### REACTIONS.

All bearings 25-7-0.  
(lb) - Max Horz 30=-224(LC 13)  
Max Uplift All uplift 100 lb or less at joint(s) 26, 27, 24, 22, 21, 20, 19, 18, 17, 15 except 30=-116(LC 13), 28=-132(LC 12)  
Max Grav All reactions 250 lb or less at joint(s) 30, 25, 26, 27, 28, 29, 24, 22, 21, 20, 19, 18, 17, 15

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) 0-1-12 to 3-1-12, Exterior(2N) 3-1-12 to 8-10-0, Corner(3R) 8-10-0 to 11-10-0, Exterior(2N) 11-10-0 to 27-7-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 26, 27, 24, 22, 21, 20, 19, 18, 17, 15 except (jt=lb) 30=116, 28=132.



Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.  
Tampa, FL 33610

|                |              |                   |          |          |                                       |
|----------------|--------------|-------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>T03 | Truss Type<br>Hip | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229810 |
|----------------|--------------|-------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:17 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8IDX-45BU3XZ16CZllyv75X1YQwK?i4JnTbbIEWs9n1yhmSq

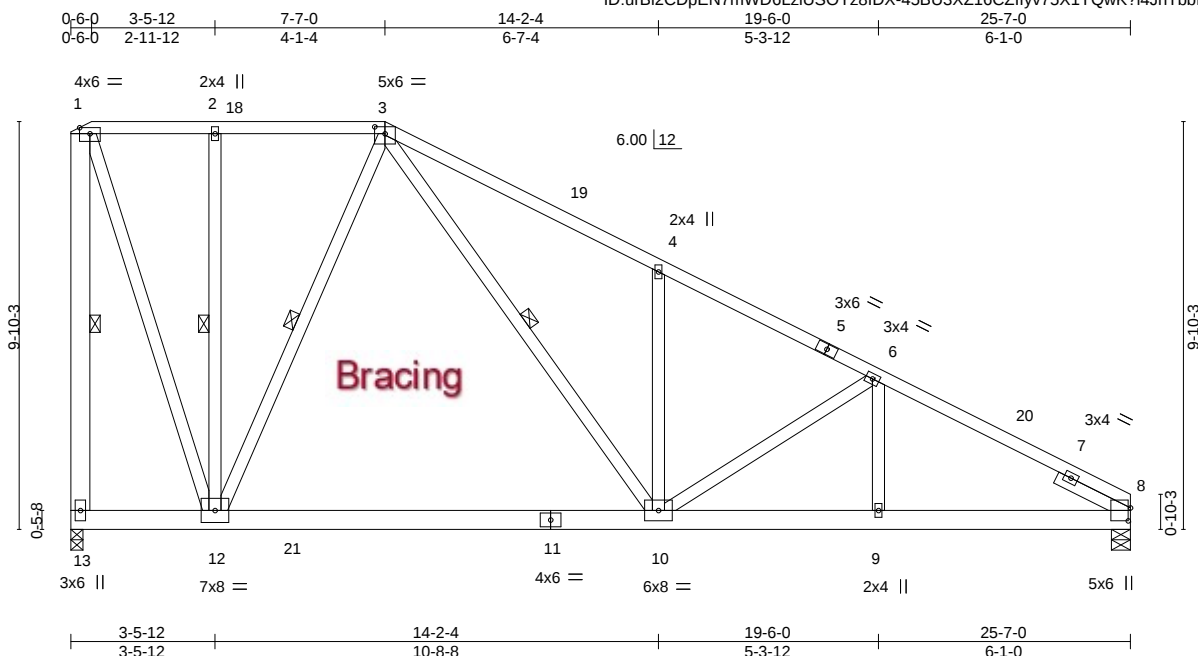

Scale = 1:55.6

|                       |       |                                    |  |           |      |                           |                      |                |          |
|-----------------------|-------|------------------------------------|--|-----------|------|---------------------------|----------------------|----------------|----------|
| Plate Offsets (X,Y)-- |       | [3:0-3-0,0-2-0], [8:0-3-12,0-0-10] |  |           |      |                           |                      |                |          |
| LOADING (psf)         |       | SPACING- 2-0-0                     |  | CSI.      |      | DEFL. in (loc) l/defl L/d |                      | PLATES GRIP    |          |
| TCLL                  | 20.0  | Plate Grip DOL 1.25                |  | TC        | 0.65 | Vert(LL)                  | -0.24 10-12 >999 240 | MT20           | 244/190  |
| TCDL                  | 7.0   | Lumber DOL 1.25                    |  | BC        | 0.92 | Vert(CT)                  | -0.44 10-12 >685 180 |                |          |
| BCLL                  | 0.0 * | Rep Stress Incr NO                 |  | WB        | 0.78 | Horz(CT)                  | 0.02 8 n/a n/a       |                |          |
| BCDL                  | 10.0  | Code FBC2020/TPI2014               |  | Matrix-MS |      |                           |                      | Weight: 207 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x6 SP No.2 \*Except\*  
8-11: 2x6 SP M 26  
WEBS 2x4 SP No.3 \*Except\*  
1-13: 2x6 SP No.2  
SLIDER Right 2x4 SP No.3 1-11-8

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-8-0 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:  
6-0-0 oc bracing: 12-13.  
WEBS 1 Row at midpt 2-12, 3-12, 3-10, 1-13

#### REACTIONS.

(size) 13=0-3-8, 8=0-5-8  
Max Horz 13=-310(LC 13)  
Max Uplift 13=-379(LC 13), 8=-248(LC 13)  
Max Grav 13=1432(LC 2), 8=1221(LC 2)

#### FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-530/137, 2-3=-530/137, 3-4=-1844/511, 4-6=-1816/384, 6-8=-1899/400,  
1-13=-1608/411  
BOT CHORD 12-13=-118/309, 10-12=-11/810, 9-10=-288/1655, 8-9=-288/1655  
WEBS 1-12=-418/1627, 3-12=-653/293, 3-10=-429/1420, 4-10=-361/228

#### NOTES-

- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-2-12 to 3-5-12, Interior(1) 3-5-12 to 7-7-0, Exterior(2R) 7-7-0 to 11-9-15, Interior(1) 11-9-15 to 25-7-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 13=379, 8=248.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

#### LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25  
Uniform Loads (plf)  
Vert: 1-3=-54, 3-8=-54, 12-13=-20, 10-12=-80(F=-60), 10-14=-20



Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see


**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

**ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**



6904 Parke East Blvd.  
Tampa, FL 36610

|         |       |            |     |     |                          |           |
|---------|-------|------------|-----|-----|--------------------------|-----------|
| Job     | Truss | Truss Type | Qty | Ply | G BUZBEE - CHASTAIN RES. | T25229811 |
| 2845640 | T04   | Hip        | 1   | 1   |                          |           |

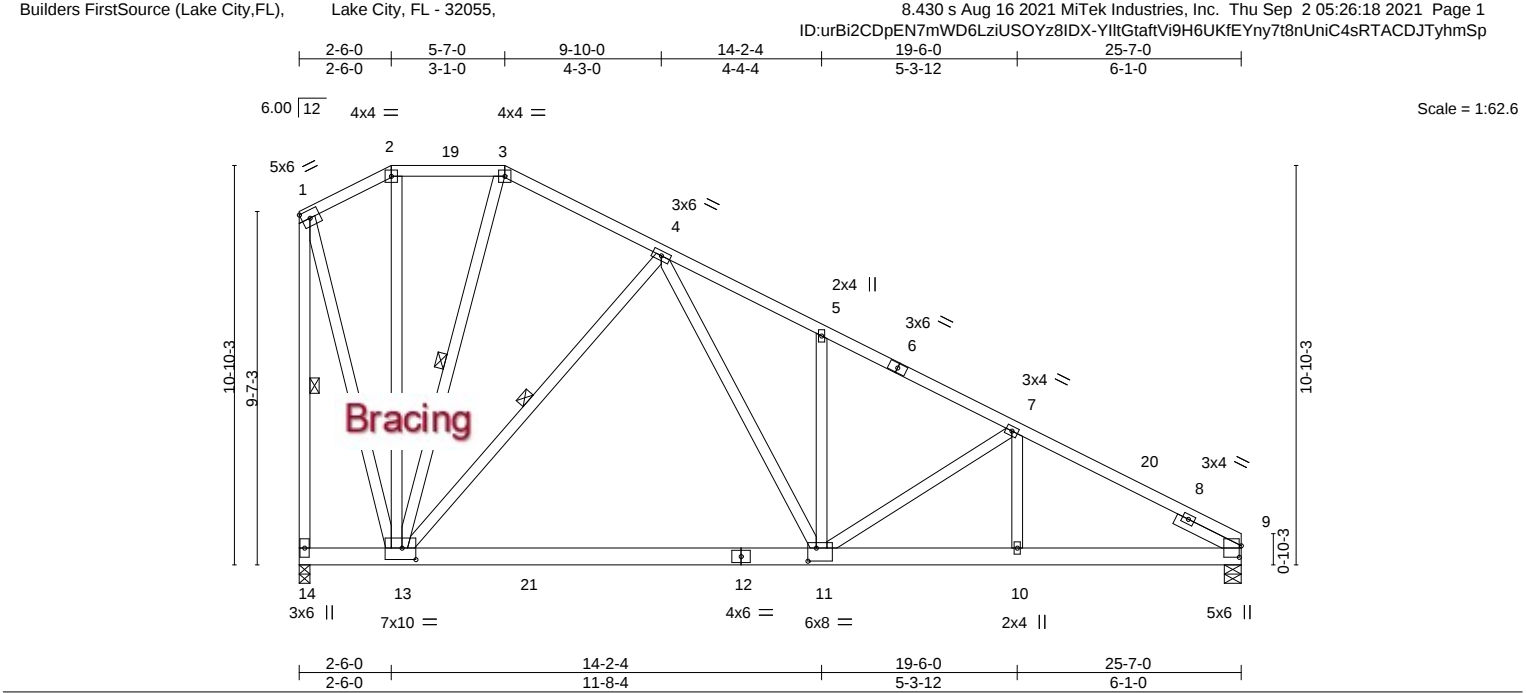

|                       |       |                                                         |      |           |      |                           |       |       |             |     |                         |
|-----------------------|-------|---------------------------------------------------------|------|-----------|------|---------------------------|-------|-------|-------------|-----|-------------------------|
| Plate Offsets (X,Y)-- |       | [9:0-3-12,0-0-10], [11:0-2-12,0-4-4], [13:0-4-8,0-3-12] |      |           |      |                           |       |       |             |     |                         |
| LOADING (psf)         |       | SPACING- 2-0-0                                          |      | CSI.      |      | DEFL. in (loc) l/defl L/d |       |       | PLATES GRIP |     |                         |
| TCLL                  | 20.0  | Plate Grip DOL                                          | 1.25 | TC        | 0.82 | Vert(LL)                  | -0.23 | 11-13 | >999        | 240 | MT20 244/190            |
| TCDL                  | 7.0   | Lumber DOL                                              | 1.25 | BC        | 0.42 | Vert(CT)                  | -0.43 | 11-13 | >706        | 180 |                         |
| BCLL                  | 0.0 * | Rep Stress Incr                                         | NO   | WB        | 0.65 | Horz(CT)                  | 0.02  | 9     | n/a         | n/a |                         |
| BCDL                  | 10.0  | Code FBC2020/TPI2014                                    |      | Matrix-MS |      |                           |       |       |             |     | Weight: 214 lb FT = 20% |


|                                 |                                                                                                   |
|---------------------------------|---------------------------------------------------------------------------------------------------|
| <b>LUMBER-</b>                  | <b>BRACING-</b>                                                                                   |
| TOP CHORD 2x4 SP No.2           | TOP CHORD Structural wood sheathing directly applied or 3-10-10 oc purlins, except end verticals. |
| BOT CHORD 2x6 SP M 26           | BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.                                    |
| WEBS 2x4 SP No.3                | WEBS 1 Row at midpt 3-13, 4-13, 1-14                                                              |
| SLIDER Right 2x4 SP No.3 1-11-8 |                                                                                                   |

|                   |                                          |
|-------------------|------------------------------------------|
| <b>REACTIONS.</b> | (size) 14=0-3-8, 9=0-5-8                 |
|                   | Max Horz 14=-321(LC 13)                  |
|                   | Max Uplift 14=-391(LC 13), 9=-246(LC 13) |
|                   | Max Grav 14=1461(LC 2), 9=1230(LC 2)     |

|                |                                                                                                       |
|----------------|-------------------------------------------------------------------------------------------------------|
| <b>FORCES.</b> | (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.                          |
| TOP CHORD      | 1-2=-492/131, 2-3=-419/128, 3-4=-503/125, 4-5=-1820/466, 5-7=-1829/376, 7-9=-1919/397, 1-14=-1748/430 |
| BOT CHORD      | 13-14=-115/321, 11-13=-29/1013, 10-11=-288/1675, 9-10=-288/1675                                       |
| WEBS           | 4-13=-945/350, 4-11=-341/1262, 5-11=-262/164, 1-13=-373/1539                                          |

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 5-7-0, Exterior(2R) 5-7-0 to 9-10-0, Interior(1) 9-10-0 to 25-7-0 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
  - Provide adequate drainage to prevent water ponding.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 14=391, 9=246.
  - In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

|                                 |                                                                   |
|---------------------------------|-------------------------------------------------------------------|
| <b>LOAD CASE(S)</b>             | Standard                                                          |
| 1) Dead + Roof Live (balanced): | Lumber Increase=1.25, Plate Increase=1.25                         |
| Uniform Loads (plf)             |                                                                   |
| Vert:                           | 1-2=-54, 2-3=-54, 3-9=-54, 13-14=-20, 11-13=-80(F=-60), 11-15=-20 |

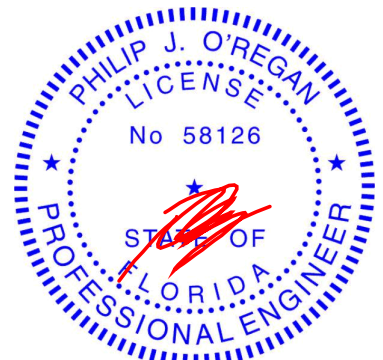

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
Tampa, FL 36610

|                          |              |                              |          |          |                                       |
|--------------------------|--------------|------------------------------|----------|----------|---------------------------------------|
| Job<br>2845640           | Truss<br>T05 | Truss Type<br>Piggyback Base | Qty<br>2 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229812 |
| Job Reference (optional) |              |                              |          |          |                                       |


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:19 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8lDX-0UJFUDbHepq?uG3WCy30VLQPou6xxYJbiqxsnyhmSo

|       |       |         |        |        |        |         |        |        |        |         |        |
|-------|-------|---------|--------|--------|--------|---------|--------|--------|--------|---------|--------|
| 2-0-0 | 7-0-0 | 13-1-12 | 19-6-8 | 24-4-0 | 29-1-9 | 34-5-12 | 39-9-0 | 45-5-4 | 47-8-1 | 51-8-0  | 53-8-0 |
| 2-0-0 | 7-0-0 | 6-1-12  | 6-4-12 | 4-9-8  | 4-9-8  | 5-4-4   | 5-3-4  | 5-8-4  | 2-2-13 | 3-11-15 | 2-0-0  |

Scale: 1/8"=1'

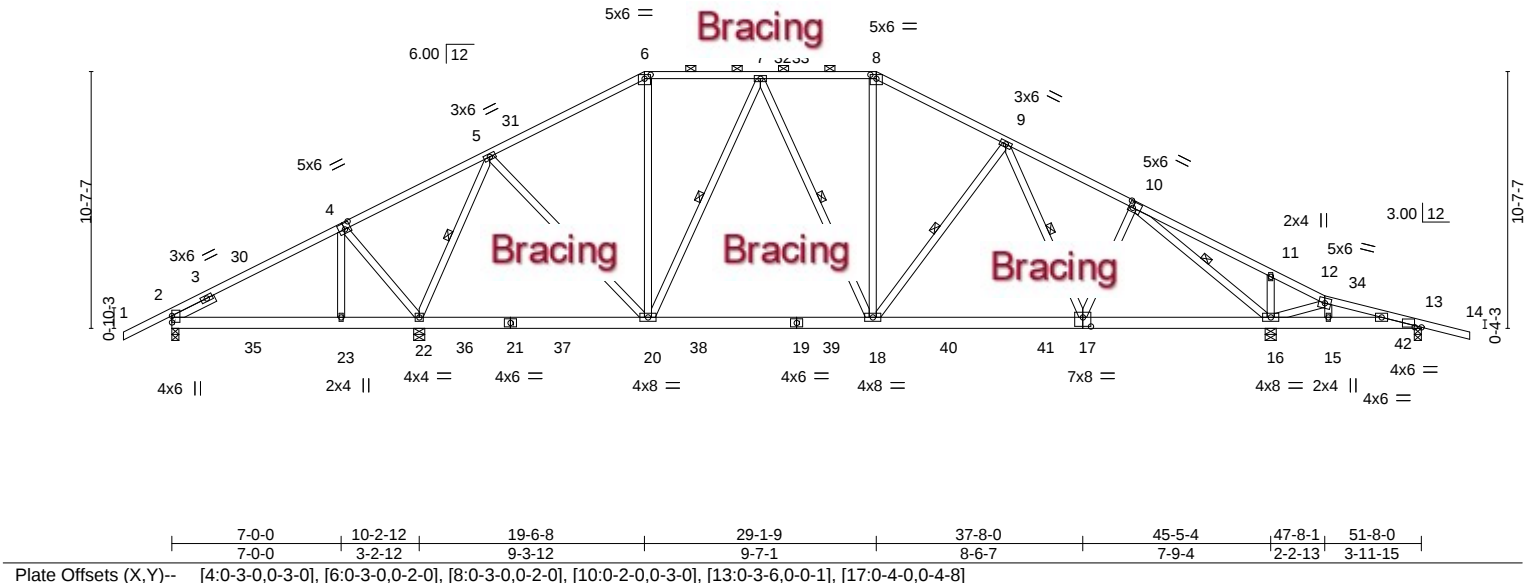

|                       |                         |                                                                                                         |
|-----------------------|-------------------------|---------------------------------------------------------------------------------------------------------|
| Plate Offsets (X,Y)-- |                         | [4:0-3-0,0-3-0], [6:0-3-0,0-2-0], [8:0-3-0,0-2-0], [10:0-2-0,0-3-0], [13:0-3-6,0-0-1], [17:0-4-0,0-4-8] |
| <b>LOADING</b> (psf)  | <b>SPACING-</b>         | 2-0-0                                                                                                   |
| TCLL 20.0             | Plate Grip DOL          | 1.25                                                                                                    |
| TCDL 7.0              | Lumber DOL              | 1.25                                                                                                    |
| BCLL 0.0 *            | Rep Stress Incr         | YES                                                                                                     |
| BCDL 10.0             | Code                    | FBC2020/TPI2014                                                                                         |
|                       | <b>CSI.</b>             |                                                                                                         |
|                       | TC                      | 0.42                                                                                                    |
|                       | BC                      | 0.49                                                                                                    |
|                       | WB                      | 0.58                                                                                                    |
|                       | Matrix-MS               |                                                                                                         |
|                       | <b>DEFL.</b>            |                                                                                                         |
|                       | in (loc)                | l/defl L/d                                                                                              |
|                       | Vert(LL)                | -0.10 17-18 >999 240                                                                                    |
|                       | Vert(CT)                | -0.16 17-18 >999 180                                                                                    |
|                       | Horz(CT)                | 0.04 13 n/a n/a                                                                                         |
|                       | <b>PLATES</b>           | <b>GRIP</b>                                                                                             |
|                       | MT20                    | 244/190                                                                                                 |
|                       | Weight: 362 lb FT = 20% |                                                                                                         |


|                                |                                                                                  |
|--------------------------------|----------------------------------------------------------------------------------|
| <b>LUMBER-</b>                 | <b>BRACING-</b>                                                                  |
| TOP CHORD 2x4 SP No.2          | TOP CHORD Structural wood sheathing directly applied or 4-5-5 oc purlins, except |
| BOT CHORD 2x6 SP No.2          | 2-0-0 oc purlins (5-1-12 max.): 6-8.                                             |
| WEBS 2x4 SP No.3               | BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:           |
| SLIDER Left 2x4 SP No.3 1-11-8 | 6-0-0 oc bracing: 2-23,22-23.                                                    |
|                                | WEBS 1 Row at midpt 5-22, 7-20, 7-18, 9-18, 9-17, 10-16                          |

**REACTIONS.** All bearings 0-3-8 except (jt=length) 22=0-5-8, 16=0-5-8.  
 (lb) - Max Horz 2=163(LC 16)  
 Max Uplift All uplift 100 lb or less at joint(s) except 2=-125(LC 9), 22=-316(LC 12), 16=-344(LC 13), 13=-177(LC 9)  
 Max Grav All reactions 250 lb or less at joint(s) except 2=435(LC 23), 22=2055(LC 2), 16=1746(LC 2), 13=299(LC 24)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
 TOP CHORD 2-4=-269/326, 4-5=0/287, 5-6=-1137/414, 6-7=-957/420, 7-8=-1246/477, 8-9=-1446/488, 9-10=-1660/466  
 BOT CHORD 20-22=-77/487, 18-20=-109/1152, 17-18=-204/1407, 16-17=-197/1341  
 WEBS 4-23=-361/191, 4-22=-428/512, 5-22=-1557/396, 5-20=-72/803, 6-20=-44/292, 7-20=-523/162, 7-18=-72/285, 8-18=-82/419, 9-18=-312/205, 10-17=-5/287, 10-16=-1831/520, 11-16=-277/169, 12-16=-124/286

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -2-0-0 to 3-2-0, Interior(1) 3-2-0 to 19-6-8, Exterior(2R) 19-6-8 to 24-8-8, Interior(1) 24-8-8 to 29-1-9, Exterior(2R) 29-1-9 to 34-5-12, Interior(1) 34-5-12 to 53-8-0 zone; porch left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 125 lb uplift at joint 2, 316 lb uplift at joint 22, 344 lb uplift at joint 16 and 177 lb uplift at joint 13.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

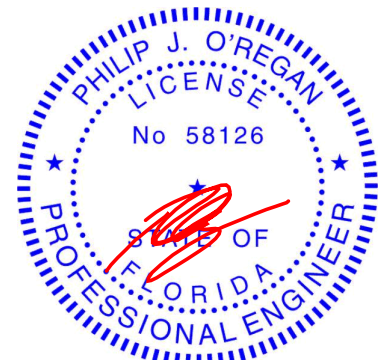

Philip J. O'Regan PE No.58126  
 MiTek USA, Inc. FL Cert 6634  
 6904 Parke East Blvd. Tampa FL 33610  
 Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
 Tampa, FL 33610

|         |       |            |     |     |                          |           |
|---------|-------|------------|-----|-----|--------------------------|-----------|
| Job     | Truss | Truss Type | Qty | Ply | G BUZBEE - CHASTAIN RES. | T25229813 |
| 2845640 | T05G  | GABLE      | 1   | 1   |                          |           |

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,


8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:22 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYZ8IDX-Q3?N6Ed9xkCaljo5u4dj7z2v856P8wE1OnARSEyhmSI

Job Reference (optional)

|        |       |         |        |        |         |         |        |        |
|--------|-------|---------|--------|--------|---------|---------|--------|--------|
| -2-0-0 | 7-0-0 | 13-1-12 | 19-6-8 | 24-4-0 | 28-5-11 | 34-5-12 | 39-9-0 | 45-2-8 |
| 2-0-0  | 7-0-0 | 6-1-12  | 6-4-12 | 4-9-8  | 4-1-11  | 6-0-1   | 5-3-4  | 5-5-8  |

Scale = 1:80.9

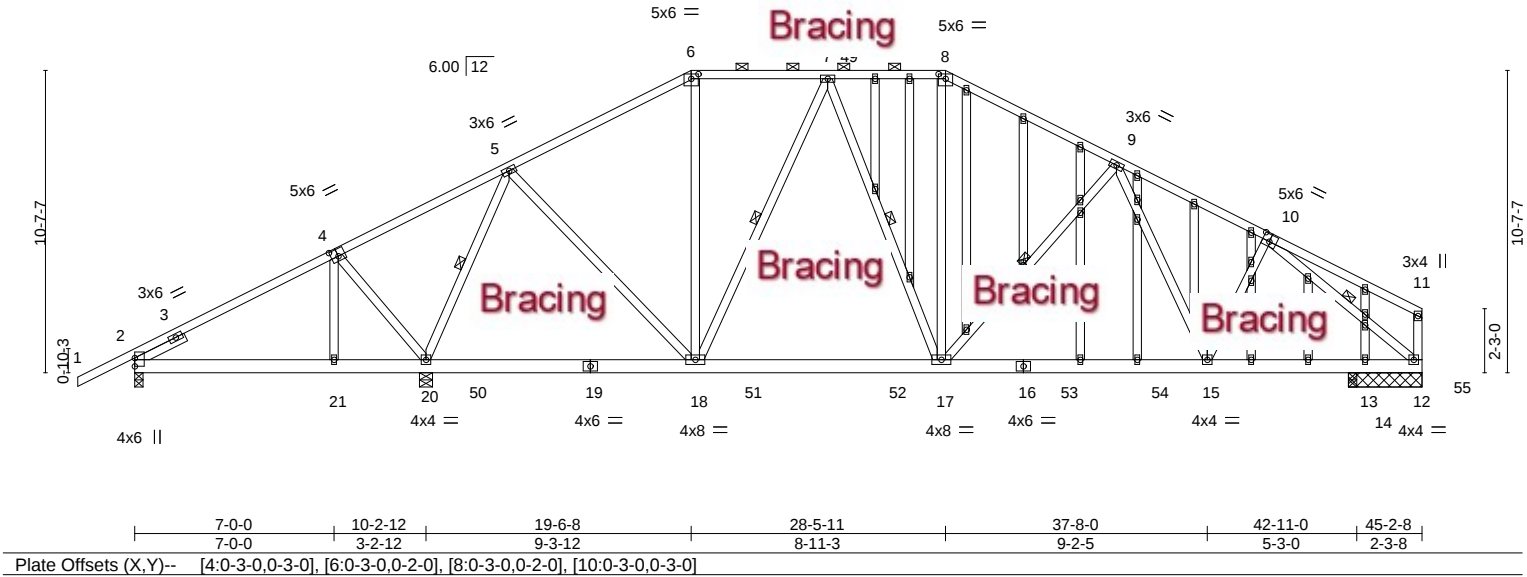

| LOADING (psf) | SPACING-             | 2-0-0 | CSI.      | DEFL.    | in (loc)    | l/defl | L/d | PLATES         | GRIP     |
|---------------|----------------------|-------|-----------|----------|-------------|--------|-----|----------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.48   | Vert(LL) | -0.12 15-17 | >999   | 240 | MT20           | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.57   | Vert(CT) | -0.21 15-17 | >999   | 180 |                |          |
| BCLL 0.0 *    | Rep Stress Incr      | NO    | WB 0.50   | Horz(CT) | 0.04 12     | n/a    | n/a |                |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-MS |          |             |        |     | Weight: 408 lb | FT = 20% |

**LUMBER-**  
TOP CHORD 2x4 SP No.2  
BOT CHORD 2x6 SP No.2  
WEBS 2x4 SP No.3  
OTHERS 2x4 SP No.3  
SLIDER Left 2x4 SP No.3 1-11-18

**BRACING-**  
TOP CHORD Structural wood sheathing directly applied or 4-4-10 oc purlins, except end verticals, and 2-0-0 oc purlins (5-3-5 max.): 6-8.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 2-21,20-21.  
WEBS 1 Row at midpt 5-20, 7-18, 7-17, 9-17, 10-12


**REACTIONS.** All bearings 0-3-8 except (jt=length) 20=0-5-8, 12=2-7-0, 13=2-7-0.  
(lb) - Max Horz 2=204(LC 8)  
Max Uplift All uplift 100 lb or less at joint(s) except 2=-115(LC 5), 20=-374(LC 8), 12=-313(LC 9), 13=-446(LC 16), 14=-140(LC 28)  
Max Grav All reactions 250 lb or less at joint(s) 13 except 2=440(LC 19), 20=2027(LC 2), 12=1335(LC 2), 14=583(LC 2)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 2-4=-278/293, 4-5=0/250, 5-6=-1116/268, 6-7=-939/275, 7-8=-1219/362, 8-9=-1423/362, 9-10=-1648/401  
BOT CHORD 18-20=-126/441, 17-18=-120/1131, 15-17=-210/1405, 14-15=-256/1329, 13-14=-256/1329, 12-13=-256/1329  
WEBS 4-20=-425/211, 5-20=-1520/287, 5-18=-76/779, 6-18=-58/279, 7-18=-519/175, 7-17=-84/296, 8-17=-66/403, 9-17=-317/208, 10-15=0/263, 10-12=-1718/314

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; porch left exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 115 lb uplift at joint 2, 374 lb uplift at joint 20, 313 lb uplift at joint 12, 446 lb uplift at joint 13 and 140 lb uplift at joint 14.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 56 lb down and 34 lb up at 44-7-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

Continued on page 2

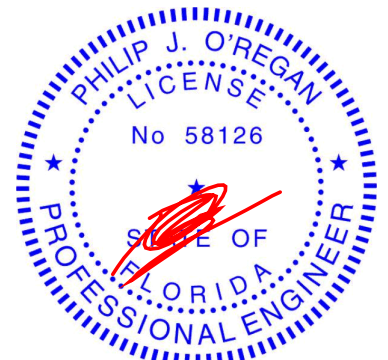

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
Tampa, FL 33610

|         |       |            |     |     |                          |           |
|---------|-------|------------|-----|-----|--------------------------|-----------|
| Job     | Truss | Truss Type | Qty | Ply | G BUZBEE - CHASTAIN RES. | T25229813 |
| 2845640 | T05G  | GABLE      | 1   | 1   | Job Reference (optional) |           |

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:22 2021 Page 2  
ID:urBi2CDpEN7mWD6LziUSOYz8lDX-Q3?N6Ed9xkCaljo5u4dj7z2v856P8wE1OnARSEyhmSl

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25
- Uniform Loads (plf)
  - Vert: 1-6=-54, 6-8=-54, 8-11=-54, 12-45=-20
- Concentrated Loads (lb)
  - Vert: 55=-56(F)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
Tampa, FL 36610

|         |       |                |     |     |                          |           |
|---------|-------|----------------|-----|-----|--------------------------|-----------|
| Job     | Truss | Truss Type     | Qty | Ply | G BUZBEE - CHASTAIN RES. | T25229814 |
| 2845640 | T06   | Piggyback Base | 3   | 1   |                          |           |

Builders FirstSource (Lake City,FL), Lake City, FL - 32055, 8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:24 2021 Page 1  
ID:urBi2CDpEN7mWD6LziUSOYZ8IDX-NS68XwfQTL5i?1yT?VfBCO7E5vpacovKr5fYX7yhmSj  
2-0-0 7-0-0 13-5-8 19-6-8 22-0-0 29-1-9 34-5-12 39-9-0 45-5-4 47-8-1 51-8-0 53-8-0  
2-0-0 7-0-0 6-5-8 6-1-0 2-5-8 7-1-9 5-4-3 5-3-4 5-8-4 2-2-13 3-11-15 2-0-0  
Scale: 1/8"=1'

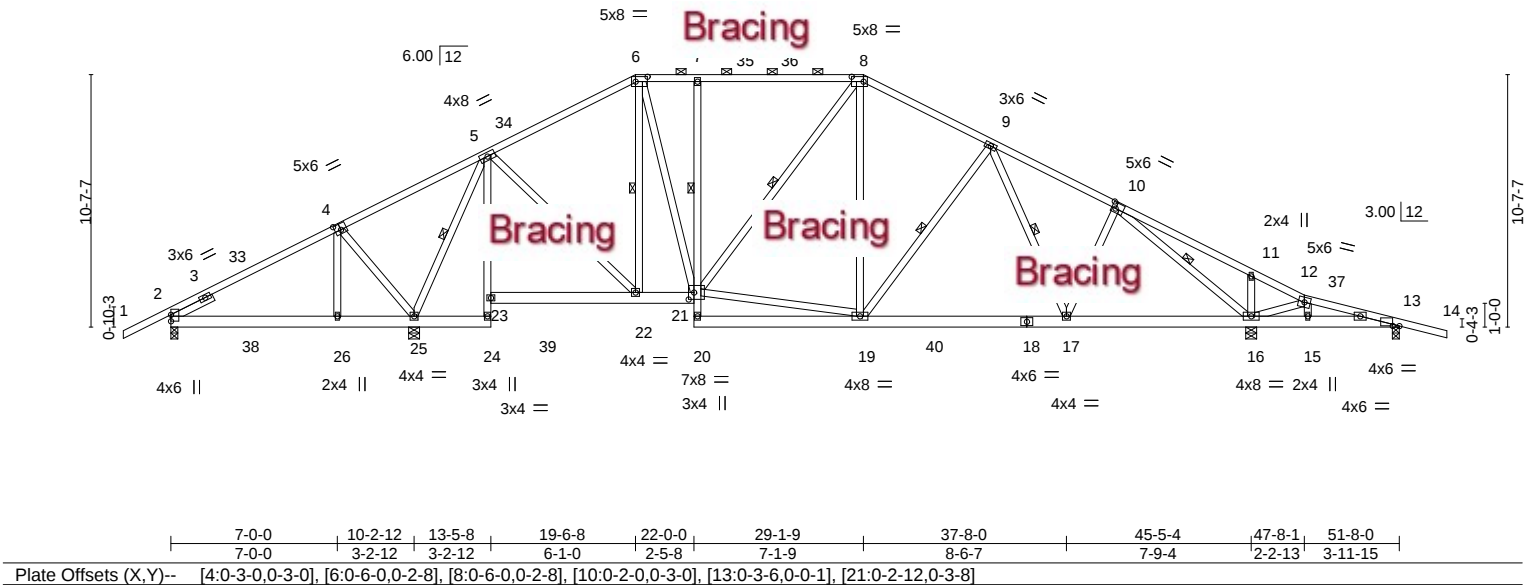


|                      |                       |             |                                  |                |             |
|----------------------|-----------------------|-------------|----------------------------------|----------------|-------------|
| <b>LOADING</b> (psf) | <b>SPACING-</b> 2-0-0 | <b>CSI.</b> | <b>DEFL.</b> in (loc) l/defl L/d | <b>PLATES</b>  | <b>GRIP</b> |
| TCLL 20.0            | Plate Grip DOL 1.25   | TC 0.52     | Vert(LL) -0.11 17-19 >999 240    | MT20           | 244/190     |
| TCDL 7.0             | Lumber DOL 1.25       | BC 0.46     | Vert(CT) -0.18 17-19 >999 180    |                |             |
| BCLL 0.0 *           | Rep Stress Incr YES   | WB 0.62     | Horz(CT) 0.07 13 n/a n/a         |                |             |
| BCDL 10.0            | Code FBC2020/TPI2014  | Matrix-MS   |                                  | Weight: 392 lb | FT = 20%    |

|                                                       |                                                                                   |
|-------------------------------------------------------|-----------------------------------------------------------------------------------|
| <b>LUMBER-</b>                                        | <b>BRACING-</b>                                                                   |
| TOP CHORD 2x4 SP No.2                                 | TOP CHORD Structural wood sheathing directly applied or 4-7-10 oc purlins, except |
| BOT CHORD 2x6 SP No.2 *Except* 5-24-7-20: 2x4 SP No.3 | 2-0-0 oc purlins (5-1-1 max.): 6-8.                                               |
| WEBS 2x4 SP No.3                                      | BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing. Except:             |
| SLIDER Left 2x4 SP No.3 1-11-18                       | 1 Row at midpt 7-21                                                               |
|                                                       | WEBS 1 Row at midpt 5-25, 6-22, 8-21, 9-19, 9-17, 10-16                           |

**REACTIONS.** All bearings 0-3-8 except (jt=length) 25=0-5-8, 16=0-5-8.  
(lb) - Max Horz 2=163(LC 16)  
Max Uplift All uplift 100 lb or less at joint(s) except 2=-130(LC 8), 25=-349(LC 12), 16=-356(LC 13), 13=-137(LC 9)  
Max Grav All reactions 250 lb or less at joint(s) except 2=286(LC 23), 25=2194(LC 2), 16=1677(LC 2), 13=291(LC 24)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 2-4=-283/428, 4-5=-177/14, 5-6=-1020/434, 6-7=-994/472, 7-8=-998/474, 8-9=-1288/503, 9-10=-1534/499  
BOT CHORD 25-26=-251/73, 24-25=-43/264, 22-23=-46/283, 21-22=-63/854, 7-21=-339/167, 17-19=-228/1278, 16-17=-240/1236  
WEBS 4-26=-347/277, 4-25=-523/506, 5-25=-1868/385, 5-22=-79/845, 6-22=-293/78, 6-21=-185/602, 19-21=-109/916, 8-19=-116/472, 9-19=-327/200, 10-17=0/261, 10-16=-1747/437, 11-16=-276/169

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
  - 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCdL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -2-0-0 to 3-2-0, Interior(1) 3-2-0 to 19-6-8, Exterior(2R) 19-6-8 to 24-8-8, Interior(1) 24-8-8 to 29-1-9, Exterior(2R) 29-1-9 to 34-5-12, Interior(1) 34-5-12 to 53-8-0 zone; end vertical left and right exposed; porch left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
  - 4) Provide adequate drainage to prevent water ponding.
  - 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 6) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
  - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 130 lb uplift at joint 2, 349 lb uplift at joint 25, 356 lb uplift at joint 16 and 137 lb uplift at joint 13.
  - 8) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

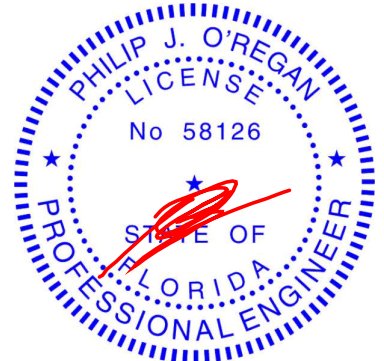

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date: September 2,2021

|         |       |                |     |     |                          |           |
|---------|-------|----------------|-----|-----|--------------------------|-----------|
| Job     | Truss | Truss Type     | Qty | Ply | G BUZBEE - CHASTAIN RES. | T25229815 |
| 2845640 | T07   | Piggyback Base | 2   | 1   |                          |           |


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:26 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8lDX-JqEuycgg?zi0EK5s7whfHpCakiWF4jRdJP8eb?yhmSh

|       |       |        |        |        |        |        |         |        |         |        |
|-------|-------|--------|--------|--------|--------|--------|---------|--------|---------|--------|
| 2-0-0 | 7-0-0 | 13-5-8 | 19-6-8 | 22-0-0 | 29-1-9 | 36-0-0 | 42-10-4 | 47-8-1 | 51-8-0  | 53-8-0 |
| 2-0-0 | 7-0-0 | 6-5-8  | 6-1-0  | 2-5-8  | 7-1-9  | 6-10-7 | 6-10-4  | 4-9-13 | 3-11-15 | 2-0-0  |

Scale: 1/8"=1'

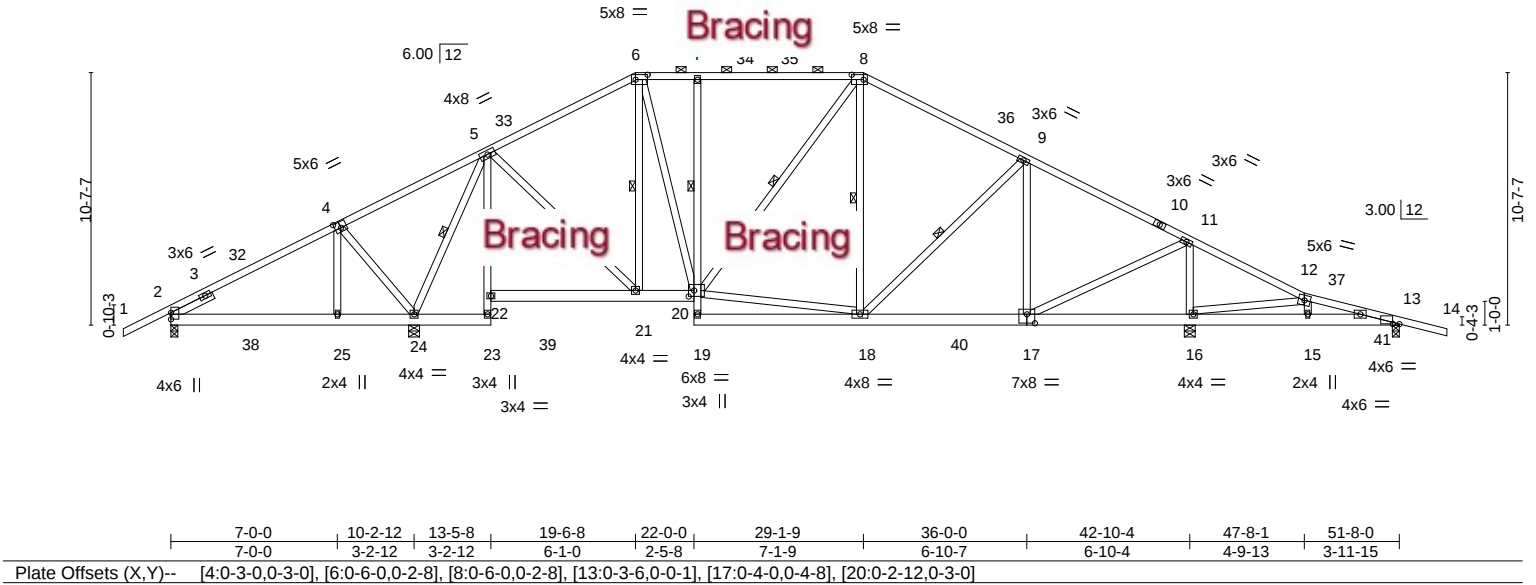


| LOADING (psf) | SPACING-             | 2-0-0 | CSI.      | DEFL.    | in (loc)    | l/defl | L/d | PLATES         | GRIP     |
|---------------|----------------------|-------|-----------|----------|-------------|--------|-----|----------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.51   | Vert(LL) | -0.06 17-18 | >999   | 240 | MT20           | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.45   | Vert(CT) | -0.10 18-19 | >999   | 180 |                |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.55   | Horz(CT) | 0.05 13     | n/a    | n/a |                |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-MS |          |             |        |     | Weight: 389 lb | FT = 20% |

| LUMBER-                                               | BRACING-                                                                          |
|-------------------------------------------------------|-----------------------------------------------------------------------------------|
| TOP CHORD 2x4 SP No.2                                 | TOP CHORD Structural wood sheathing directly applied or 5-4-14 oc purlins, except |
| BOT CHORD 2x6 SP No.2 *Except* 5-23,7-19: 2x4 SP No.3 | 2-0-0 oc purlins (5-6-15 max.): 6-8.                                              |
| WEBS 2x4 SP No.3                                      | BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing. Except:             |
| SLIDER Left 2x4 SP No.3 1-11-18                       | 1 Row at midpt 7-20                                                               |
|                                                       | WEBS 1 Row at midpt 5-24, 6-21, 8-20, 8-18, 9-18                                  |

| REACTIONS.                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------|
| All bearings 0-3-8 except (jt=length) 24=0-5-8, 16=0-5-8.                                                           |
| (lb) - Max Horz 2=163(LC 16)                                                                                        |
| Max Uplift All uplift 100 lb or less at joint(s) except 2=-134(LC 8), 24=-335(LC 12), 16=-368(LC 13), 13=-183(LC 9) |
| Max Grav All reactions 250 lb or less at joint(s) except 2=310(LC 23), 24=2000(LC 2), 16=1808(LC 2), 13=300(LC 24)  |

| FORCES.                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.                                                                                   |
| TOP CHORD 2-4=-280/394, 4-5=-12/640, 5-6=-901/378, 6-7=-850/407, 7-8=-854/410, 8-9=-1041/384, 9-11=-1023/255, 11-12=-331/456, 12-13=-114/260                   |
| BOT CHORD 23-24=-42/263, 21-22=-46/281, 20-21=-29/768, 7-20=-333/165, 17-18=-29/857, 16-17=-356/368                                                            |
| WEBS 4-25=-345/273, 4-24=-516/504, 5-24=-1667/308, 5-21=-29/702, 6-20=-143/476, 18-20=-23/689, 9-17=-413/258, 11-17=-441/1351, 11-16=-1478/587, 12-16=-424/558 |

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -2-0-0 to 3-2-0, Interior(1) 3-2-0 to 19-6-8, Exterior(2R) 19-6-8 to 24-8-8, Interior(1) 24-8-8 to 29-1-9, Exterior(2R) 29-1-9 to 34-3-9, Interior(1) 34-3-9 to 53-8-0 zone; end vertical left exposed; porch left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
  - Provide adequate drainage to prevent water ponding.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 134 lb uplift at joint 2, 335 lb uplift at joint 24, 368 lb uplift at joint 16 and 183 lb uplift at joint 13.
  - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

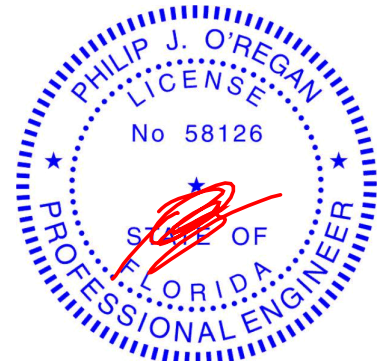

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.  
Tampa, FL 33610

|         |       |                |     |     |                          |           |
|---------|-------|----------------|-----|-----|--------------------------|-----------|
| Job     | Truss | Truss Type     | Qty | Ply | G BUZBEE - CHASTAIN RES. | T25229816 |
| 2845640 | T08   | Piggyback Base | 5   | 1   |                          |           |



Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:27 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8lDX-n1oG9yhmGqtsUg2gdCuq1lmx6qop9GmX3tC8SyhmSg



Scale = 1:93.7

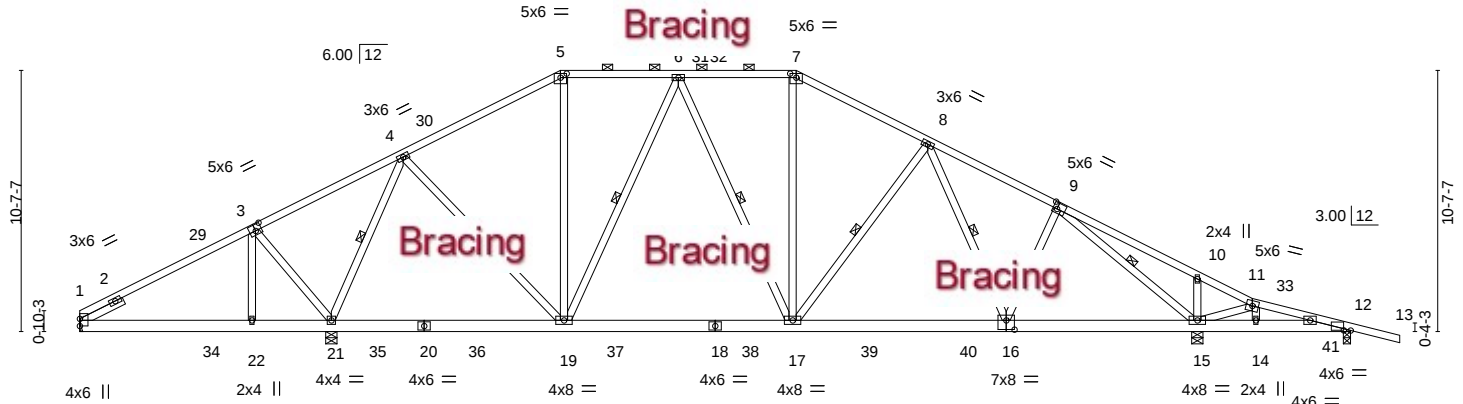

|                                                                                                                              |       |                      |      |           |      |                           |                      |                |          |
|------------------------------------------------------------------------------------------------------------------------------|-------|----------------------|------|-----------|------|---------------------------|----------------------|----------------|----------|
| Plate Offsets (X,Y)-- [3:0-3-0,0-3-0], [5:0-3-0,0-2-0], [7:0-3-0,0-2-0], [9:0-2-0,0-3-0], [12:0-3-6,0-0-1], [16:0-4-0,0-4-8] |       |                      |      |           |      |                           |                      |                |          |
| LOADING (psf)                                                                                                                |       | SPACING- 2-0-0       |      | CSI.      |      | DEFL. in (loc) l/defl L/d |                      | PLATES GRIP    |          |
| TCLL                                                                                                                         | 20.0  | Plate Grip DOL       | 1.25 | TC        | 0.41 | Vert(LL)                  | -0.10 16-17 >999 240 | MT20           | 244/190  |
| TCDL                                                                                                                         | 7.0   | Lumber DOL           | 1.25 | BC        | 0.49 | Vert(CT)                  | -0.16 16-17 >999 180 |                |          |
| BCLL                                                                                                                         | 0.0 * | Rep Stress Incr      | YES  | WB        | 0.58 | Horz(CT)                  | 0.04 12 n/a n/a      |                |          |
| BCDL                                                                                                                         | 10.0  | Code FBC2020/TPI2014 |      | Matrix-MS |      |                           |                      | Weight: 359 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x6 SP No.2  
WEBS 2x4 SP No.3  
SLIDER Left 2x4 SP No.3 1-11-8

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-5-3 oc purlins, except 2-0-0 oc purlins (5-1-9 max.): 5-7.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 1-22,21-22.  
WEBS 1 Row at midpt 4-21, 6-19, 6-17, 8-17, 8-16, 9-15

#### REACTIONS.


All bearings 0-5-8 except (jt=length) 1=Mechanical, 12=0-3-8.  
(lb) - Max Horz 1=-177(LC 13)  
Max Uplift All uplift 100 lb or less at joint(s) except 1=-111(LC 9), 21=-310(LC 12), 15=-344(LC 13), 12=-177(LC 9)  
Max Grav All reactions 250 lb or less at joint(s) except 1=336(LC 23), 21=2043(LC 2), 15=1750(LC 2), 12=299(LC 24)

#### FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 1-3=-238/376, 3-4=0/262, 4-5=-1149/430, 5-6=-969/425, 6-7=-1253/486, 7-8=-1454/497, 8-9=-1667/470  
BOT CHORD 19-21=-87/502, 17-19=-115/1161, 16-17=-212/1414, 15-16=-204/1347  
WEBS 3-22=-380/197, 3-21=-452/541, 4-21=-1536/387, 4-19=-66/799, 5-19=-45/294, 6-19=-522/155, 6-17=-71/281, 7-17=-86/423, 8-17=-311/205, 9-16=-5/288, 9-15=-1837/528, 10-15=-277/169, 11-15=-124/286

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 5-2-0, Interior(1) 5-2-0 to 19-6-8, Exterior(2R) 19-6-8 to 24-8-8, Interior(1) 24-8-8 to 29-1-9, Exterior(2R) 29-1-9 to 34-5-12, Interior(1) 34-5-12 to 53-8-0 zone; porch left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 111 lb uplift at joint 1, 310 lb uplift at joint 21, 344 lb uplift at joint 15 and 177 lb uplift at joint 12.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

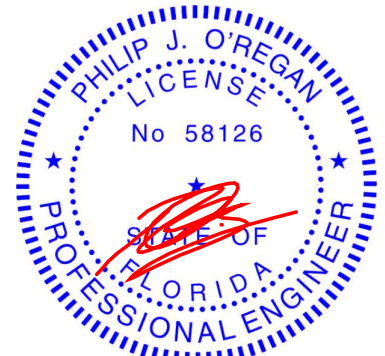

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
Tampa, FL 33610

|                |               |                     |          |          |                                       |
|----------------|---------------|---------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>T08G | Truss Type<br>GABLE | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229817 |
|----------------|---------------|---------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055, 8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:29 2021 Page 1

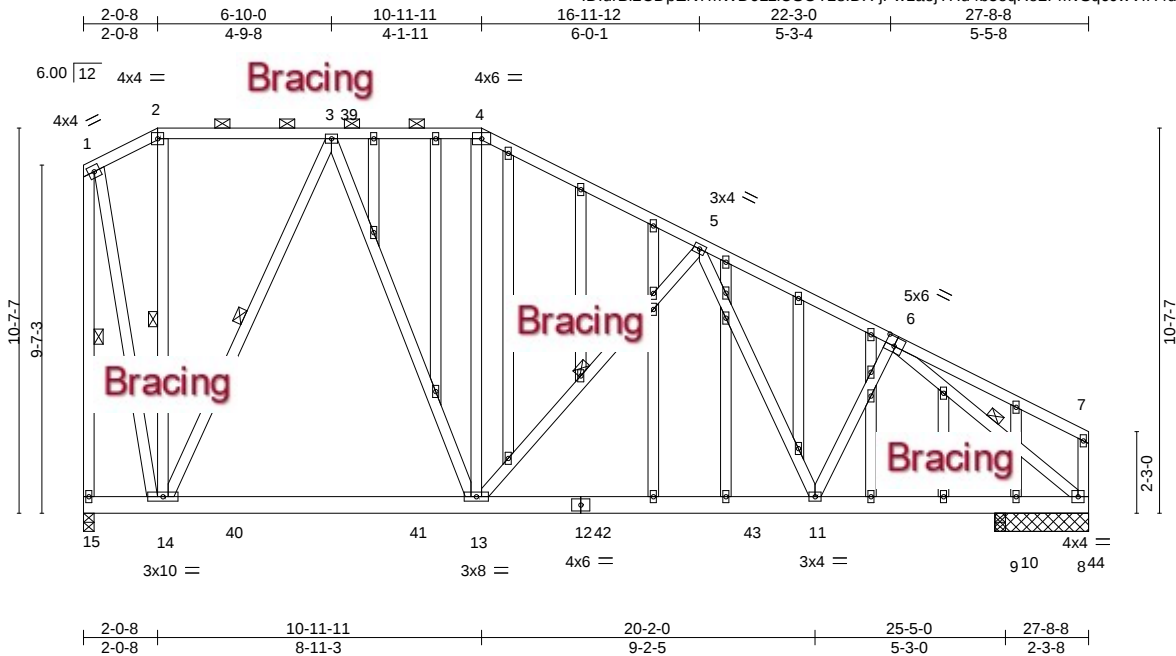

|                       |                      |       |             |              |             |        |     |                |             |
|-----------------------|----------------------|-------|-------------|--------------|-------------|--------|-----|----------------|-------------|
| Plate Offsets (X,Y)-- | [6:0-3:0,0-3:0]      |       |             |              |             |        |     |                |             |
| <b>LOADING</b> (psf)  | <b>SPACING-</b>      | 2-0-0 | <b>CSI.</b> | <b>DEFL.</b> | in (loc)    | l/defl | L/d | <b>PLATES</b>  | <b>GRIP</b> |
| TCLL 20.0             | Plate Grip DOL       | 1.25  | TC 0.42     | Vert(LL)     | -0.10 11-13 | >999   | 240 | MT20           | 244/190     |
| TCDL 7.0              | Lumber DOL           | 1.25  | BC 0.53     | Vert(CT)     | -0.17 11-13 | >999   | 180 |                |             |
| BCLL 0.0 *            | Rep Stress Incr      | NO    | WB 0.52     | Horz(CT)     | 0.02 8      | n/a    | n/a |                |             |
| BCDL 10.0             | Code FBC2020/TPI2014 |       | Matrix-MS   |              |             |        |     | Weight: 320 lb | FT = 20%    |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x6 SP No.2  
WEBS 2x4 SP No.3  
OTHERS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-0-9 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 2-4.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.  
WEBS 1 Row at midpt 2-14, 3-14, 5-13, 1-15, 6-8

#### REACTIONS.

All bearings 0-3-8 except (jt=length) 8=2-7-0, 9=2-7-0.  
(lb) - Max Horz 15=-267(LC 9)  
Max Uplift All uplift 100 lb or less at joint(s) except 15=-247(LC 9), 8=-236(LC 9), 9=-349(LC 16), 10=-107(LC 28)  
Max Grav All reactions 250 lb or less at joint(s) 9 except 15=1150(LC 2), 8=1061(LC 2), 10=466(LC 16)

#### FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
TOP CHORD 1-2=-271/62, 3-4=-769/233, 4-5=-923/219, 5-6=-1250/289, 1-15=-1175/231  
BOT CHORD 14-15=-8/267, 13-14=-4/582, 11-13=-96/1004, 10-11=-169/1020, 9-10=-169/1020, 8-9=-169/1020  
WEBS 3-14=-815/266, 3-13=-166/573, 5-13=-378/230, 1-14=-201/1052, 6-8=-1310/199

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Provide adequate drainage to prevent water ponding.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 247 lb uplift at joint 15, 236 lb uplift at joint 8, 349 lb uplift at joint 9 and 107 lb uplift at joint 10.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 56 lb down and 34 lb up at 27-1-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

**LOAD CASE(S)** Standard



Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

Continued on page 2

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**  
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
Tampa, FL 36610

|         |       |            |     |     |                          |           |
|---------|-------|------------|-----|-----|--------------------------|-----------|
| Job     | Truss | Truss Type | Qty | Ply | G BUZBEE - CHASTAIN RES. | T25229817 |
| 2845640 | T08G  | GABLE      | 1   | 1   | Job Reference (optional) |           |

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:29 2021 Page 2  
ID:urBi2CDpEN7mWD6LziUSOYZ8lDX-jPw1aejYHu4b5oqRo2FMvSq6JwVfh4d3?NMJCKyhmSe

**LOAD CASE(S)** Standard  
1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25  
Uniform Loads (plf)  
Vert: 1-2=-54, 2-4=-54, 4-7=-54, 8-15=-20  
Concentrated Loads (lb)  
Vert: 44=-56(B)

|         |       |                |     |     |                          |           |
|---------|-------|----------------|-----|-----|--------------------------|-----------|
| Job     | Truss | Truss Type     | Qty | Ply | G BUZBEE - CHASTAIN RES. | T25229818 |
| 2845640 | T09   | Piggyback Base | 2   | 1   |                          |           |


Builders FirstSource (Lake City,FL),
Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:31 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8IDX-fo1n?JkppVKIK6\_qvTHq\_twRhjCtl\_oMShrPHDyhmSc

2-0-0 | 7-0-0 | 13-1-12 | 19-6-8 | 24-4-0 | 29-1-9 | 36-0-0 | 42-10-4 | 47-8-1 | 51-8-0 | 53-8-0  
2-0-0 | 7-0-0 | 6-1-12 | 6-4-12 | 4-9-8 | 4-9-8 | 6-10-7 | 6-10-4 | 4-9-13 | 3-11-15 | 2-0-0

Scale: 1/8"=1'

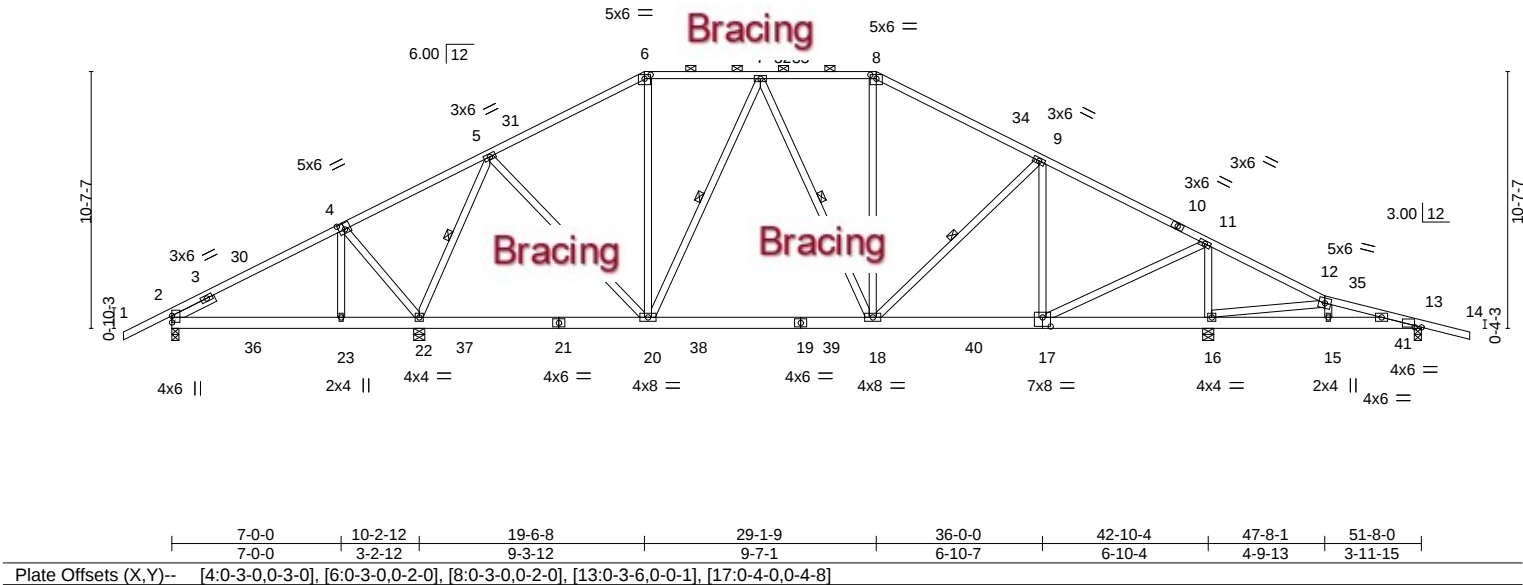


|                       |       |                                                                                       |                 |             |      |              |                 |                         |         |
|-----------------------|-------|---------------------------------------------------------------------------------------|-----------------|-------------|------|--------------|-----------------|-------------------------|---------|
| Plate Offsets (X,Y)-- |       | [4:0-3-0,0-3-0], [6:0-3-0,0-2-0], [8:0-3-0,0-2-0], [13:0-3-6,0-0-1], [17:0-4-0,0-4-8] |                 |             |      |              |                 |                         |         |
| <b>LOADING</b> (psf)  |       | <b>SPACING-</b>                                                                       |                 | <b>CSI.</b> |      | <b>DEFL.</b> |                 | <b>PLATES</b>           |         |
| TCLL                  | 20.0  | Plate Grip DOL                                                                        | 1.25            | TC          | 0.49 | in (loc)     | l/defl          | MT20                    | GRIP    |
| TCDL                  | 7.0   | Lumber DOL                                                                            | 1.25            | BC          | 0.48 | Vert(LL)     | >999            |                         | 244/190 |
| BCLL                  | 0.0 * | Rep Stress Incr                                                                       | YES             | WB          | 0.54 | Vert(CT)     | >999            |                         |         |
| BCDL                  | 10.0  | Code                                                                                  | FBC2020/TPI2014 | Matrix-MS   |      | Horz(CT)     | 0.02 13 n/a n/a |                         |         |
|                       |       |                                                                                       |                 |             |      |              |                 | Weight: 359 lb FT = 20% |         |

|                |                         |                 |                                                                          |
|----------------|-------------------------|-----------------|--------------------------------------------------------------------------|
| <b>LUMBER-</b> |                         | <b>BRACING-</b> |                                                                          |
| TOP CHORD      | 2x4 SP No.2             | TOP CHORD       | Structural wood sheathing directly applied or 4-11-10 oc purlins, except |
| BOT CHORD      | 2x6 SP No.2             |                 | 2-0-0 oc purlins (5-9-6 max.): 6-8.                                      |
| WEBS           | 2x4 SP No.3             | BOT CHORD       | Rigid ceiling directly applied or 10-0-0 oc bracing, Except:             |
| SLIDER         | Left 2x4 SP No.3 1-11-8 |                 | 6-0-0 oc bracing: 16-17.                                                 |
|                |                         | WEBS            | 1 Row at midpt 5-22, 7-20, 7-18, 9-18                                    |

|                                                           |                                                                                                           |  |  |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|--|--|
| <b>REACTIONS.</b>                                         |                                                                                                           |  |  |
| All bearings 0-3-8 except (jt=length) 22=0-5-8, 16=0-5-8. |                                                                                                           |  |  |
| (lb) - Max Horz                                           | 2=163(LC 16)                                                                                              |  |  |
| Max Uplift                                                | All uplift 100 lb or less at joint(s) except 2=-128(LC 12), 22=-302(LC 12), 16=-356(LC 13), 13=-182(LC 9) |  |  |
| Max Grav                                                  | All reactions 250 lb or less at joint(s) except 2=461(LC 23), 22=1853(LC 2), 16=1882(LC 2), 13=310(LC 24) |  |  |

|                                                                                             |                                                                                                                                                          |
|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FORCES.</b> (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown. |                                                                                                                                                          |
| TOP CHORD                                                                                   | 2-4=-266/342, 5-6=-1029/370, 6-7=-861/380, 7-8=-1002/389, 8-9=-1193/385, 9-11=-1138/246, 11-12=-333/414, 12-13=-150/258                                  |
| BOT CHORD                                                                                   | 2-23=-207/255, 22-23=-199/252, 20-22=-77/490, 18-20=-50/989, 17-18=-26/960, 16-17=-318/370                                                               |
| WEBS                                                                                        | 4-23=-359/188, 4-22=-421/510, 5-22=-1348/332, 5-20=-54/663, 7-20=-376/126, 8-18=-27/296, 9-17=-433/257, 11-17=-441/1424, 11-16=-1541/587, 12-16=-432/557 |

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
  - Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -2-0-0 to 3-2-0, Interior(1) 3-2-0 to 19-6-8, Exterior(2R) 19-6-8 to 24-8-8, Interior(1) 24-8-8 to 29-1-9, Exterior(2R) 29-1-9 to 34-3-9, Interior(1) 34-3-9 to 53-8-0 zone; end vertical left exposed; porch left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
  - Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
  - Provide adequate drainage to prevent water ponding.
  - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
  - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 128 lb uplift at joint 2, 302 lb uplift at joint 22, 356 lb uplift at joint 16 and 182 lb uplift at joint 13.
  - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

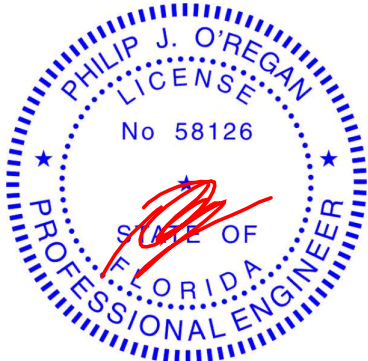

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date: September 2,2021

|                |              |                      |          |          |                                       |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>T10 | Truss Type<br>Common | Qty<br>3 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229819 |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:32 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8IDX-8\_b9CfiRapS9yFZ0TAo3X4Sdl7YTUPFVhLbzpfyhmSb



Scale = 1:61.9


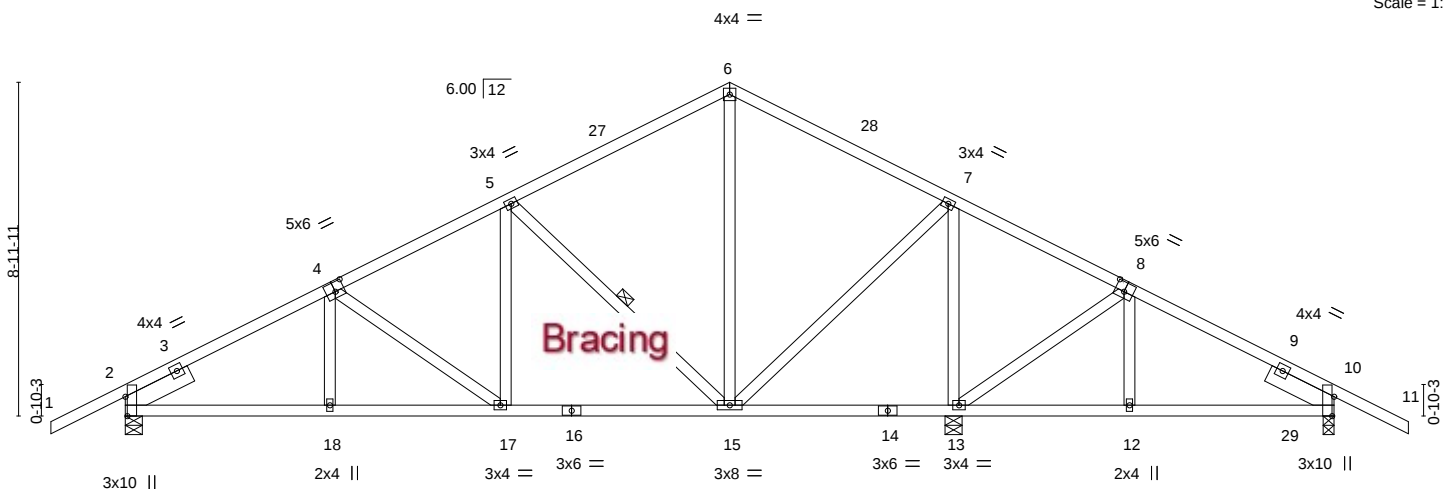


Plate Offsets (X,Y)-- [2:0-6-4,Edge], [4:0-3-0,0-3-0], [8:0-3-0,0-3-0], [10:0-6-4,Edge]

| LOADING (psf) | SPACING-             | 2-0-0 | CSI.      | DEFL.    | in (loc)    | l/defl | L/d | PLATES         | GRIP     |
|---------------|----------------------|-------|-----------|----------|-------------|--------|-----|----------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.41   | Vert(LL) | -0.04 17-18 | >999   | 240 | MT20           | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.46   | Vert(CT) | -0.09 17-18 | >999   | 180 |                |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.66   | Horz(CT) | 0.02 13     | n/a    | n/a |                |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-MS |          |             |        |     | Weight: 196 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3  
SLIDER Left 2x6 SP No.2 1-11-8, Right 2x6 SP No.2 1-11-8

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-10-10 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.  
WEBS 1 Row at midpt 5-15

#### REACTIONS.


(size) 2=0-5-8, 13=0-5-8, 10=0-3-8  
Max Horz 2=-136(LC 13)  
Max Uplift 2=-226(LC 12), 13=-207(LC 12), 10=-154(LC 13)  
Max Grav 2=877(LC 1), 13=1377(LC 1), 10=424(LC 24)

#### FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-1087/266, 4-5=-855/240, 5-6=-436/191, 6-7=-435/186, 7-8=0/283, 8-10=-219/296  
BOT CHORD 2-18=-278/915, 17-18=-279/914, 15-17=-182/727  
WEBS 7-15=-116/712, 7-13=-1055/227, 8-13=-371/369, 5-15=-568/232, 5-17=-37/330

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -2-0-0 to 1-3-0, Interior(1) 1-3-0 to 16-3-0, Exterior(2R) 16-3-0 to 19-6-0, Interior(1) 19-6-0 to 34-6-0 zone; end vertical left and right exposed; porch right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 226 lb uplift at joint 2, 207 lb uplift at joint 13 and 154 lb uplift at joint 10.



Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see


**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 33610

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:34 2021 Page 1  
ID:urBi2CDpEN7mWD6LziUSOYz8IDX-4NjwdLnh6QjtbZjObbqXcVY04xKXyS8o8f43uYyhmSZ  
-2-0-0 | 16-3-0 | 32-6-0 | 34-6-0 |  
2-0-0 | 16-3-0 | 16-3-0 | 2-0-0 |  
Scale = 1:61.4

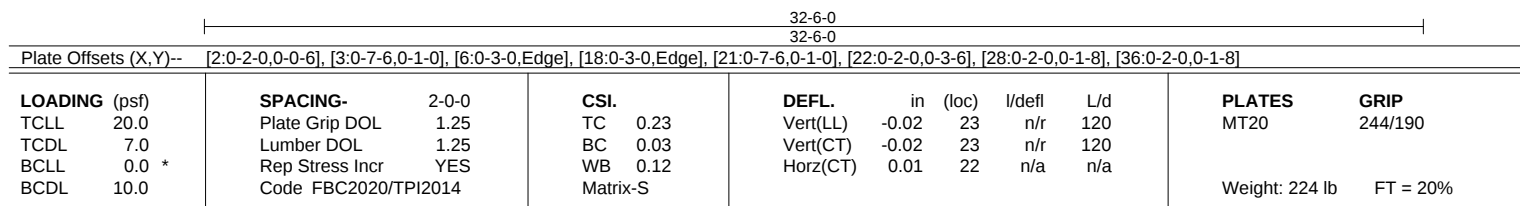


**REACTIONS.** All bearings 32-6-0.  
(lb) - Max Horz 2=131(LC 12)  
Max Uplift All uplift 100 lb or less at joint(s) 2, 33, 34, 35, 37, 38, 39, 40, 31, 30, 29, 27, 26, 25, 24, 22  
Max Grav All reactions 250 lb or less at joint(s) 2, 32, 33, 34, 35, 37, 38, 39, 40, 31, 30, 29, 27, 26, 25, 24, 22

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

**NOTES-**

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TC DL=4.2psf; BC DL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCp=0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) -2-0-0 to 1-3-0, Exterior(2N) 1-3-0 to 16-3-0, Corner(3R) 16-3-0 to 19-6-0, Exterior(2N) 19-6-0 to 34-6-0 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 4) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 5) All plates are 2x4 MT20 unless otherwise indicated.
- 6) Gable requires continuous bottom chord bearing.
- 7) Gable studs spaced at 2-0-0 oc.
- 8) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 9) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 10) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 33, 34, 35, 37, 38, 39, 40, 31, 30, 29, 27, 26, 25, 24, 22.

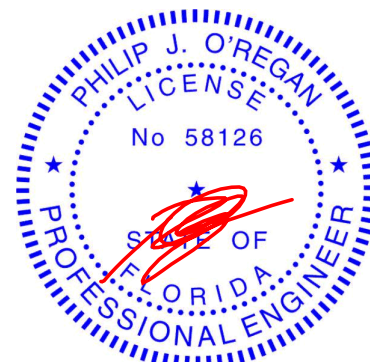

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2, 2021



Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for the individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personnel injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Code**

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd  
Tampa, FL 36610

|                |              |                      |          |          |                                       |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>T11 | Truss Type<br>Common | Qty<br>3 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229821 |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,


8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:35 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8IDX-YZHLrhJtkrkpbJb8JMM8j49uKauh2yNjpdQ\_yhmSY

|       |        |        |        |        |        |        |
|-------|--------|--------|--------|--------|--------|--------|
| 5-7-0 | 10-4-8 | 16-3-0 | 22-3-4 | 27-0-0 | 32-6-0 | 34-6-0 |
| 5-7-0 | 4-9-8  | 5-10-8 | 6-0-4  | 4-8-12 | 5-6-0  | 2-0-0  |

4x4 =

Scale = 1:60.7

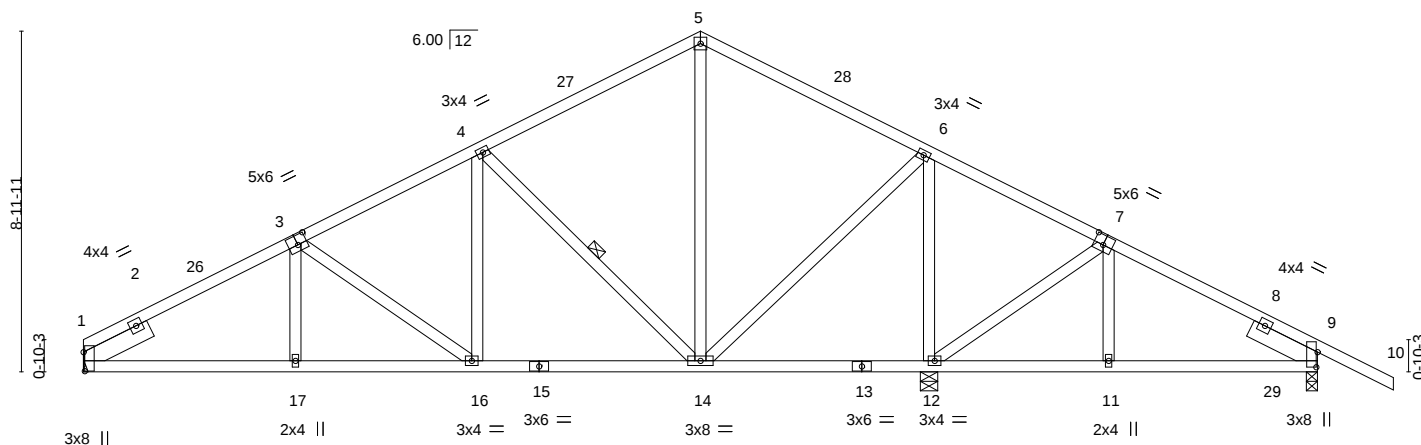

|       |        |        |        |        |        |
|-------|--------|--------|--------|--------|--------|
| 5-7-0 | 10-4-8 | 16-3-0 | 22-3-4 | 27-0-0 | 32-6-0 |
| 5-7-0 | 4-9-8  | 5-10-8 | 6-0-4  | 4-8-12 | 5-6-0  |

Plate Offsets (X,Y)-- [1:0-6-0,0-0-6], [3:0-3-0,0-3-0], [7:0-3-0,0-3-0], [9:0-4-12,0-0-6]

| LOADING (psf) | SPACING-             | 2-0-0 | CSI.      | DEFL.    | in (loc)    | l/defl | L/d | PLATES         | GRIP     |
|---------------|----------------------|-------|-----------|----------|-------------|--------|-----|----------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.35   | Vert(LL) | -0.04 16-17 | >999   | 240 | MT20           | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.41   | Vert(CT) | -0.08 16-17 | >999   | 180 |                |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.65   | Horz(CT) | 0.02 12     | n/a    | n/a |                |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-MS |          |             |        |     | Weight: 193 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3  
SLIDER Left 2x6 SP No.2 1-11-8, Right 2x6 SP No.2 1-11-8

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-0-1 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.  
WEBS 1 Row at midpt 4-14

#### REACTIONS.


(size) 1=Mechanical, 12=0-5-8, 9=0-3-8  
Max Horz 1=-150(LC 13)  
Max Uplift 1=-183(LC 12), 12=-205(LC 12), 9=-155(LC 13)  
Max Grav 1=768(LC 1), 12=1370(LC 1), 9=426(LC 24)

#### FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-3=-1126/281, 3-4=-866/245, 4-5=-445/194, 5-6=-446/190, 6-7=0/266, 7-9=-223/312  
BOT CHORD 1-17=-294/955, 16-17=-294/956, 14-16=-183/733  
WEBS 3-16=-277/134, 4-14=-572/234, 6-14=-113/705, 6-12=-1048/226, 7-12=-368/366, 4-16=-43/334

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCCL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-3-0, Interior(1) 3-3-0 to 16-3-0, Exterior(2R) 16-3-0 to 19-6-0, Interior(1) 19-6-0 to 34-6-0 zone; end vertical right exposed; porch right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=183, 12=205, 9=155.

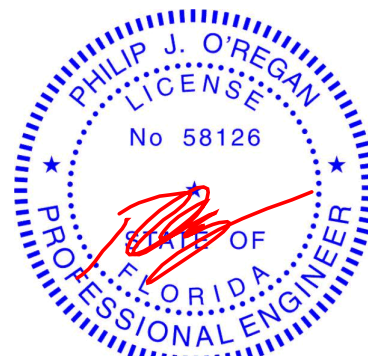

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




6904 Parke East Blvd.  
Tampa, FL 33610

|                          |              |                             |          |          |                                       |
|--------------------------|--------------|-----------------------------|----------|----------|---------------------------------------|
| Job<br>2845640           | Truss<br>T12 | Truss Type<br>Common Girder | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229822 |
| Job Reference (optional) |              |                             |          |          |                                       |


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:37 2021 Page 1  
ID:urBi2CDpEn7mWD6LziUSOYz8lDX-UyP2GNpaPL5S21RzGkOEE89UA8DX9ddErdIkUsyhmSW



4x4 =

Scale = 1:57.2

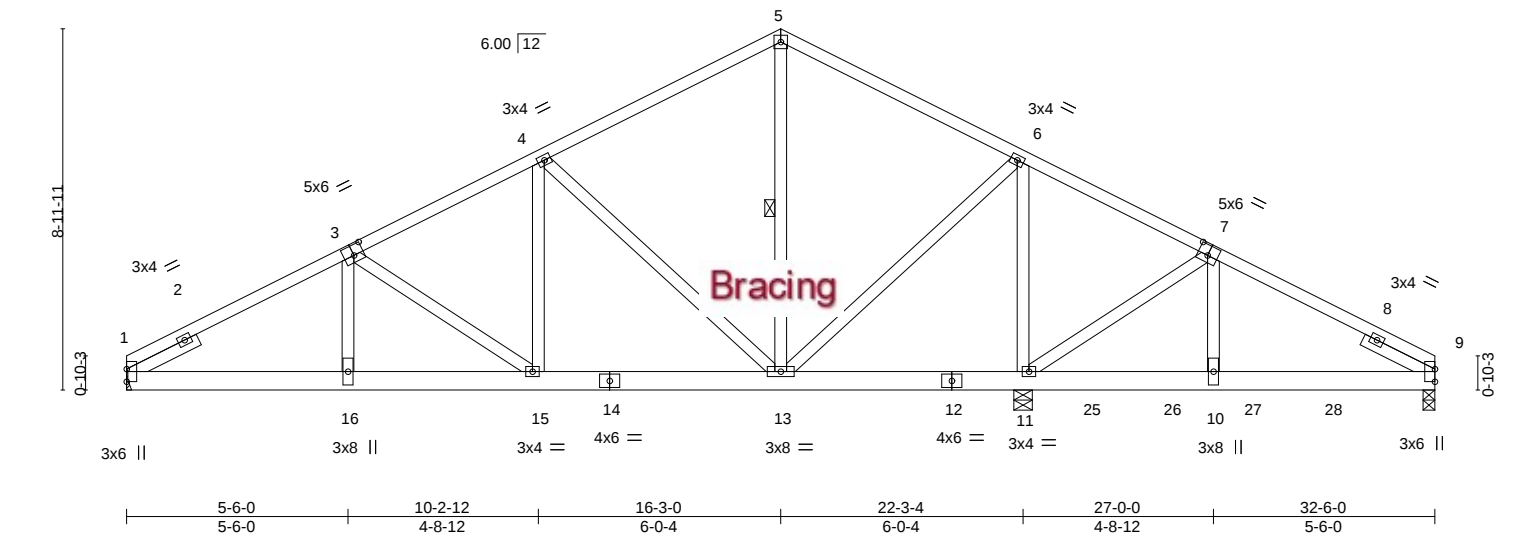

|                                                        |  |                      |  |           |  |                               |  |       |  |                |  |          |  |
|--------------------------------------------------------|--|----------------------|--|-----------|--|-------------------------------|--|-------|--|----------------|--|----------|--|
| Plate Offsets (X,Y)-- [3:0-3:0,0-3:0], [7:0-3:0,0-3:0] |  | LOADING (psf)        |  | SPACING-  |  | CSI.                          |  | DEFL. |  | PLATES         |  | GRIP     |  |
| TCLL 20.0                                              |  | Plate Grip DOL 1.25  |  | TC 0.43   |  | Vert(LL) -0.04 10-23 >999 240 |  | MT20  |  | 244/190        |  |          |  |
| TCDL 7.0                                               |  | Lumber DOL 1.25      |  | BC 0.59   |  | Vert(CT) -0.06 10-23 >999 180 |  |       |  |                |  |          |  |
| BCLL 0.0 *                                             |  | Rep Stress Incr NO   |  | WB 0.78   |  | Horz(CT) 0.01 11 n/a n/a      |  |       |  |                |  |          |  |
| BCDL 10.0                                              |  | Code FBC2020/TPI2014 |  | Matrix-MS |  |                               |  |       |  | Weight: 211 lb |  | FT = 20% |  |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x6 SP No.2  
WEBS 2x4 SP No.3  
SLIDER Left 2x4 SP No.3 1-11-8, Right 2x4 SP No.3 1-11-8

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-5-12 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:  
WEBS 6-0-0 oc bracing: 11-13.  
1 Row at midpt 5-13

#### REACTIONS.

(size) 1=Mechanical, 11=0-5-8, 9=0-3-8  
Max Horz 1=121(LC 27)  
Max Uplift 1=189(LC 27), 11=534(LC 9), 9=385(LC 9)  
Max Grav 1=738(LC 1), 11=2178(LC 1), 9=1120(LC 20)

#### FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 1-3=-1087/296, 3-4=-829/259, 4-5=-391/197, 5-6=-393/202, 6-7=-56/370, 7-9=-967/371  
BOT CHORD 1-16=-321/929, 15-16=-322/927, 13-15=-213/713, 11-13=-302/132, 10-11=-269/840,  
9-10=-278/865  
WEBS 6-13=-152/748, 6-11=-1092/246, 7-11=-1268/481, 7-10=-350/1000, 4-13=-591/240,  
4-15=-46/347, 3-15=-284/137

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TC DL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCPI=0.18; MWFRS (envelope) gable end zone; porch right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=189, 11=534, 9=385.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 316 lb down and 131 lb up at 23-11-4, 316 lb down and 131 lb up at 25-11-4, 316 lb down and 131 lb up at 27-11-4, and 316 lb down and 131 lb up at 29-11-4, and 320 lb down and 127 lb up at 31-11-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

#### LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25  
Uniform Loads (plf)  
Vert: 1-5=-54, 5-9=-54, 17-21=-20

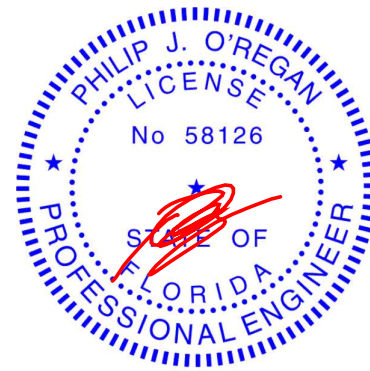

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

Continued on page 2

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**  
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd.  
Tampa, FL 33610

|         |       |               |     |     |                          |           |
|---------|-------|---------------|-----|-----|--------------------------|-----------|
| Job     | Truss | Truss Type    | Qty | Ply | G BUZBEE - CHASTAIN RES. | T25229822 |
| 2845640 | T12   | Common Girder | 1   | 1   | Job Reference (optional) |           |

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:37 2021 Page 2  
ID:urBi2CDpEN7mWD6LziUSOYz8lDX-UyP2GNpaPL5S21RzGkOEE89UA8DX9ddErdIkUsyhmsW


**LOAD CASE(S)** Standard  
Concentrated Loads (lb)  
Vert: 23=-320(B) 25=-316(B) 26=-316(B) 27=-316(B) 28=-316(B)

|                |              |                      |          |          |                                       |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>T13 | Truss Type<br>Common | Qty<br>2 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229823 |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:38 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8IDX-y8yQTjqCAfDJgA0AqRvTmLicYYtuD5O3H2H1JyhmSV

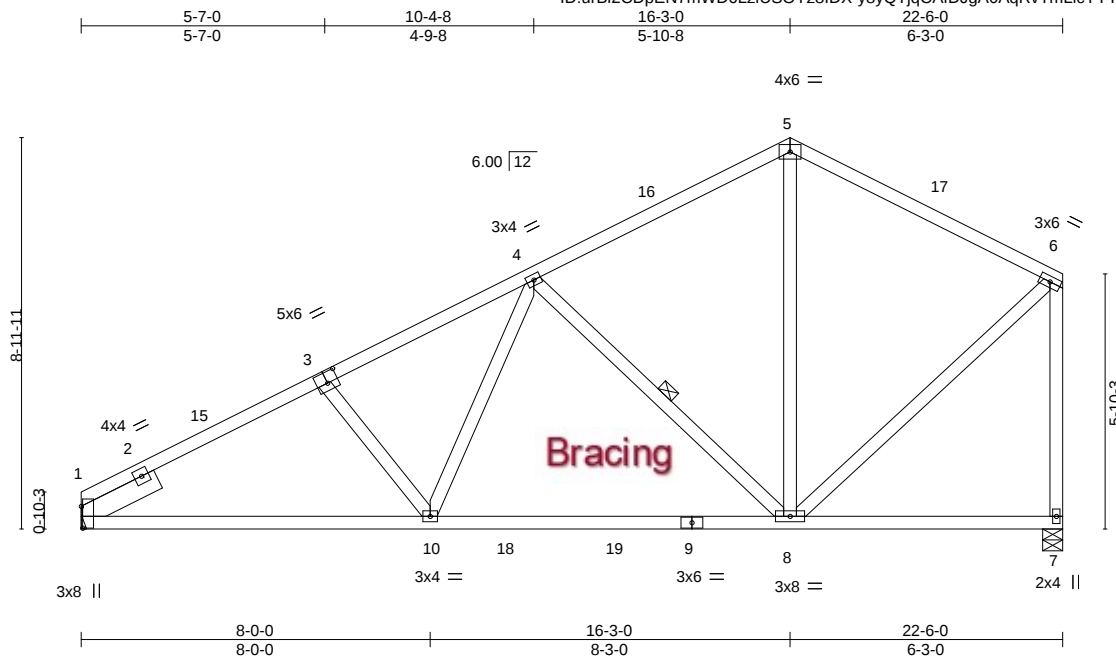

| Plate Offsets (X,Y)-- [1:0-6-0,0-0-6], [3:0-3-0,0-3-0] |       |                      |      |           |      |                           |                     |                |          |
|--------------------------------------------------------|-------|----------------------|------|-----------|------|---------------------------|---------------------|----------------|----------|
| LOADING (psf)                                          |       | SPACING- 2-0-0       |      | CSI.      |      | DEFL. in (loc) l/defl L/d |                     | PLATES GRIP    |          |
| TCLL                                                   | 20.0  | Plate Grip DOL       | 1.25 | TC        | 0.58 | Vert(LL)                  | -0.15 8-10 >999 240 | MT20           | 244/190  |
| TCDL                                                   | 7.0   | Lumber DOL           | 1.25 | BC        | 0.65 | Vert(CT)                  | -0.26 8-10 >999 180 |                |          |
| BCLL                                                   | 0.0 * | Rep Stress Incr      | YES  | WB        | 0.25 | Horz(CT)                  | 0.03 7 n/a n/a      |                |          |
| BCDL                                                   | 10.0  | Code FBC2020/TPI2014 |      | Matrix-MS |      |                           |                     | Weight: 134 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3  
SLIDER Left 2x6 SP No.2 1-11-8

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-5-13 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 9-4-10 oc bracing.  
WEBS 1 Row at midpt 4-8

#### REACTIONS.


(size) 1=Mechanical, 7=0-5-8  
Max Horz 1=220(LC 12)  
Max Uplift 1=-173(LC 12), 7=-184(LC 12)  
Max Grav 1=902(LC 2), 7=901(LC 2)

#### FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-3=-1328/284, 3-4=-1216/282, 4-5=-618/194, 5-6=-615/188, 6-7=-823/245  
BOT CHORD 1-10=-394/1140, 8-10=-283/896  
WEBS 4-10=-73/441, 4-8=-566/242, 5-8=-22/285, 6-8=-145/658

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 16-3-0, Exterior(2R) 16-3-0 to 19-3-0, Interior(1) 19-3-0 to 22-4-4 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=173, 7=184.



Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610

|                |              |                      |          |          |                                       |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>T14 | Truss Type<br>Common | Qty<br>3 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229824 |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:39 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8IDX-QKWpg2qqxyLAikbMN8QijZFnlYu7dgMXlnqZlyhmSU



Scale = 1:52.8

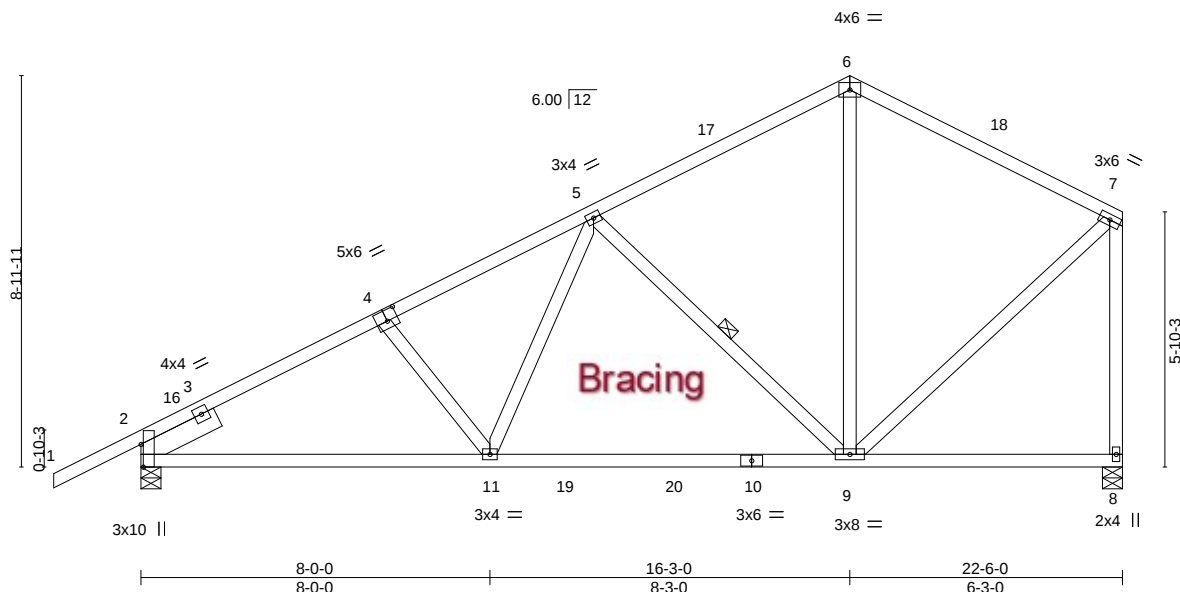

|                       |       |                                 |      |             |      |                                  |                     |                    |          |
|-----------------------|-------|---------------------------------|------|-------------|------|----------------------------------|---------------------|--------------------|----------|
| Plate Offsets (X,Y)-- |       | [2:0-6-4,Edge], [4:0-3-0,0-3-0] |      |             |      |                                  |                     |                    |          |
| <b>LOADING</b> (psf)  |       | <b>SPACING-</b> 2-0-0           |      | <b>CSI.</b> |      | <b>DEFL.</b> in (loc) l/defl L/d |                     | <b>PLATES GRIP</b> |          |
| TCLL                  | 20.0  | Plate Grip DOL                  | 1.25 | TC          | 0.58 | Vert(LL)                         | -0.15 9-11 >999 240 | MT20               | 244/190  |
| TCDL                  | 7.0   | Lumber DOL                      | 1.25 | BC          | 0.65 | Vert(CT)                         | -0.26 9-11 >999 180 |                    |          |
| BCLL                  | 0.0 * | Rep Stress Incr                 | YES  | WB          | 0.25 | Horz(CT)                         | 0.03 8 n/a n/a      |                    |          |
| BCDL                  | 10.0  | Code FBC2020/TPI2014            |      | Matrix-MS   |      |                                  |                     | Weight: 138 lb     | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3  
SLIDER Left 2x6 SP No.2 1-11-8

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-3-8 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 9-6-4 oc bracing.  
WEBS 1 Row at midpt 5-9

#### REACTIONS.


(size) 2=0-5-8, 8=0-5-8  
Max Horz 2=249(LC 12)  
Max Uplift 2=-217(LC 12), 8=-182(LC 12)  
Max Grav 2=994(LC 2), 8=897(LC 2)

#### FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-1307/266, 4-5=-1198/265, 5-6=-616/191, 6-7=-612/187, 7-8=-820/244  
BOT CHORD 2-11=-383/1116, 9-11=-279/888  
WEBS 5-11=-65/423, 5-9=-557/239, 6-9=-21/283, 7-9=-144/654

#### NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -2-0-0 to 1-0-0, Interior(1) 1-0-0 to 16-3-0, Exterior(2R) 16-3-0 to 19-3-0, Interior(1) 19-3-0 to 22-4-4 zone; end vertical left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=217, 8=182.

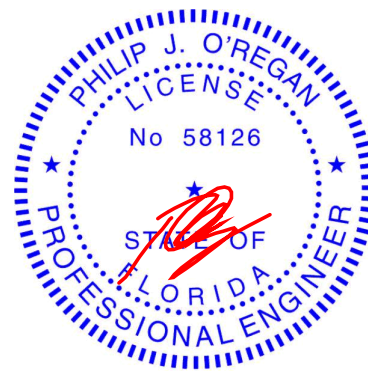

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 33610

|                |              |                      |          |          |                                       |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>T15 | Truss Type<br>Common | Qty<br>3 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229825 |
|----------------|--------------|----------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:39 2021 Page 1  
ID:urBi2CDpEN7mWD6LziUSOYz8lDX-QKWpg2qqxyLAIKbMN8QijZFoRyu5dgmXlnqZlyhmSU

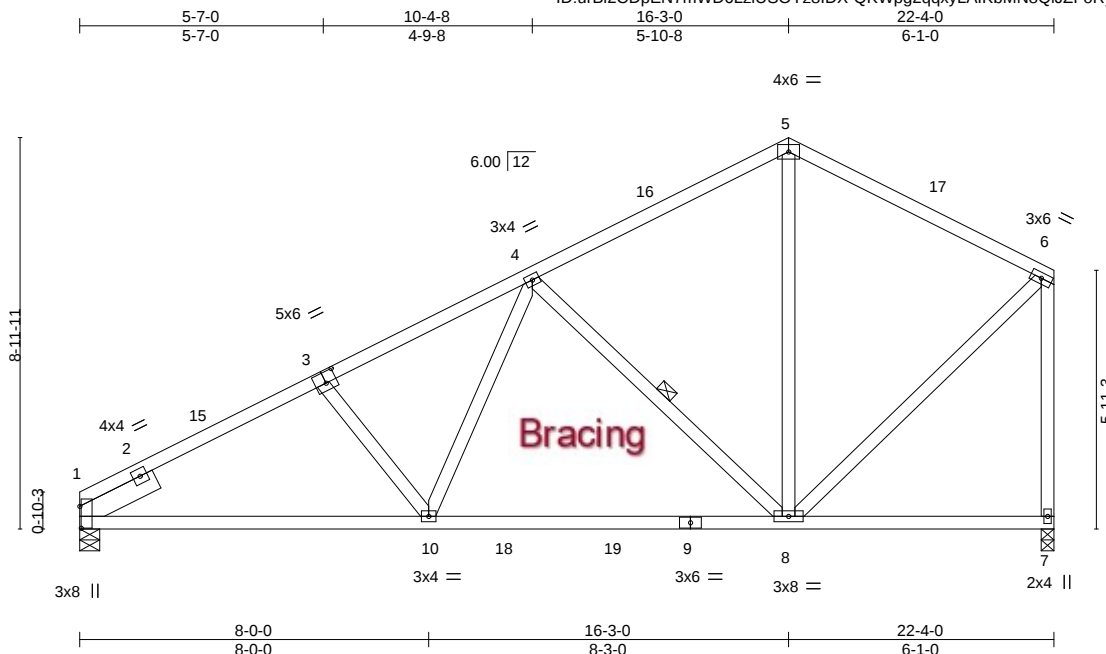

Scale = 1:52.8

| Plate Offsets (X,Y)-- |                 | [1:0-6-0,0-0-6], [3:0-3-0,0-3-0] |                              |
|-----------------------|-----------------|----------------------------------|------------------------------|
| <b>LOADING</b> (psf)  | <b>SPACING-</b> | 2-0-0                            | <b>CSI.</b>                  |
| TCLL 20.0             | Plate Grip DOL  | 1.25                             | TC 0.57                      |
| TCDL 7.0              | Lumber DOL      | 1.25                             | BC 0.65                      |
| BCLL 0.0 *            | Rep Stress Incr | YES                              | WB 0.25                      |
| BCDL 10.0             | Code            | FBC2020/TPI2014                  | Matrix-MS                    |
|                       |                 |                                  | <b>DEFL.</b>                 |
|                       |                 |                                  | in (loc) l/defl L/d          |
|                       |                 |                                  | Vert(LL) -0.15 8-10 >999 240 |
|                       |                 |                                  | Vert(CT) -0.26 8-10 >999 180 |
|                       |                 |                                  | Horz(CT) 0.03 7 n/a n/a      |
|                       |                 |                                  | <b>PLATES</b> <b>GRIP</b>    |
|                       |                 |                                  | MT20 244/190                 |
|                       |                 |                                  | Weight: 134 lb FT = 20%      |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3  
SLIDER Left 2x6 SP No.2 1-11-8

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-6-6 oc purlins, except end verticals.  
BOT CHORD Rigid ceiling directly applied or 9-4-14 oc bracing.  
WEBS 1 Row at midpt 4-8

#### REACTIONS.


(size) 1=0-5-8, 7=0-3-8  
Max Horz 1=222(LC 12)  
Max Uplift 1=171(LC 12), 7=185(LC 12)  
Max Grav 1=895(LC 2), 7=895(LC 2)

#### FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-3=-1316/281, 3-4=-1204/279, 4-5=-604/190, 5-6=-598/185, 6-7=-820/245  
BOT CHORD 1-10=-393/1129, 8-10=-282/884  
WEBS 4-10=-73/442, 4-8=-567/243, 5-8=-20/275, 6-8=-146/654

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 16-3-0, Exterior(2R) 16-3-0 to 19-3-0, Interior(1) 19-3-0 to 22-2-4 zone; end vertical left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=171, 7=185.

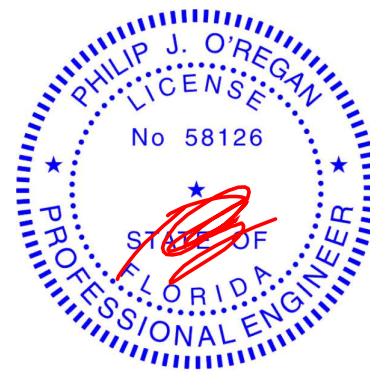

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610

|                          |              |                      |          |          |                                       |
|--------------------------|--------------|----------------------|----------|----------|---------------------------------------|
| Job<br>2845640           | Truss<br>T16 | Truss Type<br>Common | Qty<br>2 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229826 |
| Job Reference (optional) |              |                      |          |          |                                       |


Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:40 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8IDX-vX4BuOrSiGT1vUAYxsxxrmn2ELJHM9AhXbXO5ByhmST



Scale = 1:25.9

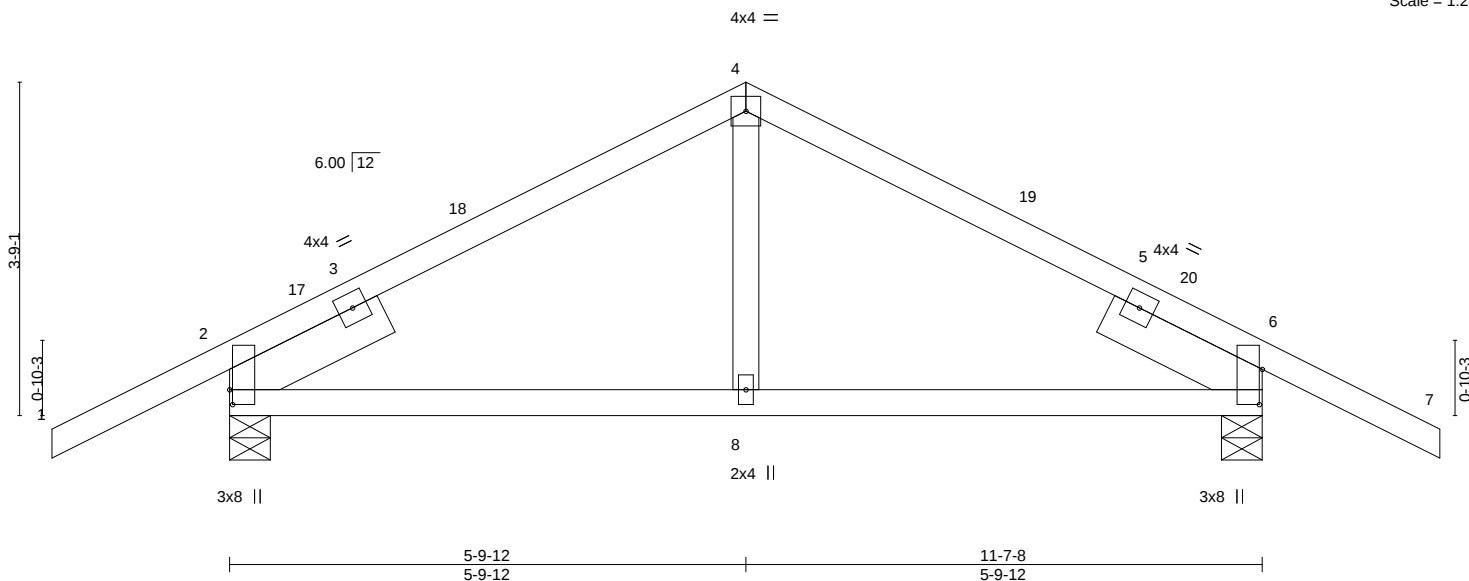

| Plate Offsets (X,Y)-- |  | [2:0-2-0,0-0-6], [6:0-4-12,0-0-6] |       |             |  |              |            |        |     |               |             |
|-----------------------|--|-----------------------------------|-------|-------------|--|--------------|------------|--------|-----|---------------|-------------|
| <b>LOADING</b> (psf)  |  | <b>SPACING-</b>                   | 2-0-0 | <b>CSI.</b> |  | <b>DEFL.</b> | in (loc)   | l/defl | L/d | <b>PLATES</b> | <b>GRIP</b> |
| TCLL 20.0             |  | Plate Grip DOL                    | 1.25  | TC 0.25     |  | Vert(LL)     | -0.02 8-15 | >999   | 240 | MT20          | 244/190     |
| TCDL 7.0              |  | Lumber DOL                        | 1.25  | BC 0.27     |  | Vert(CT)     | -0.04 8-15 | >999   | 180 |               |             |
| BCLL 0.0 *            |  | Rep Stress Incr                   | YES   | WB 0.09     |  | Horz(CT)     | 0.01 2     | n/a    | n/a |               |             |
| BCDL 10.0             |  | Code FBC2020/TPI2014              |       | Matrix-MS   |  |              |            |        |     | Weight: 58 lb | FT = 20%    |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3  
SLIDER Left 2x6 SP No.2 1-11-8, Right 2x6 SP No.2 1-11-8

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

#### REACTIONS.


(size) 2=0-5-8, 6=0-5-8  
Max Horz 2=58(LC 12)  
Max Uplift 2=-132(LC 12), 6=-132(LC 13)  
Max Grav 2=538(LC 1), 6=538(LC 1)

#### FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-430/212, 4-6=-429/212  
BOT CHORD 2-8=-56/368, 6-8=-56/368

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) -2-0-0 to 1-0-0, Interior(1) 1-0-0 to 5-9-12, Exterior(2R) 5-9-12 to 8-9-12, Interior(1) 8-9-12 to 13-7-8 zone; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=132, 6=132.

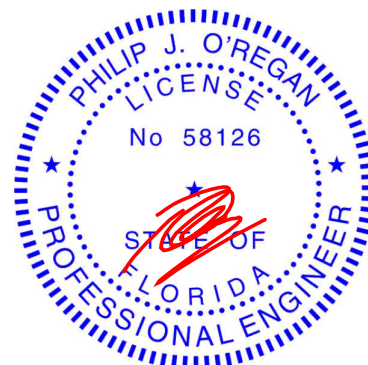

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610

|                                                             |               |                                      |          |          |                                       |
|-------------------------------------------------------------|---------------|--------------------------------------|----------|----------|---------------------------------------|
| Job<br>2845640                                              | Truss<br>T16G | Truss Type<br>Common Supported Gable | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229827 |
| Builders FirstSource (Lake City,FL), Lake City, FL - 32055, |               |                                      |          |          | Job Reference (optional)              |

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:41 2021 Page 1  
ID:urBi2CDpEN7mWD6LziUSOYz8IDX-NjeZ5ks4TabuXelVZSAO\_KCJljB5d8qlFGxdehyhmSS



Scale = 1:25.9

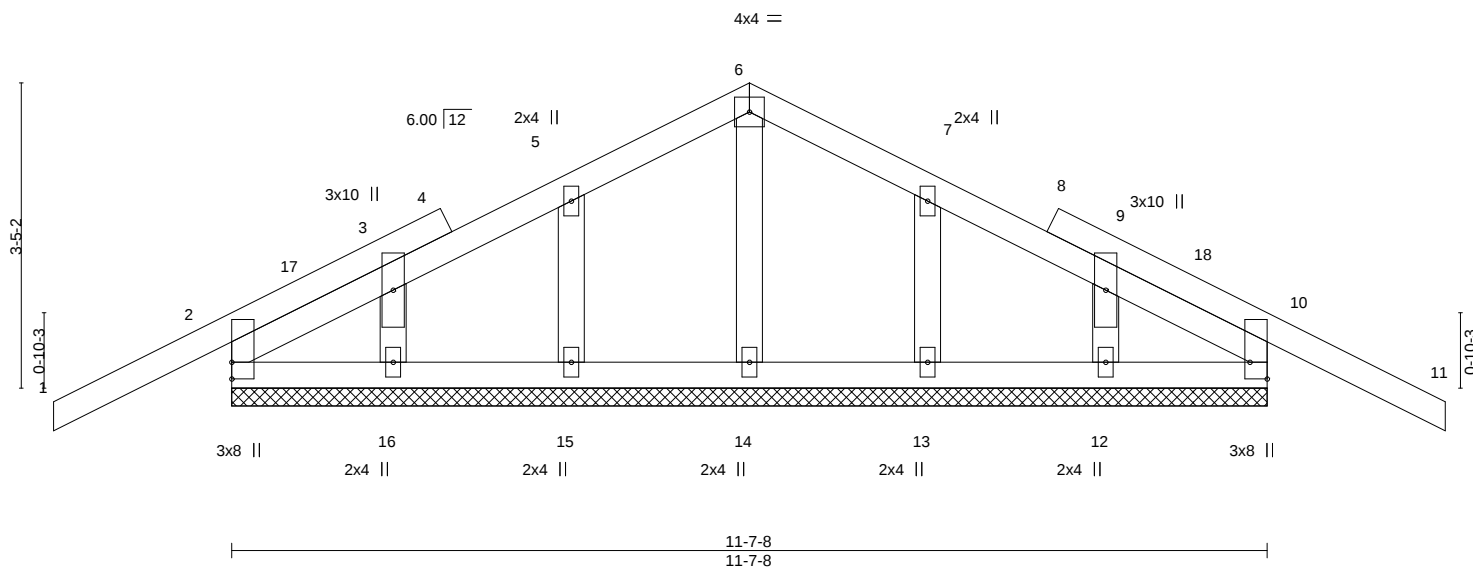

|                                       |                      |       |             |              |          |        |     |               |             |
|---------------------------------------|----------------------|-------|-------------|--------------|----------|--------|-----|---------------|-------------|
| Plate Offsets (X,Y)-- [10:Edge,0-2-5] |                      |       |             |              |          |        |     |               |             |
| <b>LOADING</b> (psf)                  | <b>SPACING-</b>      | 2-0-0 | <b>CSI.</b> | <b>DEFL.</b> | in (loc) | l/defl | L/d | <b>PLATES</b> | <b>GRIP</b> |
| TCLL 20.0                             | Plate Grip DOL       | 1.25  | TC 0.23     | Vert(LL)     | -0.02    | 11     | n/r | MT20          | 244/190     |
| TCDL 7.0                              | Lumber DOL           | 1.25  | BC 0.03     | Vert(CT)     | -0.03    | 11     | n/r |               |             |
| BCLL 0.0 *                            | Rep Stress Incr      | YES   | WB 0.04     | Horz(CT)     | 0.00     | 10     | n/a |               |             |
| BCDL 10.0                             | Code FBC2020/TPI2014 |       | Matrix-S    |              |          |        |     | Weight: 64 lb | FT = 20%    |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
OTHERS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


#### REACTIONS.

All bearings 11-7-8.  
(lb) - Max Horz 2=53(LC 12)  
Max Uplift All uplift 100 lb or less at joint(s) 2, 10, 15, 16, 13, 12  
Max Grav All reactions 250 lb or less at joint(s) 2, 10, 14, 15, 16, 13, 12

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Corner(3E) -2-0-0 to 1-0-0, Exterior(2N) 1-0-0 to 5-9-12, Corner(3R) 5-9-12 to 8-9-12, Exterior(2N) 8-9-12 to 13-7-8 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Gable requires continuous bottom chord bearing.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 10, 15, 16, 13, 12.



Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 36610

|                                                             |              |                             |          |          |                                       |
|-------------------------------------------------------------|--------------|-----------------------------|----------|----------|---------------------------------------|
| Job<br>2845640                                              | Truss<br>T17 | Truss Type<br>Common Girder | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229828 |
| Builders FirstSource (Lake City,FL), Lake City, FL - 32055, |              |                             |          |          |                                       |

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:42 2021 Page 1  
ID:urBi2CDpEN7mWD6LziUSOYz8lDX-rvCxJ4tiDtl9oKx3H\_PxBtJc9s\_qu5z\_v0VA4yhmSR

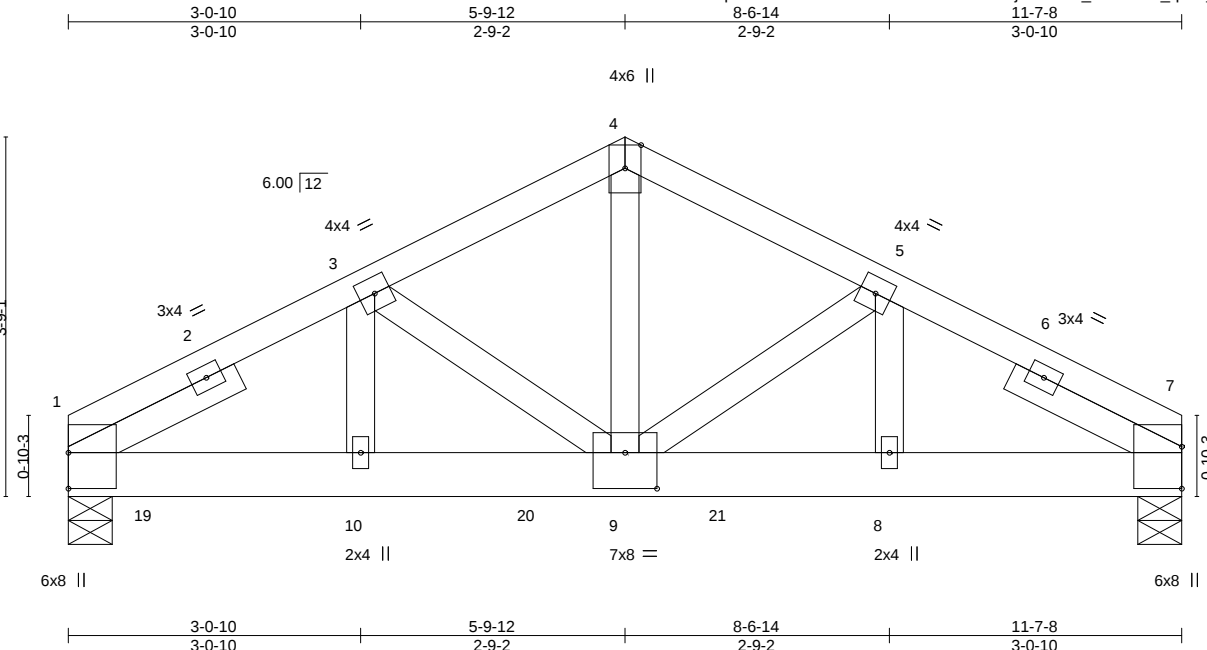

|                                       |                      |       |             |               |             |          |     |
|---------------------------------------|----------------------|-------|-------------|---------------|-------------|----------|-----|
| Plate Offsets (X,Y)-- [9:0-4-0,0-4-8] |                      |       |             |               |             |          |     |
| <b>LOADING</b> (psf)                  | <b>SPACING-</b>      | 2-0-0 | <b>CSI.</b> | <b>DEFL.</b>  | in (loc)    | l/defl   | L/d |
| TCLL 20.0                             | Plate Grip DOL       | 1.25  | TC 0.51     | Vert(LL)      | -0.06 8-9   | >999     | 240 |
| TCDL 7.0                              | Lumber DOL           | 1.25  | BC 0.89     | Vert(CT)      | -0.10 8-9   | >999     | 180 |
| BCLL 0.0 *                            | Rep Stress Incr      | NO    | WB 0.83     | Horz(CT)      | 0.03 7      | n/a      | n/a |
| BCDL 10.0                             | Code FBC2020/TPI2014 |       | Matrix-MS   |               |             |          |     |
|                                       |                      |       |             | <b>PLATES</b> | <b>GRIP</b> |          |     |
|                                       |                      |       |             | MT20          | 244/190     |          |     |
|                                       |                      |       |             | Weight: 71 lb |             | FT = 20% |     |


|                                                          |                                                                           |
|----------------------------------------------------------|---------------------------------------------------------------------------|
| <b>LUMBER-</b>                                           | <b>BRACING-</b>                                                           |
| TOP CHORD 2x4 SP No.2                                    | TOP CHORD Structural wood sheathing directly applied or 2-9-9 oc purlins. |
| BOT CHORD 2x6 SP No.2                                    | BOT CHORD Rigid ceiling directly applied or 8-6-11 oc bracing.            |
| WEBS 2x4 SP No.3                                         |                                                                           |
| SLIDER Left 2x4 SP No.3 1-11-8, Right 2x4 SP No.3 1-11-8 |                                                                           |

|                   |                                       |
|-------------------|---------------------------------------|
| <b>REACTIONS.</b> | (size) 1=0-5-8, 7=0-5-8               |
|                   | Max Horz 1=-43(LC 32)                 |
|                   | Max Uplift 1=-647(LC 8), 7=-647(LC 9) |
|                   | Max Grav 1=2655(LC 1), 7=2785(LC 1)   |

|                |                                                                              |
|----------------|------------------------------------------------------------------------------|
| <b>FORCES.</b> | (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown. |
| TOP CHORD      | 1-3=-3374/829, 3-4=-2720/680, 4-5=-2719/679, 5-7=-3355/808                   |
| BOT CHORD      | 1-10=-736/2941, 9-10=-736/2941, 8-9=-671/2920, 7-8=-671/2920                 |
| WEBS           | 4-9=-528/2166, 5-9=-702/183, 5-8=-145/793, 3-9=-655/209, 3-10=-167/726       |

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
  - 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone; Lumber DOL=1.60 plate grip DOL=1.60
  - 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
  - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
  - 5) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
  - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=647, 7=647.
  - 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 749 lb down and 201 lb up at 0-10-4, 748 lb down and 203 lb up at 2-10-4, 748 lb down and 203 lb up at 4-10-4, 718 lb down and 209 lb up at 6-10-4, and 882 lb down and 193 lb up at 8-10-4, and 884 lb down and 191 lb up at 10-10-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
  - 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

|                                                                           |
|---------------------------------------------------------------------------|
| <b>LOAD CASE(S)</b> Standard                                              |
| 1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25 |
| Uniform Loads (plf)                                                       |
| Vert: 1-4=-54, 4-7=-54, 11-15=-20                                         |
| Concentrated Loads (lb)                                                   |
| Vert: 8=-807(F) 10=-748(F) 17=-809(F) 19=-749(F) 20=-748(F) 21=-718(F)    |

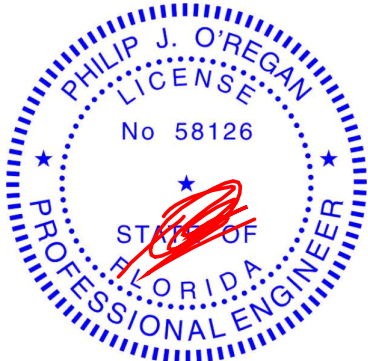


Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date: September 2,2021

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:43 2021 Page 1  
ID:urBi2CDpEN7mWD6LziUSOYz8IDX-J6mJWOuK Brcnv7c VeTPPXGZLhZVq7DZl2iWyhmSO

|        |       |       |
|--------|-------|-------|
| -2-0-0 | 3-0-0 | 6-4-0 |
| 2-0-0  | 3-0-0 | 3-4-0 |

Scale = 1:15.8

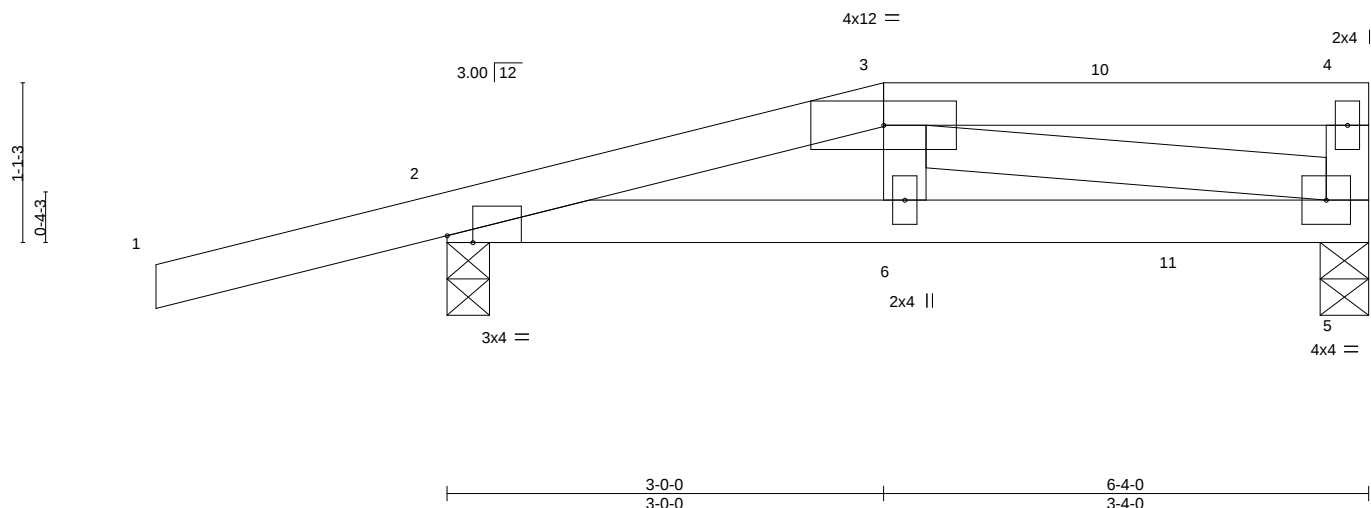

| Plate Offsets (X,Y)-- |       | [2:0-2-2,Edge]       |       |             |      |              |           |        |     |               |             |
|-----------------------|-------|----------------------|-------|-------------|------|--------------|-----------|--------|-----|---------------|-------------|
| <b>LOADING</b>        | (psf) | <b>SPACING-</b>      | 2-0-0 | <b>CSI.</b> |      | <b>DEFL.</b> | in (loc)  | l/defl | L/d | <b>PLATES</b> | <b>GRIP</b> |
| TCLL                  | 20.0  | Plate Grip DOL       | 1.25  | TC          | 0.26 | Vert(LL)     | -0.01 6   | >999   | 240 | MT20          | 244/190     |
| TCDL                  | 7.0   | Lumber DOL           | 1.25  | BC          | 0.29 | Vert(CT)     | -0.02 5-6 | >999   | 180 |               |             |
| BCLL                  | 0.0 * | Rep Stress Incr      | NO    | WB          | 0.15 | Horz(CT)     | 0.01 5    | n/a    | n/a |               |             |
| BCDL                  | 10.0  | Code FBC2020/TPI2014 |       | Matrix-MP   |      |              |           |        |     | Weight: 28 lb | FT = 20%    |

**LUMBER-**

|           |             |
|-----------|-------------|
| TOP CHORD | 2x4 SP No.2 |
| BOT CHORD | 2x4 SP No.2 |
| WEBS      | 2x4 SP No.3 |

**BRACING-**

|           |                                                                                       |
|-----------|---------------------------------------------------------------------------------------|
| TOP CHORD | Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals. |
| BOT CHORD | Rigid ceiling directly applied or 10-0-0 oc bracing.                                  |

REACTIONS.

(size) 5=0-4-0, 2=0-3-8  
 Max Horz 2=49(LC 4)  
 Max Uplift 5=-128(LC 5), 2=-219(LC 4)  
 Max Grav 5=306(LC 1), 2=415(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 2-3=-623/248  
BOT CHORD 2-6=-245/589, 5-6=-257/620  
WEBS 3-5=-640/265

**NOTES-**

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCp=-0.18; MWFRS (envelope) gable end zone; porch left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 4) Provide adequate drainage to prevent water ponding.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 5=128, 2=219.
- 8) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 132 lb down and 93 lb up at 3-0-0, and 51 lb down and 37 lb up at 5-0-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 9) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

## LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.25, Plate Increase=1.25  
Uniform Loads (plf)  
Vert: 1-3=-54, 3-4=-54, 5-7=-20  
Concentrated Loads (lb)  
Vert: 6=-104(B) 11=-51(B)

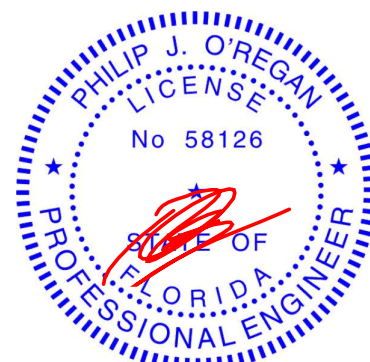

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2, 2021



Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



6904 Parke East Blvd  
Tampa, FL 36610


|                          |              |                     |          |          |                                       |
|--------------------------|--------------|---------------------|----------|----------|---------------------------------------|
| Job<br>2845640           | Truss<br>V01 | Truss Type<br>GABLE | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229830 |
| Job Reference (optional) |              |                     |          |          |                                       |

Builders FirstSource (Lake City,FL),

Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:44 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8lDX-nlKikmuzIVzSO5UJAi0t0cylpzjtlzwGSCVbEzyhmSP

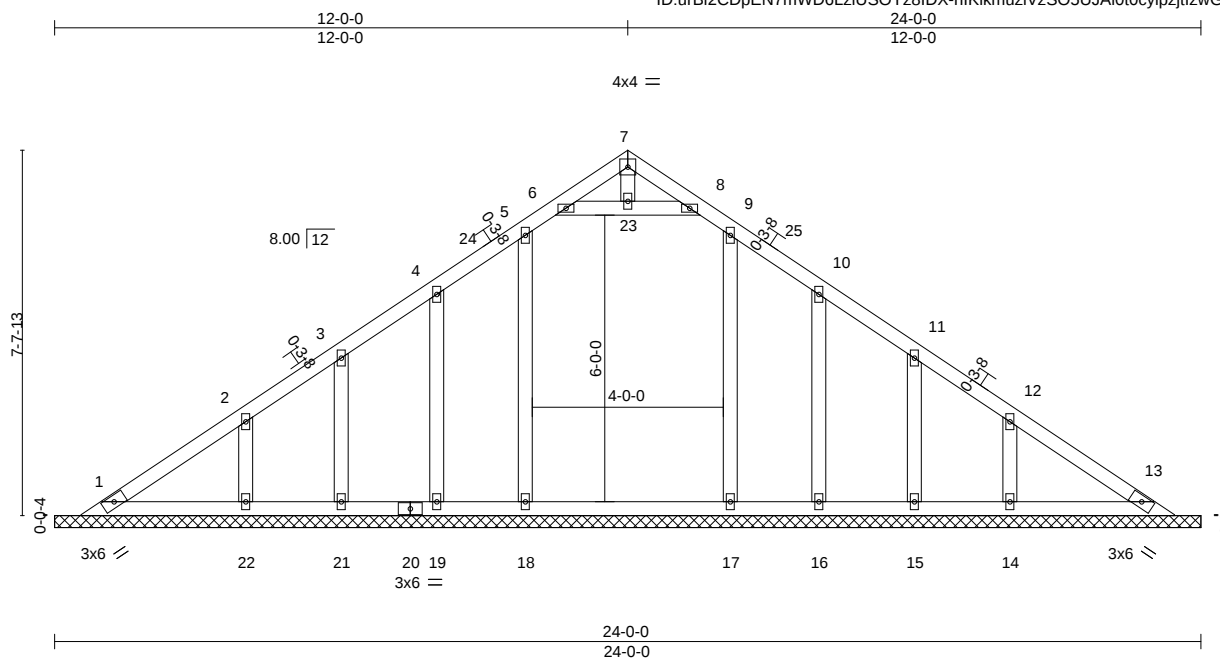

Scale: 1/4"=1'

| LOADING (psf) | SPACING-             | 2'-0" | CSI.     | DEFL.    | in (loc) | l/defl | L/d | PLATES         | GRIP     |
|---------------|----------------------|-------|----------|----------|----------|--------|-----|----------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.08  | Vert(LL) | n/a      | -      | n/a | MT20           | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.16  | Vert(CT) | n/a      | -      | n/a |                |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.10  | Horz(CT) | 0.00     | 13     | n/a |                |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-S |          |          |        |     | Weight: 124 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
WEBS 2x4 SP No.3  
OTHERS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0" oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing.

#### REACTIONS.

All bearings 24'-0".

(lb) - Max Horz 1=-161(LC 8)


Max Uplift All uplift 100 lb or less at joint(s) 1, 18, 19, 21, 16, 15 except 22=-109(LC 12), 14=-109(LC 13)

Max Grav All reactions 250 lb or less at joint(s) 1, 13, 19, 21, 16, 15 except 18=326(LC 19), 17=301(LC 20), 22=282(LC 19), 14=282(LC 20)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 1'-0" to 4'-0", Interior(1) 4'-0" to 12'-0", Exterior(2R) 12'-0" to 15'-0", Interior(1) 15'-0" to 22'-11" zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 4) All plates are 2x4 MT20 unless otherwise indicated.
- 5) Gable requires continuous bottom chord bearing.
- 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 7) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 18, 19, 21, 16, 15 except (jt=lb) 22=109, 14=109.



Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 36610


|                          |              |                     |          |          |                                       |
|--------------------------|--------------|---------------------|----------|----------|---------------------------------------|
| Job<br>2845640           | Truss<br>V02 | Truss Type<br>GABLE | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229831 |
| Job Reference (optional) |              |                     |          |          |                                       |

Builders FirstSource (Lake City,FL),

Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:45 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8IDX-FUt4x6vbWo5J0F2WkPX6YqVvDM3z1PgQgsE9mPyhmSO

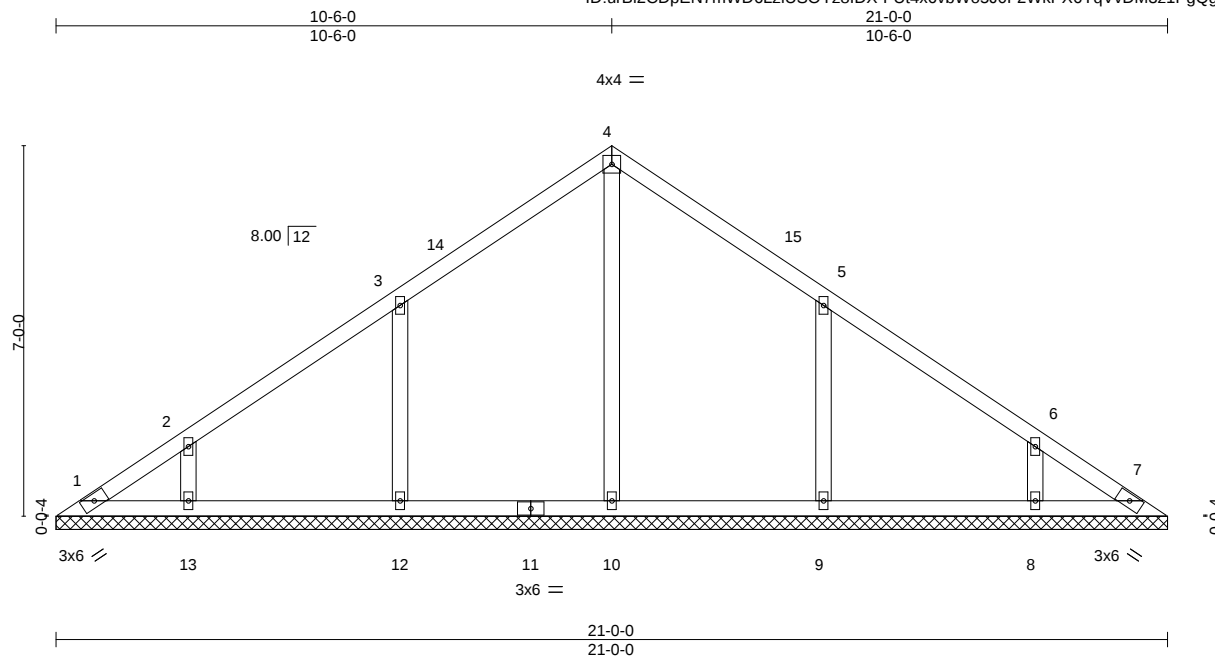

| LOADING (psf) | SPACING-             | 2-0-0 | CSI.     | DEFL.    | in (loc) | l/defl | L/d | PLATES        | GRIP     |
|---------------|----------------------|-------|----------|----------|----------|--------|-----|---------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.17  | Vert(LL) | n/a      | -      | n/a | MT20          | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.17  | Vert(CT) | n/a      | -      | n/a |               |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.13  | Horz(CT) | 0.00     | 7      | n/a |               |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-S |          |          |        |     | Weight: 91 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
OTHERS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0" oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing.

#### REACTIONS.


All bearings 21'-0".  
(lb) - Max Horz 1=147(LC 9)  
Max Uplift All uplift 100 lb or less at joint(s) 1, 7 except 12=-158(LC 12), 13=-117(LC 12), 9=-158(LC 13), 8=-117(LC 13)  
Max Grav All reactions 250 lb or less at joint(s) 1, 7 except 10=356(LC 22), 12=428(LC 19), 13=306(LC 19), 9=428(LC 20), 8=306(LC 20)

#### FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.  
WEBS 3-12=-254/183, 5-9=-254/183

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-5-12 to 3-5-12, Interior(1) 3-5-12 to 10-6-0, Exterior(2R) 10-6-0 to 13-6-0, Interior(1) 13-6-0 to 20-6-4 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 7 except (jt=lb) 12=158, 13=117, 9=158, 8=117.

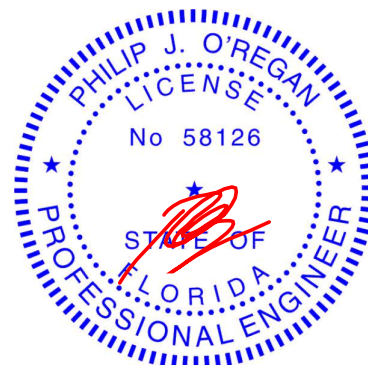

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 36610


|                |              |                     |          |          |                                       |
|----------------|--------------|---------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>V03 | Truss Type<br>GABLE | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229832 |
|----------------|--------------|---------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL),

Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:46 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8lDX-jgRS8SwDH6DAePdii72L5113?mO6mtcZvW\_iJryhmSN

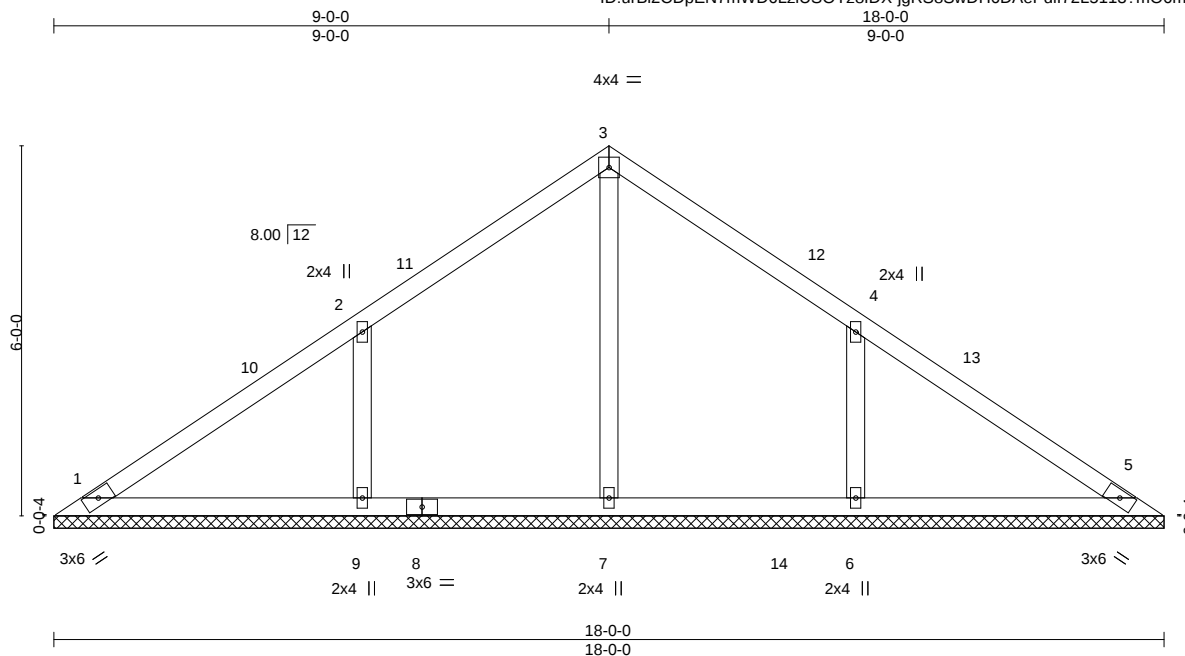

Scale = 1:37.4

| LOADING (psf) | SPACING-             | 2-0-0 | CSI.     | DEFL.    | in (loc) | l/defl | L/d | PLATES        | GRIP     |
|---------------|----------------------|-------|----------|----------|----------|--------|-----|---------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.23  | Vert(LL) | n/a      | -      | n/a | MT20          | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.18  | Vert(CT) | n/a      | -      | n/a |               |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.09  | Horz(CT) | 0.00     | 5      | n/a |               |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-S |          |          |        |     | Weight: 73 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
OTHERS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0-0 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10'-0-0 oc bracing.

#### REACTIONS.

All bearings 18'-0-0.

(lb) - Max Horz 1=-125(LC 10)

Max Uplift All uplift 100 lb or less at joint(s) 1, 5 except 9=-185(LC 12), 6=-185(LC 13)


Max Grav All reactions 250 lb or less at joint(s) 1, 5 except 7=316(LC 22), 9=487(LC 19), 6=484(LC 20)

#### FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 2-9=-292/206, 4-6=-292/205

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-5-12 to 3-5-12, Interior(1) 3-5-12 to 9-0-0, Exterior(2R) 9-0-0 to 12-0-0, Interior(1) 12-0-0 to 17-6-4 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 5 except (jt=lb) 9=185, 6=185.



Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see


**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



6904 Parke East Blvd.  
Tampa, FL 36610

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:47 2021 Page 1  
ID:urBi2CDpEN7mWD6LziUSQYz8IDX-Bt?dMoxr2OL1FZCurgZaeFaFzAlMVK8i8AiGrHyhmSM

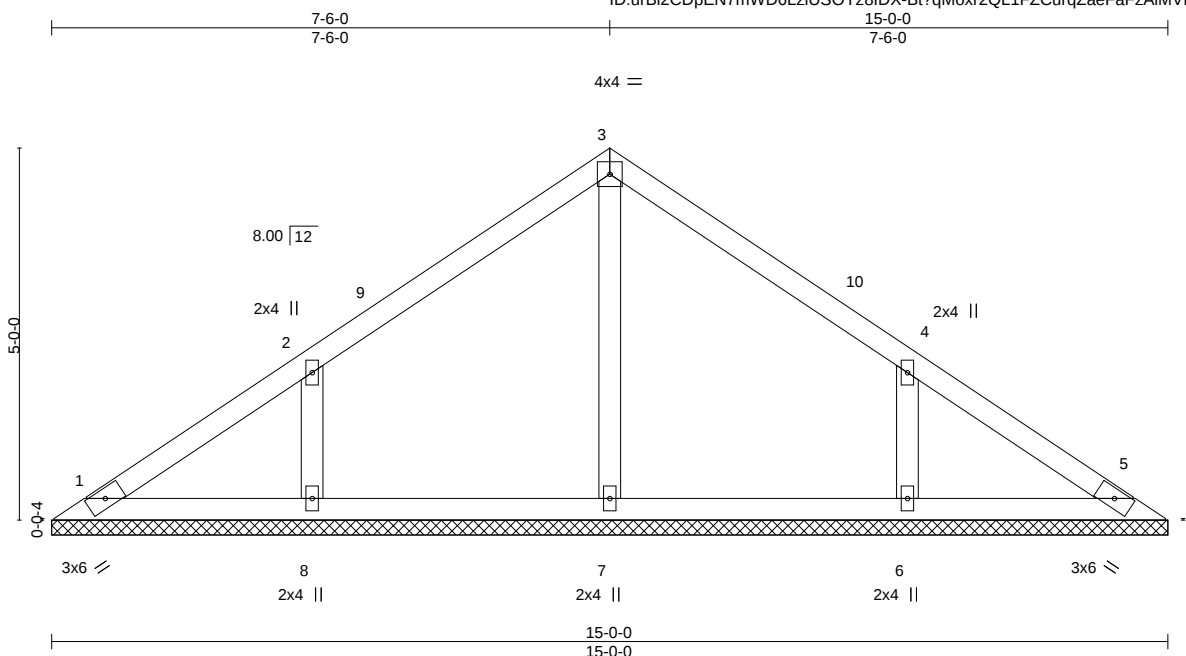

|                      |                       |             |                                  |               |             |
|----------------------|-----------------------|-------------|----------------------------------|---------------|-------------|
| <b>LOADING</b> (psf) | <b>SPACING-</b> 2-0-0 | <b>CSI.</b> | <b>DEFL.</b> in (loc) l/defl L/d | <b>PLATES</b> | <b>GRIP</b> |
| TCLL 20.0            | Plate Grip DOL 1.25   | TC 0.15     | Vert(LL) n/a - n/a 999           | MT20          | 244/190     |
| TCDL 7.0             | Lumber DOL 1.25       | BC 0.11     | Vert(CT) n/a - n/a 999           |               |             |
| BCLL 0.0 *           | Rep Stress Incr YES   | WB 0.07     | Horz(CT) 0.00 5 n/a n/a          |               |             |
| BCDL 10.0            | Code FBC2020/TPI2014  | Matrix-S    |                                  | Weight: 59 lb | FT = 20%    |

**LUMBER-**

|           |             |
|-----------|-------------|
| TOP CHORD | 2x4 SP No.2 |
| BOT CHORD | 2x4 SP No.2 |
| OTHERS    | 2x4 SP No.3 |

**BRACING-**

|           |                                                                 |
|-----------|-----------------------------------------------------------------|
| TOP CHORD | Structural wood sheathing directly applied or 6-0-0 oc purlins. |
| BOT CHORD | Rigid ceiling directly applied or 10-0-0 oc bracing.            |


**REACTIONS.**

**ONS.** All bearings 15-0-0.  
(lb) - Max Horz 1=103(LC 8)  
Max Uplift All uplift 100 lb or less at joint(s) 1, 5 except 8=151(LC 12), 6=151(LC 13)  
Max Grav All reactions 250 lb or less at joint(s) 1, 5, 7 except 8=320(LC 19), 6=319(LC 20)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

**NOTES-**

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-5-12 to 3-6-0, Interior(1) 3-6-0 to 7-6-0, Exterior(2R) 7-6-0 to 10-6-0, Interior(1) 10-6-0 to 14-6-4 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- 4) Gable requires continuous bottom chord bearing.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 5 except (jt=lb) 8=151, 6=151.

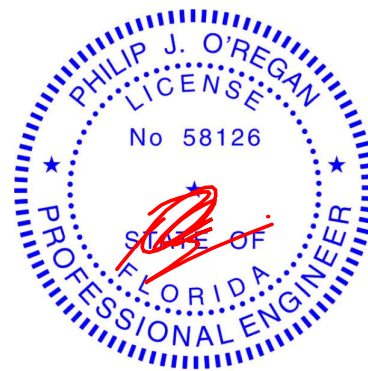

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2, 2021

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

**WARNING –** Verify design parameters and READ NOTES ON THIS AND INCLUDED WITHIN REFERENCE PAGE MM-1419.161, 3/29/2020 BEFORE USE. Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601.




6904 Parke East Blvd  
Tampa, FL 36610

|                          |              |                     |          |          |                                       |
|--------------------------|--------------|---------------------|----------|----------|---------------------------------------|
| Job<br>2845640           | Truss<br>V05 | Truss Type<br>GABLE | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229834 |
| Job Reference (optional) |              |                     |          |          |                                       |

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:48 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8lDX-g3ZCZ7xTpjTutjn5PX5pAS7N8a2iEnHsMqTpNkyhmSL

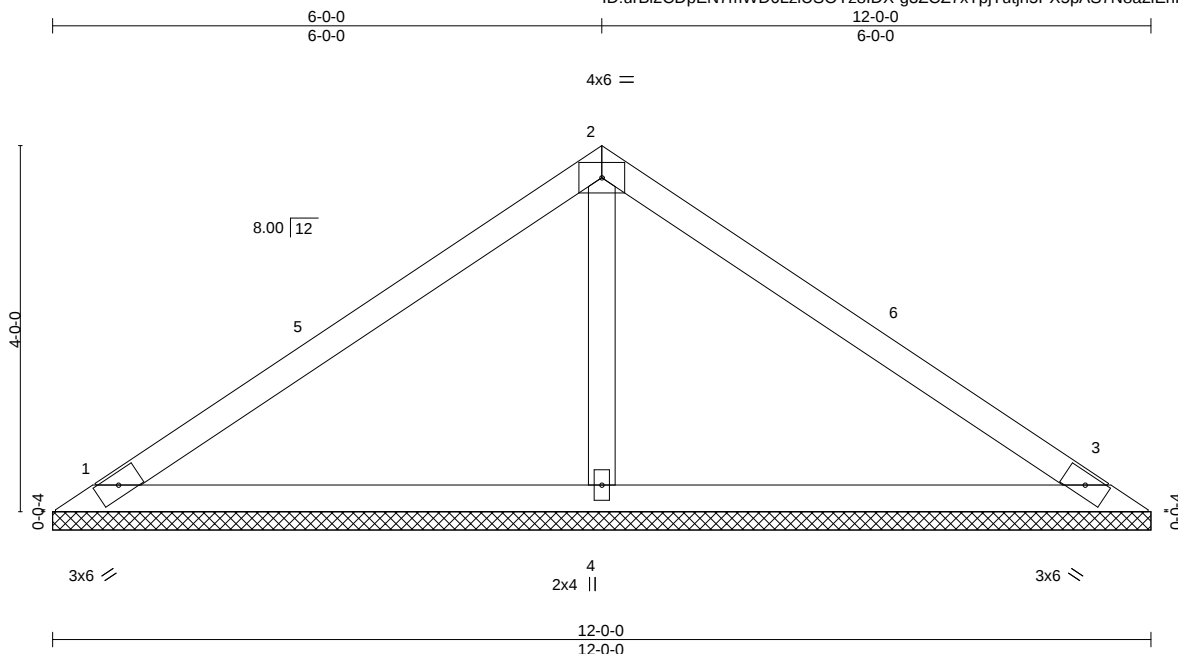

Scale = 1:25.2

| LOADING (psf) | SPACING-             | 2-0-0 | CSI.     | DEFL.    | in   | (loc) | l/defl | L/d | PLATES        | GRIP     |
|---------------|----------------------|-------|----------|----------|------|-------|--------|-----|---------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.38  | Vert(LL) | n/a  | -     | n/a    | 999 | MT20          | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.30  | Vert(CT) | n/a  | -     | n/a    | 999 |               |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.08  | Horz(CT) | 0.00 | 3     | n/a    | n/a |               |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-S |          |      |       |        |     | Weight: 43 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
OTHERS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0" oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing.

#### REACTIONS.


(size) 1=12'-0", 3=12'-0", 4=12'-0"  
Max Horz 1=-81(LC 8)  
Max Uplift 1=-53(LC 12), 3=-63(LC 13), 4=-56(LC 12)  
Max Grav 1=200(LC 1), 3=200(LC 1), 4=417(LC 1)

#### FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 2-4=-257/110

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-5-12 to 3-5-12, Interior(1) 3-5-12 to 6-0-0, Exterior(2R) 6-0-0 to 9-0-0, Interior(1) 9-0-0 to 11-6-4 zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3, 4.

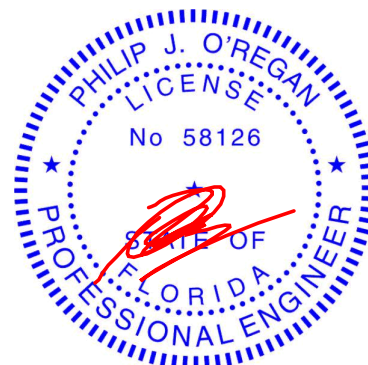

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610

|                |              |                     |          |          |                                       |
|----------------|--------------|---------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>V06 | Truss Type<br>GABLE | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229835 |
|----------------|--------------|---------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:49 2021 Page 1

ID:urBi2CDpEN7mWD6LziUSOYz8lDX-8F7bnTy5a1bVtMHZFc2jgfbv\_Q6zF5?bUCMwAymhSK

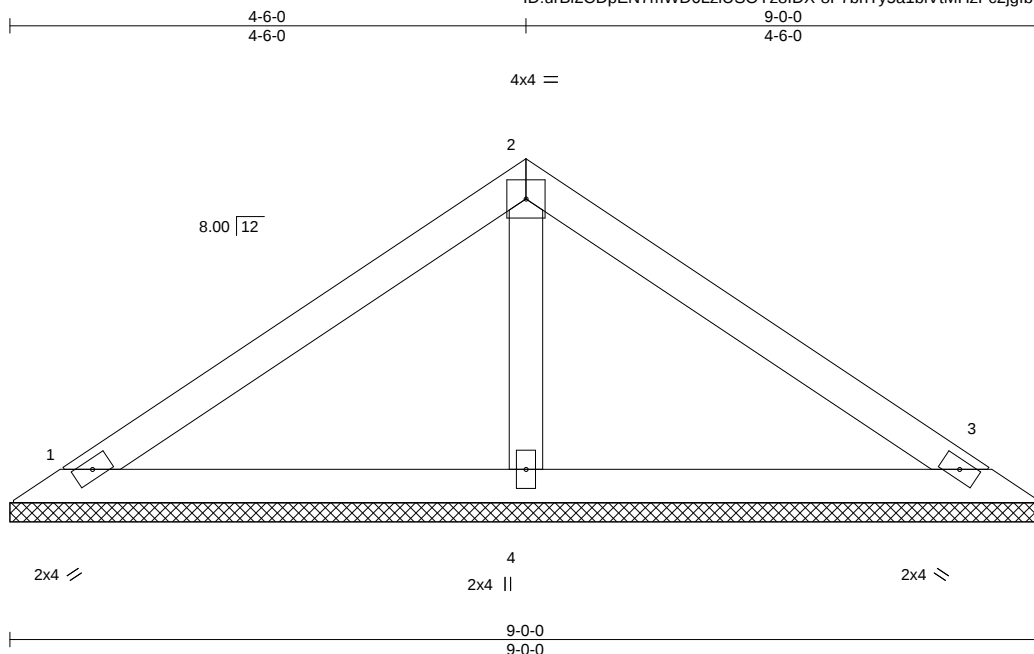

Scale = 1:20.1

| LOADING (psf) | SPACING-             | 2-0-0 | CSI.     | DEFL.    | in   | (loc) | l/defl | L/d | PLATES        | GRIP     |
|---------------|----------------------|-------|----------|----------|------|-------|--------|-----|---------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.19  | Vert(LL) | n/a  | -     | n/a    | 999 | MT20          | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.16  | Vert(CT) | n/a  | -     | n/a    | 999 |               |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.04  | Horz(CT) | 0.00 | 3     | n/a    | n/a |               |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-S |          |      |       |        |     | Weight: 31 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
OTHERS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


#### REACTIONS.

(size) 1=9-0-0, 3=9-0-0, 4=9-0-0  
Max Horz 1=-59(LC 8)  
Max Uplift 1=-38(LC 12), 3=-46(LC 13), 4=-41(LC 12)  
Max Grav 1=146(LC 1), 3=146(LC 1), 4=304(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-5-12 to 3-5-12, Interior(1) 3-5-12 to 4-6-0, Exterior(2R) 4-6-0 to 7-6-0, Interior(1) 7-6-0 to 8-6-4 zone;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3, 4.

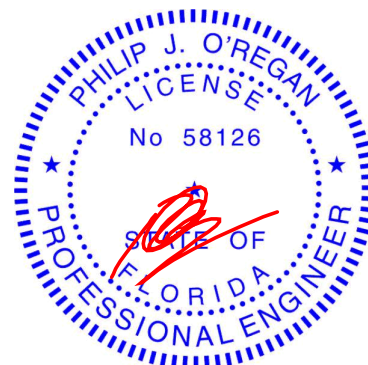

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




6904 Parke East Blvd.  
Tampa, FL 36610


|                |              |                     |          |          |                                       |
|----------------|--------------|---------------------|----------|----------|---------------------------------------|
| Job<br>2845640 | Truss<br>V07 | Truss Type<br>GABLE | Qty<br>1 | Ply<br>1 | G BUZBEE - CHASTAIN RES.<br>T25229836 |
|----------------|--------------|---------------------|----------|----------|---------------------------------------|

Builders FirstSource (Lake City,FL), Lake City, FL - 32055,

8.430 s Aug 16 2021 MiTek Industries, Inc. Thu Sep 2 05:26:50 2021 Page 1  
ID:urBi2CDpEN7mWD6LziUSOYz8IDX-cShz\_pzjLLkc60xTXy7HfCn4Nnpie9q8ywScyhmSJ



Scale = 1:14.7

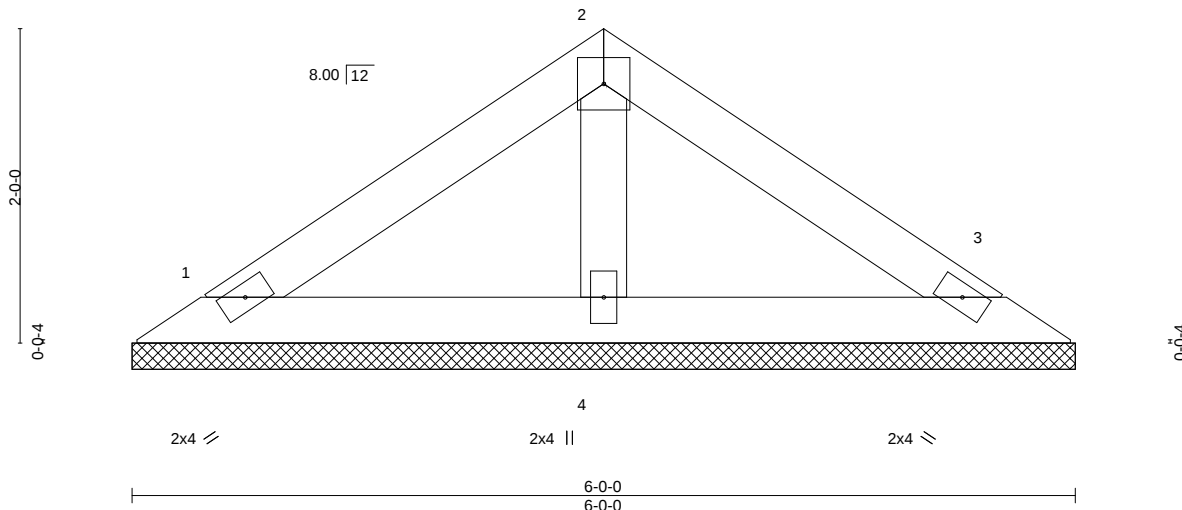

| LOADING (psf) | SPACING-             | 2-0-0 | CSI.     | DEFL.    | in   | (loc) | l/defl | L/d | PLATES        | GRIP     |
|---------------|----------------------|-------|----------|----------|------|-------|--------|-----|---------------|----------|
| TCLL 20.0     | Plate Grip DOL       | 1.25  | TC 0.10  | Vert(LL) | n/a  | -     | n/a    | 999 | MT20          | 244/190  |
| TCDL 7.0      | Lumber DOL           | 1.25  | BC 0.06  | Vert(CT) | n/a  | -     | n/a    | 999 |               |          |
| BCLL 0.0 *    | Rep Stress Incr      | YES   | WB 0.02  | Horz(CT) | 0.00 | 3     | n/a    | n/a |               |          |
| BCDL 10.0     | Code FBC2020/TPI2014 |       | Matrix-P |          |      |       |        |     | Weight: 20 lb | FT = 20% |

#### LUMBER-

TOP CHORD 2x4 SP No.2  
BOT CHORD 2x4 SP No.2  
OTHERS 2x4 SP No.3

#### BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.  
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


#### REACTIONS.

(size) 1=6-0-0, 3=6-0-0, 4=6-0-0  
Max Horz 1=-37(LC 8)  
Max Uplift 1=-29(LC 12), 3=-34(LC 13), 4=-15(LC 12)  
Max Grav 1=100(LC 1), 3=100(LC 1), 4=173(LC 1)

**FORCES.** (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

#### NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=130mph (3-second gust) Vasd=101mph; TCDL=4.2psf; BCDL=3.0psf; h=20ft; Cat. II; Exp B; Encl., GCpi=0.18; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Building Designer / Project engineer responsible for verifying applied roof live load shown covers rain loading requirements specific to the use of this truss component.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- \* This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3, 4.

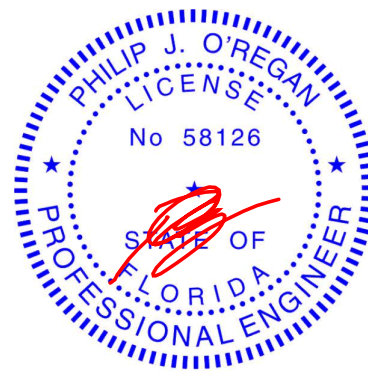

Philip J. O'Regan PE No.58126  
MiTek USA, Inc. FL Cert 6634  
6904 Parke East Blvd. Tampa FL 33610  
Date:

September 2,2021

**WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

**Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601  
**ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**




6904 Parke East Blvd.  
Tampa, FL 36610




# Symbols

## PLATE LOCATION AND ORIENTATION



Center plate on joint unless X, Y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.



For 4 x 2 orientation, locate plates 0-  $\frac{3}{16}$ " from outside edge of truss.

— This symbol indicates the required direction of slots in connector plates.

**\* Plate location details available in MiTek 2012 software or upon request.**

## PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

## LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

## BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

## Industry Standards:

ANSI/TP1.1: National Design Specification for Metal Plate Connected Wood Truss Construction.  
DSB-89: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

# Numbering System

6-4-8 dimensions shown in ft-in-sixteenths (Drawings not to scale)

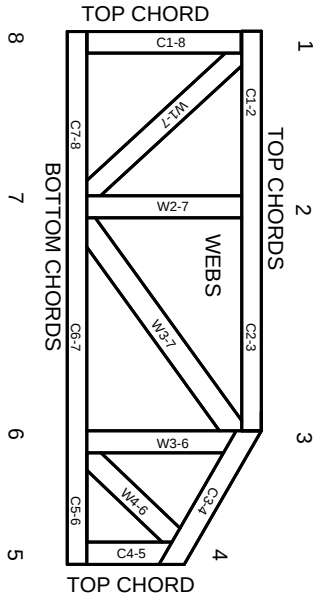

**JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.**

**CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.**

## PRODUCT CODE APPROVALS

ICC-ES Reports:

ESR-1311, ESR-1352, ESR1988  
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MiTek® All Rights Reserved




MiTek Engineering Reference Sheet: MII-7473 rev. 5/19/2020



# General Safety Notes


**Failure to Follow Could Cause Property Damage or Personal Injury**

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.

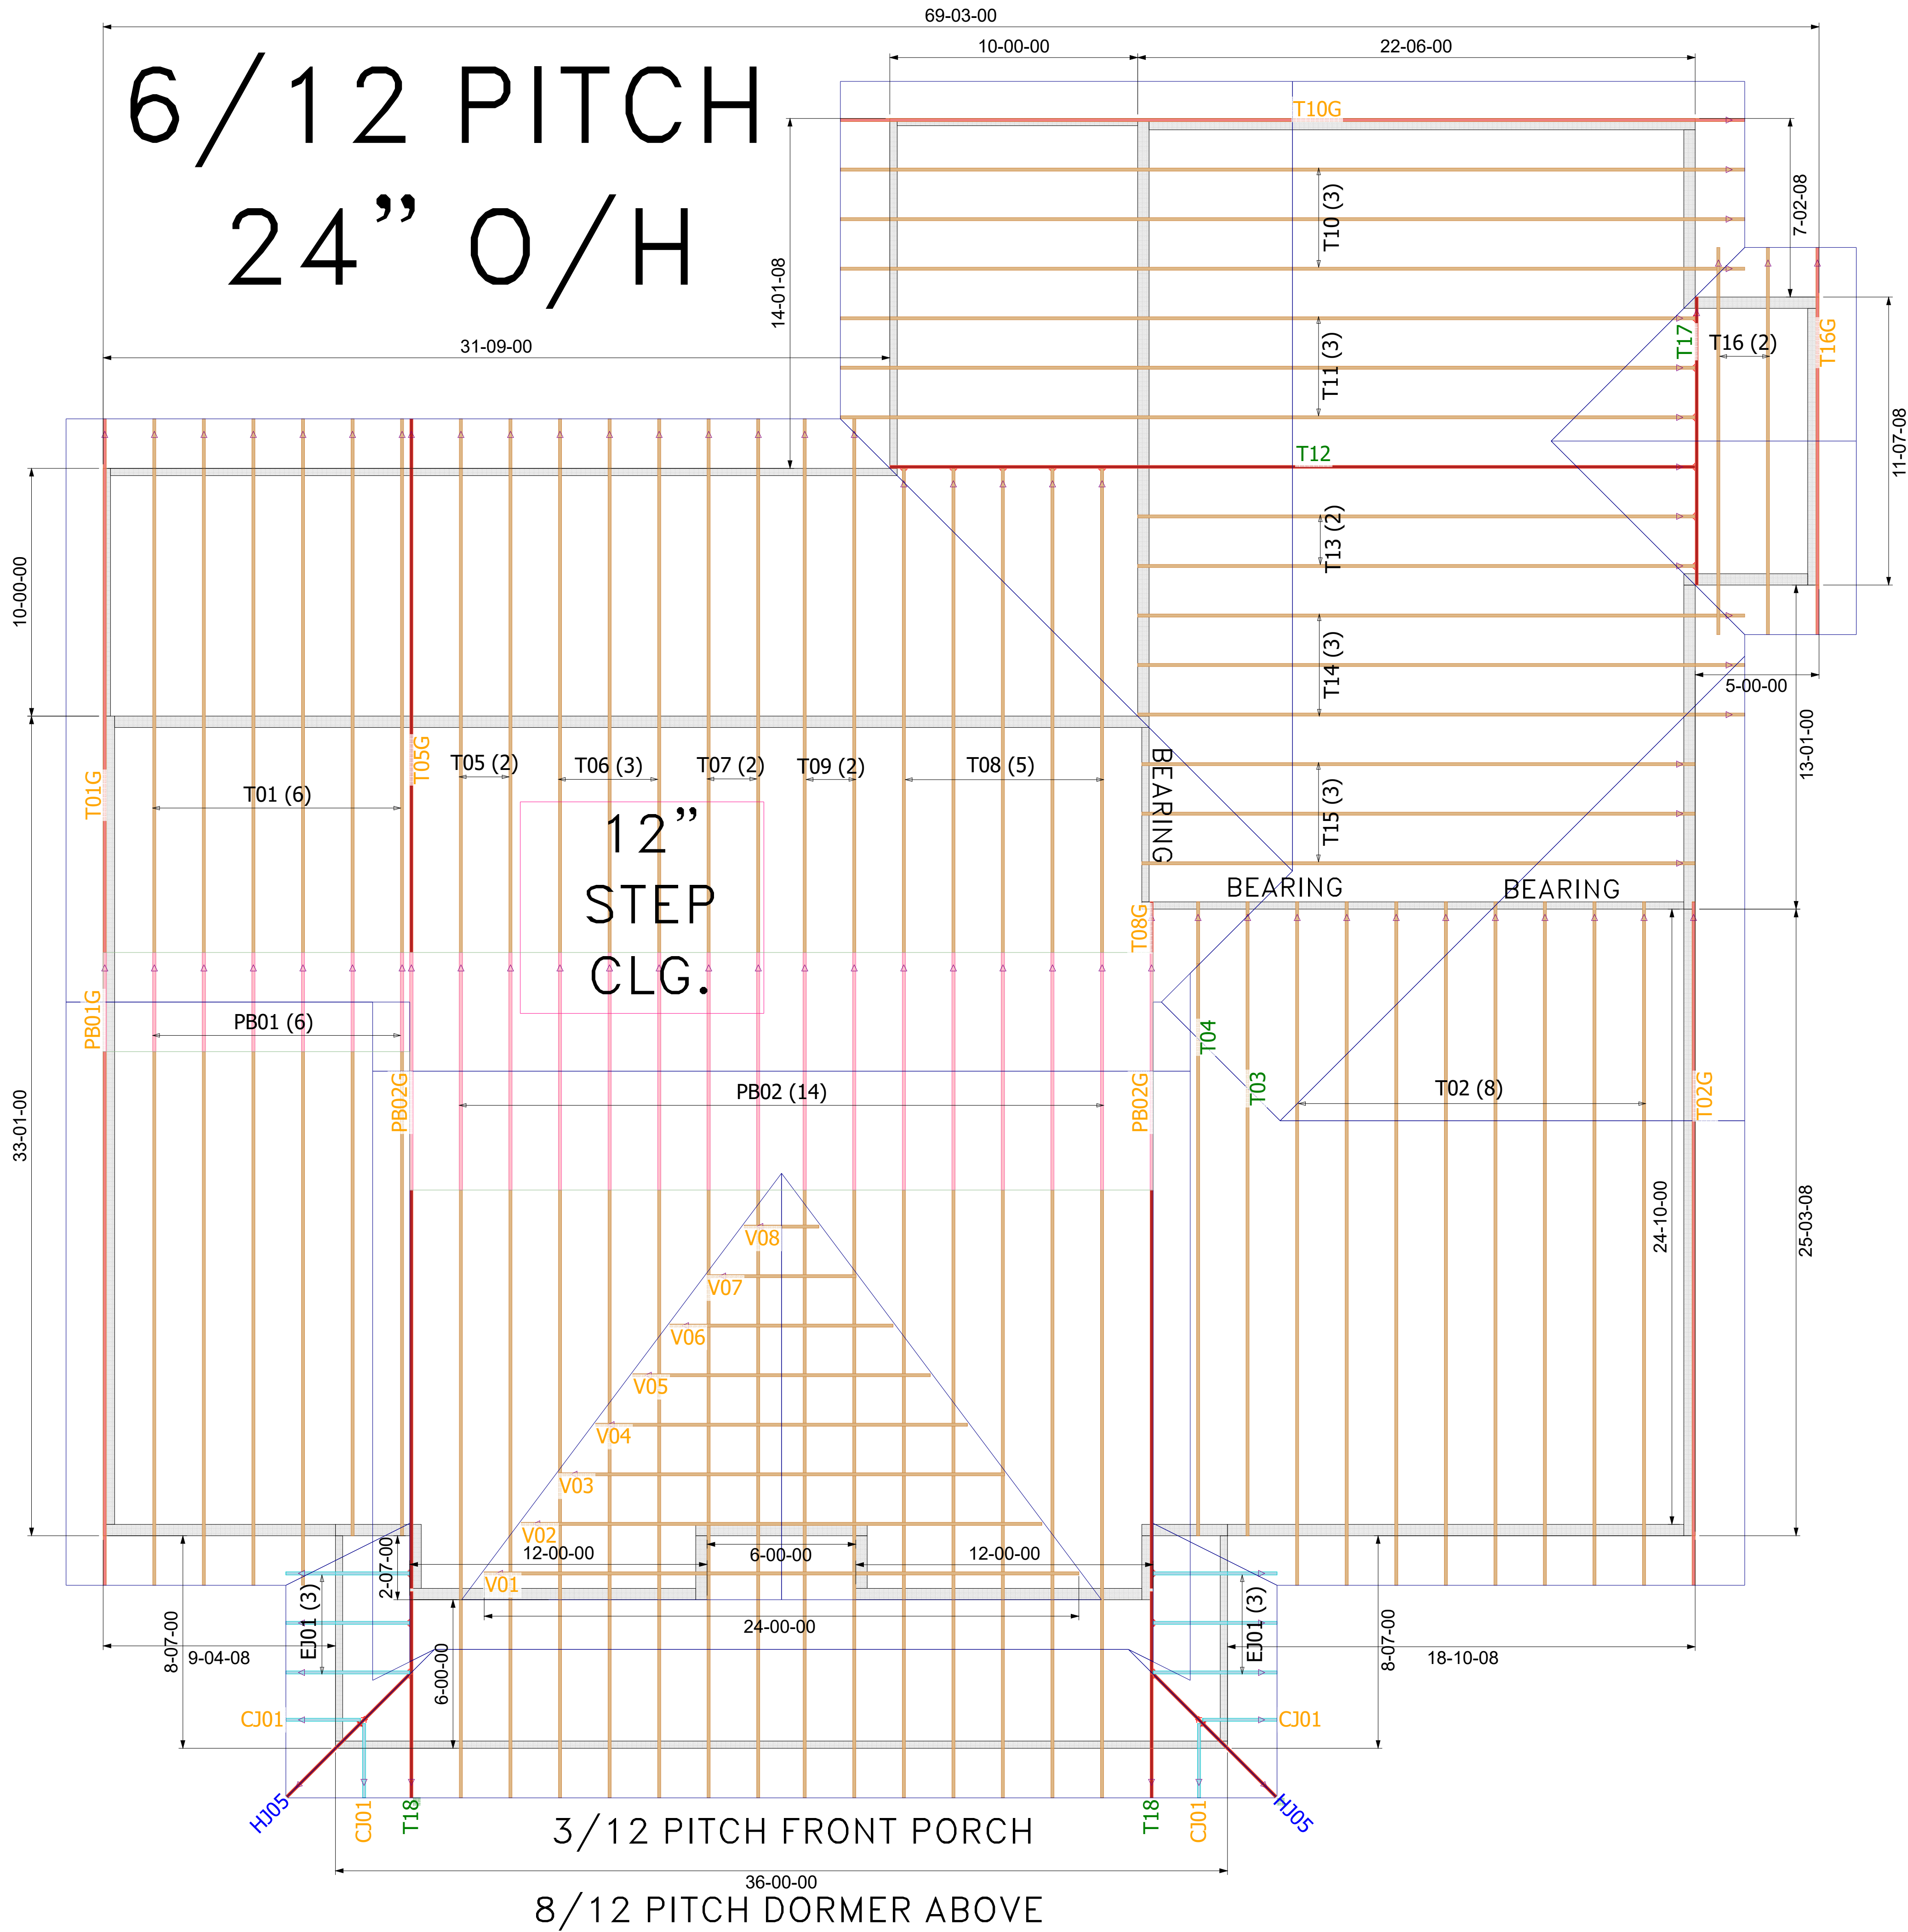

MITEK PLATE APPROVAL #'S 2197.2–2197.4, BOISE EWP PRODUCT #'S LVL FL1644–R2, BCI JOISTS FL1392–R2

THE ARROW HEAD AT THE END OF THE TRUSS ON THE TRUSS PLACEMENT PLAN (LAYOUT) CORRESPONDS WITH THE LEFT SIDE OF THE INDIVIDUAL TRUSS DRAWING. USE THIS AS AN ORIENTATION GUIDE WHEN SETTING THE TRUSSES ON THE STRUCTURE.

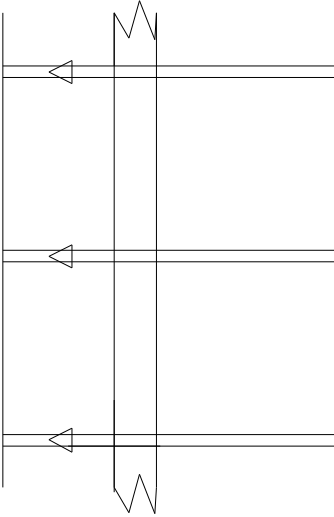

- General Notes:
- Per ANSI/TPI 1-2002 all " Truss to Wall" connections are the responsibility of the Building Designer, not the Truss Manufacturer.
  - Use Manufacturer's specifications for all hanger connections unless noted otherwise.
  - Trusses are to be 24" o.c. U.N.O.
  - All hangers are to be Simpson or equivalent U.N.O.- Use 10d x 1 1/2" Nails in hanger connections to single ply girder trusses.
  - Trusses are not designed to support brick U.N.O.
  - Dimensions are Feet-Inches- Sixteenths

Notes:

No back charges will be accepted by Builders FirstSource unless approved in writing first. 850-835-4541

ACQ lumber is corrosive to truss plates. Any ACQ lumber that comes in contact with truss plates (i.e. scabbed on tails) must have an approved barrier applied first.

Refer to BCSI-B1 Summary Sheet-Guide for handling, Installing and Bracing of Metal Plate Connected Wood Truss prior to and during truss installation.

It is the responsibility of the Contractor to ensure of the proper orientation of the truss placement plans as to the construction documents and field conditions of the structure orientation. If a reversed or flipped layout is required, it will be supplied at no extra cost by Builders FirstSource.

It is the responsibility of the Contractor to make sure the placement of trusses are adjusted for plumbing drops, can lights, ect.... so the trusses do not interfere with these type of items.

All common framed roof or floor systems must be designed as to NOT impose any loads on the floor trusses below. The floor trusses have not been designed to carry any additional loads from above.

This truss placement plan was not created by an engineer, but rather by the Builders FirstSource staff and is solely to be used as an installation guide and does not require a seal. Complete truss engineering and analysis can be found on the truss design drawings which may be sealed by the truss design engineer.

Gable end trusses require continuous bottom chord bearing. Refer to local codes for wall framing requirements.

Although all attempts have been made to do so, trusses may not be designed symmetrically. Please refer to the individual truss drawings and truss placement plans for proper orientation and placement.



Lake City  
PHONE: 386-755-6894  
FAX: 386-755-7973

Jacksonville  
PHONE: 904-772-6100  
FAX: 904-772-1973

Tallahassee  
PHONE: 850-576-5177

Builder: G. BUZBEE, INC.

Legal Address: Chastain Res.

|                   |                   |                         |
|-------------------|-------------------|-------------------------|
| Model: Custom     |                   |                         |
| Date: 7-19-21     | Drawn By: KLH     | Original Ref #: 2845640 |
| Floor 1 Job#: N/A | Floor 2 Job#: N/A | Roof Job #: 2845640     |