

ROMMY DAVIS
NEW GRID-INTERACTIVE PHOTOVOLTAIC SYSTEM
DC SYSTEM SIZE (5.81KW)



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

This item has been electronically signed and sealed by Vincent Mwumvaneza using a Digital Signature and Date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Vincent Mwumvaneza
a

Digitally signed by
Vincent Mwumvaneza
Date: 2023.06.29
13:38:59 -04'00'

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY ,
FL 32055, USA

REVISIONS

REV	ENG.	DESCRIPTION	DATE

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

SITE MAP &
VICINITY MAP

SHEET NUMBER

A-00

SYSTEM DETAILS

DESCRIPTION	NEW GRID-INTERACTIVE PHOTOVOLTAIC SYSTEM WITH NO BATTERY STORAGE
DC RATING OF SYSTEM	SYSTEM SIZE :5.81 KW DC STC
AC RATING OF SYSTEM	5 KW AC
AC OUTPUT CURRENT	21 A
NO. OF MODULES	(14) TRINA SOLAR TSM-DE09R.05 (415W) SOLAR MODULE
NO. OF INVERTERS	(1) SOLAREEDGE SE5000H-US INVERTER
POINT OF CONNECTION	BACKFEED BREAKER IN THE MMC
ARRAY STRINGING	(1) BRANCH OF 14 MODULES

SITE DETAILS



ASHRAE EXTREME LOW	-5°C
ASHRAE 2% HIGH	34°C
GROUND SNOW LOAD	0 PSF
WIND SPEED	110MPH (ASCE 7-16)
RISK CATEGORY	I
WIND EXPOSURE CATEGORY	C

GOVERNING CODES

FLORIDA RESIDENTIAL CODE, 7TH EDITION 2020 (FRC)
FLORIDA BUILDING CODE, 7TH EDITION 2020 (FBC)
FLORIDA FIRE PREVENTION CODE, 7TH EDITION 2020 (FFPC)
NATIONAL ELECTRICAL CODE, NEC 2017 CODE BOOK, NFPA 70

SHEET INDEX


SHEET NO.	SHEET NAME
A - 00	SITE MAP & VICINITY MAP
A - 01	ROOF PLAN & MODULES
S - 01	ARRAY LAYOUT
S - 02	STRUCTURAL ATTACHMENT DETAIL
E - 01	ELECTRICAL LINE DIAGRAM
E - 02	WIRING CALCULATIONS
E - 03	SYSTEM LABELING
DS - 01	MODULE DATASHEET
DS - 02	INVERTER DATASHEET
DS - 03	COMBINER DATASHEET
DS - 04	RACKING DATASHEET
DS - 05	ATTACHMENT DATASHEET

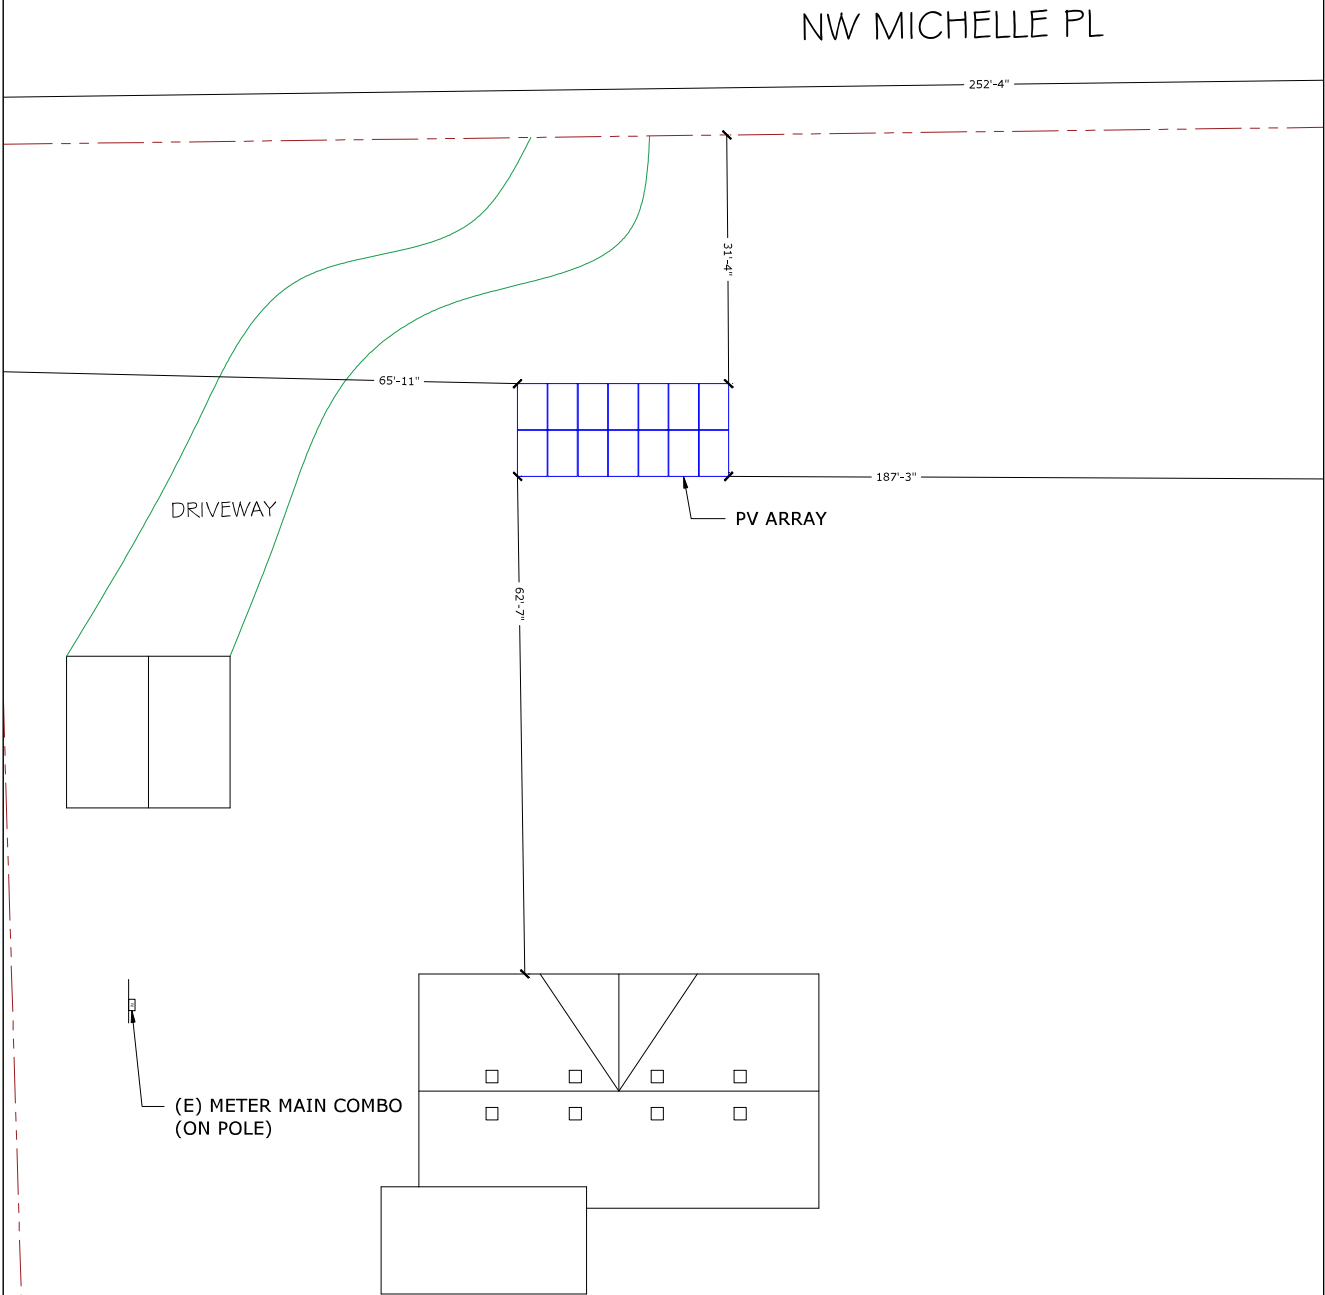


SITE MAP




VICINITY MAP

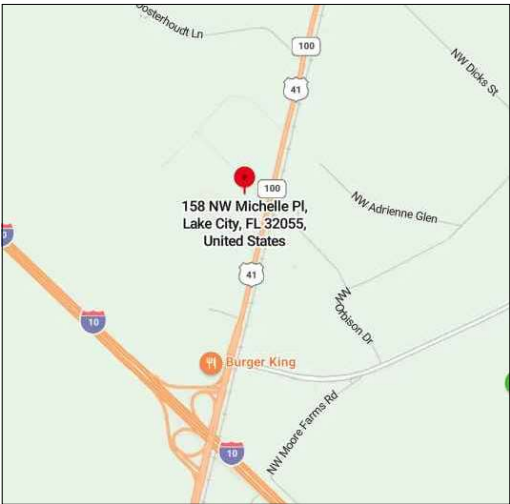

WIND FLOW MAP

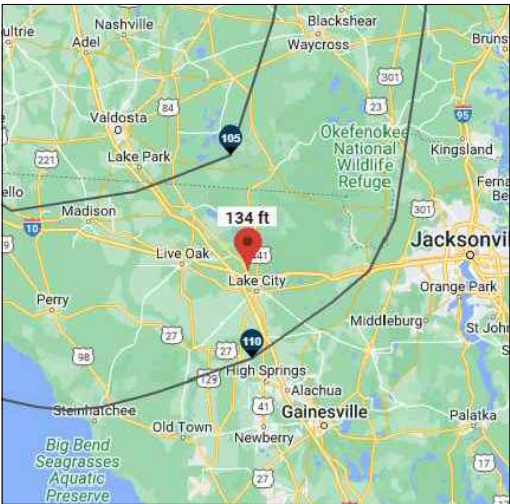



MODULE TYPE, DIMENSIONS & WEIGHT

NUMBER OF MODULES = 14 MODULES
MODULE TYPE = TRINA SOLAR TSM-DE09R.05 (415W) SOLAR MODULE
WEIGHT = 48.06 LBS / 21.8 KG.
MODULE DIMENSIONS = 69.37" X 44.65" = 21.51 SF

NUMBER OF INVERTER = 1 INVERTER
INVERTER TYPE = SOLAREEDGE SE5000H-US INVERTER

DC SYSTEM SIZE: 5.81 KW
AC SYSTEM SIZE: 5 KW



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REVISIONS	DATE				
	DESCRIPTION				
	REV	ENGG.			

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	


SHEET NAME

ROOF PLAN
& MODULES

SHEET NUMBER

A-01

(E) FRONT YARD

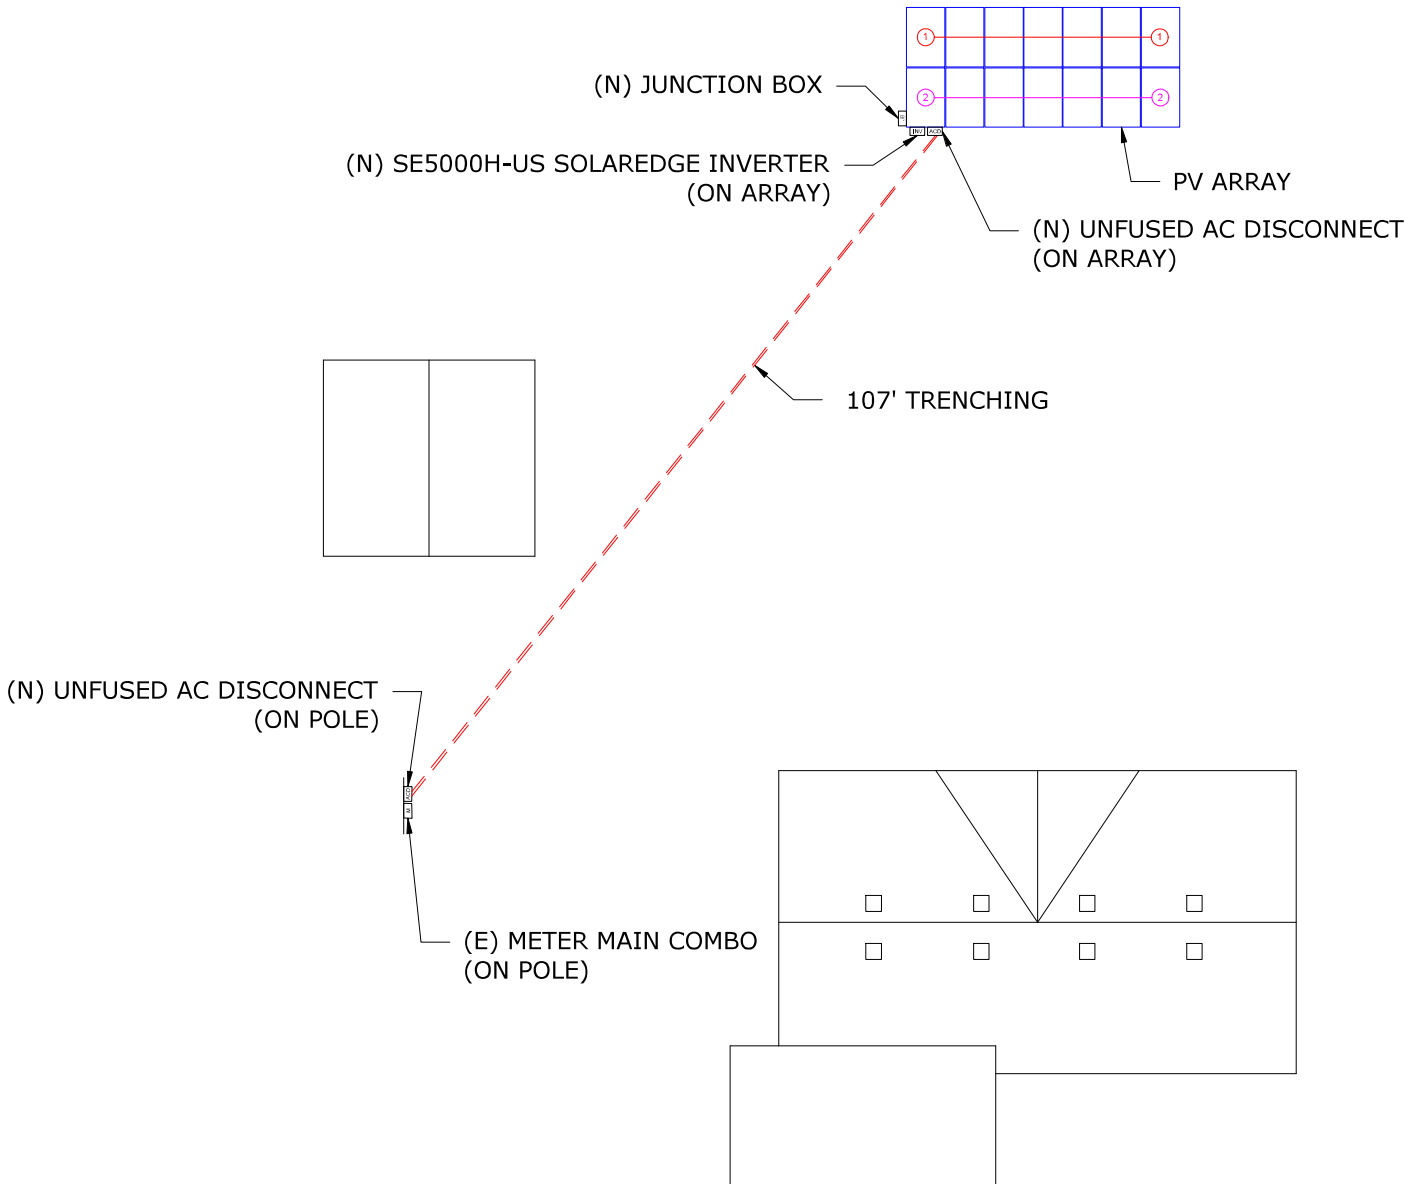

(E) BACK YARD

LEGENDS

- M - METER MAIN COMBO
- JB - JUNCTION BOX
- INV - INVERTER
- ACD - AC DISCONNECT
- [Hatched Box] - FIRE SETBACK
- 1 - STRING TAG
- [Circle with X] - VENT, ATTIC FAN (ROOF OBSTRUCTION)
- - CONDUIT
- - TRENCHING

(ARRAY #1)

MODULES - 14
GROUND TILT - 20°
GROUND AZIMUTH - 180°



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315




ENGINEER OF RECORD

This item has been electronically signed
and sealed by Vincent Mwumvaneza
using a Digital Signature and Date.
Printed copies of this document are not
considered signed and sealed and the
signature must be verified on any
electronic copies.

Vincent Mwumvaneza
Digitally signed by Vincent Mwumvaneza
Date: 2023.06.29 13:39:37 -04'00'

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

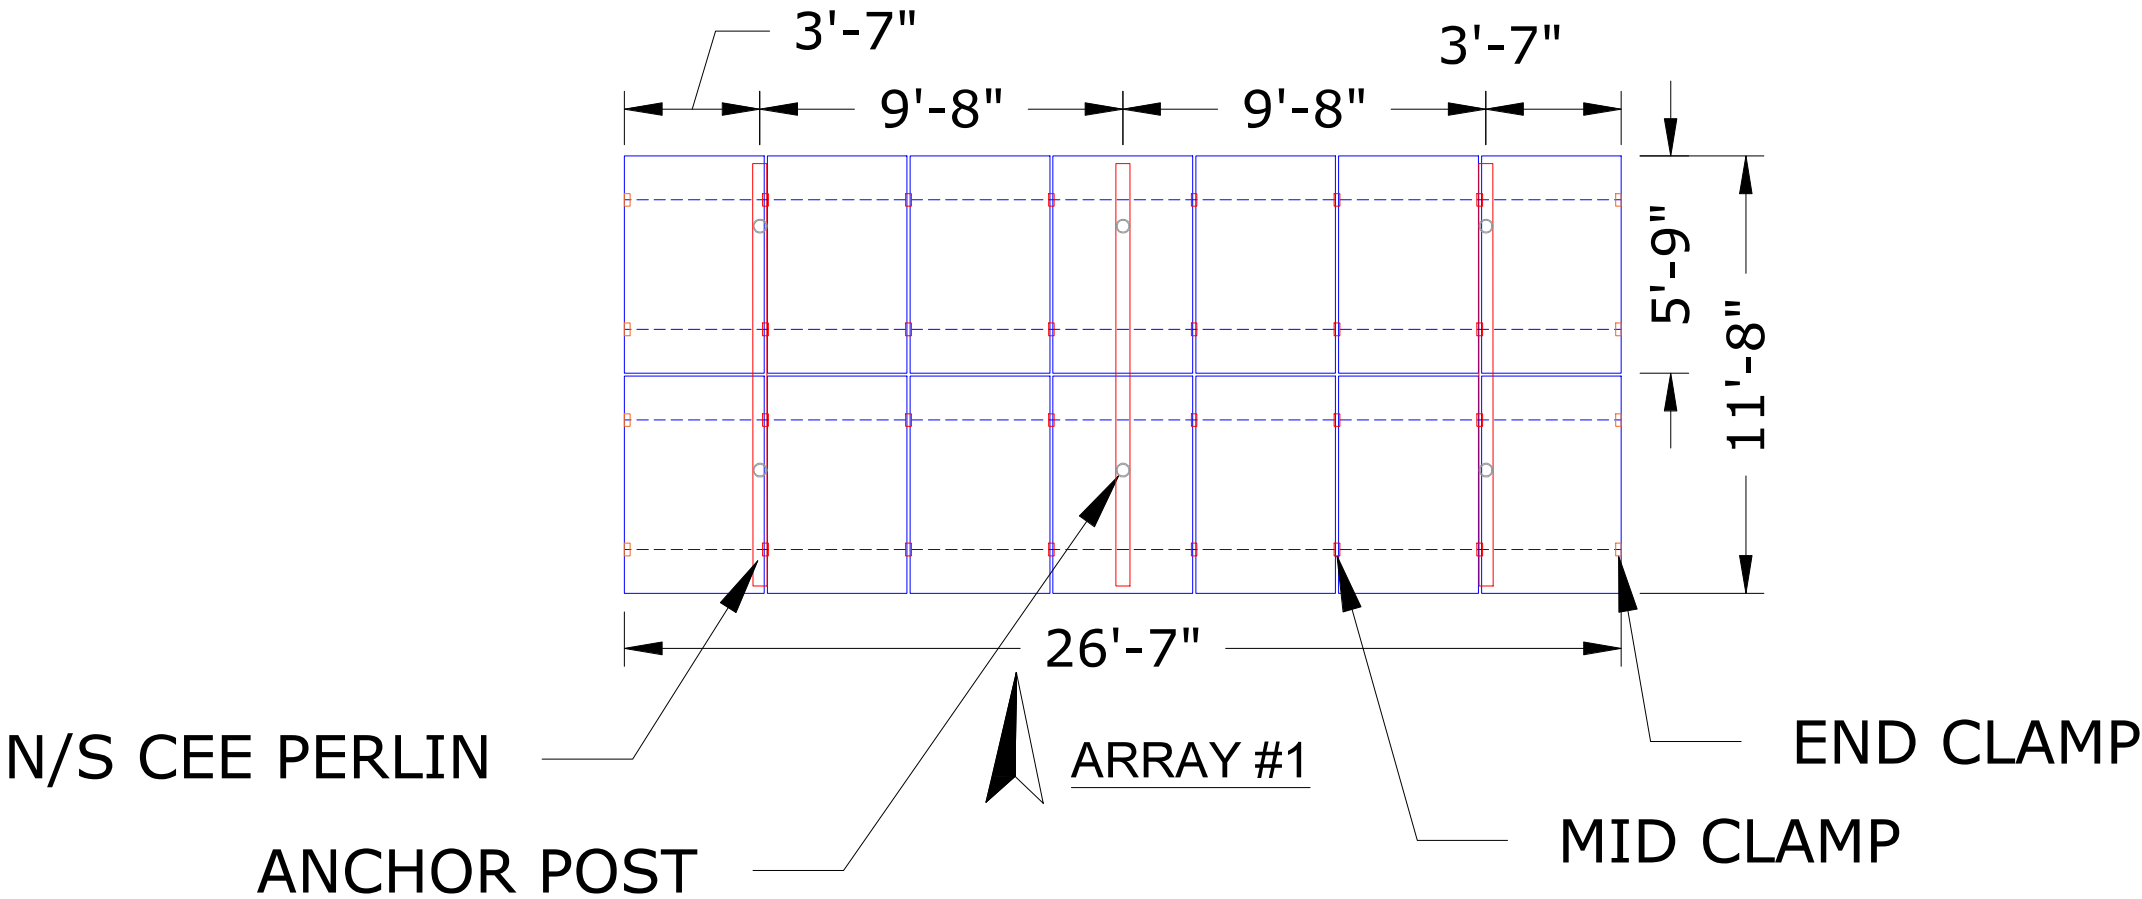

- ANCHOR POST
- CAPS
- RAILS
- RAFTERS / TRUSSES

REV	ENGG.	DESCRIPTION	DATE				

PERMIT DEVELOPER

DATE 06/08/2023

DESIGNER OSB





REVIEWER

SHEET NAME

ARRAY
LAYOUT

SHEET NUMBER

S-01

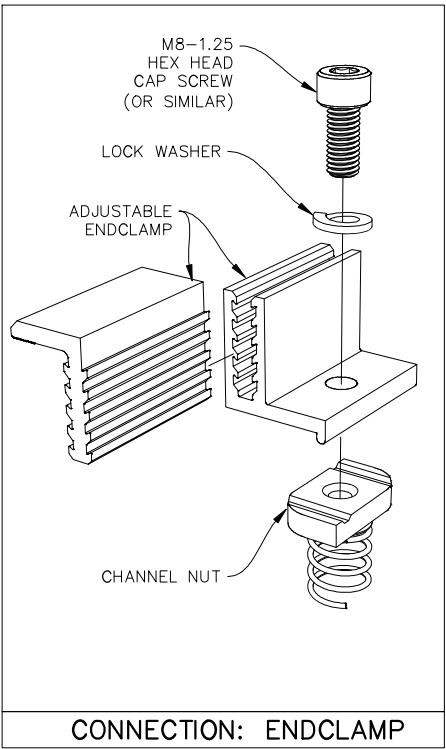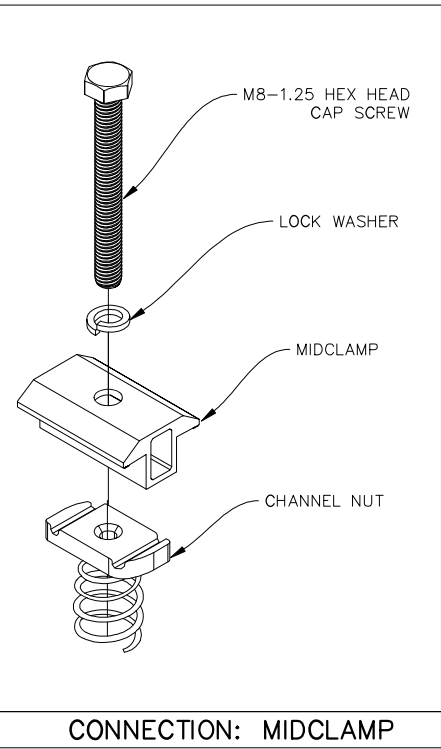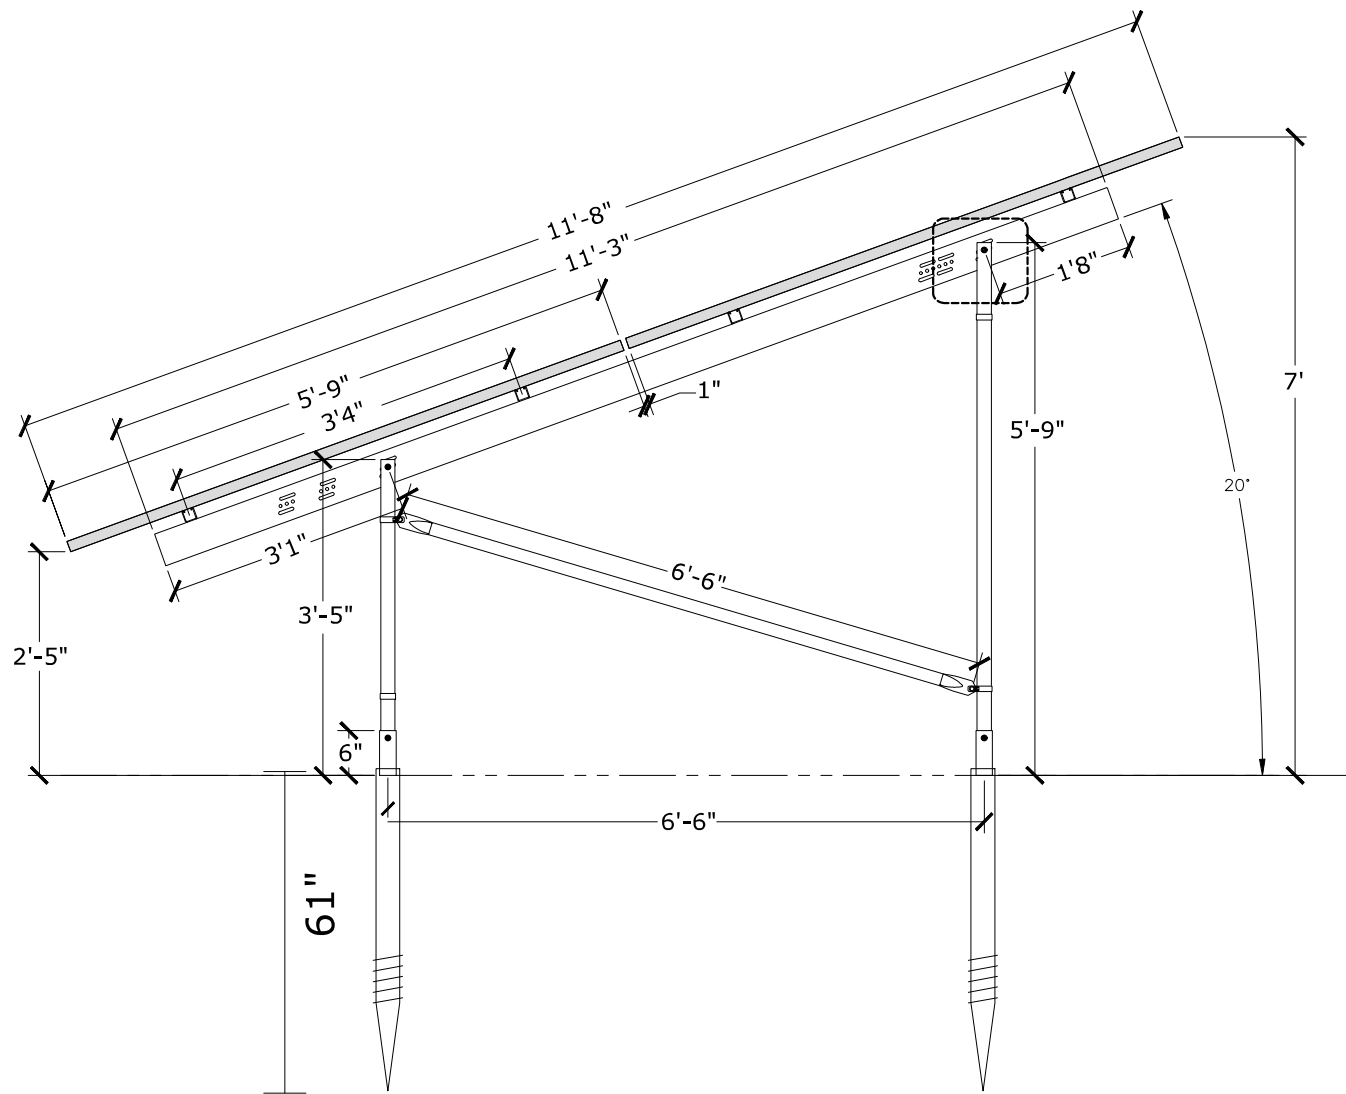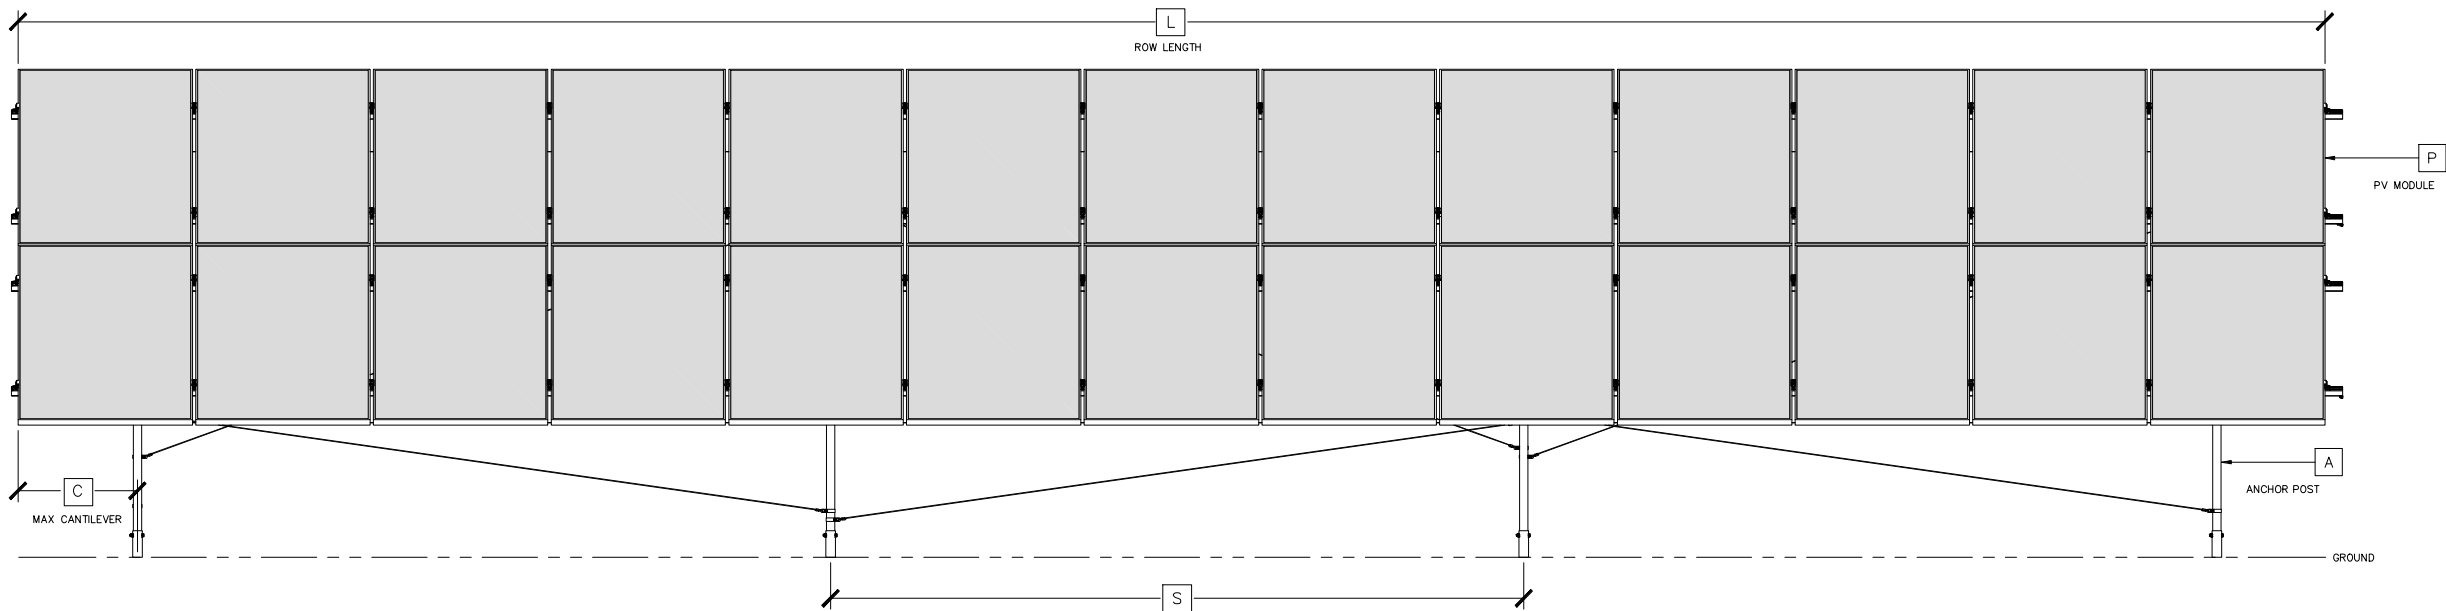

978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315



ENGINEER OF RECORD

This item has been electronically signed and sealed by Vincent Mwumvaneza using a Digital Signature and Date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Vincent Mwumvaneza
Digitally signed by Vincent Mwumvaneza
Date: 2023.06.29 13:39:53 -04'00'

ROMMY DAVIS


158 NW MICHELLE PL, LAKE CITY ,
FL 32055, USA

REVISIONS	DATE					
	DESCRIPTION					
REV	ENG.					

PERMIT DEVELOPER	
DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME
STRUCTURAL ATTACHMENT DETAILS

SHEET NUMBER
S-02

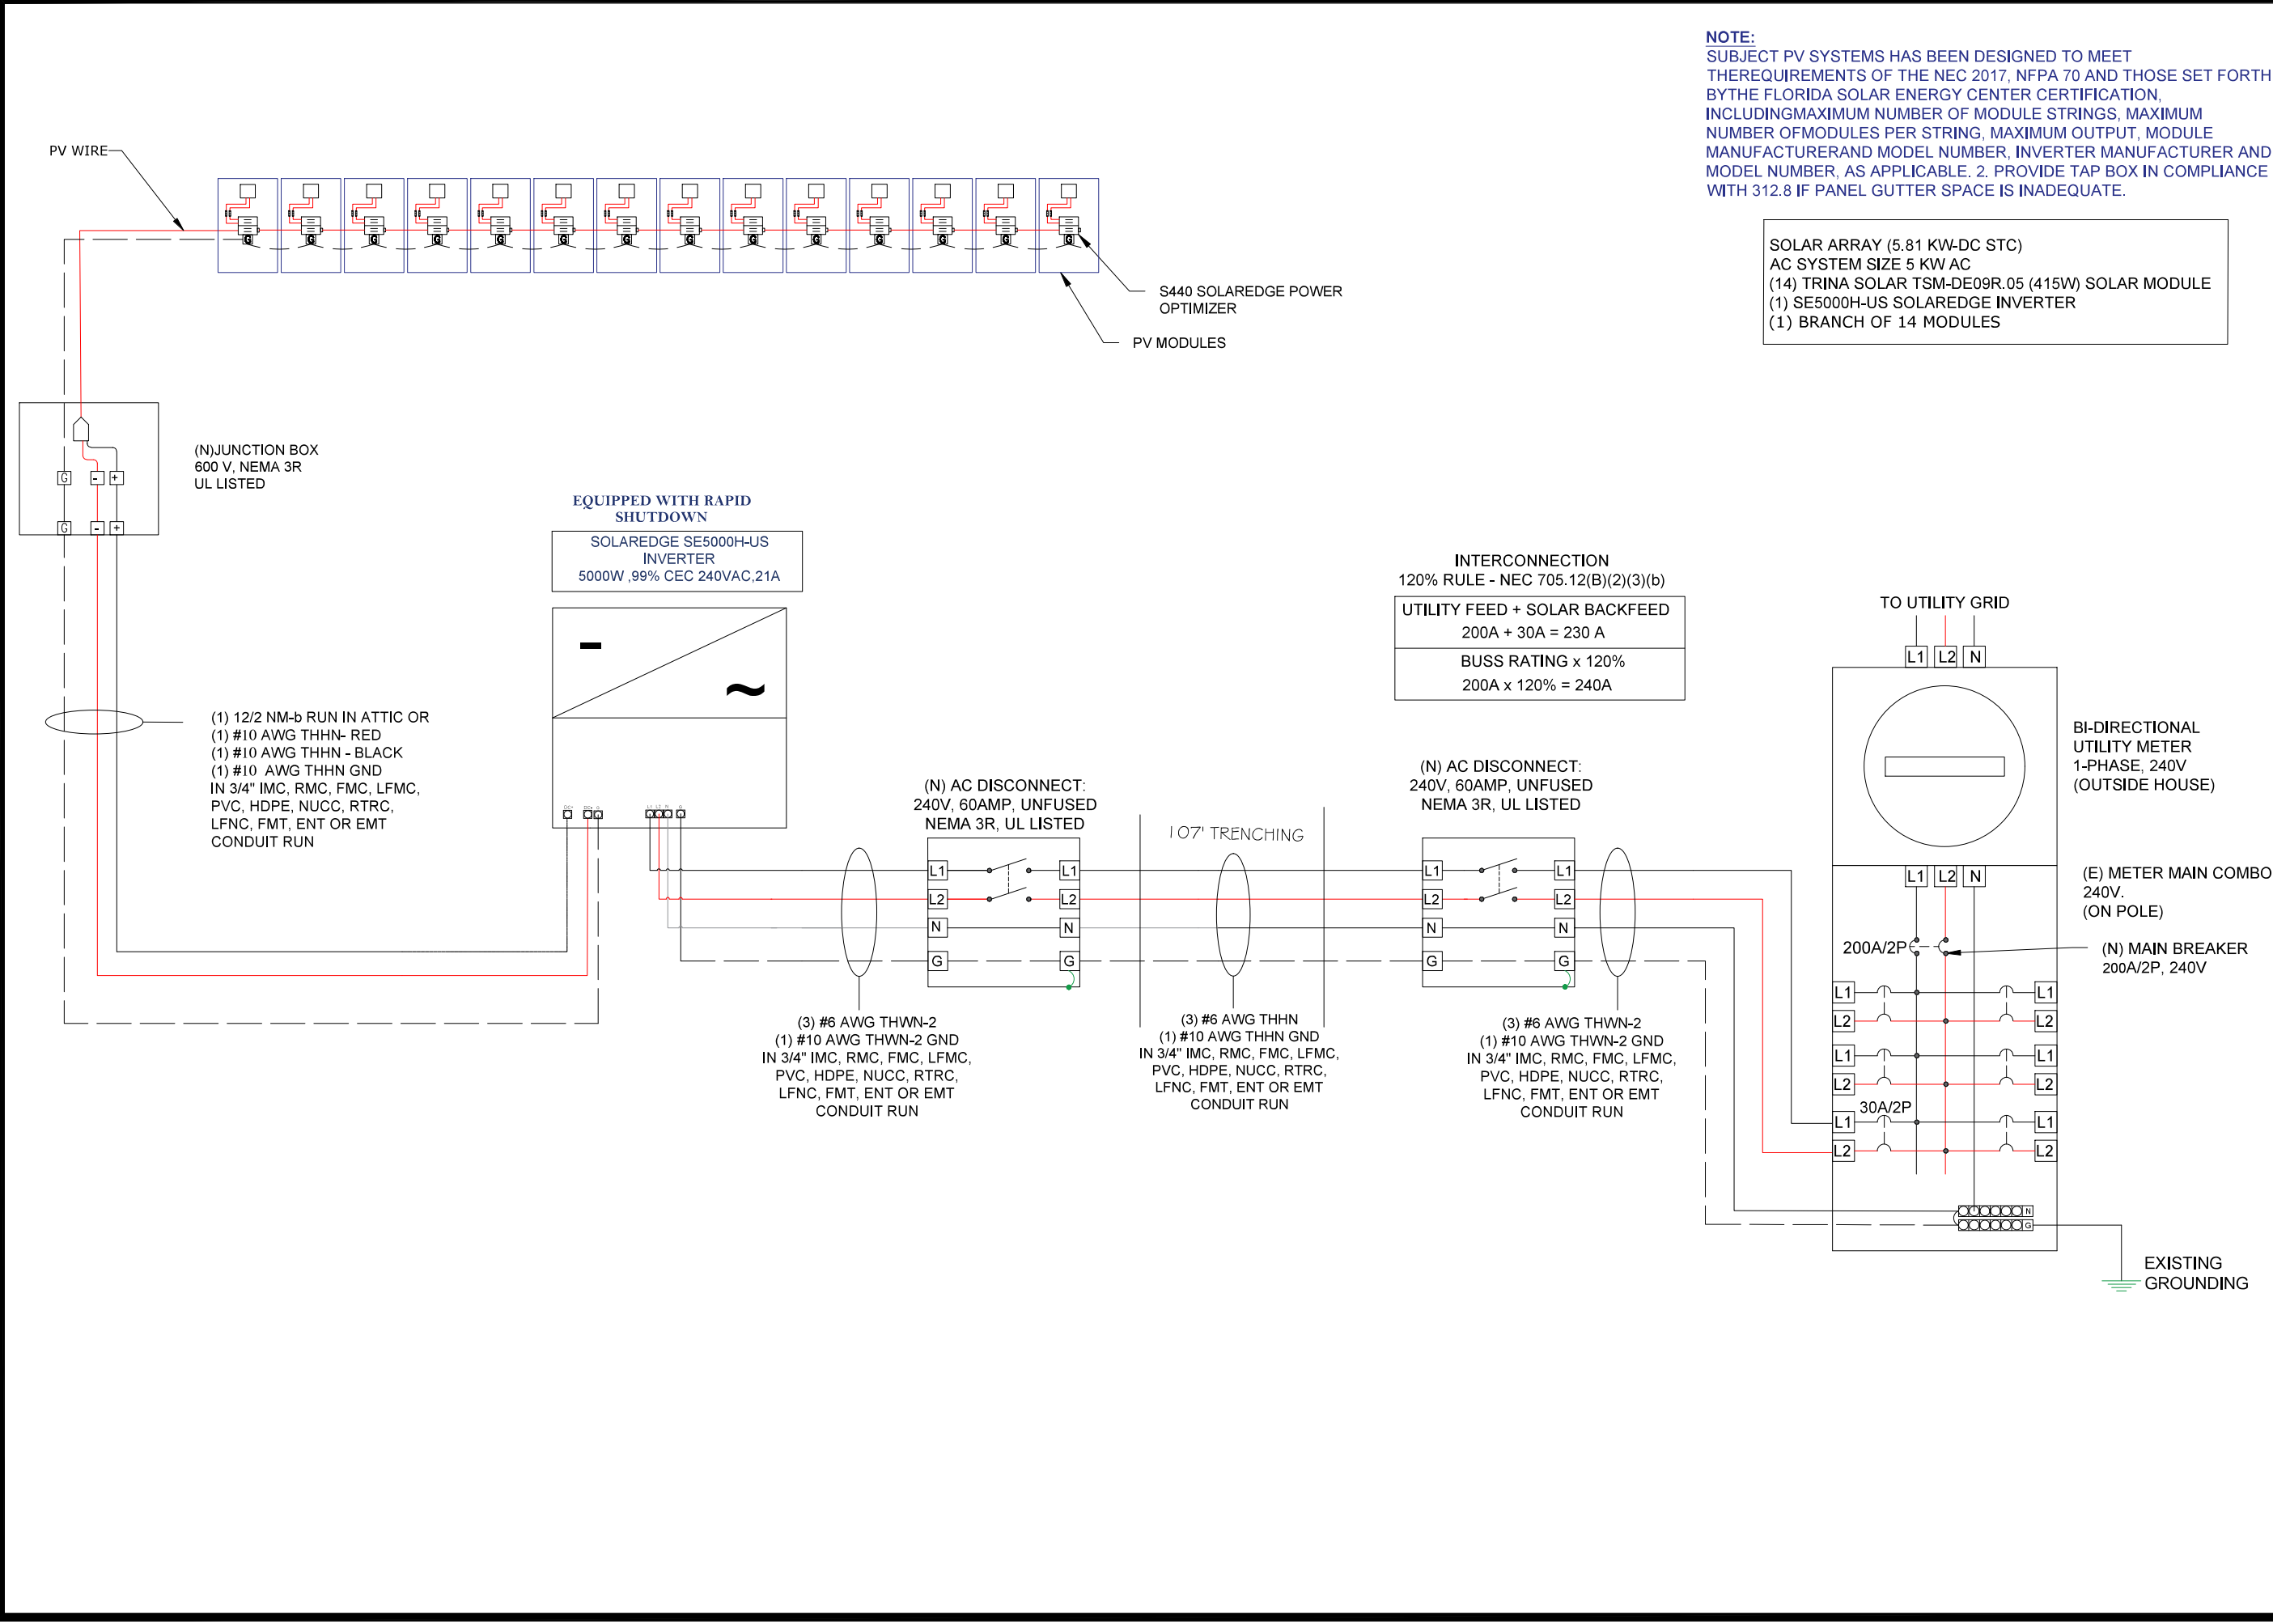

978 SW 2ND AVE GAINESVILLE, FL 32601
CONTACT: (800) 798-0315

ENGINEER OF RECORD

Domingo A. Villaruel
No. 85111
STATE OF FLORIDA
PROFESSIONAL ENGINEER
EXPIRES: 12/31/2025

Digitally signed by Domingo A. Villaruel: A01410D000001D00000177F58B8C588C0001626D
410D000001D00000177F58B8C588C0001626D
Date: 2023.06.21 11:36:00 -07'00'

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY, FL 32055, USA

REVISIONS	DATE	DESCRIPTION
REV	ENG	

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

ELECTRICAL LINE DIAGRAM

SHEET NUMBER

E-01

ELECTRICAL CALCULATIONS:

1. CURRENT CARRYING CONDUCTOR

(A) BEFORE INVERTER
AMBIENT TEMPERATURE = 34°C
CONDUIT INSTALLED AT DISTANCE OF 7/8 INCHES ABOVE ROOFNEC 310.15(B)(3)(c)
TEMPERATURE DERATE FACTOR - 0.96 ...NEC 310.15(B)(2)(a)
GROUPING FACTOR - 0.8...NEC 310.15(B)(3)(a)

CONDUCTOR AMPACITY
= (OPT O/P CURRENT) x 1.56 / A.T.F / G.F ...NEC 690.8(B)
= [(15 x 1.56) x 1.25] / 0.96 / 0.8
= 38.09 A
SELECTED CONDUCTOR - #10 THHN ...NEC 310.15(B)(16)

AFTER INVERTER
TEMPERATURE DERATE FACTOR - 0.96
GROUPING FACTOR - 1

CONDUCTOR AMPACITY
=(TOTAL INV O/P CURRENT) x 1.25 / 0.96 / 1 ...NEC 690.8(B)
=[21 x 1.25] / 0.96 / 1
=27.34 A
SELECTED CONDUCTOR - #6 THHN...NEC 310.15(B)(16)

2. PV OVER CURRENT PROTECTION ..NEC 690.9(B)
=TOTAL INVERTER O/P CURRENT x 1.25
=(21 x 1.25) = 26.25 A
SELECTED OCPD = 30A

SELECTED EQUIPMENT GROUND CONDUCTOR (EGC) = #10 THHN... NEC 250.122(A)

MODULE SPECIFICATION	
MODEL NO.	TRINA SOLAR TSM-DE09R.05(415W)
PEAK POWER	415W
RATED VOLTAGE (Vmpp)	41.7 V
RATED CURRENT (Imp)	9.94 A
OPEN CIRCUIT VOLTAGE (Voc)	50.0 V
SHORT CIRCUIT CURRENT (Isc)	10.55 A

OPTIMIZER SPECIFICATIONS	
MANUFACTURER	SOLAREEDGE OPTIMIZER
MODEL NO.	S440
MAX.OPEN CIRCUIT VOLTAGE (Voc)	60 V
MAX. AC OUTPUT CURRENT	15 A

MAX VOLTAGE DROP CALCULATION						
CABLE SIZE	CABLE DESCRIPTION	ONE WAY DISTANCE IN FEET (D)	BRANCH CURRENT (I)	RESISTANCE OF CONDUCTOR(R)	VOLTAGE (V)	% VOLTAGE DROP=(0.2*D*I*R)/V
#6 THWN-2	UNFUSED AC DISCONNECT TO UNFUSED AC DISCONNECT	107	21	0.491	240	0.919

ELECTRICAL NOTES


- ALL EQUIPMENT TO BE LISTED BY UL OR OTHER NRTL AND LABELED FOR ITS APPLICATION.
- COPPER CONDUCTORS SHALL BE RATED FOR 600 V AND 90 DEGREE C WET ENVIRONMENT.THE TERMINALS ARE RATED FOR 75 DEGREE C ROMEX/NM-B (NONMETALLIC-SHEATHED) CABLE MAY BE USED FOR BOTH EXPOSED AND CONCEALED WORK IN NORMALLY DRY LOCATIONS AT TEMPERATURES NOT TO EXCEED 90°C (WITH AMPACITY LIMITED TO THAT FOR 60°C CONDUCTORS) AS SPECIFIED IN THE NATIONAL ELECTRICAL CODE. VOLTAGE RATING FOR NM-B CABLE IS 600 VOLTS.
- WORKING CLEARANCES AROUND ALL NEW AND EXISTING ELECTRICAL EQUIPMENT SHALL COMPLY WITH NEC 110.265.
- WORKING CLEARANCES AROUND ALL NEW AND EXISTING DRAWINGS INDICATE THE GENERAL ARRANGEMENT OF SYSTEMS CONTRACTOR SHALL FURNISH ALL NECESSARY OUTLETS, SUPPORTS, FITTINGS AND ACCESSORIES TO FULFILL APPLICABLE CODES AND STANDARDS.
- WHERE SIZES OF JUNCTION BOXES, RACEWAYS, AND CONDUITS ARE NOT SPECIFIED, THE CONTRACTOR SHALL SIZE THEM ACCORDINGLY.
- ALL WIRE TERMINATIONS SHALL BE APPROPRIATELY LABELED AND READILY VISIBLE.
- MODULE GROUNDING CLIPS TO BE INSTALLED BETWEEN MODULE FRAME AND MODULE SUPPORT RAIL, PER THE GROUNDING CLIP MANUFACTURER'S INSTRUCTION.
- MODULE SUPPORT RAIL TO BE BONDED TO CONTINUOUS COPPER G.E.C. VIA WEEB LUG OR ILSCO GBL-4DBT LAY-IN LUG.
- THE POLARITY OF THE GROUNDED CONDUCTORS IS NEGATIVE.
- UTILITY HAS 24-HR UNRESTRICTED ACCESS TO ALL PHOTOVOLTAIC SYSTEM COMPONENTS LOCATED AT THE SERVICE ENTRANCE.
- MODULES CONFORM TO AND ARE LISTED UNDER UL 1703.
- RACKING CONFORMS TO AND IS LISTED UNDER UL 2703.
- CONDUCTORS EXPOSED TO SUNLIGHT SHALL BE LISTED AS SUNLIGHT RESISTANT PER NEC ARTICLE 300.6 (C) (1) AND ARTICLE 310.10 (D).
- CONDUCTORS EXPOSED TO WET LOCATIONS SHALL BE SUITABLE FOR USE IN WET LOCATIONS PER NEC ARTICLE 310.10 (C).

INVERTER SPECIFICATIONS	
MANUFACTURER	SOLAREEDGE
MODEL NO.	SE5000H-US
MAX.OUTPUT POWER	5000 W
MAX. AC OUTPUT VOLTAGE	240 V
MAX. AC OUTPUT CURRENT	21 A



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT :-(800) 798-0315

ENGINEER OF RECORD



Domingo A. Villaruel
No. 410D000001
EXP. 12/31/2025
This item has been electronically signed and sealed by Domingo Villaruel using 07F3BC588C
Digital Signature and Date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REV	ENG.	DESCRIPTION	DATE			

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

WIRING CALCULATIONS

SHEET NUMBER

E-02

⚠

WARNING

ELECTRIC SHOCK HAZARD

DO NOT TOUCH TERMINALS

TERMINALS ON BOTH LINE AND

LOAD SIDES MAY BE ENERGIZED

IN THE OPEN POSITION

LABEL LOCATION:
AC DISCONNECT, POINT OF INTERCONNECTION,
COMBINER PANEL
(PER CODE: NEC 690.13(B))

WARNING PHOTOVOLTAIC

POWER SOURCE

LABEL LOCATION:
CONDUIT RUNWAY
(PER CODE: NEC690.31(G)(3)(4))

⚠

WARNING

DUAL POWER SOURCE

SECOND SOURCE IS PHOTOVOLTAIC SYSTEM

LABEL LOCATION:
MAIN SERVICE DISCONNECT
(NEC 705.12(B)(3-4) & NEC 690.59)

- ADHESIVE FASTENED SIGNS:
- ANSI Z535.4-2011 PRODUCT SAFETY SIGNS AND LABELS, PROVIDES GUIDELINES FOR SUITABLE FONT SIZES, WORDS, COLORS, SYMBOLS, AND LOCATION REQUIREMENTS FOR LABELS. NEC 110.21(B)(1)
 - THE LABEL SHALL BE OF SUFFICIENT DURABILITY TO WITHSTAND THE ENVIRONMENT INVOLVED. NEC 110.21(B)(3)
 - ADHESIVE FASTENED SIGNS MAY BE ACCEPTABLE IF PROPERLY ADHERED. VINYL SIGNS SHALL BE WEATHER RESISTANT. IFC 605.11.1.3

PHOTOVOLTAIC SYSTEM AC DISCONNECT

RATED AC OPERATING CURRENT 21 AMPS

AC NOMINAL OPERATING VOLTAGE 240 VOLTS

LABEL LOCATION:
AC DISCONNECT, INVERTER
(PER CODE: NEC 690.54)

WARNING

INVERTER OUTPUT CONNECTION DO NOT

RELOCATE THIS OVERCURRENT DEVICE

LABEL LOCATION:
POINT OF INTERCONNECTION, MAIN SERVICE DISCONNECT
(PER CODE: NEC 705.12 (B)(2)(c))
[Not required if panelboard is rated not less than sum of ampere ratings of all overcurrent devices supplying it]

DATA PER PANEL

PHOTOVOLTAIC SYSTEM

EQUIPPED WITH RAPID

SHUTDOWN

LABEL LOCATION:
AC DISCONNECT, DC DISCONNECT, POINT OF
INTERCONNECTION
(PER CODE: NEC 690.56(C)(3))

⚠

WARNING

INVERTER OUTPUT CONNECTION

DO NOT RELOCATE THIS

OVERCURRENT DEVICE

EMERGENCY CONTACT

727-571-4141

⚠

WARNING

DEDICATED SOLAR PANELS DO

NOT CONNECT ANY OTHER LOADS

EMERGENCY RESPONDER THIS

SOLAR PV SYSTEM IS EQUIPPED

WITH RAPID SHUTDOWN

TURN RAPID SHUTDOWN

SWITCH TO THE

"OFF" POSITION TO

SHUTDOWN PV SYSTEM.

SOLAR ELECTRIC

PV PANELS

NEC690.56(C)(1) AND NFPA 111.12.2.1.1.1.1, 11.12.2.1.4

EnLight Energy

978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

DOMINGO A VILLARUEL

No. 85111

STATE OF FLORIDA

PROFESSIONAL ENGINEER

EXPRESS: 2/28/2025

This item has been electronically signed and sealed by Domingo Villaruel using a Digital Signature and Date. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Domingo A Villaruel:AO14100000017F38C588C0001626D
Digitally signed by Domingo A Villaruel:AO14100000017F38C588C0001626D Date: 2023.06.29 11:36:22 -0700

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REV	ENG.	DESCRIPTION	DATE				

PERMIT DEVELOPER	
DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

SYSTEM LABELING

SHEET NUMBER

E-03

Vertex S

BACKSHEET MONOCRYSTALLINE MODULE

Mono Multi Solutions

PRODUCT: TSM-DE09R.05
PRODUCT RANGE: 405-425W

425W
MAXIMUM POWER OUTPUT

0~+5W
POSITIVE POWER TOLERANCE

21.3%
MAXIMUM EFFICIENCY



reddot winner 2022



Outstanding Visual Appearance

- Designed with aesthetics in mind
- Excellent cell color control by dedicated cell blackening treatment and machine selection.
- Thinner wires that appear all black at a distance



Small in size, big on power

- Small form factor. Generate a huge amount of energy even in limited space.
- Up to 425W, 21.3% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather lower temperature coefficient (-0.34%) and operating temperature



Universal solution for residential and C&I rooftops


- Designed for compatibility with existing mainstream optimizers, inverters and mounting systems
- Perfect size and low weight. Easy for handling. Economy for transporting
- Diverse installation solutions. Flexible for system deployment



High Reliability

- 15 year product warranty
- 25 year performance warranty with lowest degradation;
- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Mechanical performance up to 6000 Pa positive load and 4000 Pa negative load

Trina Solar's Backsheet Performance Warranty

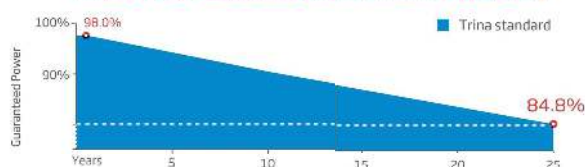

Comprehensive Products and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716
ISO 9001: Quality Management System
ISO 14001: Environmental Management System
ISO14064: Greenhouse Gases Emissions Verification
ISO45001: Occupational Health and Safety Management System

Trina solar


Vertex S

BACKSHEET MONOCRYSTALLINE MODULE


DIMENSIONS OF PV MODULE(mm)

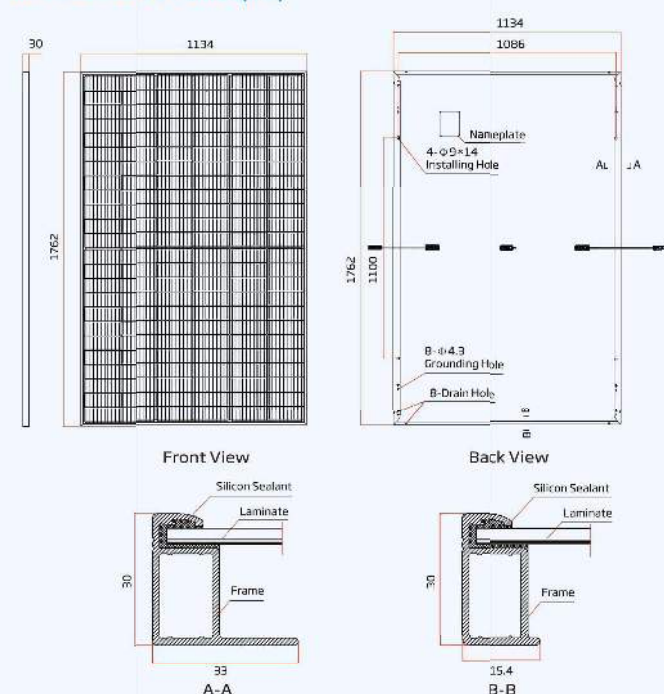

I-V CURVES OF PV MODULE(415W)

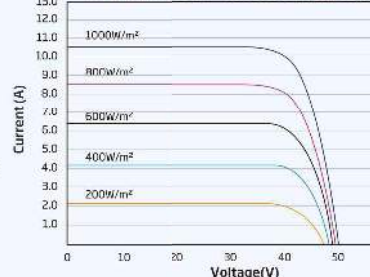

P-V CURVES OF PV MODULE(415W)

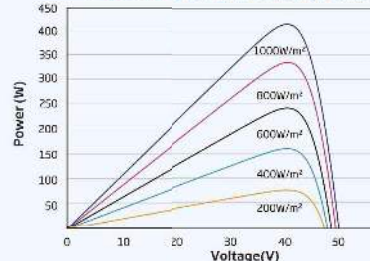

ELECTRICAL DATA (STC)

Peak Power Watts- P_{max} (W)*	405	410	415	420	425
Power Tolerance- P_{max} (W)			0 ~ +5		
Maximum Power Voltage- V_{mp} (V)	41.3	41.5	41.7	42.0	42.2
Maximum Power Current- I_{mp} (A)	9.82	9.87	9.94	10.01	10.08
Open Circuit Voltage- V_{oc} (V)	49.7	49.8	50.0	50.1	50.2
Short Circuit Current- I_{sc} (A)	10.50	10.53	10.55	10.58	10.61
Module Efficiency- η_m (%)	20.3	20.5	20.8	21.0	21.3

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Maximum Power- P_{max} (W)	306	309	312	317	321
Maximum Power Voltage- V_{mp} (V)	38.3	38.5	38.7	39.2	39.5
Maximum Power Current- I_{mp} (A)	7.99	8.03	8.07	8.10	8.13
Open Circuit Voltage- V_{oc} (V)	46.8	46.9	47.1	47.1	47.2
Short Circuit Current- I_{sc} (A)	8.46	8.49	8.50	8.53	8.55

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	144 cells
Module Dimensions	1762×1134×30 mm (69.37×44.65×1.18 inches)
Weight	21.8 kg (48.1 lb)
Glass	3.2 mm (0.13 inches), High Transmittance, 45° Tilted Heat Strengthened Glass
Encapsulant material	EVA/POE
Backsheet	Black-White
Frame	30mm (1.18 inches) Anodized Aluminium Alloy
J-Box	IP68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), Portrait: 350/240 mm (13.78/11.02 inches) Length can be customized
Connector	MC4 EVQ2 / TS4*

*Please refer to regional datasheet for specified connectors.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P_{max}	-0.34%/°C
Temperature Coefficient of V_{oc}	-0.25%/°C
Temperature Coefficient of I_{sc}	0.04%/°C

WARRANTY

15 year Product Workmanship Warranty
25 year Power Warranty
2% first year degradation
0.55% Annual Power Attenuation
(Please refer to product warranty for details)

MAXIMUM RATINGS

Operational Temperature	-40 ~ +85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	20A

PACKAGING CONFIGURATION

Modules per box: 36 pieces
Modules per 40' container: 936 pieces

Trina solar

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© 2022 Trina Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.


Version number: TSM_EN_2022_A

www.trinasolar.com



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD



Domingo A. Villaruel
Villaruel:A014
10D0000017
000177758
00016260
001626D
Date: 2025.07.11 11:36:33 -07

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REVISIONS

REV	ENG.	DESCRIPTION	DATE

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

MODULE
DATASHEET

SHEET NUMBER

DS-01

Power Optimizer

For Residential Installations

S440 / S500 / S500B



POWER OPTIMIZER

Enabling PV power optimization at the module level

- Specifically designed to work with SolarEdge residential inverters
- Mitigates all types of module mismatch loss, from manufacturing tolerance to partial shading
- Detects abnormal PV connector behavior, preventing potential safety issues*
- Faster installations with simplified cable management and easy assembly using a single bolt
- Module-level voltage shutdown for installer and firefighter safety
- Flexible system design for maximum space utilization
- Superior efficiency (99.5%)
- Compatible with bifacial PV modules

* Functionality subject to inverter model and firmware version

solaredge.com

solaredge

Power Optimizer

For Residential Installations


S440 / S500 / S500B

	S440	S500	S500B	UNIT
INPUT				
Rated Input DC Power ⁽¹⁾	440	500		W
Absolute Maximum Input Voltage (Voc)	60	125		Voc
MPPT Operating Range	8 – 60	12.5 – 105		Voc
Maximum Short Circuit Current (Isc) of Connected PV Module	14.5	15		Adc
Maximum Efficiency		99.5		%
Weighted Efficiency		98.6		%
Overvoltage Category		II		
OUTPUT DURING OPERATION				
Maximum Output Current		15		Adc
Maximum Output Voltage	60	80		Voc
OUTPUT DURING STANDBY (POWER OPTIMIZER DISCONNECTED FROM INVERTER OR INVERTER OFF)				
Safety Output Voltage per Power Optimizer		1 ± 0.1		Voc
STANDARD COMPLIANCE⁽²⁾				
EMC		FCC Part 15 Class B, IEC61000-6-2, IEC61000-6-3, CISPR11, EN-55011		
Safety		IEC62109-1 (class II safety), UL1741		
Material		UL94 V-0, UV Resistant		
RoHS		Yes		
Fire Safety		VDE-AR-E 2100-712:2013-05		
INSTALLATION SPECIFICATIONS				
Maximum Allowed System Voltage		1000		Vdc
Dimensions (W x L x H)		129 x 155 x 30	129 x 155 x 45	mm
Weight (including cables)		65.5		gr
Input Connector		MC4 ⁽³⁾		
Input Wire Length		0.1		m
Output Connector		MC4		
Output Wire Length		(+) 2.3, (-) 0.10		m
Operating Temperature Range ⁽⁴⁾		-40 to +85		°C
Protection Rating		IP68		
Relative Humidity		0 – 100		%

(1) Rated power of the module at STC will not exceed the Power Optimizer Rated input DC Power. Modules with up to +5% power tolerance are allowed.
(2) For details about CE compliance, see Declaration of Conformity – CE.
(3) For other connector types please contact SolarEdge.
(4) For ambient temperature above +70°C power de-rating is applied. Refer to Power Optimizers Temperature De-Rating Technical Note for details.

PV System Design Using a SolarEdge Inverter ⁽⁵⁾	SolarEdge Home Wave Single Phase	Three Phase SExxK-RWB	Three Phase for 230/400V Grid	Three Phase for 277/480V Grid	
Minimum String Length (Power Optimizers)	S440, S500: 8 S500B: 6	9 8	16 14	18 50	
Maximum String Length (Power Optimizers)	24	20			
Maximum Continuous Power per String	5700	5625	11250	12750	W
Maximum Allowed Connected Power per String (Permitted only when the power difference between strings is less than 2.000W)	See ⁽⁶⁾	See ⁽⁶⁾	13500	15000	W
Parallel Strings of Different Lengths or Orientations		Yes			

(5) It is not allowed to mix S-series and P-series Power Optimizers in new installations.
(6) If the inverter's rated AC power is maximum nominal power per string, then the maximum power per string will be able to reach up to the inverter's maximum input DC power.
Refer to Application Note: Single String Design Guidelines.

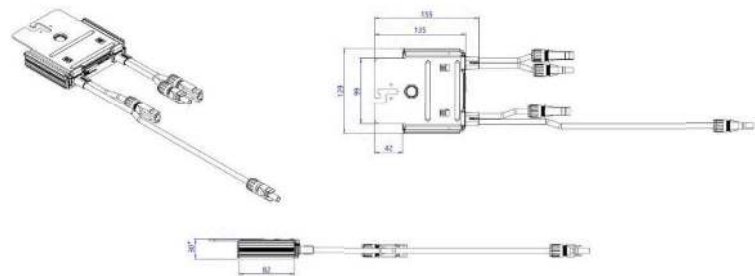

* 45mm for S500B


© SolarEdge Technologies, Ltd. All rights reserved. SOLAREGE, the SolarEdge logo, OPTIMIZED BY SOLAREGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners. Date: September 27, 2022 DS-000091-ENG. Subject to change without notice.

CE RoHS

EnLight Energy

978 SW 2ND AVE GAINESVILLE, FL 32601
CONTACT: (800) 798-0315

ENGINEER OF RECORD



Domingo A. Villaruel
Villaruel: A014100
410D000001
00000177F38C58
0001626D
11:36:42 -0700

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY, FL 32055, USA

REVISONS	REV. ENGG.	DESCRIPTION	DATE				

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

OPTIMIZER DATASHEET

SHEET NUMBER

DS-02



APASOLAR.COM
WHERE INNOVATION MEETS AUTOMATION




STANDARD SPECIFICATIONS

Engineering: APA Drawings can be PE stamped for all 50 States and territories
Grounding: Materials included
Foundation: Helical, Ground Screw or Ballast
Tilt Angles: 5°-35° Tilt Options
Racking Coating: Galvanized; G90
Foundation Coating: HDG
Wind Loading: Up to 150mph
Snow Loading: Up to 100psf
Mounting Orientation: 2-High in Portrait
Warranty: 25 Years

DUAL POST DESIGN

Ready Rack is a dual post design, making it an ideal choice for challenging sites with heavy wind or snow loads, and high topography. It comes standard with shallow micro helicals for soft or saturated soils, deep frost lines, shallow bedrock or high water tables. Ground screw or ballast foundation options are also available for sites with rock or non-penetrative soils.



READY RACK

The **Ready Rack™** system is one of our original designs, updated and optimized over the years with innovative features to bring down hardware cost and install time. It is one of the most versatile systems on the market, and is designed to easily accommodate changes with modules, layouts and terrain. The simplistic hardware allows contractors to streamline the install process with adjustable features built in. Helical foundations and quick-install bracing, along with carefully engineered, strong, and lightweight cee channels, are highly configurable and allow infinite solutions to common adjustment issues.

In business since 2009, APA offers a versatile line of racking and foundation solutions for projects in even the most challenging environments. With projects nationwide, APA is a trusted racking partner.



WHY USE READY RACK™?

CUSTOMIZABLE ROW LENGTHS

How do you fit more content in an area while increasing production and reducing costs? Fill up every inch of space by creating rows as long or as short as you need.

VERSATILE DESIGN

Design your rack to fit any panel and in any space, all thanks to highly adaptable components.

HIGH TERRAIN CAPACITY

By easily accommodating slopes over 20%, difficult terrain is no longer a problem.

INCREASED SPACING

Longer spans means less parts, faster installation, and more money in your pocket.

HIGH GROUND CLEARANCE


Whether your project needs clearance for snow or room for maintenance, our highly adjustable foundations have got you covered.

INSTALLER FRIENDLY

Sleek and strong, our cee channel accommodates varying post heights, spans, tilts, and allows for adjustments in the field.

HIGH STRENGTH PARTS

Engineered for the toughest Northern winters and the harshest Southern hurricanes, Ready Rack has stood the test of time.

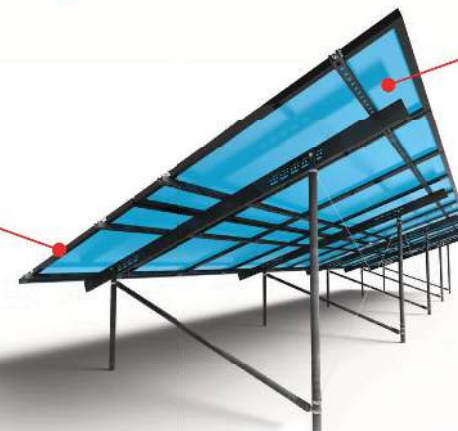

20-345 COUNTY ROAD X \ CO. BOX 224 \ RIDGEVILLE CORNERS, OH 43055

419.267.5280 // SALES@APASOLAR.COM

419.267.5280 // SALES@APASOLAR.COM



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY,
FL 32055, USA

REVISONS	REV	ENG.	DESCRIPTION	DATE					

PERMIT DEVELOPER

DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME

RACKING
DATASHEET

SHEET NUMBER

DS-04




APALTERNATIVES.COM
WHERE INNOVATION MEETS AUTOMATION



ROCKY SOIL
CONDITIONS

APA's ground screws are designed for sites with rock. The forged tip helps lead the screw straight and plumb. The threads of the screw bite and hold firmly into the soil without getting caught on rocks and cobbles. The heavy walled tube and welded connections allow massive amounts of torque and downward pressure to be applied helping the screw to advance into even the toughest soils.

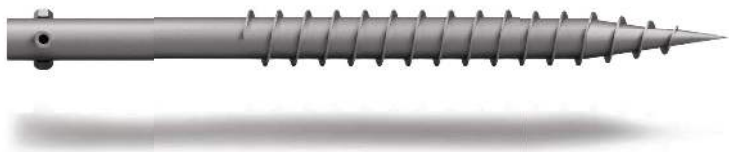

20-345 COUNTY ROAD X P.O. BOX 326 RIDGEVILLE CORNERS, OH 43555

SIMPLE
INSTALL

Several types of equipment can be used to install APA's ground screws. Skid loaders or mini excavators with an auger attachment are among the most common installation equipment. Many drilling contractors can use a simple adaptor to drive ground screws without buying new equipment. Most pile driving rigs can be converted to rotary heads with little effort.

GROUND
SCREW

APA Ground Screws are manufactured for even the most challenging solar sites. Our ground screws use heavy walled tubing for the main shaft of the screw. The tips of the screw are forged, making them extremely hard, this is essential to help it penetrate into or pass by underground obstructions. The threads are welded with a patented automated welding process to provide a consistent and strong weld along the entire length of the thread. Ground screws come with a durable hot dipped galvanized coating that will protect them from corrosion.

In business since 2008, APA offers the most versatile line of racking and foundation solutions for projects in even the most challenging environments. With projects nationwide, APA is a trusted quality racking partner.

419.267.5280 SALES@APALTERNATIVES.COM

WHAT MAKES THE GROUND SCREW FOUNDATION SO CAPABLE?

HARD SOILS

Hard soils are why ground screws were designed. The forged tip and heavy duty steel tube allow for thousands of pounds of downforce and turning torque to be applied to the screw. This amount of torque and downforce allows rocks and cobbles to be pushed out of the way during installation

SOLID ROCK

Ground screws can be installed into solid rock. By utilizing the method of drilling a pilot hole and adding some gravel backfill. The ground screws are securely installed into the pilot hole using the threads of the screw and the gravel backfill then locks them into the solid rock

SANDY SOILS

The granular structure of sand has poor friction value making it hard for driven piles to perform well. However, the shape and threads of a ground screw displace and compact the sand around it when installed. This helps interlock the sand together and provides excellent holding power of the screw threads

HEIGHT ADJUSTMENT

Posts can be adjusted to the perfect height by simply raising or lowering the top post in or out of the screw. To secure the top post, simply tighten the three set screws

SHALLOW INSTALL

The ground screws can be installed as shallow as 30" depending on the soil. This allows for less chances of hitting underground obstructions

Diameter	Overall Length			
2.35"	40"	61"	73"	85"
3.00"	40"	61"	73"	85"
3.50"	40"	61"	73"	85"
4.00"	61"	73"	85"	
4.50"	61"	73"	85"	

Custom sizes are available - contact us for more information

SET SCREW OR FLANGE CONNECTION

Ground screws can be manufactured with a set of three screw nuts or a flange welded to the top of the post. The set screws and flange options allow the screws to be used with fixed tilt, tracking and other solar mounting applications



419.267.5280 // SALES@APALTERNATIVES.COM



978 SW 2ND AVE GAINESVILLE ,
FL 32601
CONTACT:-(800) 798-0315

ENGINEER OF RECORD

ROMMY DAVIS

158 NW MICHELLE PL, LAKE CITY ,
FL 32055, USA

REV	ENG.	DESCRIPTION	DATE				

PERMIT DEVELOPER	
DATE	06/08/2023
DESIGNER	OSB
REVIEWER	

SHEET NAME
ATTACHMENT DATASHEET
SHEET NUMBER
DS-05