# TYPE OF CONSTRUCTION

Roof: Gable Construction, Wood Trusses @ 24" O

Walls: 2x6 Wood Studs @ 16" O.C. Floor: 4" Thk. Concrete Slab W/ Fibermesh Concrete Additive

Foundation: Continuous Footer/Stem Wall

### ROOF DECKING Material: 1/2" CD Plywood or 7/16" 0.5.B.

Sheet Size: 48"x96" Sheets Perpendicular to Roof Framing Fasteners: 8d Common Nails per schedule on sheet A.7

# SHEARWALLS

Material: 1/2" CD Plywood or 7/16" 0.5.B.

Sheet Size: 48"x96" Sheets Placed Vertical Fasteners: 8d Common Nails @ 4" O.C. Edges \$ 8" O.C. Interior Double Top Plate (S.Y.P.) W/16d Nails @ 12" O.C. Dragstrut:

# Wall Studs: 2x4 Studs @ 16" O.C.

HURRICANE UPLIFT CONNECTORS SIMPSON H2.5a or SDWC15600 @ Ea. Truss End (Typ. U.O.N.) Wall Tension: Wall Sheathing Nailing is Adequate - 8d @ 4" O.C. Top & Bot.

Anchor Bolts: 1/2" A307 Bolts @ 48" O.C. - 1st Bolt 12"-16" from corner Corner Hold-down Device: (1) HD5a @ each corner

Porch Column Base Connector: Simpson ABU66 @ each column Porch Column to Beam Connector: Simpson EPC66/PC66 @ each column

### FOOTINGS AND FOUNDATIONS

Footing: EXISTING 10"X18" X CONT., CONCRETE FOOTING W/ 2 #5 REBAR.

### STRUCTURAL DESIGN CRITERIA:

THE DESIGN COMPLIES WITH THE REQUIREMENTS OF THE 2020 FLORIDA BUILDING CODE - SECTION 1609 AND OTHER REFERENCED CODES AND SPECIFICATIONS. ALL CODES AND SPECIFICATIONS SHALL BE LATEST EDITION AT TIME OF PERMIT.

# 2. WIND LOAD CRITERIA: RISK CATAGORY: 2, EXPOSURE: "B"

BASED ON ANSI/ASCE 7-16. 2020 FBC 1609-A WIND VELOCITY: YILT = 130 MPH YASD = 101 MPH

# 3. ROOF DESIGN LOADS:

SUPERIMPOSED DEAD LOADS: . . . . . . 20 PSF SUPERIMPOSED LIVE LOADS: . . . . . . 20 PSF

4. FLOOR DESIGN LOADS:

SUPERIMPOSED DEAD LOADS: . . . . . . . 25 PSF SUPERIMPOSED LIVE LOADS:

RESIDENTIAL 40 PSF ...... 60 PSF BALCONIES

5. WIND NET UPLIFT: ARE AS INDICATED ON PLANS

# TERMITE PROTECTION NOTES:

SOIL CHEMICAL BARRIER METHOD:

I, A PERMANENT SIGN WHICH IDENTIFIES THE TERMITE TREATMENT PROVIDER AND NEED FOR REINSPECTION AND TREATMENT CONTRACT RENEWAL SHALL BE PROVIDED. THE SIGN SHALL BE POSTED NEAR THE WATER HEATER OR ELECTRIC PANEL, FBC 104,2,6

2. CONDENSATE AND ROOF DOWNSPOUTS SHALL DISCHARGE AT LEAST 1'-O" AWAY FROM BUILDING SIDE WALLS. FBC 1503.4.4

3. IRRIGATION/SPRINKLER SYSTEMS INCLUDING ALL RISERS AND SPRAY HEADS SHALL NOT BE INSTALLED WITHIN 1'-O" FROM BUILDING SIDE WALLS.

4. TO PROVIDE FOR INSPECTION FOR TERMITE INFESTATION, BETWEEN WALL COVERINGS AND FINAL EARTH GRADE SHALL NOT BE LESS THAN 6".

EXCEPTION: PAINT AND DECORATIVE CEMENTIOUS FINISH LESS THAN 5/8" THICK ADHERED DIRECTLY TO THE FOUNDATION WALL, FBC 1403.1.6 5. INITIAL TREATMENT SHALL BE DONE AFTER ALL EXCAVATION AND

BACKFILL IS COMPLETE, FBC 1816.1.1 6. SOIL DISTURBED AFTER THE INITIAL TREATMENT SHALL BE RETREATED INCLUDING SPACES BOXED OR FORMED. FBC 1816.1.2

7. BOXED AREAS IN CONCRETE FLOOR FOR SUBSEQUENT INSTALLATION OF TRAPS, ETC., SHALL BE MADE WITH PERMANENT METAL OR PLASTIC FORMS, PERMANENT FORMS MUST BE OF A SIZE AND DEPTH THAT WILL ELIMINATE THE DISTURBANCE OF SOIL AFTER THE INITIAL TREATMENT.

8. MINIMUM 6 MIL YAPOR RETARDER MUST BE INSTALLED TO PROTECT AGAINST RAINFALL DILUTION, IF RAINFALL OCCURS BEFORE YAPOR RET-ARDER PLACEMENT, RETREATMENT IS REQUIRED. FBC 1816.1.4

9. CONCRETE OVERPOUR AND MORTAR ALONG THE FOUNDATION PERIMETER MUST BE REMOYED BEFORE EXTERIOR SOIL TREATMENT. FBC 1816.1.5 10, SOIL TREATMENT MUST BE APPLIED UNDER ALL EXTERIOR CONCRETE

OR GRADE WITHIN 1'-O" OF THE STRUCTURE SIDEWALLS, FBC 1816,1.6 II. AN EXTERIOR VERTICAL CHEMICAL BARRIER MUST BE INSTALLED AFTER CONSTRUCTION IS COMPLETE INCLUDING LANDSCAPING AND IRRIGATION. ANY SOIL DISTURBED AFTER THE VERTICAL BARRIER IS APPLIED, SHALL

BE RETREATED. FBC 1816.1.6 12. ALL BUILDINGS ARE REQUIRED TO HAVE PER-CONSTRUCTION TREATMENT.

13. A CERTIFICATE OF COMPLIANCE MUST BE ISSUED TO THE BUILDING DEPART-MENT BY # LICENSED PEST CONTROL COMPANY BEFORE A CERTIFICATE OF OCCUPANCY WILL BE ISSUED. THE CERTIFICATE OF COMPLIANCE SHALL STATE: "THE BUILDING HAS RECEIVED A COMPLETE TREATMENT FOR THE PREVENTION OF SUBTERRANEAN TERMITES, THE TREATMENT IS IN ACCORDANCE WITH THE RULES AND LAWS OF THE FLORIDA DEPARTMENT OF AGRICULTURE AND CONS-UMER SERVICES", FBC 1816.1.7

14. AFTER ALL WORK IS COMPLETED, LOOSE WOOD AND FILL MUST BE REMOVED FROM BELOW AND WITHIN 1'-O" OF THE BUILDING, THIS INCLUDES ALL GRADE STAKES, TUB TRAP BOXES, FORMS, SHORING OR OTHER CELLULOSE CONTAINING MATERIAL, FBC 2303.1.3

15. NO WOOD, YEGETATION, STUMPS, CARDBOARD, TRASH, ETC., SHALL BE BURIED WITHIN 15'-O" OF ANY BUILDING OR PROPOSED BUILDING. FBC 2303.1.4

# FRAMING ANCHOR SCHEDULE

APPLICATION MANUF'R/MODEL CAP. SIMPSON H2.5a or SDWC15600 screws 600# TRUSS TO WALL: GIRDER TRUSS TO POST/HEADER: SIMPSON LGT, W/ 28 - 16d NAILS 1785# HEADER TO KING STUD(S): 1370# SIMPSON ST22

17*00*#

2200#

315#/240#

NO CONNECTION REQ. WHEN USING WINDSTORM BOARD PLATE TO STUD: STUD TO SILL: NO CONNECTION REQ. WHEN USING WINDSTORM BOARD SIMPSON PC66/EPC66 PORCH BEAM TO POST: PORCH POST TO FND .: SIMPSON ABUGG MISC, JOINTS SIMPSON A34

ALL ANCHORS SHALL BE SECURED W/ NAILS AS PRESCRIBED BY THE MANUFACTURER FOR MAXIMUM JOINT STRENGTH, UNLESS NOTED OTHERWISE.

REFER TO THE INCLUDED STRUCTURAL DETAILS FOR ADDITIONAL ANCHORS/ JOINT REINFORCEMENT AND FASTENERS.

ALL UNLISTED JOINTS IN THE LOAD PATH SHALL BE REINFORCED WITH SIMPSON A34 FRAMING ANCHORS, TYPICAL T.O.

"SEMCO" PRODUCT APPROVAL: MIAMI/DADE COUNTY REPORT #95-0818.15


"SIMPSON" PRODUCT APPROVALS: MIAMI/DADE COUNTY REPORT #97-0107.05, #96-1126.11, #99-0623.04

5BCC1 NER-443, NER-393

BUILDING COMPONENTS & CLADDING LOADS  2T MEAN BUILDING HEIGHT = 30.0', EXPOSURE "B"  ROOF ANGLE T TO 2T							
	ZONE	AREA	Yult 110 MPH	Yult 120 MPH	Yult 130 MPH	Yult 140 MPH	
ROOF 1' TO 21'	1 1 1	10 20 50	12.0 / -19.9 11.4 / -19.4 10.0 / -18.6	14.9 / -23.7 13.6 / -23.0 11.9 / -22.2	17.5 / -27.8 16.0 / -27.0 13.9 / -26.0	20.3 / -32.3 18.5 / -31.4 16.1 / -30.2	
	2 2 2	10 20 50	12.5 / -34.7 11.4 / -31.9 10.0 / -28.2	14.9 / -41.3 13.6 / -38.0 11.9 / -33.6	17.5 / -48.4 16.0 / -44.6 13.9 / -39.4	20.3 / -56.2 18.5 / -51.7 16.1 / -45.7	
	3 3 3	10 20 50	12.5 / -51.3 11.4 /-47.9 10.0 / -43.5	14.9 / -61.0 13.6 / -57.1 11.9 / -51.8	17.5 / -71.6 16.0 / -67.0 13.9 / -60.8	20.3 / -83.1 18.5 / -77.7 16.1 / -70.5	
MALL	4 4 4	10 20 50	21.8 / -23.6 20.8 / -22.6 19.5 / -21.3	25.9 / -34.7 24.7 / -26.9 23.2 / -25.4	30.4 / -33.0 29.0 / -31.6 27.2 / -29.8	35.3 / -38.2 33.7 / -36.7 31.6 / -34.6	
	5 5 -	10 20	21.8 / -29.1 20.8 / -27.2	25.9 / -34.7 24.7 / -32.4	30.4 /-40.7 29.0 / -38.0	35.3 / -47.2 33.7 / -44.0	

HEIGHT & EXPOSURE ADJUSTMENT COEFFICIENTS FOR BUILDING COMPONENTS & CLADDING							
BLDG	EXPOSURE	EXPOSURE	EXPOSURE "D"				
HEIGHT	"B"	"C"					
15	1.00	1.21	1.47				
20	1.00	1.29	1.55				
25	1.00	1.35	1.61				
30	1.00	1.4 <i>0</i>	1.66				

5 50 19.5 / -24.6 23.2 / -29.3 27.2 / -34.3 31.6 / -39.8

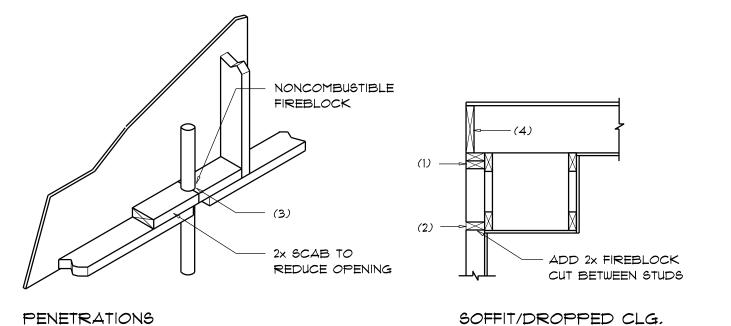

# FIREBLOCKING NOTES:

FIREBLOCKING SHALL BE INSTALLED IN WOOD FRAME CONSTRUCTION IN THE FOLLOWING LOCATIONS:

- 1. IN CONCEALED SPACES OF STUD WALLS AND PARTITIONS INCLUDING FURRED SPACES AT CEILING AND FLOOR LEVELS.
- 2. AT ALL INTERCONNECTIONS BETWEEN CONCEALED VERTICAL AND HORIZONTAL SPACES SUCH AS OCCUR AT SOFFITS, DROP CEILINGS, COVE CEILINGS, ETC.
- 3. AT OPENINGS AROUND VENTS, PIPES, DUCTS, CHIMNEYS AND FIREPLACES AT CEILING AND FLOOR LEVELS WITH "PYROPANEL MULTIFLEX SEALANT"
- 4. AT ALL INTERCONNECTIONS BETWEEN CONCEALED VERTICAL STUD WALL OR PARTITION SPACES AND CONCEALED SPACES CREATED BY AN ASSEMBLY OF FLOOR JOISTS, FIREBLOCKING SHALL BE PROVIDED FOR THE FULL DEPTH

# Fire Stopping DETAILS

OF THE JOISTS AT THE ENDS AND OVER THE SUPPORTS.

SCALE: NONE

# General Roofing NOTES:

# DECK REQUIREMENTS:

ASPHALT SHINGLES SHALL BE FASTENED TO SOLIDLY SHEATHED DECKS.

ASPHALT SHINGLES SHALL BE USED ONLY ON ROOF SLOPES OF 2:12 OR GREATER, FOR ROOF SLOPES FROM 2:12 TO 4:12, DBL, UNDERLAYMENT IS REQUIRED.

# UNDERLAYMENT:

- VENT SLOT AT RIDGE, PER PLAN

CONT. 2X4 BLOCKING BETWEEN

ROOF SHEATHING, PER PLAN

SHEATHING, OR "H" CLIPS

ROOF SHEATHING, PER PLAN

OR SLOPED (HIPS)

TRUSSES PER LAN

(**A**3

CONT. 2X4 BLOCKING BETWEEN

TRUSSES ALONG RIDGE, HORIZONTAL

TRUSSES PER LAN

CONT. 2X4 BLOCKING BETWEEN TRUSSES ALONG JOINTS IN

TRUSSES ALONG BOTH SIDES OF

ROOF SHEATHING, PER PLAN

VENT SLOTS

Vent DETAIL

Joint DETAIL

SCALE: 1" = 1'-0"

SCALE: 1" = 1'-0"

SCALE: 1" = 1'-0"

TRUSSES PER LAN

UNLESS OTHERWISE NOTED, UNDERLAYMENT SHALL CONFORM W/ ASTM D 226, TYPE I, OR ASTM D 4869, TYPE I.

### SELF-ADHERING POLYMER MODIFIED BITUMEN SHEET: SELF ADHERING POLYMER MODIFIED BITUMEN SHALL COMPLY W/ ASTM D 1970.

### ASPHALT SHINGLES:

ASPHALT SHINGLES SHALL HAVE SELF SEAL STRIPS OR BE INTERLOCKING, AND COMPLY WITH ASTM D 225 OR ASTM D 3462.

### FASTENERS:

FASTENERS FOR ASPHALT SHINGLES SHALL BE GALVANIZED, STAINLESS STEEL, ALUMINUM OR COPPER ROOFING NAILS, MINIMUM 12 GAUGE SHANK WITH A MINIMUM 3/8 INCH DIAMETER HEAD, OF A LENGTH TO PENETRATE THROUGH THE ROOFING MATERIAL AND A MINIMUM 3/4" INTO THE ROOF SHEATHING. WHERE THE SHEATHING IS LESS THAN 3/4" THICK, THE NAILS SHALL PENETRATE THROUGH THE SHEATHING.

### ATTACHMENT:

ASPHALT SHINGLES SHALL BE SECURED TO THE ROOF WITH NOT LESS THAN FOUR FASTENERS PER STRIP SHINGLE OR TWO FASTENERS PER INDIVIDUAL SHINGLE, WHERE ROOFS LOCATED IN BASIC WIND SPEED OF 110 MPH OR GREATER, SPECIAL METHODS OF FASTENING ARE REQUIRED. UNLESS OTHERWISE NOTED, ATTACHMENT OF ASPHALT SHINGLES SHALL CONFORM WITH ASTM D 3161 OR M-DC PA 107-95.

# UNDERLAYMENT APPLICATION:

FOR ROOF SLOPES FORM 2:12 TO 4:12, UNDERLAYMENT SHALL BE A MINIMUM OF TWO LAYERS APPLIED AS FOLLOWS:

- 1. STARTING AT THE EAVE, A 19 INCH STRIP OF UNDERLAYMENT SHALL BE APPLIED PARALLEL WITH THE EAVE AND FASTENED SUFFICIENTLY TO STAY IN PLACE.
- 2. STARTING AT THE EAVE, 36 INCH WIDE STRIPS OF UNDERLAYMENT FELT SHALL BE APPLIED OVERLAPPING SUCCESSIVE SHEETS 19 INCHES AND FASTENED SUFFICIENTLY TO STAY IN PLACE.

FOR ROOF SLOPED 4:12 AND GREATER, UNDERLAYMENT SHALL BE A MINIMUM OF ONE LAYER OF UNDERLAYMENT FELT APPLIED AS FOLLOWS: STARTING AT THE EAVE, UNDERLAYMENT SHALL BE APPLIED SHINGLE FASHION PARALLEL TO THE EAVE, LAPPED 2 INCHES, AND FASTENED


# SUFFICIENTLY TO STAY IN PLACE. BASE AND CAP FLASHINGS:

BASE AND CAP FLASHING SHALL BE INSTALLED IN ACCORDANCE W/ MFGR'S INSTALLATION INSTRUCTIONS, BASE FLASHING SHALL BE OF EITHER CORROSION RESISTANT METAL OF MINIMUM NOMINAL THICKNESS 0.019 INCH OR MINERAL SURFACE ROLL ROOFING WEIGHING A MINIMUM OF 17 LBS PER 100 SQUARE FEET, CAP FLASHING SHALL BE CORROSION RESISTANT METAL OF MINIMUM NOMINAL THICKNESS OF 0,019 INCH.

VALLEY LININGS SHALL BE INSTALLED IN ACCORDANCE W/ MANUFACTURER'S INSTALLATION INSTRUCTIONS BEFORE APPLYING ASPHALT SHINGLES. VALLEY LININGS OF THE FOLLOWING TYPES SHALL BE PERMITTED. 1. FOR OPEN VALLEYS LINED WITH METAL, THE VALLEY LINING SHALL BE

- AT LEAST 16" WIDE AND OF ANY OF THE CORROSION RESISTANT METALS IN FBC TABLE 1507.3.9.2. 2, FOR OPEN VALLEYS, VALLEY LINING OF TWO PLIES OF MINERAL SURFACE
- ROLL ROOFING SHALL BE PERMITTED. THE BOTTOM LAYER SHALL BE 18 INCHES AND THE TOP LAYER A MINIMUM OF 36 INCHES WIDE. 3, FOR CLOSED VALLEYS VALLEY LINING SHALL BE ONE OF THE FOLLOWING: 1. BOTH TYPES 1 AND 2 ABOVE, COMBINED.
- 2. ONE PLY OF SMOOTH ROLL ROOFING AT LEAST 36 INCHES WIDE AND COMPLYING WITH ASTM D 224. 3. SPECIALTY UNDERLAYMENT AT LEAST 36 INCHES WIDE AND COMPLYING WITH ASTM D 1970.



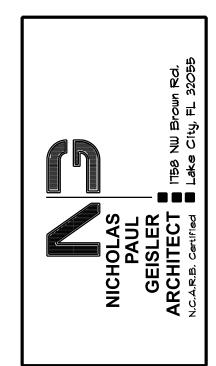

SHEET NUMBER OF 4 SHEETS

