A. CONCRETE & FOUNDATION DESIGN:

ALL CONCRETE GRADE BEAMS AND FOOTINGS SHALL BE 3000

- MINIMUM, 3 1/2" NOMINAL THICKNESS.
 3. FIBERMESH (3/4" PER CUBIC YARD MIN.) MEETING PSI MINIMUM.
 ALL CONCRETE FILLED SUPPORTED SLABS SHALL BE 2500 PSI

- APPROPRIATE ACI AND ASTM REQUIREMENTS MAY BE USED
 IN LIEU OF WELDED WIRE MESH

 4. ALL SLABS ON GRADE SHALL BE A MINIMUM OF 4" THICK
 WITH FIBERMESH.

 5. ALL REINFORCING SHALL CONFORM TO ASTM A615, BE GRADE
 60 (60 KSI MIN,) DEFORMED BARS, #3 BARS MAY BE GRADE 40
 6. ALL OVER POUR CONCRETE FILLED SUPPORTED SLABS SHALL
 BE 3000 PSI MIN., 2" MINIMUM. THICKNESS.
 7. SOIL BEARING PRESSURE SHALL BE A MINIMUM OF 1500 PSF.
 8. THE CONCRETE SHALL CONFORM TO ASTM C94 FOR THE

OPC (PORTLAND CEMENT TYPE 1,- ASTM C 150).
AGGREGATES - #6 STONE , ASTM C 33 SIZE NO. 67 LESS THAN FOLLOWING:

AIR ENTRAINING +/- 1% - ASTM C 260.

CLEAN POTABLE WATER WATER REDUCING AGENT - ASTM C 494.

OTHER ADMIXTURES SHALL NOT BE PERMITTED.

9. METAL WELDED WIRE SHALL CONFORM TO ASTM A 185.

10. PREPARE & PLACE CONCRETE ACCORDING TO AMERICAN CONCRETE INSTITUTE MANUAL STANDARD PRACTICE, PART 1, 2, & 3 ALONG WITH HOT WEATHER CONDITIONS RECOMMENDATIONS.

11. IF UTILIZING EXISTING CONCRETE FOR FOUNDATION, CONCRETE SHALL BE A MINIMUM OF 4" IN THICKNESS, VISIBLY FREE OF ANY STRUCTURAL EXCESSIVE CRACKING, SPALLING OR OTHER DETERIORATION

B. MASONRY:

. CONCRETE MASONRY UNITS (CMU) SHALL BE STANDARD HOLLOW UNITS AND SHALL BE 2000 PSI MINIMUM BASED ON TYPE M OR S MORTAR.

2.ALL MORTAR SHALL BE OF TYPE M OR S.
3.ALL GROUT SHALL BE 2000 PSI MINIMUM AND HAVE
MAXIMUM COARSE AGGREGATE SIZE OF 3/8".
4.PROVIDE CLEAN-OUTS FOR REINFORCED CELLS CONTAINING
REINFORCEMENT WHEN GROUT POUR EXCEEDS 5'-0" IN

C. ALUMINUM: 1. ALL STRUCTURA

- ALL STRUCTURAL ALUMINUM SHALL CONFORM TO THE MINIMUM REQUIREMENTS OF 6005-T5 FOR ALLOY WITH A MINIMUM THICKNESS OF 0.040" FOR SUPPORTING MEMBERS. WHERE KICK PLATES ARE USED A MINIMUM THICKNESS OF
- 0.024" SHALL APPLY.

 3. STRUCTURAL ALUMINUM DESIGN CONFORMS TO "PART 1-A SPECIFICATIONS FOR ALUMINUM STRUCTURES ALLOWABLE STRESS DESIGN" OF "PART 1-B SPECIFICATIONS FOR ALUMINUM STRUCTURES BUILDING LOAD AND RESISTANCE FACTOR DESIGN" OF THE ALUMINUM DESIGN MANUAL PREPARED BY THE ALUMINUM ASSOCIATION, INC. WASHINGTON D.C. THE FLORIDA BUILDING CODE 7TH EDITION (CHAPTER 16 STRUCTURAL DESIGN & CHAPTER 20 G.
- 4. WHERE ALUMINUM COMES INTO CONTACT WITH STEEL, OR PRESSURE TREATED LUMBER PROVIDE DIELECTRIC
- SEPARATION.

 5. ALUMINUM MEMBERS SHALL BE STITCHED WITH NO LESS THAN #10 SMS 6" FROM THE ENDS AND 12" ON CENTER, IF USING #12 SPACING MAY BE 24" ON CENTER.

 6. VINYL AND ACRYLIC PANELS SHALL BE REMOVABLE. THEY SHALL BE IDENTIFIED WITH A DECAL ESSENTIALLY STATING "REMOVABLE PANEL SHALL BE REMOVED WHEN WIND SPEEDS EXCEED 75 MPH". DECAL SHALL BE PLACED SO IT IS VISIBLE WHEN PANEL IS INSTALLED.

 7. 1"X2"X0.045" NON-STRUCTURAL MEMBERS SHALL BE ATTACHED TO HOST WITH 1/4"Ø X 1-3/4" EMBEDMENT & 24" O.C. MASONRY SCREW FOR CONCRETE & EQUIVALENT SIZE WOOD SCREW WHEN I NOOD & #10X 1/2" EMBEDMENT SMS
- OR TEK SCREWS IN ALUMINUM MEMBERS TYPICAL.

D. FASTENERS:

ALL LAG BOLTS SHALL CONFORM TO STAINLESS STEEL TYPE 300 18-8, WITH STANDARD FLAT WASHER UNLESS MANUFACTURER GALVANIZES BOLTS SPECIFIES FOR USE

- WITH ACQ PRESSURE TREATED WOOD.
 HEX BOLTS HAS TO BE ASTM A 325, PLATED WITH STANDARD FLAT WASHERS AND NUTS.
 ALL CONCRETE SCREWS SHALL BE, SIMPSON, HILTI, RAWL,
- TAPCON, REDHEAD, DYNABOLT, PORTECT OR APPROVED
- ALL METAL TIES AND ASSOCIATED ACCESSORIES SHALL BE HOT DIPPED GALVANIZED.

 ALL LAG BOLTS SHALL HAVE A MINIMUM EMBEDMENT OF 8X BOLT DIAMETER INTO STRUCTURAL FRAMING (G=.42 MIN.).

 LAG BOLTS AND SCREWS INTO WOOD FRAMING SHALL BE PROVIDED WITH PILOT HOLES HAVING A DIAMETER NOT GREATER THAN 70 PERCENT OF THE THREAD DIAMETER OF THE BOLT OR SCREW. ALL LAG BOLTS AND SCREWS SHALL BE
- INSERTED IN PILOT HOLES BY TURNING AND UNDER NO CIRCUMSTANCES BY DRIVING WITH A HAMMER.
 ALL EXPANSION ANCHORS SHALL BE DESIGNED IN ACCORDANCE WITH THE SPECIFIC MANUFACTURER'S REQUIREMENTS AND ALLOWABLE LOADS AND SHALL ONLY
- BE APPLIED IN CONDITIONS ACCEPTABLE TO
 MANUFACTURER. FASTENERS SHALL BE A MINIMUM OF SAE
 GRADE #5 OR BETTER ZINC PLATED.

 8. ALL FASTENERS CONNECTING ALUMINUM COMPONENTS OR
 PRESSURE TREATED LUMBER ARE STAINLESS STEEL TYPE 300
 18-8, UNLESS MANUFACTURER GALVANIZED BOLTS SPECIFIES
 FOR USE WITH ACQ PRESSURE TREATED WOOD, OR
 OTHERWISE NOTED ON PLANS.

 9. ALL FASTENERS SHALL COMPLY WITH ASTM A653
 10. CONNECTORS SHALL COMPLY WITH ASTM A653
- CLASS G-185
- 11. FOR SMS, THE MINIMUM CENTER-TO-CENTER SPACING SHALL BE 3/4" AND MINIMUM CENTER-TO-EDGE SHALL BE 1/2" UNLESS NOTED OTHER WISE.

REFERENCE STANDARDS:

ASTM E 119 ASTM E 1300

CURRENT ASCE 7
CURRENT ALUMINUM DESIGN MANUAL-AA ASM35, AND SPEC.
FOR ALUMINUM PART 1-A, & 1-B
ASTM C94
ASTM C150
ASTM C33
ASTM C260

ASTM A615 ASTM A185 ASTM C494

ILDING CODE 7TH EDITION (CHAPTERS 16, 20 & 23).

ABBREVIATIONS:

THE FOLLOWING LIST OF ABBREVIATIONS IS NOT INTENDED TO REPRESENT ALL THOSE USED ON THESE DRAWINGS, BUT TO SUPPLEMENT THE MORE COMMON ABBREVIATIONS.

TYP - TYPICAL SIM - SIMILAR

UON -- UNLESS OTHERWISE NOTED

CONT -- CONTINUOUS VIF - VERIFY IN FIELD

G. RESPONSIBILITY:

- CODES, LOCAL ORDINANCES, ETC.
 CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND DETAILS,
 NOTIFYING ENGINEER OF ANY DISCREPANCIES BETWEEN ALL SITE WORK SHALL BE PERFORMED BY A LICENSED CONTRACTOR IN ACCORDANCE WITH APPLICABLE BUILDING
- DRAWINGS, FABRICATED ITEMS, OR ACTUAL FIELD
- CONTRACTOR.

 ALL DETAILS ON THESE DRAWINGS ARE ENGINEERED BASED ON INFORMATION PROVIDED BY THE CONTRACTOR AND MANUFACTURER. THESE DRAWINGS REPRESENT THE ACCEPTABILITY OF THE 'SUNROOM' ROOM ADDITION ELEMENTS AS PROVIDED BY THE
- ANY DETAILS NOT SHOWN ARE TO BE ENGINEERED BY A LICENSED P.E. IN ACCORDANCE WITH STANDARD ENGINEERING PRACTICES.

H. MISCELLANEOUS:

ALUMINUM ADDITIONS ARE NOT TO BE INSTALLED ON A MANUFACTURED HOME, TRAILER HOME, OR PRE-FAB HOME. IF THE EXISTING STRUCTURE IS ONE OF THESE, A SEPARATE 4TH

WALL SUPPORT SYSTEM MUST BE ENGINEERED SO THAT NO ADDITIONAL LOADING IS PLACED ON THE MANUFACTURED

- IF ENCLOSURE CONTAINS A SWIMMING POOL OR SPA, THE ENCLOSURE SHALL COMPLY WITH RESIDENTIAL SWIMMING BARRIER REQUIREMENTS OF THE FBC 7TH EDITION R 4501.17 IN
- DOOR LOCATIONS MAY BE DETERMINED IN THE FIELD BY
- CONTRACTOR.

 4. IF PAVERS ARE UNDER ALUMINUM MEMBERS THEY SHALL

 4. IF PAVERS ARE UNDER ALUMINUM MEMBERS THEY SHALL

 4. IF PAVERS ARE UNDER ALUMINUM MEMBERS THEY SHALL

 5. SCREENING MATERIAL SHALL BE 18X14X0.013 OR

 5. SCREENING MATERIAL SHALL BE 18X14X0.013 OR
- ALL STRUCTURAL POST SHALL BE ANCHORED TO AN EXISTING/PROPOSED CONCRETE FOUNDATION FOR UPLIFT **PURPOSES**

EQUIVALENT DENSITY SCREEN MESH ONLY UNLESS NOTED ON DRAWING S-2.

DESIGN DATA:

1. ULTIMATE DESIGN WIND SPEED Vult, (3 SECOND GUST):

NOMINAL DESIGN WIND SPEED Vasd:

120 MPH 93 MPH

4000 WIND EXPOSURE:
WIND LOADS:

SCREEN ROOF: SCREEN WALLS (WINDWARD): SCREEN WALLS (LEEWARD):

5. FACTOR APPLIED TO SCREEN WIND LOADS FOR 18X14X0.013
OR EQUIVALENT DENSITY SCREEN MESH:
6. FACTOR APPLIED TO SCREEN WIND LOADS FOR ALLOWABLE SOLID ROOF:

N/A N/A N/A 17 PSF

LIVE LOAD: 300 Ib. VERTICAL DOWNLOAD ON PRIMARY SCREEN ENCLOSURE MEMBERS.
200 Ib. VERTICAL DOWNLOAD ON SCREEN ENCLOSURE PURLINS.
10 PSF VERTICAL DOWNLOAD ON SOLID ROOF.
SCREEN ROOF TYPE: N/A
SOLID ROOF TYPE: ELITE EPS COMPOSITE PANEL ROOF, FLORIDA PRODUCT
APPROVAL, FL 7561-R5. STRESS DESIGN:

0.6 N/A

10. PROPOSED FOUNDATION (SEE S-2 FOR SIZE AND LOCATION) SHALL BE ADEQUATE TO RESIST THE UPLOADS FOR THE PROPOSED STRUCTURE

ALUMINUM STRUCTURAL MEMBERS S-1 GENERAL NOTES

S-2 DRAWING

2 x 2: --2 x 3: --2 x 4: --2 x 5: --3 x 3: --HOLLOW SECTIONS 3" x 3" x 0.125" 2" x 4" x 0.050" 2" x 5" x 0.050" 2" x 3" x 0.050" x 2" x 0.044" S-3 DETAILS S-4 DETAILS

1 x 2:-**BACK SECTIONS** 1" x 2" x 0.040"

1 x 3: SNAP SECTIONS 2" x 2" x 0.045" -1" x 3" x 0.045"

2 x 3 SMS: -2 x 4 SMS:--3 x 3 SMS:--2 x 2 SMS: SELF MATING (SMB) --2" x 3" x 0.072" - 2" x 4" x 0.045" - 3" x 3" x 0.090"

- 2" x 6" x 0.050" x 0.120" - 2" x 7" x 0.057" x 0.120" - 2" x 8" x 0.072" x 0.224" - 2" x 9" x 0.072" x 0.224" 2" x 10" x 0.092" x 0.374" 2" x 4" x 0.044" x 0.100" 2" x 5" x 0.050" x 0.118"

2 x 2: TUBE SECTIONS

2" x 2" x 0.090"

S

I

County lumb 0 Reviewed Compliance 0 Building ĝ Code Copy

ons Examine Minimum A A PROPERTY OF THE PARTY OF THE PAR PROFESSIONAL ENGINEER SEAL

Ian J. Foster P.E. FLORIDA LICENSE: 93654 FLORIDA LICENSE: 38654 FLORIDA LICENSE: 53608 FLORIDA LICENSE: 70667 Thomas L. Hanson P.E Erik Stuart P.E. oel Falardeau P.E. David W. Smith P.E. ENGINEER OF RECORD:

×


5344 9th Street Services, Inc. FLORIDA LICENSE: 77605 **FBC Plans & Engineering**


Website-www.fbcplans.com Fax# 1-(866)824-7894 E-mail-erb@fbcplans.com Ph# (813)838-0735 Zephyrhills, FL 33542


RO 3 RO 2 RO 1 REVISION: DRAWN BY: ST DATE: 04/11/2023 DATE:

PROJECT ADDRESS: RO 4 SHE CITY, FL 32024 REEDEN ob# 23_0411_114

RICHARDSON ALUMINUM LLC CONTRACTOR:

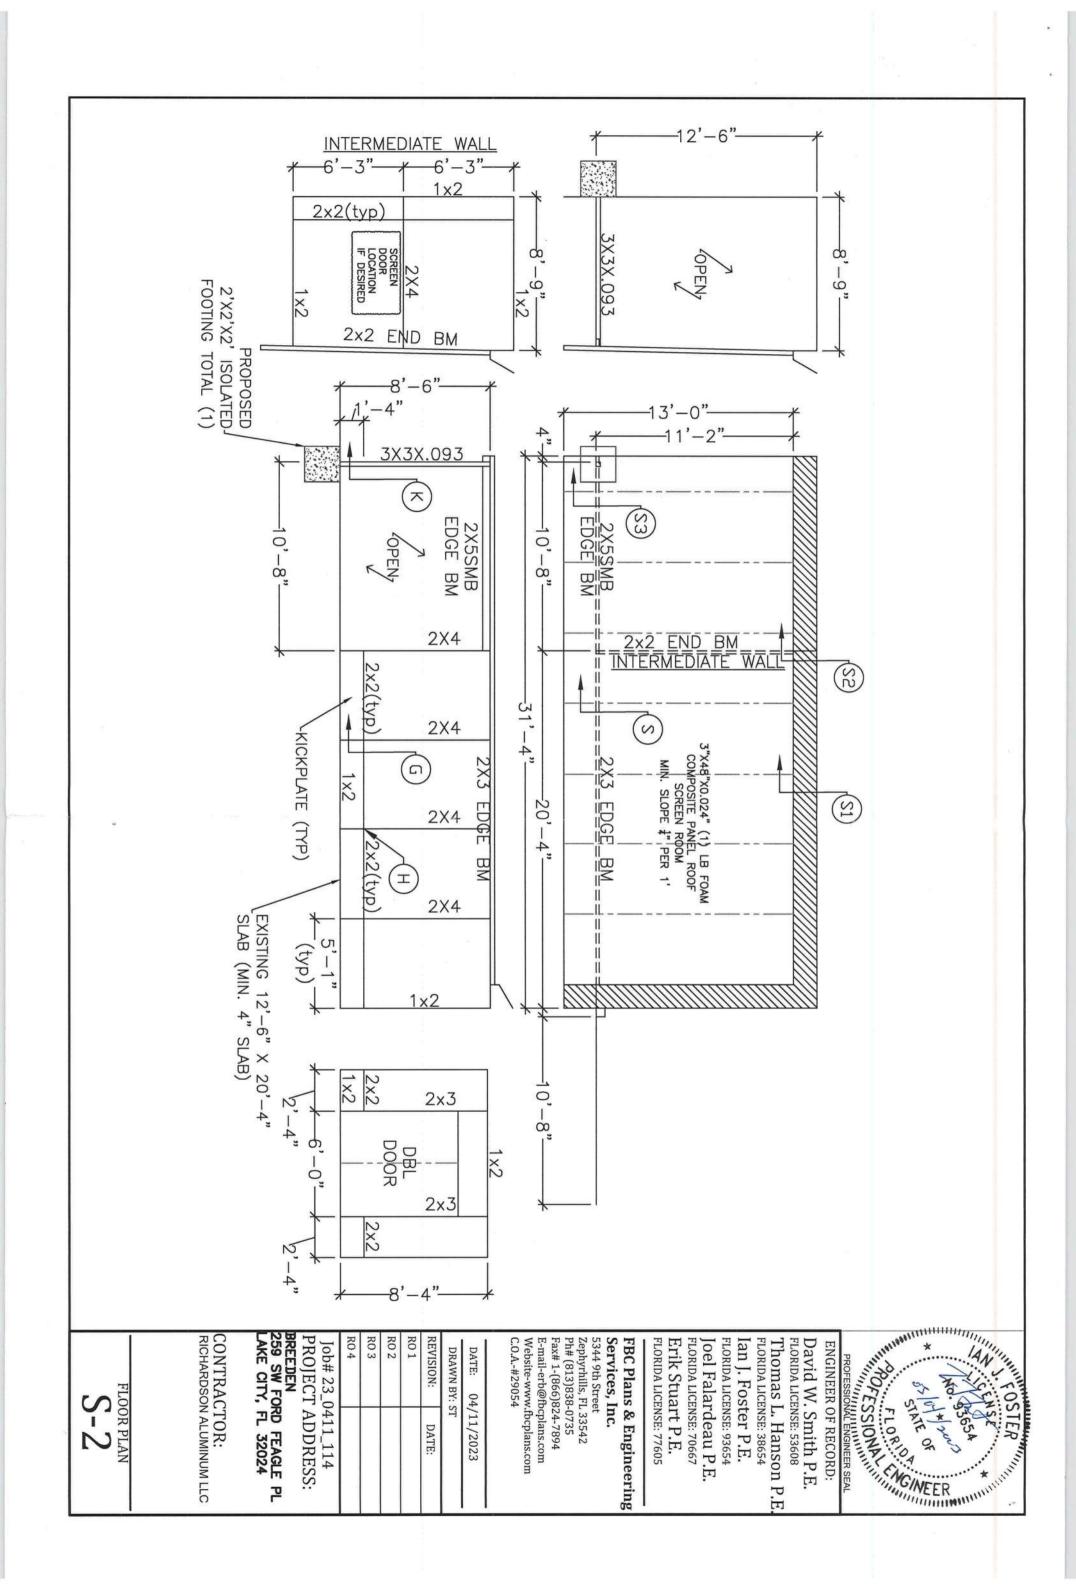

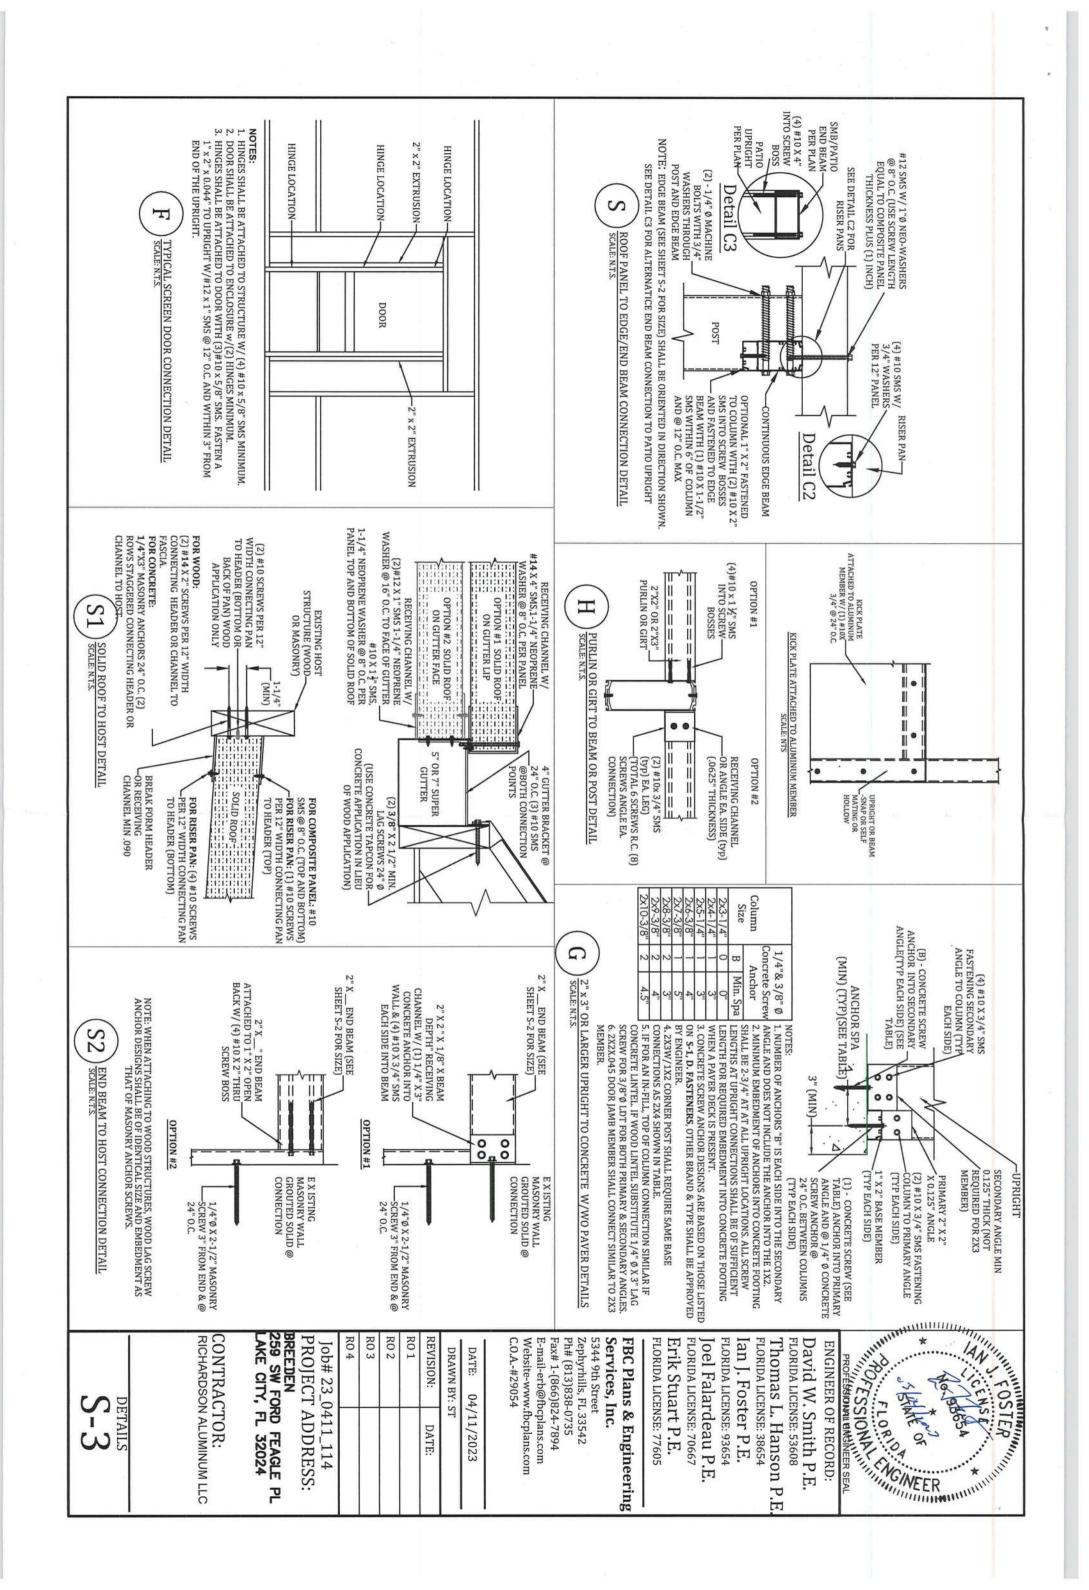

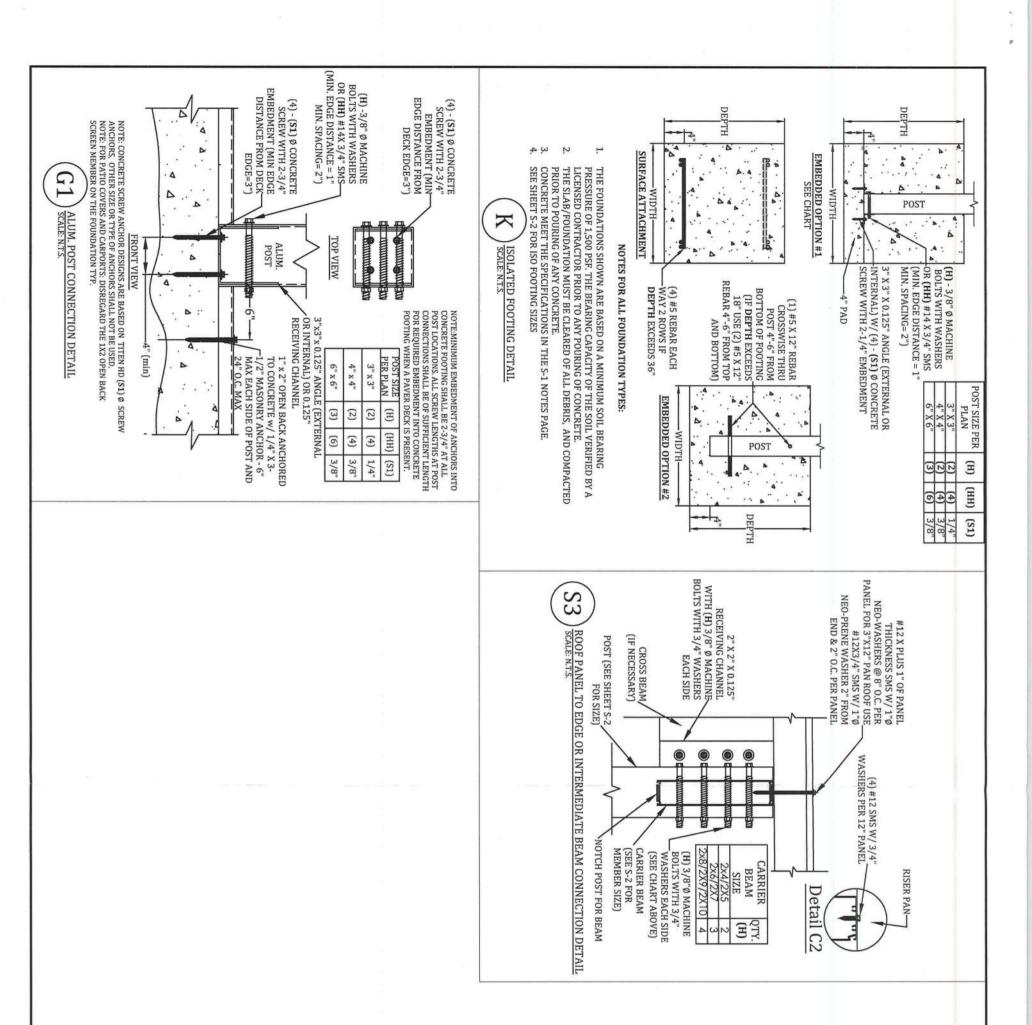



PROFESSIONAL ENGINEER SEAL

Joel Falardeau P.E. FLORIDA LICENSE: 70667 FLORIDA LICENSE: 93654 FLORIDA LICENSE: 38654 FLORIDA LICENSE: 53608 lan J. Foster P.E. Thomas L. Hanson P.E. David W. Smith P.E. ENGINEER OF RECORD:

5344 9th Street Services, Inc. **FBC Plans & Engineering**

FLORIDA LICENSE: 77605 Erik Stuart P.E.

C.O.A.-#29054 Website-www.fbcplans.com E-mail-erb@fbcplans.com Fax# 1-(866)824-7894 Ph# (813)838-0735 Zephyrhills, FL 33542 DATE: DRAWN BY: ST 04/11/2023

PROJECT ADDRESS: RO 4 RO3 RO 2 RO 1 REVISION: ob# 23_0411_114 DATE:

REEDEN 259 SW FORD FEAGLE PL AKE CITY, FL 32024

CONTRACTOR:

RICHARDSON ALUMINUM LLC