

DATE 09/29/2005

Columbia County Building Permit

PERMIT

This Permit Expires One Year From the Date of Issue

000023671

APPLICANT DANETTA GIBBONS PHONE 497-2958
ADDRESS 1711 SW CENTRAL TERR FT. WHITE FL 32038
OWNER DANETTA GIBBONS PHONE 497-2958
ADDRESS 1711 SW CENTRAL TERR FT. WHITE FL 32038
CONTRACTOR RODNEY FEAGLE PHONE 352 486-8124
LOCATION OF PROPERTY 47S, TR ON WILSON SPRINGS RD, TR NEWARK, TL COPPERHEAD, TR ON
CENTRAL, PASS SANTA FE RD, 100 YRDS ON RIGHT
TYPE DEVELOPMENT MH, UTILITY ESTIMATED COST OF CONSTRUCTION _____
HEATED FLOOR AREA _____ TOTAL AREA _____ HEIGHT .00 STORIES _____
FOUNDATION _____ WALLS _____ ROOF PITCH _____ FLOOR _____
LAND USE & ZONING A-3 MAX. HEIGHT _____
Minimum Set Back Requirments: STREET-FRONT 30.00 REAR 25.00 SIDE 25.00
NO. EX.D.U. 0 FLOOD ZONE X DEVELOPMENT PERMIT NO. _____

PARCEL ID 25-6S-15-01247-000 SUBDIVISION THREE RIVERS ESTATES
LOT 17 BLOCK _____ PHASE _____ UNIT 20 TOTAL ACRES _____

IH0000526
Culvert Permit No. _____ Culvert Waiver _____ Contractor's License Number _____ Applicant/Owner/Contractor Danetta Gibbons
EXISTING 05-0976-N BK HD Y
Driveway Connection _____ Septic Tank Number _____ LU & Zoning checked by _____ Approved for Issuance _____ New Resident _____
COMMENTS: ONE FOOT ABOVE THE ROAD, Section 8.9, 1st floor elevation to
be At 34' elevation letter required before power.
Check # or Cash 104

FOR BUILDING & ZONING DEPARTMENT ONLY

(footer/Slab)

Temporary Power _____ Foundation _____ Monolithic _____
date/app. by _____ date/app. by _____ date/app. by _____
Under slab rough-in plumbing _____ Slab _____ Sheathing/Nailing _____
date/app. by _____ date/app. by _____ date/app. by _____
Framing _____ Rough-in plumbing above slab and below wood floor _____
date/app. by _____ date/app. by _____
Electrical rough-in _____ Heat & Air Duct _____ Peri. beam (Lintel) _____
date/app. by _____ date/app. by _____ date/app. by _____
Permanent power _____ C.O. Final _____ Culvert _____
date/app. by _____ date/app. by _____ date/app. by _____
M/H tie downs, blocking, electricity and plumbing _____ Pool _____
date/app. by _____ date/app. by _____
Reconnection _____ Pump pole _____ Utility Pole _____
date/app. by _____ date/app. by _____ date/app. by _____
M/H Pole _____ Travel Trailer _____ Re-roof _____
date/app. by _____ date/app. by _____ date/app. by _____

BUILDING PERMIT FEE \$.00 CERTIFICATION FEE \$.00 SURCHARGE FEE \$.00
MISC. FEES \$ 200.00 ZONING CERT. FEE \$ 50.00 FIRE FEE \$.00 WASTE FEE \$ _____
FLOOD ZONE DEVELOPMENT FEE \$ _____ CULVERT FEE \$ _____ TOTAL FEE 250.00

INSPECTORS OFFICE [Signature] CLERKS OFFICE CN

NOTICE: IN ADDITION TO THE REQUIREMENTS OF THIS PERMIT, THERE MAY BE ADDITIONAL RESTRICTIONS APPLICABLE TO THIS PROPERTY THAT MAY BE FOUND IN THE PUBLIC RECORDS OF THIS COUNTY. AND THERE MAY BE ADDITIONAL PERMITS REQUIRED FROM OTHER GOVERNMENTAL ENTITIES SUCH AS WATER MANAGEMENT DISTRICTS, STATE AGENCIES, OR FEDERAL AGENCIES.

"WARNING TO OWNER: YOUR FAILURE TO RECORD A NOTICE OF COMMENCEMENT MAY RESULT IN YOUR PAYING TWICE FOR IMPROVEMENTS TO YOUR PROPERTY. IF YOU INTEND TO OBTAIN FINANCING, CONSULT WITH YOUR LENDER OR AN ATTORNEY BEFORE RECORDING YOUR NOTICE OF COMMENCEMENT."

This Permit Must Be Prominently Posted on Premises During Construction

PLEASE NOTIFY THE COLUMBIA COUNTY BUILDING DEPARTMENT AT LEAST 24 HOURS IN ADVANCE OF EACH INSPECTION, IN ORDER THAT IT MAY BE MADE WITHOUT DELAY OR INCONVIENCE, PHONE 758-1008. THIS PERMIT IS NOT VALID UNLESS THE WORK AUTHORIZED BY IT IS COMMENCED WITHIN 6 MONTHS AFTER ISSUANCE.

The Issuance of this Permit Does Not Waive Compliance by Permittee with Deed Restrictions.

PERMIT APPLICATION / MANUFACTURED HOME INSTALLATION APPLICATION

For Office Use Only (Revised 6-23-05) Zoning Official BLK 260105 Building Official NO 9-23-05

AP# 0509-48 Date Received 9-13-05 By CT Permit # 23671

Flood Zone other zone Development Permit N/A Zoning A-3 Land Use Plan Map Category A-3

Comments Section 8.9 1st Floor elevation to be at 34' elevation letter required before before power

FEMA Map# _____ Elevation _____ Finished Floor _____ River _____ In Floodway _____

☒ Site Plan with Setbacks Shown ☒ EH Signed Site Plan ☐ EH Release ☒ Well letter ☐ Existing well

☒ Copy of Recorded Deed or Affidavit from land owner ☒ Letter of Authorization from installer

00-00-00 Three Rivers, Unit 20 Lot 17

Property ID # RO1247-000 Must have a copy of the property deed

New Mobile Home _____ Used Mobile Home ☒ Year 1997

Applicant DANETTA J. OR WALTER D. GIBBONS Phone # (386) 269-4259 or (386) 497-2958

Address THREE RIVERS ESTATES CENTRAL RD UNIT 20 LOT 17 COLUMBIA CO.

Name of Property Owner DANETTA or WALTER GIBBONS Phone # (386) 269-4259

911 Address CENTRAL RD UNIT 20 LOT 17 1711 SW Central FW 32038

Circle the correct power company - FL Power & Light - Clay Electric Terr

(Circle One) - Suwannee Valley Electric - Progress Energy

Name of Owner of Mobile Home Danetta & Walter D Gibbons Phone # (386) 497-2958

Address _____

Relationship to Property Owner Owners

Current Number of Dwellings on Property 0

Lot Size 100 X 1000 Total Acreage _____

Do you : Have an Existing Drive or need a Culvert Permit or a Culvert Waiver (Circle one)

Is this Mobile Home Replacing an Existing Mobile Home No owes assessments

Driving Directions to the Property SEE PROPERTY LOCATOR
475 TR on Wilson Springs Rd, TR Newark, TL Coppelhead,
TR Central, PASS Santa Fe Rd, 100 yards on right,
2 poles at wood line.

Name of Licensed Dealer/Installer RONNEY FEAGLE Phone # (352) 486 824

Installers Address P.O. Box 1367 BRONSON FL 32621

License Number TH0000526 Installation Decal # 253762

Unit # - 20

Lot # - 17

CENTRAL RD.

RIVERS ESTATES

T. White Fl.


32038

Lot Size: 100' wide

400' ~~Deep~~ Deep

26' From either side of home
To property line

Aprox: 200' From Road to Front
OF Home

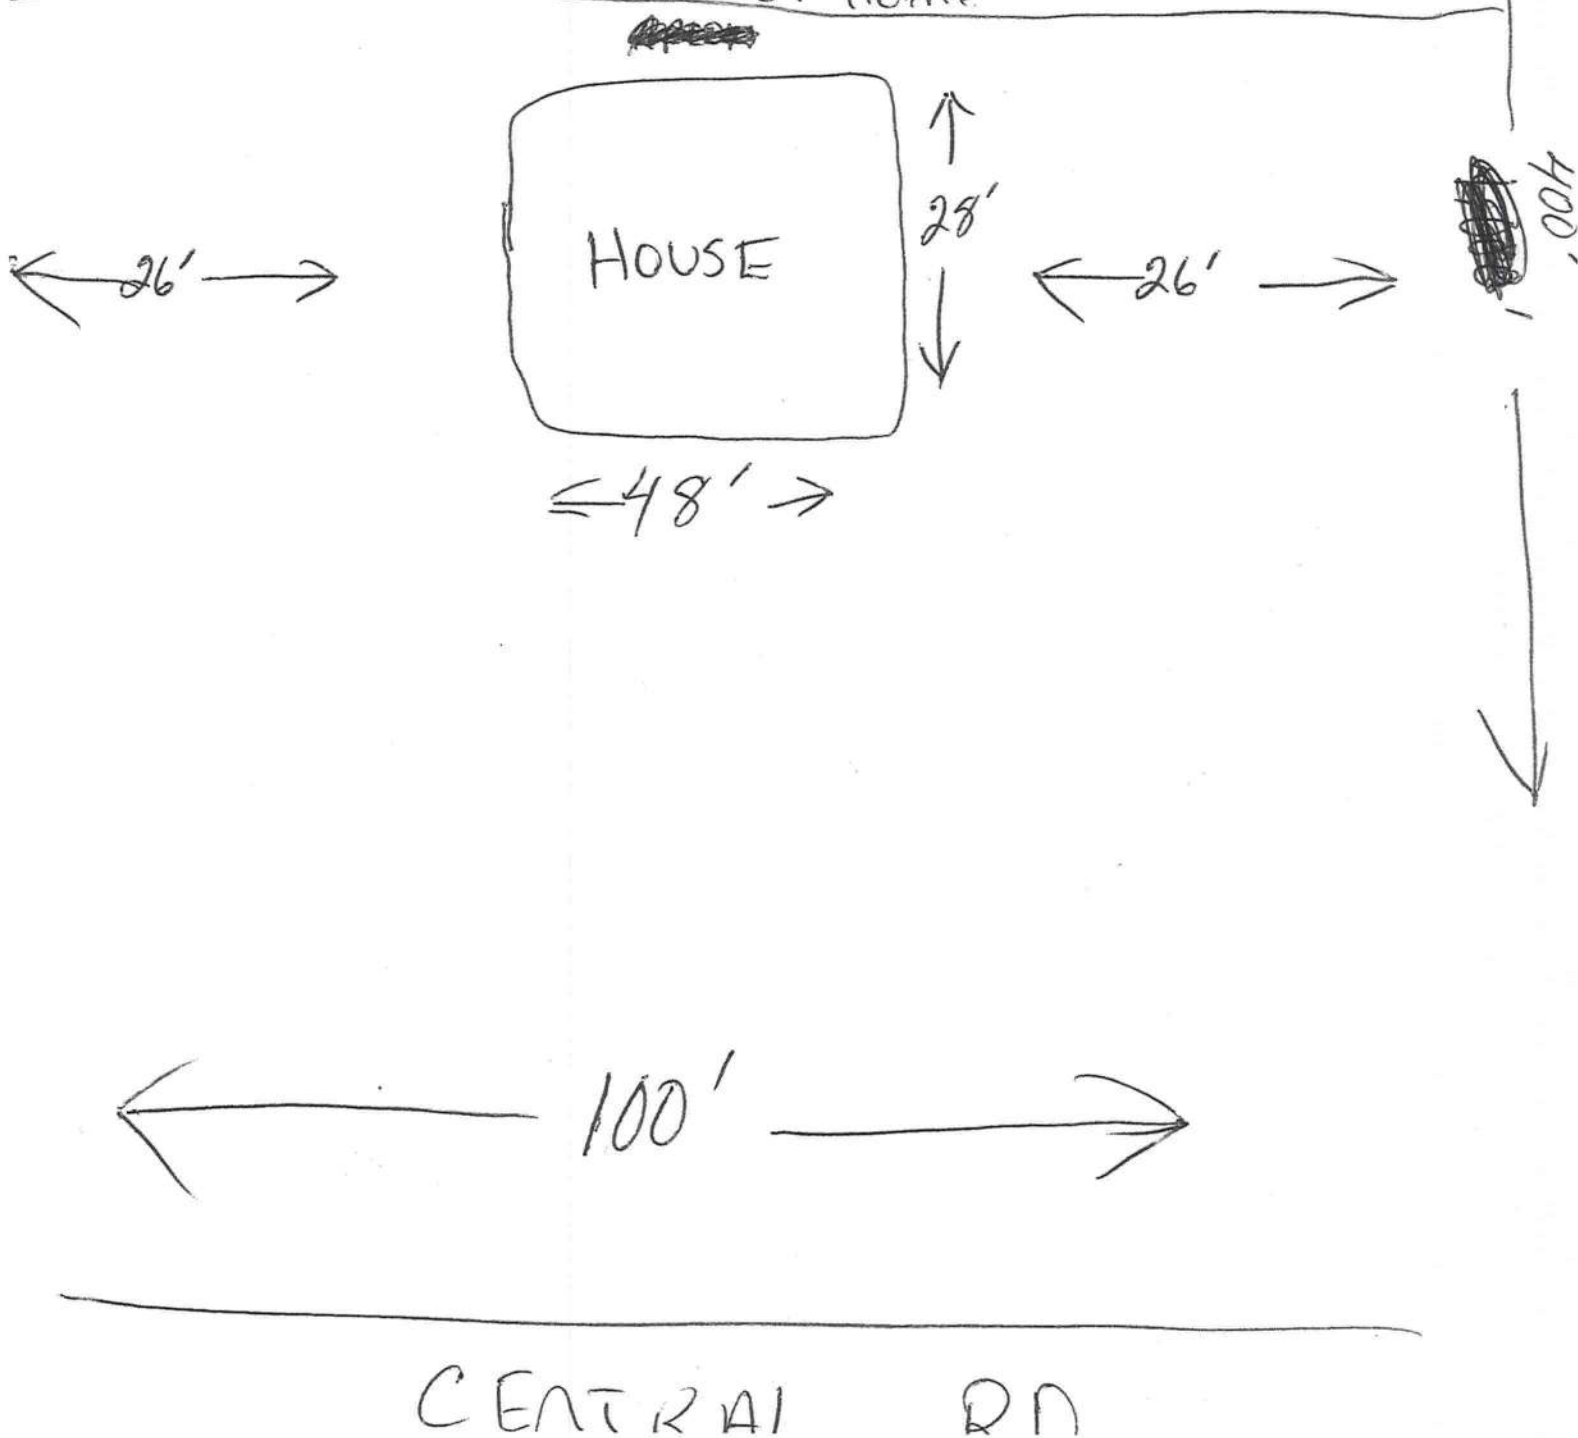

PERMIT WORKSHEET

page 1 of 2

PERMIT NUMBER

Installer

RODNEY FERGIE

License #

I4000054

Address of home being installed

THREE RIVERS ESTATES CENTRAL RD.

Unit

20 LOT 17 COLUMBIA

Manufacturer

REDMAN

Length x width

28 x 48

NOTE: if home is a single wide fill out one half of the blocking plan
if home is a triple or quad wide sketch in remainder of home

I understand Lateral Arm Systems cannot be used on any home (new or used) where the sidewall ties exceed 5 ft 4 in.



Installer's initials

RF

Typical pier spacing



Show locations of Longitudinal and Lateral Systems (use dark lines to show these locations)

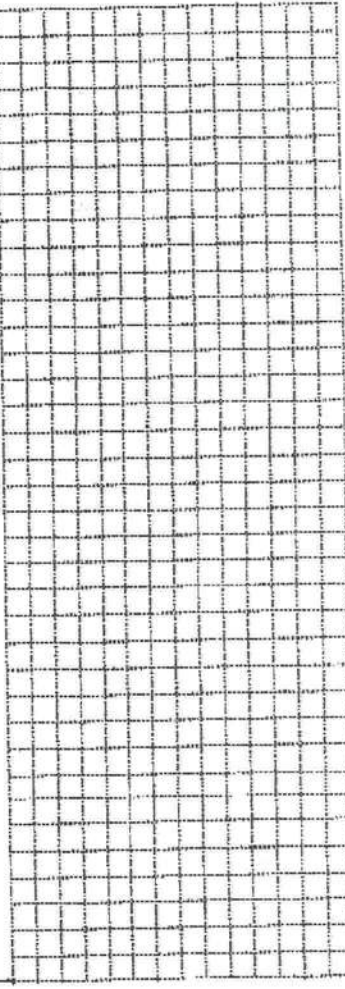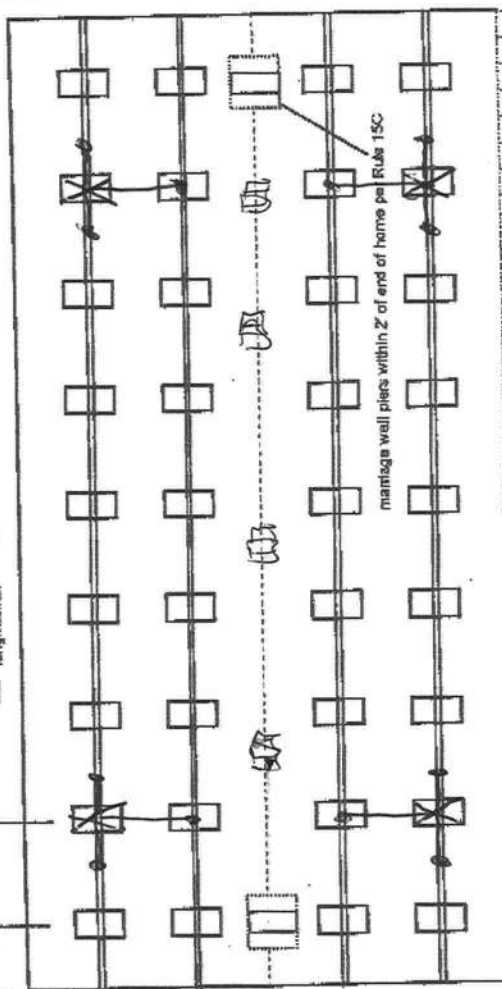New Home ☐ Used Home ☒Home installed to the Manufacturer's Installation Manual ☐Home is installed in accordance with Rule 15-C ☒Single wide ☐Wind Zone II ☐Wind Zone III ☐Double wide ☒

Installation Decal #

253762

Triple/Quad ☐

Serial #

FLAING10914 A/B

PIER SPACING TABLE FOR USED HOMES

Load bearing capacity	Footer size (sq in)	16" x 16" (256)	18 1/2" x 18 1/2" (342)	20" x 20" (400)	22" x 22" (484)*	24" x 24" (576)*	26" x 26" (676)
1000 psf	3'	4'	4'	5'	6'	7'	8'
1500 psf	4' 6"	6'	6'	7'	8'	8'	8'
2000 psf	6'	8'	8'	8'	8'	8'	8'
2500 psf	7' 6"	8'	8'	8'	8'	8'	8'
3000 psf	8'	8'	8'	8'	8'	8'	8'
3500 psf	8'	8'	8'	8'	8'	8'	8'

* Interpolated from Rule 15C-1 pier spacing table.

PIER PAD SIZES

I-beam pier pad size

23.5 x 31.5

Perimeter pier pad size

N/A

Other pier pad sizes (required by the mfg.)

N/A

Draw the approximate locations of marriage wall openings 4 foot or greater. Use this symbol to show the piers.



List all marriage wall openings greater than 4 foot and their pier pad sizes below.

Opening 6'-0" x 18" Pier pad size

8' 0" 18 x 18

8' 0" 18 x 18

8' 0" 18 x 18

TIEDOWN COMPONENTS

Longitudinal Stabilizing Device (LSD)

Manufacturer

Longitudinal Stabilizing Device w/ Lateral Arms

Manufacturer

01.10.05

OTHER TIES

Number

Sidewall

Longitudinal

Marriage wall

Shearwall

2

6

N/A

POPULAR PAD SIZES

Pad Size	Sq In
16" x 16"	256
16" x 18"	288
18.5" x 18.5"	342
16" x 22.5"	360
17" x 22"	374
13 1/4" x 26 1/4"	348
20" x 20"	400
17 3/16" x 25 3/16"	441
17 1/2" x 25 1/2"	446
24" x 24"	576
26" x 26"	676

ANCHORS

4 ft

5 ft

FRAME TIES

within 2' of end of home spaced at 5' 4" oc

PERMIT WORKSHEET

PERMIT NUMBER

POCKET PENETROMETER TEST

The pocket penetrometer tests are rounded down to 1000 psf or check here to declare 1000 lb. soil without testing.

x 1000 x 1000 x 1000

POCKET PENETROMETER TESTING METHOD

1. Test the perimeter of the home at 8 locations.
2. Take the reading at the depth of the footer.
3. Using 500 lb. increments, take the lowest reading and round down to that increment.

x 1000 x 1000 x 1000

TORQUE PROBE TEST

The results of the torque probe test is 286 inch pounds or check here if you are declaring 5' anchors without testing. A test showing 275 inch pounds or less will require 4 foot anchors.

Note: A state approved lateral arm system is being used and 4 ft. anchors are allowed at the sidewall locations. I understand 5 ft anchors are required at all centerline tie points where the torque test reading is 275 or less and where the mobile home manufacturer may requires anchors with 4000 lb holding capacity.

Installer's initials

ALL TESTS MUST BE PERFORMED BY A LICENSED INSTALLER

Installer Name

Date Tested

Electrical

Plumbing

Connect electrical conductors between multi-wide units, but not to the main power source. This includes the bonding wire between multi-wide units. Pg.

Connect all sewer drains to an existing sewer tap or septic tank. Pg.

Connect all potable water supply piping to an existing water meter, water tap, or other independent water supply systems. Pg.

Site Preparation

Debris and organic material removed ☒ Pad ☐ Other ☐
Water drainage: Natural ☒ Swale ☐

Fastening multi wide units

Floor: Type Fastener: 3/8 x 4 Length: 6" Spacing: 18-24"
Walls: Type Fastener: 3/8 x 4 Length: 6" Spacing: 24"
Roof: Type Fastener: 1/2 x 4 Length: 6" Spacing: 24"
For used homes a min. 30 gauge, 8" wide, galvanized metal strip will be centered over the peak of the roof and fastened with galv. roofing nails at 2" on center on both sides of the centerline.

Gasket (weatherproofing requirement)

I understand a properly installed gasket is a requirement of all new and used homes and that condensation, mold, mildew and buckled marriage walls are a result of a poorly installed or no gasket being installed. I understand a strip of tape will not serve as a gasket.

Installer's initials

Type gasket foam

Installed: Between Floors Yes ☒
Between Walls Yes ☒
Bottom of ridgebeam Yes ☒

Weatherproofing

The bottomboard will be repaired and/or taped. Yes ☒ Pg. 10
Siding on units is installed to manufacturer's specifications. Yes ☒
Fireplace chimney installed so as not to allow intrusion of rain water. Yes ☒

Miscellaneous

Skirting to be installed. Yes ☒ No ☐
Dryer vent installed outside of skirting. Yes ☒ N/A ☐
Range downflow vent installed outside of skirting. Yes ☒ N/A ☐
Drain lines supported at 4 foot intervals. Yes ☒
Electrical crossovers protected. Yes ☒
Other: ☐

Installer verifies all information given with this permit worksheet is accurate and true based on the

manufacturer's installation instructions and or Rule 15C-1 & 2

Installer Signature

Date 8-31-05

@ CAM112M01	S	CamaUSA Appraisal System	Columbia County
9/13/2005 10:59	Legal Description Maintenance	5100	Land 001 *
Year T Property	Sel		AG 000
2005 R 00-00-00-01247-000			Bldg 000
			Xfea 000
GIBBONS WALTER D & DANETTA R		5100	TOTAL B*

1	LOT 17 UNIT 20 THREE RIVERS	ESTATES. ORB 456-68, 464-617,	2
3	'625-731', '784-2261', 'CT '859-1251	'978-2411'.	4
5			6
7			8
9			10
11			12
13			14
15			16
17			18
19			20
21			22
23			24
25			26
27			28

Mnt '4/07/2003' KYLIE

F1=Task F3=Exit F4=Prompt F10=GoTo PgUp/PgDn F24=More

CODE ENFORCEMENT

COLUMBIA COUNTY, FLORIDA

PRELIMINARY MOBILE HOME INSPECTION REPORT

DATE RECEIVED _____ BY _____ IS THE M/H ON THE PROPERTY WHERE THE PERMIT WILL BE ISSUED? _____
OWNERS NAME DANIEL S. OR WALTER D. GIBBONS PHONE 386-269-4259 DAD 386-497-2958
911 ADDRESS THREE RIVER ESTATES CENTRAL RD UNIT 20 LOT 17
MOBILE HOME PARK THREE RIVERS ESTATES SUBDIVISION _____
DRIVING DIRECTIONS TO MOBILE HOME SEE PROPERTY LOCATOR

MOBILE HOME INSTALLER RODNEY FEAGLE PHONE (352) 486-8124 CELL (352) 281-2196

MOBILE HOME INFORMATION

MAKE RED MAN YEAR 1997 SIZE 28 x 48 COLOR Gray + burgundy
SERIAL No. FLA14610914 A/B

WIND ZONE II Must be wind zone II or higher NO WIND ZONE I ALLOWED

INTERIOR:

INSPECTION STANDARDS

(P or F) - P = PASS F = FAILED

P SMOKE DETECTOR () OPERATIONAL () MISSING
P FLOORS () SOLID () WEAK () HOLES DAMAGED LOCATION _____
P DOORS () OPERABLE () DAMAGED
P WALLS () SOLID () STRUCTURALLY UNSOUND
P WINDOWS () OPERABLE () INOPERABLE
P PLUMBING FIXTURES () OPERABLE () INOPERABLE () MISSING
P CEILING () SOLID () HOLES () LEAKS APPARENT
P ELECTRICAL (FIXTURES/OUTLETS) () OPERABLE () EXPOSED WIRING () OUTLET COVERS MISSING () LIGHT FIXTURES MISSING

EXTERIOR:

P WALLS / SIDING () LOOSE SIDING () STRUCTURALLY UNSOUND () NOT WEATHERTIGHT () NEEDS CLEANING
P WINDOWS () CRACKED / BROKEN GLASS () SCREENS MISSING () WEATHERTIGHT
P ROOF () APPEARS SOLID () DAMAGED

STATUS:

APPROVED ☒ WITH CONDITIONS: _____


NOT APPROVED _____ NEED REINSPECTION FOR FOLLOWING CONDITIONS: _____

INSPECTOR SIGNATURE Rodney Feagle PRINT NAME RODNEY FEAGLE ID NUMBER _____ DATE 8-31-05

INSPECTION COMPANY UF MOBILE HOME SERVICE LICENSE # I10000526

DAWETA OR WATER GIBBONS
28 x 48 D/W

BLOCKING DIAGRAM

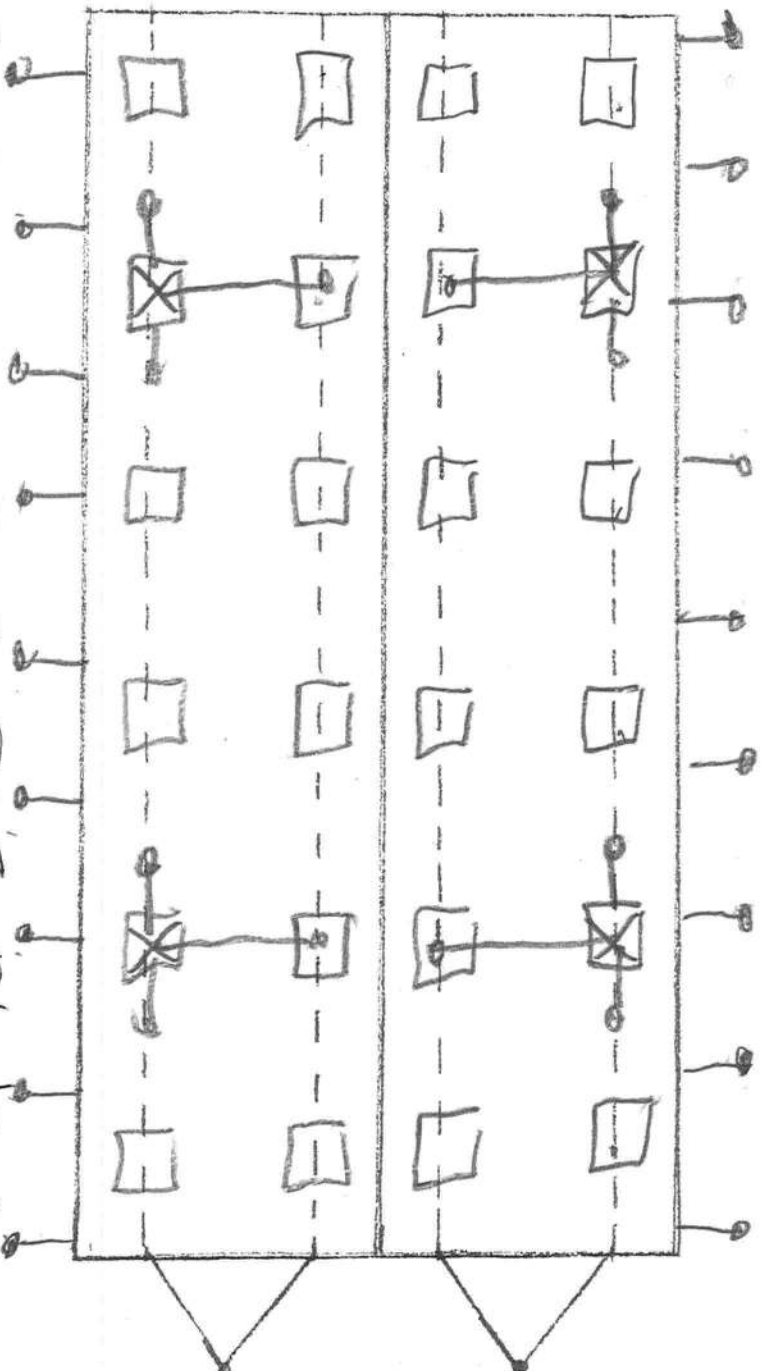

□ - PADS 23.5' x 31.5' 8' O/C 6 PER RAIL

⊠ - USD X 4 SYSTEMS (OVER TECH)

• ANCHORS 4 FT. 5' 11" O/C 9 PER SIDE



2004-2005 Mobile Home Installer License



Licensee: Rodney L. Feagle

License Number: IH0000526

Effective Date



Expiration Date

10-1-04

9-30-05


State of Florida - Department of Highway Safety and Motor Vehicles - Division of Motor Vehicles

REQUIRED NUMBER AND LOCATION OF MODEL 1101 "V" BRACES FOR UP TO 4/12 ROOF PITCH

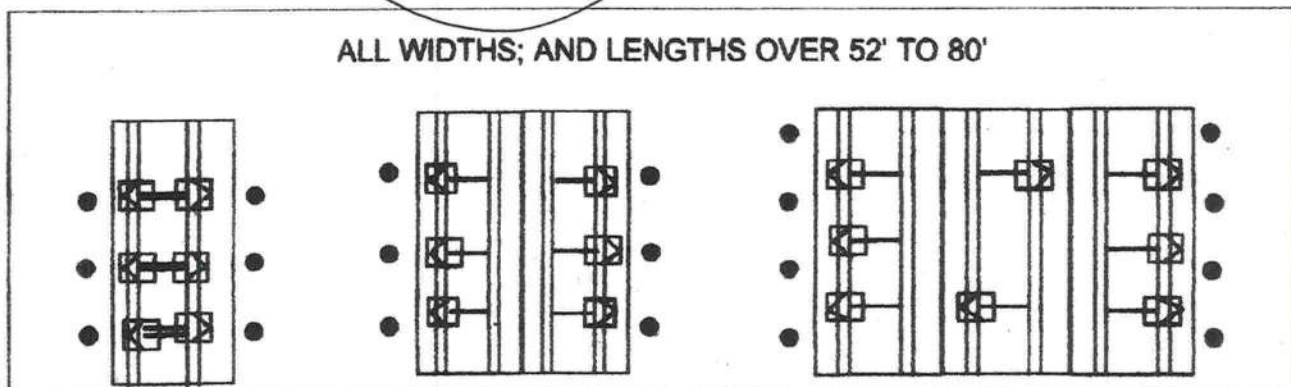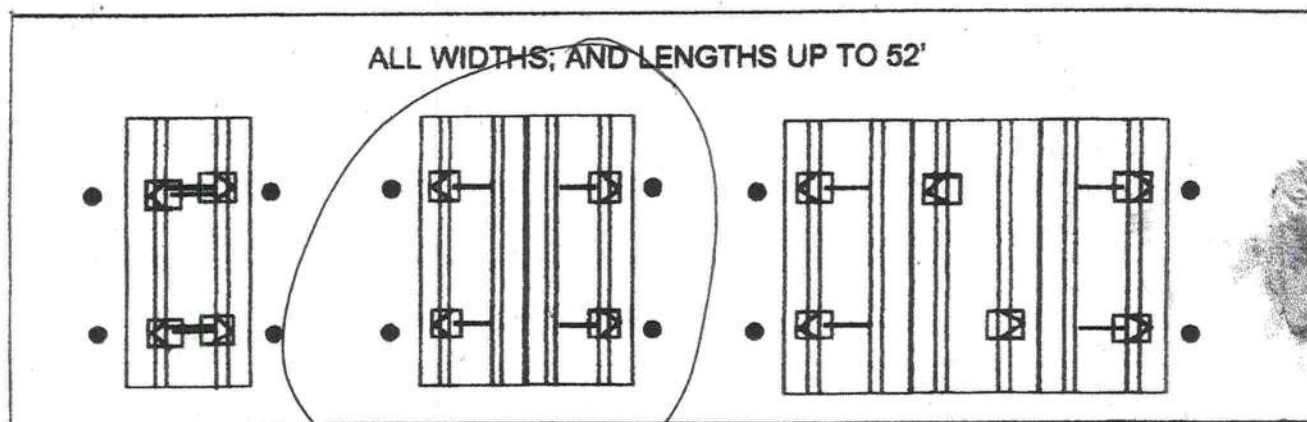

HOMES WITH 5/12 ROOF PITCH REQUIRE: PER FLORIDA REGULATIONS

6 systems for home lengths up to 52' and 8 systems for homes over 52' and up to 80'. One stabilizer plate and frame tie required at each lateral bracing system.

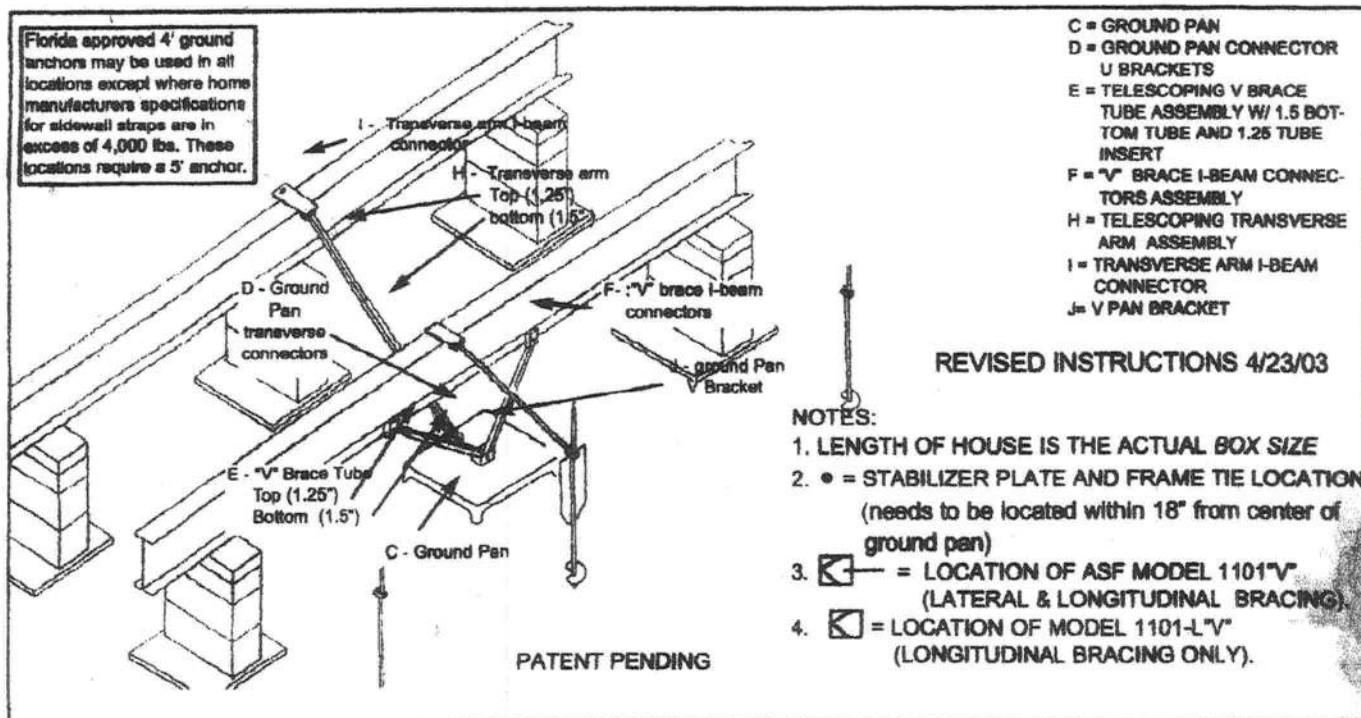

MANUFACTURED HOUSING FOUNDATION SYSTEMS
A DIVISION OF OLIVER TECHNOLOGIES, INC.
1-800-284-7437

Telephone: 931-798-4856
Fax: 931-798-8811
www.olivertechnologies.com

1786

Gibbons

Dad ³⁸⁶⁴⁹⁷²⁹⁵⁸ ~~catcher~~

195 to 129 go left

R on 47

Left at Library in H White
go to Stop - make left
(Wilson Sp. Rd)follow to next (Stop sign)
(2 or 3 miles)

R on Newark

go 1 1/2 to 2 miles to

Left on Copperhead

go about 100 yds turn
into Central

R on Central

past ~~the~~ Santa Fe Rd

about approx 100 yards

on right - ~~Right~~ just

past 25 mile sign

2 galvanized poles at
wood line -

Ben's Golden West

No 7612

DATE OF BIRTH

BUYER: 12-22-61

CO/BUYER: 12-9-66

P.O. BOX 537

CHIEFLAND, FL 32644

(352) 493-0227

FAX (352) 493-7050

DRIVER'S LICENSE

BUYER:

CO/BUYER

In this contract the words, I, ME, and MY refer to the Buyer and Co-Buyer signing this contract. The words YOU and YOUR refer to the Dealer. Subject to the terms and conditions on both sides of this agreement you agree to sell and I agree to purchase the following described unit.

TER(S)	Dannetta J. as Walter D. Gibbons		PHONE	321 269 4259	DATE	8-27-05
RESS	70 Sky Lane Titusville, FL 32796		SALESPERSON	Carol Stephens		
EVERY ADDRESS	Three Rivers Estates		COUNTY	Columbia		
SE & MODEL	Redman		YEAR	1997	BD ROOMS	3
VAL NUMBER	FLA14610914 A+B		COLOR		FLOOR SIZE	48' W 28' L 52' W 28'
LOCATION	R-VALUE	THICKNESS	TYPE OF INSULATION	PROPOSED DELIVERY DATE	STOCK NUMBER	1786
ILING					KEY NUMBERS	
TERIOR						
DOORS						
THIS INSULATION INFORMATION WAS FURNISHED BY THE MANUFACTURER AND DISCLOSED IN COMPLIANCE WITH THE FEDERAL TRADE COMMISSION RULE				SALES TAX & COUNTY SUR TAX		
SCRE. SECTION 480.16.				2150.00		
OPTIONAL EQUIPMENT, LABOR AND ACCESSORIES				NON-TAXABLE ITEMS		
Delivered, Set-Up & Tied Down Up to 3 Blocks High				\$ Included		
CUSTOMER RESPONSIBLE FOR ANY ADDITIONAL FLOOD				Agreed		
RAIN BLOCKING.				Agreed		
Customer responsible for all plumbing, gas, and electrical				Agreed		
Jack-ups (Not Licensed)				Agreed		
the home is furnished, the furniture is sold AS IS, and has no				Agreed		
arranty.				Agreed		
Customer responsible for any wrecker or bulldozer fees incurred on				Agreed		
Customer's lot.				Agreed		
Wheels and Axles deleted from sale price of home. Returned				Agreed		
to Dealer.				Agreed		
CASH - On All cash Purchases, Home Will Be Paid in Full Before Delivery.				Agreed		
pest spray included				Agreed		
Customer responsible for re-level of home after initial setup.				Agreed		
Leaking, plum electric up to 3hrs.				Agreed		
Improvements needed. Dealer will not be responsible for depth				Agreed		
of well, or condition of water. Customer will be responsible for				Agreed		
all work performed by sub-contractors.				Agreed		
A/C installed				Agreed		
REMARKS: paint up to 3 inches				Agreed		
2 sets steps up to 4 high				Agreed		
BALANCE CARRIED TO OPTIONAL EQUIPMENT				\$		
NOTE: WARRANTY, EXCLUSIONS AND LIMITATIONS OF DAMAGES IN THE REVERSE SIDE						
DESCRIPTION OF TRADE-IN						
YEAR						
SIZE						
MAKE						
MODEL						
BEDROOMS						
TITLE NO.						
SERIAL NO.						
COLOR						
AMOUNT OWING TO WHOM						
ANY DEBT I OWE ON THE TRADE-IN IS TO BE PAID BY ☐ YOU ☐ ME						

Liquidated damages are agreed to be \$ _____ or 10% of the cash price whichever is greater

THIS AGREEMENT CONTAINS THE ENTIRE UNDERSTANDING BETWEEN YOU AND ME AND NO OTHER REPRESENTATION OR INDUCEMENT, VERBAL OR WRITTEN, HAS BEEN MADE WHICH IS NOT CONTAINED IN THIS CONTRACT.

You and I certify that the additional terms and conditions printed on the other side of this contract are agreed to as a part of this agreement, the same as if printed above the signatures. I am purchasing the above described trailer, manufactured home or vehicle; the optional equipment and accessories, the insurance as described has been voluntary; that my trade-in is free from all claims whatsoever, except as noted. I, OR WE, ACKNOWLEDGE RECEIPT OF A COPY OF THIS ORDER AND THAT I, OR WE, HAVE READ AND UNDERSTAND THE BACK OF THIS AGREEMENT.

GOLDEN WEST MFD. HSG.

DEALER

Not Valid Unless Signed and Accepted by an Officer of the Company

SIGNED X Dannetta Gibbons BUYERSOCIAL SECURITY NO. 235 11 4605SIGNED X Walter D. Gibbons BUYERSOCIAL SECURITY NO. 266 57 4218

P.01/04

FEB-06-1900 03:39

MOBILE HOME INSTALLERS
***** AUTHORIZATION *****

To Whom It May Concern:

I, RODNEY FEARLE hereby authorize Walter or Danetta Gibbons to
pull permits for DANETTA OR WALTER GIBBONS.

Rodney Fearle
Mobile Home Installer

140000926
State License #

Sworn to (or affirmed) and subscribed before me this 31 day of Aug, 2005
By: Rodney Fearle

Carol J. Stephens
Notary



☒ Personally Known
☐ Produced Identification
☐ Type of Identification Produced



**NORTH FLORIDA
WATER SYSTEMS, INC.**
11814 N.W. 202nd ST.
ALACHUA, FLORIDA 32615


ATTN:

From: Bob Mylles

Any problem please call

402-7867

Thanks,


B. Mylles

Walter Gibbons Job:

4" well, 1 hp submersible pump,
60 gallon tank with cycle stop valve.

E

F



ZI

STATE OF FLORIDA
DEPARTMENT OF HEALTH


APPLICATION FOR ONSITE SEWAGE DISPOSAL SYSTEM CONSTRUCTION PERMIT

Permit Application Number 05-0976N

GIBBONS

PART II - SITEPLAN

Scale: 1 inch = 50 feet.

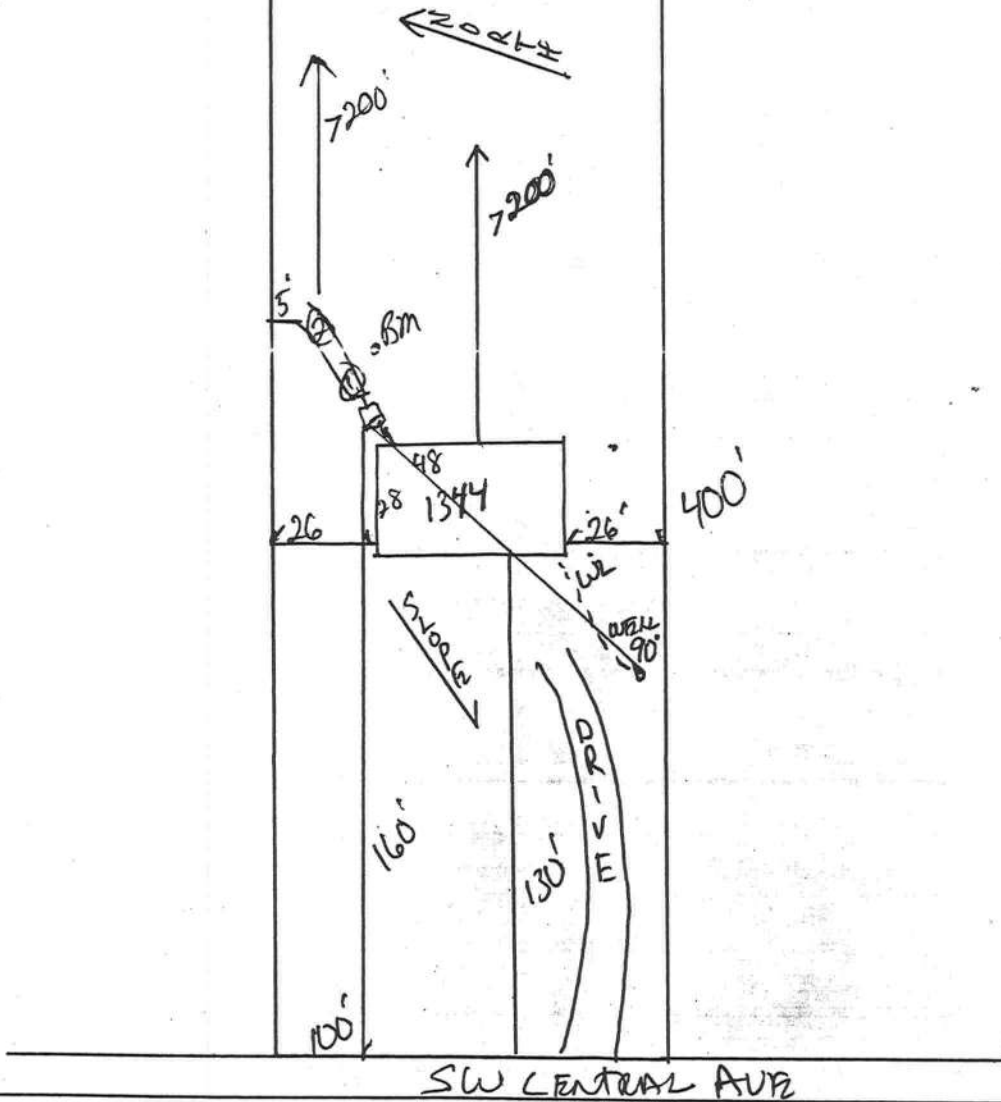

Notes: _____

Site Plan submitted by: Rock D F-O MASTER CONTRACTOR
Plan Approved ☒ Not Approved _____ Date 9-29-05
By Mr O Z Ca-bis County Health Department

ALL CHANGES MUST BE APPROVED BY THE COUNTY HEALTH DEPARTMENT

23671

WILLIAM N. KITCHEN

PROFESSIONAL SURVEYOR AND MAPPER
152 N. MARION AVENUE
LAKE CITY, FLORIDA 32055
PHONE (386) 755-7786 FAX (386) 755-5506
E-MAIL BSSK@BELLSOUTH.NET



DATE : 10/14/2005

TO WHOM IT MAY IT CONCERN:

CO: WALTER AND DANETTA GIBBONS

RE: LOT 17, UNIT 20, THREE RIVER ESTATES, PB 6, PG. 14,
NO. 1711 SW CENTRAL TERRACE, FORT WHITE, FL.

THE FINISH FLOOR ELEVATION OF THE MOBILE HOME, AT SAID LOT 17 IS
35.61 FEET. THE 100 YEAR FLOOD FOR THIS SITE ACCORDING TO THE
SUWANNEE RIVER MANAGEMENT DISTRICT IS 34.0 FEET. THE ELEVATION
SHOWN HEREON BASED ON NGVD 29, DATUM.

WILLIAM N. KITCHEN P.S.M. 5490

William N. Kitchen
10-14-2005

